



Li, Jiawei and Kendall, Graham and John, Robert (2015) Computing Nash equilibria and evolutionarily stable states of evolutionary games. IEEE Transactions on Evolutionary Computation . ISSN 1089-778X

Access from the University of Nottingham repository:

<http://eprints.nottingham.ac.uk/30423/1/PID3941653.pdf>

Copyright and reuse:

The Nottingham ePrints service makes this work by researchers of the University of Nottingham available open access under the following conditions.

- Copyright and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners.
- To the extent reasonable and practicable the material made available in Nottingham ePrints has been checked for eligibility before being made available.
- Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.
- Quotations or similar reproductions must be sufficiently acknowledged.

Please see our full end user licence at:

http://eprints.nottingham.ac.uk/end_user_agreement.pdf

A note on versions:

The version presented here may differ from the published version or from the version of record. If you wish to cite this item you are advised to consult the publisher's version. Please see the repository url above for details on accessing the published version and note that access may require a subscription.

For more information, please contact eprints@nottingham.ac.uk

Computing Nash Equilibria and Evolutionarily Stable States of Evolutionary Games

Jiawei Li, *Member, IEEE*, Graham Kendall, *Senior Member, IEEE*, and Robert John, *Senior Member, IEEE*

Abstract—Stability analysis is an important research direction in evolutionary game theory. Evolutionarily stable states have a close relationship with Nash equilibria of repeated games, which are characterized by the folk theorem. When applying the folk theorem, one needs to compute the minimax profile of the game in order to find Nash equilibria. Computing the minimax profile is an NP-hard problem. In this paper we investigate a new methodology to compute evolutionary stable states based on the level- k equilibrium, a new refinement of Nash equilibrium in repeated games. A level- k equilibrium is implemented by a group of players who adopt reactive strategies and who have no incentive to deviate from their strategies simultaneously. Computing the level- k equilibria is tractable because the minimax payoffs and strategies are not needed. As an application, this paper develops a tractable algorithm to compute the evolutionarily stable states and the Pareto front of n -player symmetric games. Three games, including the iterated prisoner's dilemma, are analyzed by means of the proposed methodology.

Index Terms—Evolutionary game theory, evolutionary stability, folk theorem, iterated prisoner's dilemma, Nash equilibrium.

I. INTRODUCTION

Evolutionary game theory has been successful in helping to explain many complex and challenging aspects of biological and social phenomena in recent decades [1, 2]. Based on the idea that biological organisms that are more fit in a given environment will tend to produce more offspring, evolutionary game theory provides us with the methodology to study strategic interactions among individuals in evolving populations.

Evolutionary stability analysis is one of the major research directions in evolutionary game theory. It considers strategic interactions in the situations when mutant strategies invade an infinite or finite population of homogeneous or heterogeneous

strategies, without concerning the parameters of evolutionary dynamics such as the selection scheme [3, 28].

Classical evolutionary stability analysis is based on the concept of evolutionarily stable strategy (ESS). An ESS is a strategy such that, if all the members of a population adopt it, then no mutant strategy can invade the population under the influence of natural selection [3]. According to [4], the condition for a strategy x to be ESS is that for any strategy $y \neq x$,

$$u(x, x) \geq u(y, x) \quad (1.a)$$

$$u(x, y) > u(y, y) \quad (1.b)$$

where $u(x, y)$ is the payoff of strategy x when interacting with another strategy y .

This condition guarantees that an ESS always outperforms mutant strategies so that a homogeneous population can be maintained in evolutionary dynamics. However, the definition of ESS is so strict that there is frequently no ESS in an infinite length or indefinite length two-player [5, 6] or n -player [7] repeated game. Except in specific situations, the condition of ESS cannot be used to analyze the evolutionary stability of strategies in evolutionary games.

A population is considered to be in an evolutionarily stable state if its genetic composition is restored by selection after a disturbance [8]. In evolutionary game theory, an evolutionarily stable state has a close relationship with Nash equilibrium (NE) and the folk theorem for infinitely repeated games [9, 10]. The folk theorem, which is the fundamental theory of non-cooperative repeated games, states that any feasible payoff profile that strictly dominates the minimax profile is a NE profile in an infinitely repeated game [11, 12]. The evolutionary stable states are a subset of those Nash equilibria in the corresponding evolutionary game.

Computing a NE is generally hard in either a one-shot game or a repeated game. It has been proved in complexity theory that computing whether a two-player $n \times n$ game has any NE in which both players get non-negative payoffs is NP-hard [13]. Recent results have shown that the problem of finding a NE is PPAD-complete, even for a two-player game, and even if all payoffs are ± 1 , which suggests that these problems are as hard as finding Brouwer fixed-point and thus are computationally intractable [14-16]. Computing an approximate NE, such as ϵ -NE, is also PPAD-complete [17]. In infinitely repeated games, finding a NE or ϵ -NE of $(k+1)$ -player games is as hard as finding NE of k -player one-shot games [18], unless some changes are made to simplify the model [19].

This paper is submitted for review on 23rd March 2015.

J. Li is with the ASAP research group, School of Computer Science, University of Nottingham, UK (e-mail: jiawei.michael.li@gmail.com).

G. Kendall is with the School of Computer Science, University of Nottingham Malaysia Campus, Malaysia and the ASAP research group, School of Computer Science, University of Nottingham, UK (e-mail: graham.kendall@nottingham.edu.my).

R. John is with the ASAP research group, School of Computer Science, University of Nottingham, UK (e-mail: Robert.john@nottingham.ac.uk).

Copyright (c) 2012 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending a request to pubs-permissions@ieee.org.

The main difficulty of this problem lies in computing the minimax profile because the strategy space of a repeated game is much more complicated than that of a one-shot game. In [20], a polynomial algorithm for finding a NE in a two-player average-payoff repeated game is designed by restricting the strategies of the players. Some learning algorithms, fictitious play for example [47, 49], assume that each player adopts a stationary strategy at each round. These methods are flawed if reactive strategies are taken into account. The computational complexity of finding a NE for a repeated game is still an open problem.

Some specific subsets of NE are tractable. Classical game theorists have developed a number of refinements of NE, such as subgame perfect NE [21], strong NE [22], and coalition proof NE [23, 24], because many games, especially repeated games, have multiple equilibria and those equilibria can be significantly different in terms of simplicity, stability, and commitment. One can refine equilibria to distinguish them in which implicit commitments are credible due to incentives [25]. Some refinements of NE require less computational complexity than computing the Brouwer fixed-point or the minimax payoff profile. Unlike a NE, however, none of the refinements of NE so far guarantees its existence in a game.

In this paper, we propose a new refinement of NE in repeated games, namely the level- k equilibrium, in order to develop tractable and general algorithms to compute NE of repeated games. Based on this concept, we show that specific Pareto optimums of the convex hull of the feasible payoff profiles are NE payoff profiles. The minimax payoff profile is not needed in computing the level- k equilibria. We prove that there must be at least one level- k equilibrium in a repeated game.

Symmetric games are a set of fair games in which the identity of any player has no influence on the result. Almost all evolutionary games are symmetric so that individuals in the population face the same situations in the evolution. According to the folk theorem and the concept of level- k equilibrium, we show that the Pareto front of the payoff profiles must be evolutionarily stable states in symmetric games.

There are two novel contributions in this paper:

a. We prove the existence of level- k equilibria, a subset of NE of repeated games, which are not characterized by the folk theorem. Computing a NE is considered to be NP-hard. We show that the level- k equilibria are tractable and ubiquitous in repeated games.

b. Stability analysis based on ESS is not suitable for repeated games and evolutionary games. We propose a tractable algorithm based on the level- k equilibrium to compute the evolutionarily stable states of n -player symmetric repeated games.

The rest of the paper is organized as follows. Section 2 introduces evolutionarily stable state and NE of repeated games and the relationship between them. Section 3 defines the concept of level- k equilibrium and discusses how a level- k equilibrium is implemented among a group of players adopting reactive strategies. We prove that level- k equilibria are a subset of NE, based on which an algorithm is developed to compute the evolutionarily stable payoff and Pareto front of an n -player evolutionary game in Section 4. Section 5 analyzes three games

by means of the proposed algorithm. Section 5 concludes the paper.

II. EVOLUTIONARILY STABLE STATE AND NASH EQUILIBRIUM

An evolutionarily stable state is a state such that a disturbance cannot change the genetic compositions of the population, if that disturbance is not too large. Besides intrinsic disturbances such as stochastic decisions and noise in game dynamics, crossover and mutation in selection process are also sources of disturbance.

The dynamic of an evolutionary game is generally expressed by the replicator equation,

$$\dot{x}_i = x_i(u_i(x) - \bar{u}(x)) \quad (2)$$

where $x = (x_1, \dots, x_n)$ is the vector of the distribution of types $i = 1, \dots, n$ in the population, $u_i(x)$ is the fitness (payoff) of type i , and $\bar{u}(x) = \sum_{j=1}^n x_j u_j(x)$ is the average population fitness. It is generally difficult to acquire accurate solutions of the replicator equation.

A state \hat{x} is said to be evolutionarily stable if for all $x \neq \hat{x}$ in some neighborhood of \hat{x} ,

$$\begin{cases} u_i(x) \geq \bar{u}(x) & \text{if } x_i \leq \hat{x}_i \\ u_i(x) < \bar{u}(x) & \text{if } x_i > \hat{x}_i \end{cases} \quad (3)$$

When the population deviates from the state \hat{x} , due to a disturbance, it will be restored by a selection process.

NE is a stable state in strategic games such that no player can be better off by unilaterally deviating from it. Nash has proven that any strategic game has at least one NE if mixed strategies are taken into consideration [26]. However, there is no upper bound of the number of NE. A strategic game may have multiple, sometimes unlimited, NE [48].

Consider an infinitely repeated n -player game $G = \{I, S, U\}^T$ where $I = \{1, \dots, n\}$ is the player set and $S = \{S_1, \dots, S_n\}$ and $U = \{U_1, \dots, U_n\}$ are the strategy set and the payoff set respectively. Let $s_{-i} = (s_1, \dots, s_{i-1}, s_{i+1}, \dots, s_n)$ denote the strategy profile excluding the strategy of player i . The iteration of the game is counted by t , starting from $t = 0$. Each player has a pure action space A_i^t in the t^{th} stage game.

A strategy profile (s_1, \dots, s_n) is a NE if, for any $i \in n$ and $s'_i \in S_i$ there are

$$u_i(s'_i, s_{-i}) \leq u_i(s_i, s_{-i}) \quad (4)$$

In repeated games, the set of NE includes any feasible payoff profile that dominates the minimax profile, which is characterized by the folk theorem.

The concept of an evolutionarily stable state is equivalent to the concept of strong NE [9]. A strong NE is an equilibrium in which no coalition of a group of players can be better off by deviating from their current strategies simultaneously. In repeated games, a strong NE is both a Pareto optimum and a NE of the stage game.

A strategy profile $(\bar{s}_1, \dots, \bar{s}_n)$ and the corresponding payoff profile is a strong NE in a n -player repeated game if, for any $s'_i \neq \bar{s}_i$ and $s'_{-i} \neq \bar{s}_{-i}$, there are

$$u_i(\bar{s}_i, \bar{s}_{-i}) \geq u_i(s'_i, \bar{s}_{-i}) \quad (5.a)$$

$$u_i(\bar{s}_i, \bar{s}_{-i}) \geq u_i(s'_i, s'_{-i}) \quad (5.b)$$

These inequalities are necessary and sufficient conditions for (3) to hold in a selection process. (5.a) is the condition of NE while (5.b) is the condition of Pareto optimum. For a two-player symmetric game, (5.a) and (5.b) can be simplified to

$$u(\bar{s}, \bar{s}) \geq u(s', \bar{s}) \quad (6.a)$$

$$u(\bar{s}, \bar{s}) \geq u(s', s') \quad (6.b)$$

The main difficulty in computing a NE of a repeated game is that it is difficult to find a suitable expression of the strategies of players. There are not only pure strategies and mixed strategies, but also reactive strategies that the choice of a player at time t is a function of past choices of all players. In iterated prisoner's dilemma, for example, tit for tat [1], grim trigger, Pavlov [27], group strategies [28], and newly appeared zero-determinant strategies [29] are all reactive strategies, as well as those learning and evolving strategies [30-36]. We will show in the next section that a group of players in a game can coordinate their repeated choices by means of reactive strategies, which may lead to equilibria that are not characterized by the folk theorem.

III. REACTIVE STRATEGIES AND LEVEL-K EQUILIBRIUM

One assumption in classical game theory is that the players believe that a deviation in their own strategy will not cause any other player's deviation from their strategies. This is not a reasonable assumption in repeated or evolutionary games because of the existence of reactive strategies. A player's strategy is reactive if it is a function of some other players' past actions. Here we give a formal definition of a reactive strategy.

Let $\mathbf{h}_i^t = (a_i^0, a_i^1, \dots, a_i^{t-1})$ be the sequence of actions chosen by player $i \in I$ within $t-1$ periods, and $\mathbf{h}_{-i}^t = (\mathbf{h}_1^t, \dots, \mathbf{h}_{i-1}^t, \mathbf{h}_{i+1}^t, \dots, \mathbf{h}_n^t)$ the past choices made by all players other than i . Player i 's strategy, s_i , is a reactive strategy when there is

$$s_i^t = \begin{cases} s_i^0 & t = 0 \\ f(\mathbf{h}_i^t, \mathbf{h}_{-i}^t) & t > 0 \end{cases} \quad (7)$$

The strategy in the first stage game, s_i^0 , is either a pure strategy or a mixed strategy. Obviously, reactive strategies do not exist in one-shot games since there always are $\mathbf{h}_i^t = \mathbf{h}_{-i}^t = \emptyset$ for any i .

Reactive strategies provide a way of coordination among a group of players in repeated games. In a repeated game with multiple Nash equilibria, for example, convergence to a designated Nash equilibrium is not guaranteed unless the players adopt specific reactive strategies.

Reactive strategies also provide a way of maintaining coordination among a group of players. Grim trigger, for example, is a reactive strategy for the players in iterated prisoner's dilemma to maintain mutual cooperation. There exists a set of trigger strategies in a repeated game, by which

the coordination among a group of players can be enforced. Once a group of players have coordinated their actions, they switch to the trigger strategy that one player will choose the minimax strategy if any other player in the group deviates from their coordination strategy.

Coordination among a group of players can be achieved when they adopt specific reactive strategies, which may form equilibrium in repeated games.

Definition 1: In a repeated n -player game, a *level- k coordination* ($2 \leq k \leq n$) denotes that a group of k players coordinate their actions by adopting some trigger strategies such that they will change their strategies simultaneously once any player in the group deviates from the assigned action.

The necessary condition of a level- k coordination is that k players can be better off by coordinating their actions. Let v_i be the minimax payoff of player $i \in I$ and s_i^* the minimax strategy. Let $K = \{j, \dots, j+k-1\}$ denote a group of k players where $j = 1, \dots, n-k+1$ and $K \in I$. The necessary condition for a level- k coordination is that there exists a strategy profile $\bar{s} = (\bar{s}_1, \bar{s}_2, \dots, \bar{s}_n)$ such that, for any s_i ($i \in K$), there are

$$\begin{cases} v_j < u_j(s_1, \dots, \underbrace{\bar{s}_j, \dots, \bar{s}_{j+k-1}}_k, \dots, s_n) \\ \vdots \\ v_{j+k-1} < u_{j+k-1}(s_1, \dots, \underbrace{\bar{s}_j, \dots, \bar{s}_{j+k-1}}_k, \dots, s_n) \end{cases} \quad (8)$$

A level- k coordination can be maintained if all players involved adopt a trigger strategy such as: keep playing the coordination strategy if all other players play their coordination strategies; otherwise, play the minimax strategy. The best responses of the players who do not belong to K are determined given the strategies of k players who coordinate their actions.

If the k players cannot further improve their payoffs by deviating from \bar{s} simultaneously, the strategy profile \bar{s} is a stable state (equilibrium) in the repeated game. This equilibrium is different from the concept of NE in that k players coordinate their actions.

Definition 2: In an infinitely repeated n -player game, we call it a *level- k equilibrium* ($2 \leq k \leq n$) if a group of k players coordinate their actions and they have no incentive to deviate from their strategies simultaneously.

A strategy profile \bar{s} is a level- k equilibrium if, for any s'_i ($i = 1, \dots, j-1, j+k, \dots, n$) and $s'_j \neq \bar{s}_j, \dots, s'_{j+k-1} \neq \bar{s}_{j+k-1}$, there are

$$\begin{cases} u_j(s'_1, \dots, \underbrace{s'_j, \dots, s'_{j+k-1}}_k, \dots, s'_n) \leq \\ \quad u_j(s'_1, \dots, \underbrace{\bar{s}_j, \dots, \bar{s}_{j+k-1}}_k, \dots, s'_n) \\ \vdots \\ u_{j+k-1}(s'_1, \dots, \underbrace{s'_j, \dots, s'_{j+k-1}}_k, \dots, s'_n) \leq \\ \quad u_{j+k-1}(s_1, \dots, \underbrace{\bar{s}_j, \dots, \bar{s}_{j+k-1}}_k, \dots, s_n) \end{cases} \quad (9)$$

We prove that any level- k equilibrium is also a NE in infinitely repeated games.

Theorem 1: In an n -player infinitely repeated game, any level- k equilibrium ($2 \leq k \leq n$) is a NE.

Proof: Let \bar{s} denote a level- k equilibrium. We first consider the case of $k = n$. We have $v_i < u_i(\bar{s}_1, \dots, \bar{s}_n)$ for all $i \in I$. According to the folk theorem, \bar{s} is a NE strategy profile.

In the case of $k < n$, if $v_i < u_i(\bar{s}_1, \dots, \bar{s}_n)$ are satisfied for all $i \in I$, \bar{s} must be a NE strategy profile according to the folk theorem. It is impossible that, for any player i , there is $v_i > u_i(\bar{s}_1, \dots, \bar{s}_n)$ because that player could deviate from \bar{s}_i to the minimax strategy so that the payoff is guaranteed to be v_i . This conflicts with the fact that \bar{s}_i is player i 's best response. We simply need to consider $v_i = u_i(\bar{s}_1, \dots, \bar{s}_n)$ for some players $i \notin K$.

Let M be the group of players who receive their minimax payoffs. Any player $i \in M$ cannot improve his/her payoff by deviating from \bar{s}_i since \bar{s}_i is the best response to \bar{s}_{-i} .

Any player $i \in K$ cannot improve their payoff by deviating from \bar{s}_i . If player i did deviate from \bar{s}_i in order to gain a higher payoff in the current round, all other members of K would play their minimax strategies in the future rounds. Player i will have to play the minimax strategy and will receive v_i in the future rounds. Knowing this, player i has no incentive to deviate from \bar{s}_i .

Since any player has no incentive to deviate from \bar{s} , it is a NE. ■

Every level- k equilibrium is a NE and a NE is not necessarily a level- k equilibrium. Thus, the level- k equilibria are refinements of NE in repeated games. The payoff profiles of the level- k equilibrium form the Parteto front in an infinitely repeated game. We prove the existence of level- k equilibrium in general repeated games in proposition 2.

Theorem 2: In an infinitely repeated n -player game, there must be at least one level- k equilibrium.

Proof: A game must have at least one NE. We first consider the case that a repeated game has only one NE. Let (u_1, \dots, u_n) denote the payoff profile of the NE and (v_1, \dots, v_n) the minimax payoff profile. There must be $u_i = v_i$ for any i because, if they are not, the game should have more NE according to the folk theorem. Obviously, (u_1, \dots, u_n) is a level- n equilibrium payoff profile.

When there exists two or more NE, there must be at least one NE that is different from the minimax profile. Let (s_1, \dots, s_n) denote the strategy profile of such a NE. We first prove that there must be $v_i < u_i(s_1, \dots, s_n)$ for at least two players. Assume that there is $v_a < u_a(s_1, \dots, s_n)$ for the player a and $v_i = u_i(s_1, \dots, s_n)$ for any $i \neq a$. Since all players except a play their minimax strategies and they have no incentive to deviate unilaterally (because (s_1, \dots, s_n) is a NE), s_a is the minimax strategy for a . This conflicts with the premise that (s_1, \dots, s_n) is different from the minimax profile. Thus, there must be $v_i < u_i(s_1, \dots, s_n)$ for at least two players.

Suppose that there are $v_i < u_i(s_1, \dots, s_n)$ for k ($k \geq 2$) players in the NE. If those k players cannot improve their payoffs by changing their strategies simultaneously, this NE is a level- k equilibrium. Otherwise, there must be a strategy profile $\{s'_i\}$ such that those k players cannot further improve their payoffs by changing their strategies simultaneously and $\{s'_i\}$ is a level- k equilibrium. ■

A level- k equilibrium is not stable if it is not a NE in the stage game because once a player within the coalition changes his/her strategy in a level- k equilibrium, all other $k - 1$ players will be triggered to change their strategies.

Some level- k equilibrium can be evolutionarily stable. In the following section, we give the condition of evolutionarily stable states and propose an algorithm to compute evolutionarily stable states in n -player symmetric games.

IV. EVOLUTIONARILY STABLE PAYOFF

The space of strategy profiles of a repeated game is very complicated even for two-player 2×2 games. On the other hand, the space of payoff profiles is simple. For example, the space of payoff profiles of an m -player $n \times n$ game can be precisely defined as an m -dimension polyhedron. In this section, we study evolutionarily stable state in payoff space rather than in strategy space.

Consider a symmetric two-player game. Let $u(s, s')$ denote the payoff for playing strategy s against strategy s' .

Definition 3: The payoff $u(s, s)$ is called *evolutionarily stable payoff* if, for any $s' \neq s$, there are $u(s, s) \geq u(s', s)$ and $u(s, s) > u(s', s')$.

The evolutionarily stable payoff (ESP) is different from the concept of ESS in that ESP is defined in payoff space rather than in strategy space. The ESP denotes the population payoff in the evolutionarily stable state. It is easy to verify that there is at most one ESP in a two-player symmetric game.

An ESP may correspond to a group of strategy profiles, rather than a unique strategy profile. In an evolutionarily stable state, it is not necessary that all players adopt the same strategy even if they receive the same payoff. There might be an unlimited set of strategies that the players could adopt in order to receive the ESP.

The ESP is easy to compute because the payoff space of a game can be precisely defined. Given the set of NE payoff profiles characterized by means of the folk theorem, we simply need to check whether or not one point on the Pareto front of the set of NE payoff profiles is the ESP, as illustrated in Fig.1. The Pareto front intersects with the diagonal at point P. Point P represents the subset of NE payoff profiles that satisfy (7.b). Point P is the ESP profile if it weakly dominates any other payoff profiles within its neighborhood as in the case of Fig. 1(b). Otherwise, there is no ESP in the game. Based on this idea, we propose an algorithm to compute the ESP and/or the Pareto front in n -player symmetric games.

The definition of ESP can be extended to n -player games. Let $i = 1, \dots, n$ denote the i^{th} player and (u_1, \dots, u_n) be a payoff profile. Since the game is symmetric, there exists a set of payoff profiles that the payoffs of all players are identical, $u_1 = u_2 = \dots = u_n$ (those profiles located on the main

diagonal of the payoff matrix). Let $u = (\bar{u}, \dots, \bar{u})$ denote the payoff profile that every player receives the maximum identical payoff \bar{u} . We simply need to make clear whether or not u is the ESP profile. A simple algorithm can compute the ESP and the Pareto front.

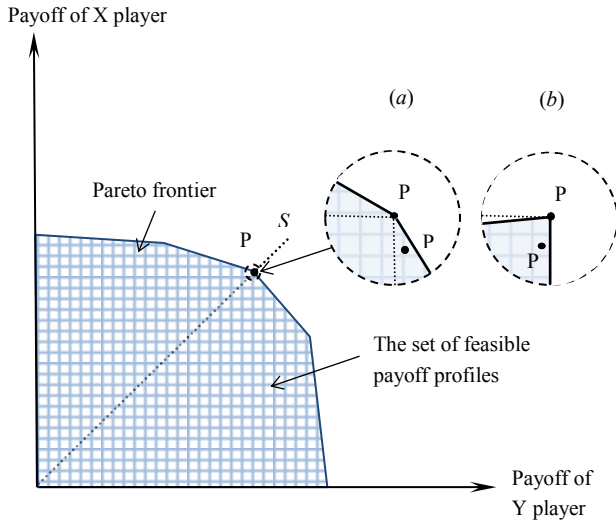


Figure 1 In a two-player symmetric game, the set of NE payoff profiles characterized by the folk theorem is illustrated by the grid area in the payoff space. X-Y coordinates are the average payoff per round of two players respectively. The Pareto front intersects with the diagonal at point P. (a) P is not an ESP profile because there exists P' such that (7.a) is not satisfied. (b) P is the ESP profile.

The profile u dominates another profile $u' = (u'_1, \dots, u'_n)$ if $\bar{u} > u'_i$. If u dominates every other payoff profile, it is the ESP. Otherwise, there is no ESP in the game. Note that we simply need to compare u with other pure-strategy payoff profiles.

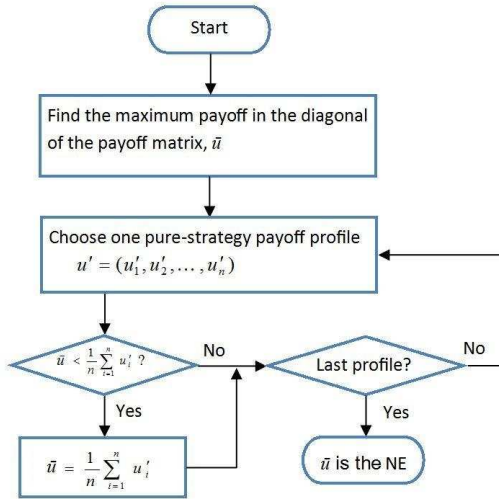


Figure 2 An algorithm to compute ESP and a Pareto optimum of a repeated n -player symmetric game.

If u is not ESP, it is not necessarily a Pareto optimum. When there is $\bar{u} < \frac{1}{n} \sum_{i=1}^n u'_i$, u must be dominated by some NEs in

which the players receive the identical payoff $\frac{1}{n} \sum_{i=1}^n u'_i$. By comparing all payoff profiles, we could find the NE payoff profile that is also the Pareto optimum for n players. Given that each player has m pure strategies, it needs at most $\frac{1}{2} nm^n$ comparisons. This algorithm can be illustrated by the flowchart in Fig. 2.

Given the Pareto optimum $u = (\bar{u}, \dots, \bar{u})$, the Pareto front can be computed by comparing all pure-strategy payoff profile with u . A payoff profile $u' = (u'_1, \dots, u'_n)$ belongs to the Pareto front if $\bar{u} < u'_i$ for some i and $u''_i < u'_i$ for any $u'' \neq u'$.

V. EVOLUTIONARY STABILITY ANALYSIS OF THREE GAMES

In this section, we compute the evolutionarily stable states of three repeated games, the iterated prisoner's dilemma, a coordination game and a three-player symmetric repeated game, by means of the proposed methodology in previous sections. The iterated prisoner's dilemma and the coordination game are typical repeated games in that the former does not have an ESP and the latter has one. The third game acts as a computational example to show the efficiency of the proposed algorithm.

A. Iterated Prisoner's Dilemma

The prisoner's dilemma (PD) is a two-player non-cooperative game in which two players try to maximize their payoffs by cooperating with, or betraying the other player. Also an n -player version PD is introduced in [37]. A PD can be represented as the following matrix (see Fig. 3):

		Y Player	
		C	D
X Player	C	R, R	S, T
	D	T, S	P, P

Figure 3 The payoffs of two players in the prisoner's dilemma is expressed as a matrix. Two players choose between two options, C and D. The values of R, S, T, AND P denote Reward for mutual cooperation, Sucker's payoff, Temptation to defect, and Punishment for mutual defection respectively.

There are two constraints, $T > R > P > S$ and $R > (T + S)/2$, which motivate each player to play non-cooperatively and prevent any incentive to alternate between cooperation and defection.

The "dilemma" faced by the prisoners is that, whatever the other does, each is better off defecting than cooperating. However, the payoff when both defect is worse for each player than the outcome they would have received if they had both cooperated.

Under the assumption of rationality, game theory predicts that both players choose to defect and their payoff profile is (P, P) , which is the unique NE of this game.

In the Iterated Prisoner's Dilemma (IPD) game, two players have to choose their mutual strategies repeatedly, and they also have a memory of their previous choices and the choices of the opponents. IPD has been heavily studied as an ideal model to study how cooperation emerges and persists in a non-cooperative environment [38-40]. According to the folk theorem, any payoff profile that strictly dominates the minimax

payoff profile (P, P) is a NE in an infinite length IPD. The grid area within ADBC in Fig. 4 illustrates the set of

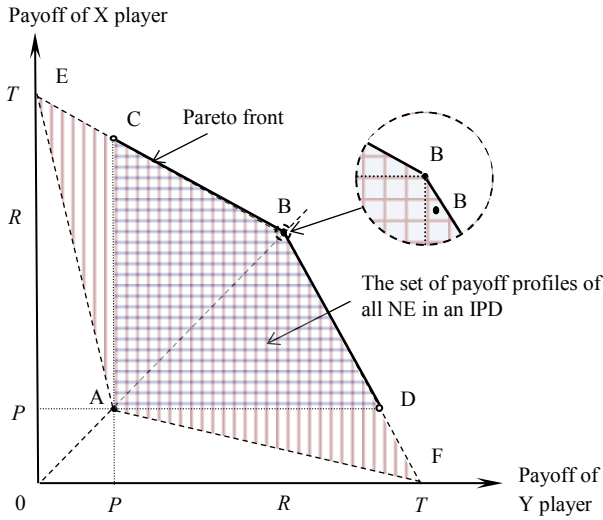


Figure 4 The set of payoff profiles of all NE in an infinite length IPD can be illustrated by the grid area within ADBC, which is characterized by the folk theorem. X-Y coordinates are the average payoff per round of two players respectively. Point A denotes the minimax payoff profile and B denotes the mutual cooperation payoff profile. The shadow area within AFBE denotes the set of feasible payoff profiles.

payoff profiles of all. Any payoff profile on CB and BD is a Pareto optimum so that any player cannot improve their payoff without reducing the other player's payoff.

The Pareto front intersects with the diagonal at B that is the mutual cooperation payoff profile. B is not an ESP profile because it does not dominate all other payoff profiles, B' for example, in the neighborhood. Thus, no ESP exists in IPD.

An evolutionary game does not necessarily converge to a stable state when there is no ESP. We ran a series of simulations to study how evolving players interact with each other in evolutionary IPD.

The evolutionary IPD model reflects the payoffs received by players in one generation in terms of copies of themselves represented in the next generation. Stochastic universal sampling is used to ensure that players produce offspring in proportion to payoffs received so that those with higher payoffs reproduce at a proportionately higher rate than those with lower payoffs. We set $R = 3$, $S = 0$, $T = 5$, and $P = 1$ in our simulations. Every player plays 50 rounds of IPD against all other players in the population in each generation. The fitness of an individual player is expressed by average payoff per round. The parents simply copy their strategies to produce offspring and neither mutation nor crossover is carried out.

An evolving player adjusts their strategy in order to adapt to the evolutionary dynamics. Let $(\rho_R, \rho_T, \rho_S, \rho_P)$ denote an IPD strategy where ρ_x ($x = R, T, S, P$) is the probability of choosing C given that the payoff in previous round is x . The evolving players in our simulations update ρ_x every round according to

$$\rho_x(t) = \rho_x(t-1) + \Delta \quad (10)$$


$$\Delta = -\Delta \quad \text{if } u < \bar{u} \quad (11)$$

where Δ is a small constant value, \bar{u} is the average payoff and u is the average payoff in the past five rounds. The idea is that, if a change of ρ_x leads to a higher payoff, keep changing it in that direction. Otherwise, change ρ_x in the opposite direction. Note that $\rho_x(t) \in [0, 1]$ and it was bounded if the computed value exceeded the limits.


In each evolutionary IPD game, we choose two evolving players randomly (by randomly setting the initial values of ρ_x) and generate a population of 20 individuals. Each strategy has 10 copies. The population evolves for 2,000 generations.

Some typical results are shown in Fig. 5 (a)-(d). In some situations, the evolution converges to stable states where two players receive equal payoffs, such as Fig. 5 (a) and (b). In other situations, one player is dominated by another player, such as Fig. 5 (c) and (d).


As the outcome of any single game is affected by chance, we repeat the evolutionary IPD for 1,000 times. The payoff profiles of two evolving players in 1,000 games are shown in Fig. 6. They distribute in the whole area of feasible payoff profiles, which shows the diversity and instability of evolutionary IPD games. The evolutionary dynamics is significantly influenced by the initial strategy combination of the population.

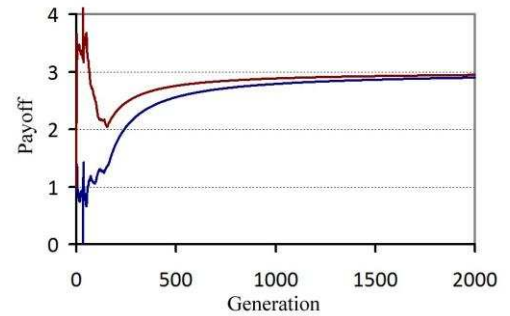

(a)

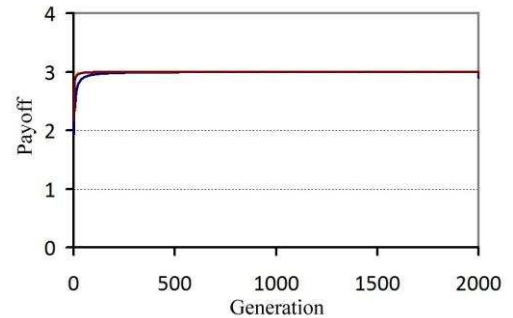

(b)

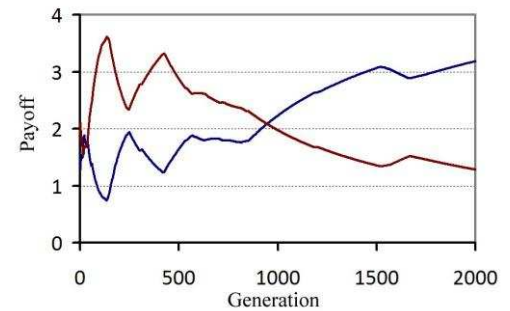

(c)

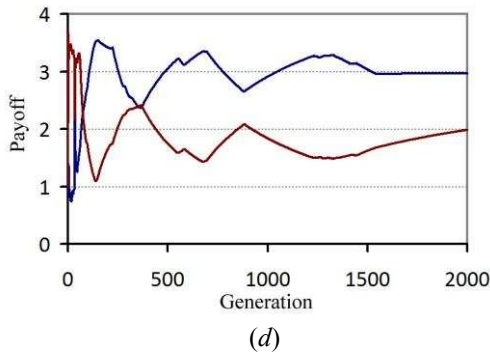


Figure 5 Typical results of evolutionary IPD games where two evolving players compete against each other. In each evolutionary IPD game, the initial population consists of two players and each player has 10 copies. There are totally 20 individuals. The population evolves for 2,000 generations. The payoffs shown in the figure are average payoffs of 10 copies in the game.

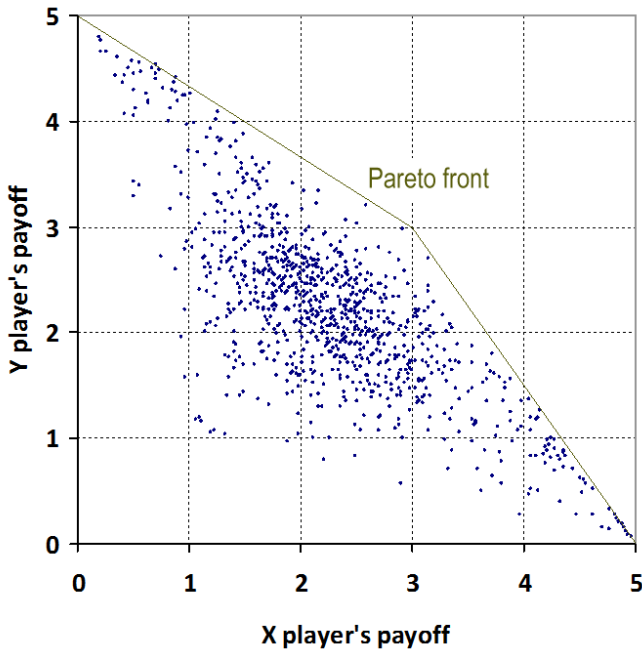


Figure 6 Payoff profiles in 1,000 evolutionary IPD games. Each diamond in the figure illustrates a pair of payoffs received by two players in an IPD.

B. A Coordination Game

Consider a coordination game with the payoff matrix as shown in Fig. 7. There are two pure-strategy NEs in this game when one player chooses *L* and the other chooses *R*. The players do not have any a priori knowledge about which NE strategy profile to choose. The probability that any NE is achieved is 0.5 no matter what pure or mixed strategies are adopted.

		Y Player	
		L	R
X Player	L	0, 0	1, 1
	R	1, 1	0, 0

Figure 7 Payoff matrix in a coordination game. Two players choose between two options, *L* and *R*.

If this game is played repeatedly, it may converge to a NE given that some reactive strategies are adopted. The coordination between *X* and *Y* can be achieved with probability $\rho \rightarrow 1$ in an infinite repeated coordination game if two players adopt the below strategies:

$$s_X^t = \begin{cases} L & \text{if X chose L and Y chose R at time } t - 1 \\ R & \text{if Y chose L and X chose R at time } t - 1 \\ \text{rand}\{L, R\} & \text{otherwise} \end{cases}$$

$$s_Y^t = \begin{cases} R & \text{if X chose L and Y chose R at time } t - 1 \\ L & \text{if Y chose L and X chose R at time } t - 1 \\ \text{rand}\{L, R\} & \text{otherwise} \end{cases}$$

The set of NE payoff profiles is represented by a line segment in *X*-*Y* coordinates as shown in Fig. 8. The endpoint *A* denotes the ESP profile, which corresponds to two pure-strategy NEs. The two NEs are evolutionarily stable states.

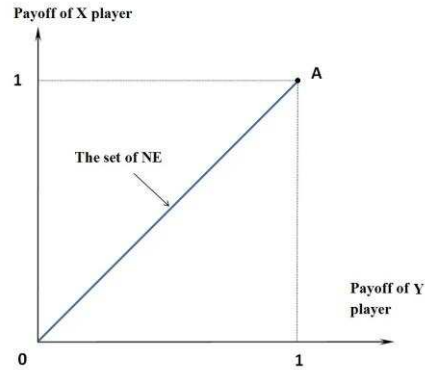


Figure 8 The set of NE payoff profiles in repeated coordination game is a line segment. The endpoint *A* is the ESP profile.

In a repeated game where the ESP exists, no payoff profile can be Pareto superior to the ESP. Thus, the Pareto front of the set of NE payoff profiles is simply a point, the ESP. The strategy profile corresponding to the ESP is dominant and no player has incentive to deviate from it.

When a game has an ESP, the evolutionary dynamic inevitably converges to a stable state so that every player receives the ESP. The ESP denotes the highest payoff each player could obtain and thus neither an individual player nor a coalition of players has an incentive to deviate from it.

C. A Three-player Symmetric Game

In this game, three players, *X*, *Y*, and *Z*, play a strategic game. Each player chooses a number in the range of (0, 1] independently. Let s_X , s_Y , and s_Z denote three players' choices. Their payoffs are determined by

$$u_i = \begin{cases} s_i & \text{if } s_X^2 + s_Y^2 + s_Z^2 \leq 1 \\ 0 & \text{otherwise} \end{cases} \quad (i = X, Y, Z)$$

This is a quadratic version of Divide-the-Dollar Game [46]. Assume that the players can only choose between the multiples

of 0.01. Thus, each player has 100 pure strategies and there are totally 10^6 pure-strategy payoff profiles.

The algorithm to compute the ESP and the Pareto front was coded in Visual C++ and run on a PC with dual 2.66GHz Intel CPU and 3.25GB RAM. It took approximately 0.023 second to compute the ESP and 17 seconds to compute the Pareto front. The intersection of the axis of symmetry and the hull of feasible payoff profiles is computed to be (0.55, 0.61, 0.57), which is close to the theoretically solution $(\sqrt{3}/3, \sqrt{3}/3, \sqrt{3}/3)$. This payoff profile is not an ESP and thus this game has no ESP. The computed Pareto front contains 7,535 payoff profiles, as shown in Fig. 9.

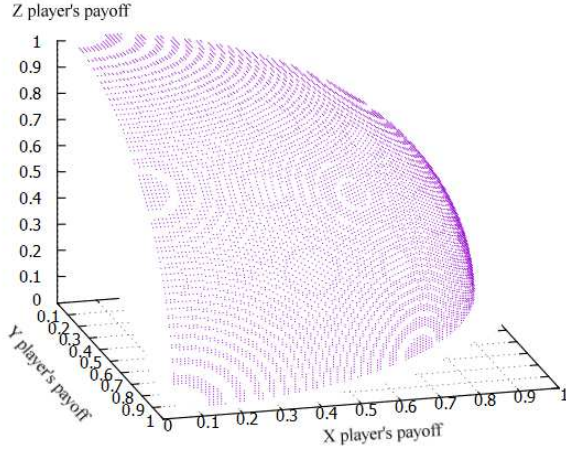


Figure 9 The computed Pareto front forms a part of unit sphere in the first quadrant.

We also run a simulation to show that the payoff profile $(\sqrt{3}/3, \sqrt{3}/3, \sqrt{3}/3)$ is a stable state for evolving players. In the simulation, three evolving players play against each other in an infinitely repeated game. Each evolving player starts with a random choice in the first round and then adjusts the choices in such a way: if a change has led to an increased payoff, keep changing the choices in this direction. Otherwise change the choices in the opposite direction. Payoffs of three players in 1,000 rounds are shown in Fig. 10. It shows that the evolving players tend to make identical choices even if they are different at the beginning of the game.

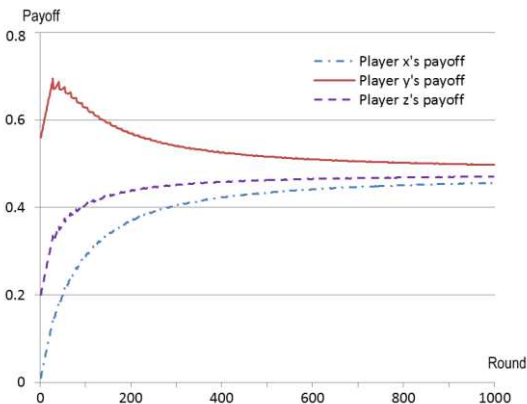


Figure 10 Payoffs of three evolving players in 1,000 interactions.

Many games do not have an ESP. The evolutionary dynamic of these games may be complex and it is not likely to converge to a stable state unless some restrictions are imposed. Generally, a game without ESP contains multiple NE and none of those NE is dominant. In an IPD game, for example, the NE payoff profiles form a convex polygon as shown in Fig. 4. The Pareto front (points on CB and BD) denotes a set of level- k equilibrium, which dominates those NE that are not Pareto optimum. How the players choose between multiple NE, which is probably the main reason for chaos and unpredictability in evolutionary game dynamics, is still an open question.

VI. CONCLUSION

Stability analysis based on the concept of ESS is flawed in that it is difficult to find an expression of possible strategies in a repeated game and that ESS is too strict to exist in most repeated games. We propose a new stability analysis of repeated games and evolutionary games based on a subset of NE, which we call them the level- k equilibrium. Evolutionarily stable states can be computed in the payoff space rather than in the strategy space so that there is no need to search and compare strategies in a complicated space.

Computing a NE of repeated games is difficult because computing the minimax profile is NP-hard. The possible payoff profiles in an n -player repeated game form an n -D convex polyhedron in the payoff space. We prove that some Pareto optimums of the hull of the polyhedron, the level- k equilibria, are NE payoff profiles. Computing the minimax profile is not necessary in computing the level- k equilibria, which means that finding specific subset of NE is tractable.

A strategy profile determines a unique payoff profile, and not vice versa. A payoff profile probably corresponds to a set of strategy profiles. For example, the players in IPD could implement mutual cooperation by adopting the strategies such as *always cooperate*, *tit-for-tat*, and numerous other strategies. Given a payoff profile, there must be at least one strategy profile for the players to adopt in order to receive the given payoffs.

The concept of ESP is defined in the payoff space and thus it can be easily computed. Generally, the strategy space of a repeated game is much more complicated than the payoff space when reactive strategies are taken into consideration. Given an ESP, there must be at least one corresponding pure strategy profile.

The level- k equilibria can be considered as refinement of NE of repeated games. In a level- k equilibrium not only does any individual player not have incentive to unilaterally change their strategies but also a group of k players has no incentive to deviate from it collectively. A level- k equilibrium is not necessarily a NE of the stage game because its corresponding strategies are reactive strategies which may not exist in one-shot games.

The existence of level- k equilibria may help to explain some phenomena in evolution that has not been well explained. Experiments have shown that cooperation can emerge and persist in multiple levels in the population [41, 42], and intermediate choices lead to less mutual cooperation [43]. The

level- k equilibrium suggests that cooperation in a local group can also be evolutionarily stable. With more intermediate choices, the set of level- k equilibrium increases and there are more possible evolutionarily stable states, with which the rate of cooperation is very likely to decrease because mutual cooperation in the whole population is only one of those stable states.

We also propose an algorithm to compute the ESP and the Pareto front of n -player symmetric games. The problem of computing the ESP can be simplified significantly because the convex hulls of feasible payoff profiles are symmetric for symmetric games. We simply need to compute the intersection point of the Pareto front and the main diagonal, which point denotes the possible ESP of the game.

This research helps to explain why the processes of evolution are diverse in some games. In those games where there is no ESP, IPD for example, the evolutionary dynamic could be complex and the results of evolution are hard to predict. We have shown that any feasible payoff profile is possible for evolving players in IPD simulations. The existence of reactive strategies suggests that individual players could coordinate their actions even if there is no communication among them, which provides another explanation for collective behaviors in evolution.

Choosing between multiple NE is still an unsolved problem in game theory. It is essentially a decision making under uncertainty because the subjective preferences of players are involved. Fuzzy logic seems to be a promising tool to solve this problem by using linguistic preference and fuzzy rules to prioritize payoff profiles [44, 45]. This will be the focus of our future work.

ACKNOWLEDGEMENT

We would like to thank Prof. Xin Yao for his insightful comments. The research of this paper was supported by the Engineering and Physical Sciences Research Council UK (EPSRC) project EP/H000968/1.

REFERENCES

- [1] Axelrod, R. (1984) *The Evolution of Cooperation*. ISBN 0-465-02121-2.
- [2] Chong S Y, Humble J, Kendall G, Li J, Yao X (2007) Iterated prisoner's dilemma and evolutionary game theory. In: *The iterated prisoners' dilemma: 20 years on*. Singapore: World Scientific, *Advances in Natural Computation* 4, 23–62.
- [3] Maynard Smith, J. and Price, G. (1973). The Logic of Animal Conflict. *Nature*, 246 (5427): 15.
- [4] Thomas, B. (1985) On evolutionarily stable sets, *Journal of Mathematical Biology*, 22: 105-115.
- [5] Boyd, R. and Lorberbaum, J. (1987) No pure strategy is evolutionarily stable in the repeated Prisoner's Dilemma game, *Nature*, 327: 58-59.
- [6] Lorberbaum, J. (1994) No strategy is evolutionarily stable in the repeated prisoner's dilemma, *Journal of Theoretical Biology*, 168: 117-130.
- [7] Yao, X. (1996) Evolutionary stability in the N-person iterated prisoner's dilemma, *BioSystems*, 37(3):189-197.
- [8] Maynard Smith, J. (1982) *Evolution and the Theory of Games*. Cambridge University Press. ISBN 0-521-28884-3.
- [9] Cressman, R. (2003) *Evolutionary Dynamics and Extensive Form Games* (Vol.5). The MIT Press.
- [10] Cressman, R. and Tao, Y. (2014) The replicator equation and other game dynamics, *Proceedings of the National Academy of Sciences* 111: 10810-10817.
- [11] Friedman J. (1971) A non-cooperative equilibrium for supergames. *Review of Economic Studies* 38(1): 1-12.
- [12] Rubinstein, A. (1979) Equilibrium in Supergames with the Overtaking Criterion, *Journal of Economic Theory*, 21: 1–9.
- [13] Gilboa, I. and Zemel, E. (1989) Nash and correlated equilibria: Some complexity considerations, *Games and Economic Behavior* 1:80–93.
- [14] Chen, X. and Deng, X. (2006). Settling the complexity of two-player nash equilibrium. In Proc. 47th IEEE Symposium on Foundations of Computer Science, pp. 261–272.
- [15] Daskalakis, C., Goldberg, P. and Papadimitriou, C. (2006). The complexity of computing a nash equilibrium. In Proc. 38th ACM Symposium on Theory of Computing, pp. 71–78.
- [16] Chen, X., Teng, S. and Valiant, P. (2007) The approximation complexity of win-lose games. In Proceedings of the eighteenth annual ACM-SIAM symposium on Discrete algorithm.
- [17] Chen, X., Deng, X. and Teng, S. (2006). Computing Nash equilibria: Approximation and smoothed complexity. In Proc. 47th IEEE Symposium on Foundations of Computer Science, pp. 603–612.
- [18] Borgs, C., Chayes, J., Immorlica, N., Kalai, A. T., Mirrokni, V., and Papadimitriou, C. (2008) The myth of the folk theorem. In *Proceedings of the fortieth annual ACM symposium on Theory of computing* (pp. 365-372). ACM.
- [19] Halpern, J. Y., Pass, R., and Seeman, L. (2014) The truth behind the myth of the folk theorem. In *Proceedings of the 5th conference on Innovations in theoretical computer science*, pp. 543-554. ACM.
- [20] Littman, M. and Stone, P. (2005) A polynomial-time Nash equilibrium algorithm for repeated games. *Decision Support Systems*, 39(1): 55-66.
- [21] Harsanyi, J. (1967) Games with Incomplete Information Played by 'Bayesian' Players, I-III. *Management Science*, 14: 159-182, 320-334, 486-502.
- [22] Aumann, R. (1959) *Acceptable points in general cooperative n-person games in "Contributions to the Theory of Games IV"*, Princeton Univ. Press, Princeton, N.J.
- [23] Moreno, D. and Wooders J. (1996) Coalition-Proof Equilibrium, *Games and Economic Behavior*, 17: 82–112.
- [24] Mertens, J. (2003) Ordinality in Non Cooperative Games, *International Journal of Game Theory*, 32: 387–430
- [25] Govindan, S. and Wilson, R. (2005) Refinements of Nash equilibrium. *The new Palgrave dictionary of economics*, 2.
- [26] Nash, J. (1951) Non-cooperative Games. *The Annals of Mathematics*, 54(2):286-295.
- [27] Nowak, M. and Sigmund, K. (1993) A strategy of win-stay, lose-shift that outperforms tit-for-tat in the prisoner's dilemma game. *Nature*, 364, 56-58.
- [28] Li, J. and Kendall, G. (2009) A strategy with novel evolutionary features for the iterated prisoner's dilemma, *Evolutionary Computation*, 17(2): 257-274.
- [29] Press, W. and Freeman, D. (2012) Iterated Prisoner's Dilemma contains strategies that dominate any evolutionary opponent. *Proceedings of the National Academy of Sciences* 109(26): 10409-10413.
- [30] Ishibuchi, H. and Namikawa, N. (2005) Evolution of Iterated Prisoner's Dilemma Game Strategies in Structured Demes Under Random Pairing in Game Playing, *IEEE Transactions on Evolutionary Computation*, 9(6): 552-561.
- [31] Quek, H., Tan, K., Goh, C. and Abbass, H. (2009) Evolution and Incremental Learning in the Iterated Prisoner's Dilemma, *IEEE Transactions on Evolutionary Computation*, 13(2): 303-320.
- [32] Mittal, S. and Deb, K. (2009) Optimal Strategies of the Iterated Prisoner's Dilemma Problem for Multiple Conflicting Objectives, *IEEE Transactions on Evolutionary Computation*, 13(3): 554-565.
- [33] Chong, S. and Yao, X. (2005) Behavioral Diversity, Choices and Noise in the Iterated Prisoner's Dilemma, *IEEE Transactions on Evolutionary Computation*, 9(6): 540-551.
- [34] Chiong, R. and Kirley, M. (2012) Effects of Iterated Interactions in Multiplayer Spatial Evolutionary Games, *IEEE Transactions on Evolutionary Computation*, 16(4): 537-555.
- [35] Li, J. and Kendall, G. (2013) Evolutionary stability of discriminating behaviors with the presence of kin cheaters, *IEEE Transactions on Cybernetics*, 43(6): 2044-2053.
- [36] Ashlock, D. and Kim, E-Y. (2008) Fingerprinting: Visualization and Automatic Analysis of Prisoner's Dilemma Strategies, *IEEE Transactions on Evolutionary Computation*, 12(5): 647-659.
- [37] Yao, X. and Darwen, P. (1994) An experimental study of N-person iterated prisoner's dilemma games, *Informatica*, 18(4):435–450.
- [38] Ferrière, R. and Michod, R. (1995) Invading wave of cooperation in a spatial iterated prisoner's dilemma, *Proceedings of the Royal Society B*, 259(1354): 77-83.

- [39] Nowak, M., Sasaki, A., Taylor, C. and Fudenberg, D. (2004) Emergence of cooperation and evolutionary stability in finite populations. *Nature*, 428: 646–650.
- [40] Li, J., Hingston, P. and Kendall G. (2011) Engineering design of strategies for winning iterated prisoner's dilemma competitions. *IEEE Transactions on Computational Intelligence & AI in Games*, 3(4): 348-360.
- [41] Darwen, P. and Yao, X. (2002) Co-Evolution in Iterated Prisoner's Dilemma with Intermediate Levels of Cooperation: Application to Missile Defense, *International Journal of Computational Intelligence and Applications*, 2(1):83-107.
- [42] Darwen, P. and Yao, X. (2000) Does extra genetic diversity maintain escalation in a co-evolutionary arms race, *International Journal of Knowledge-Based Intelligent Engineering Systems*, 4(3):191-200.
- [43] Darwen, P. and Yao, X. (2001) Why More Choices Cause Less Cooperation in Iterated Prisoner's Dilemma, Proceedings of the 2001 Congress on Evolutionary Computation, NJ, USA, pp.987-994.
- [44] Coupland, S. and John, R. (2007) Geometric type-1 and type-2 fuzzy logic systems, *IEEE Transactions on Fuzzy Systems*, 15(1): 3-15.
- [45] Chakeri, A., Habibi, J. and Heshmat, Y. (2008) Fuzzy type-2 Nash equilibrium, International Conference on Computational Intelligence for Modelling Control & Automation, pp. 398-402.
- [46] Anbarci, N. (2001) Divide-the-dollar game revisited. *Theory and Decision*, 50(4), 295-303.
- [47] Berger, U. (2007) Brown's original fictitious play, *Journal of Economic Theory*, 135:572-578.
- [48] Von Stengel, B. (2012) Rank-1 games with exponentially many Nash equilibria. *arXiv preprint arXiv:1211.2405*.
- [49] Zinkevich, M., Johanson, M., Bowling, M., and Piccione, C. (2007) Regret minimization in games with incomplete information. In *Advances in neural information processing systems*, 1729-1736.



Robert John has a BSc Mathematics, a MSc in Statistics and a PhD in Fuzzy Logic. He worked in industry for 10 years as a mathematician and knowledge engineer developing knowledge based systems for British Gas and the financial services industry. Bob spent 24 years at De Montfort University in various roles including Head of Department, Head of School and Deputy Dean. He led the Centre for Computational Intelligence research group from 2001 until 2012. He has over 150 research publications of which about 50 are in international journals. Bob joined the University of Nottingham in 2013 where he heads up the research group ASAP in the School of Computer Science. The Automated Scheduling, Optimisation and Planning (ASAP) research group carries out multi-disciplinary research into mathematical models and algorithms for a variety of real world optimisation problems.



Jiawei Li (M12) received the B.Sc. and Ph.D. degree in engineering from the Harbin Engineering University, Harbin, China in 1992 and 1998 respectively. He became a lecturer in Robotics Institute at Harbin Institute of Technology, China in 1999. Currently, he is a research fellow in the School of Computer Science at University of Nottingham, Nottingham, U.K. His research interests include a number of decision making and optimization methodologies including evolutionary game theory, fuzzy logic, interval probability

theory, hyper-heuristics and economic risk benefit analysis. He is especially interested in solving complex real world problems by integrating multiple decision making methods.



Graham Kendall (M03-SM10) received the Bachelor's degree in computation (1st class, honors) from the University of Manchester Institute of Science and Technology, Manchester, U.K. in 1997 and the Ph.D. degree in computer science from the University of Nottingham, Nottingham, U.K., in 2001. His previous experience includes almost 20 years in the Information Technology industry where he held both technical and managerial positions. He is a Professor of Computer Science at University of Nottingham and is currently based at

their Malaysia Campus where he holds the position of Vice-Provost (Research and Knowledge Transfer). He is a Director of two companies (EventMAP Ltd., Nottingham, U.K.; Aptia Solutions Ltd., Nottingham, U.K.) and CEO of two companies (MyRIAD Solutions Sdn Bhd, Malaysia and MyResearch Sdn Bhd, Malaysia). He is a Fellow of the Operational Research Society. He is the editor-in-chief of the IEEE TRANSACTIONS ON COMPUTATIONAL INTELLIGENCE AND AI IN GAMES and an Associate Editor of eight international journals, including the IEEE TRANSACTIONS ON EVOLUTIONARY COMPUTATION. He chaired the Multidisciplinary International Conference on Scheduling: Theory and Applications in 2003, 2005, 2007, 2009, and 2011, and has chaired several other international conferences, which has included establishing the IEEE Symposium on Computational Intelligence and Games. He has been awarded externally funded grants worth over £6 million from a variety of sources including Engineering and Physical Sciences Research Council (EPSRC) and commercial organizations.