

ePub^{WU} Institutional Repository

Stefan Sobernig and Bernhard Hoisl and Mark Strembeck

Protocol for a Systematic Literature Review on Design Decisions for UML-based DSMLs

Paper

Original Citation:

Sobernig, Stefan and Hoisl, Bernhard and Strembeck, Mark (2014) Protocol for a Systematic Literature Review on Design Decisions for UML-based DSMLs. *Technical Reports / Institute for Information Systems and New Media*, 2014/02. WU Vienna University of Economics and Business, Vienna.

This version is available at: <http://epub.wu.ac.at/4311/>

Available in ePub^{WU}: October 2014

ePub^{WU}, the institutional repository of the WU Vienna University of Economics and Business, is provided by the University Library and the IT-Services. The aim is to enable open access to the scholarly output of the WU.

Protocol for a Systematic Literature Review on Design Decisions for UML-based DSMLs*

Stefan Sobernig¹, Bernhard Hoisl^{1,2}, and Mark Strembeck^{1,2}

¹ Institute for Information Systems and New Media,
Vienna University of Economics and Business (WU Vienna)

² Secure Business Austria Research (SBA Research)
`{firstname.lastname}@wu.ac.at`

Document History

| | | |
|------------------|---|---------------------------|
| Version 1 | Initial document, top-level structure adapted from [64]. The procedural steps as proposed by Kitchenham [63] are applied. | Stefan Sobernig, Oct 2012 |
| Version 2 | Initial data extraction scheme and research questions; comments on research questions, search strategy and process, inclusion/exclusion criteria, quality assessment | Bernhard Hoisl, Oct 2012 |
| Version 3 | Protocol revision, the procedure has been extended to include steps described by guidelines on the quasi-gold standard by [123] and backward snowballing (see, e.g., [59]). | Stefan Sobernig, Jan 2013 |
| Version 4 | Revised inclusion/exclusion criteria | Bernhard Hoisl, Jan 2013 |
| Version 5 | Revised inclusion/exclusion criteria | Bernhard Hoisl, Feb 2013 |
| Version 6 | Protocol revision, adding dedicated sections about intermediate results and deviations from the protocol, for each step. | Stefan Sobernig, Jul 2013 |
| Version 7 | Adding Section 8 on applying a <i>frequent item-set analysis</i> [16] on the extracted decision-option sets. | Stefan Sobernig, Jul 2014 |
| Version 8 | Revising document, cleaning up, proof-reading and fixing some typos | Stefan Sobernig, Oct 2014 |

On this Document

This document is the protocol on planning and reporting the conduct of a systematic literature review (SLR) to identify and to extract design decisions from existing and documented domain-specific modeling languages (DSMLs) implemented using the Unified Modeling Language (UML). It is provided as supplemental material for two other documents. On the one hand, there is a manuscript submitted for publication which presents and discusses the results of this SLR. On the other hand, there is the decision-record catalog [54] which was extended and validated using this SLR study. Therefore, the protocol is supposed to be read in conjunction with those two documents, to trace all details of performing and eventually reproducing the steps of the SLR. Without the context of the two companion documents (manuscript, catalog), it may be difficult to comprehend the protocol as a standalone artifact.

Format and Notation. In this protocol, two different currents of text interleave. On the one hand, the procedural steps planned to perform the SLR are documented in the main text stream (sections, paragraphs). On the other hand, deviations from the planned procedure as observed when performing the SLR, as well as the intermediate results (selection decisions, data processing) obtained from individual steps are documented in greyed text blocks (including auxiliary data tables and figures). These reports on deviations, as well as on intermediate and raw results follow the corresponding main-text sections directly.

In Sections 2 and 4, word groups are decorated (e.g., underline, strikethrough) to indicate whether they were considered for formulating the search string used in the automated search of the SLR or not. These text decorations do *not* mark change information between different revisions of this document.

*This work has partly been funded by the Austrian Research Promotion Agency (FFG) of the Austrian Federal Ministry for Transport, Innovation and Technology (BMVIT) through the Competence Centers for Excellent Technologies (COMET K1) initiative and the FIT-IT program.

1 Motivation

A growing number of publications document the principles and the design process of domain-specific languages (DSLs; see, e.g., [121, 107, 104, 70]). A domain-specific modeling language (DSML) is (usually) a DSL with a graphical concrete syntax. DSMLs often focus the (platform independent) problem concerns in the target domain rather than issues of implementing the domain (see, e.g., [6]). The DSML itself is built on top of an abstract syntax (i.e., the core language model) and typically developed using metamodeling techniques (rather than grammars, for instance). Often DSML developers use formal specification techniques to express the structural and behavioral semantics [57]. A DSML is then typically integrated into a model-driven development tool chain (e.g., based on Eclipse), rather being deployed in a DSL-specific workbench.

In the following, we are particularly interested in DSMLs which are based on the Unified Modeling Language (UML) and are developed via UML extension mechanisms—native ones and beyond. Examples include pruning/reduction [96]), metamodel slicing [15], package referencing and merging [28, 22], as well as UML profiles [38, 82]. Due to the wide variety of different extension options, researchers started to document and reflect on best practices of UML-based DSML development (see, e.g., [48, 105, 106, 6, 66, 94, 67, 115, 95, 97, 81]).

In this context, different research approaches and research methods have been applied to systematically collect, organize, and review current (best and worst) practices, such as case studies [105], controlled experiments [106], critical-analytical studies based on a reference theory [97], and, more recently, systematic literature reviews [81]. However, so far these contributions focused on single elements of a DSML design in isolation (e.g., the concrete syntax for its cognitive effectiveness, or patterns of structuring the abstract syntax).

Prior to this SLR study, we have already collected and documented development experiences for UML-based DSMLs in terms of a catalog of recurring design decisions [53, 52]. The corresponding *decision records* describe the *decision context* (e.g., a development phase or certain technology choices), state a repeatedly reported design *problem* regarding a DSML design element, and document design *options* to solve the problem. These decision records can be referenced from design-rationale documents (e.g., decision templates or decision diagrams) documenting the decision making process for a particular DSML. A particular decision (and the corresponding design-rationale document) then refers to the respective design options (see Fig. 1). All options adopted for a DSML are referred to as the *decision-option set* of this DSML.

However, there is currently no empirical evidence on the actual acceptance and adoption of different decision options (as identified by our catalog) in research-driven or industry-driven DSML development projects. In addition, the inter-dependencies between the design decisions (e.g., between designing the abstract and the concrete syntax) have not been investigated and documented empirically. In particular, inter-dependencies as indicated by recurring decision-option sets have not been addressed yet.

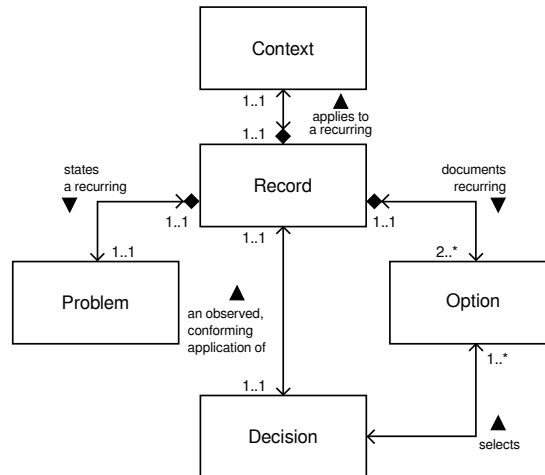


Figure 1: Conceptual overview of decision records, observed decisions, and decision option-sets.

Given the number of DSML artifacts (abstract syntax, language constraints, concrete syntax, behavior specification, and platform integration) and the iterative nature of DSML development [107], we propose a systematic review of scientific publications documenting the design processes of developing UML-based DSMLs. The aim of this systematic review is to collect a data set on actual design decisions and decision-option sets to document them and to evaluate our catalog of decision records. This way, we provide practical means in terms of decision records and characteristic solutions which help DSML engineers to

reuse rationale preserved from prior design-decision making to document the rationale behind their own decision making.

2 Research Questions

We are motivated to establish whether decision-making processes for designing domain-specific modeling¹ (DSM)¹ languages can be adequately documented in a structured and reusable manner via the *decision records* in our decision catalog (see Fig. 1). Therefore, our research questions are:

RQ 1 Is the DSML decision catalog complete with respect to the DSML design documentation ? Do the decision records [52, 53] provide sufficient coverage of decision options^d, decision drivers^d, and decision consequences^d for the Meta Object Facility^t (MOF^t) and the Unified Modeling Language^t (UML^t)? In addition, is the format used to represent the DSML design-decision records [52, 53] sufficient?

RQ 2 Based on the decision records from our decision catalog: What are the recurring combinations of design decisions^d and decision options^d that can be mined from scientific papers and DSML project documentation on design-decision making^d ?

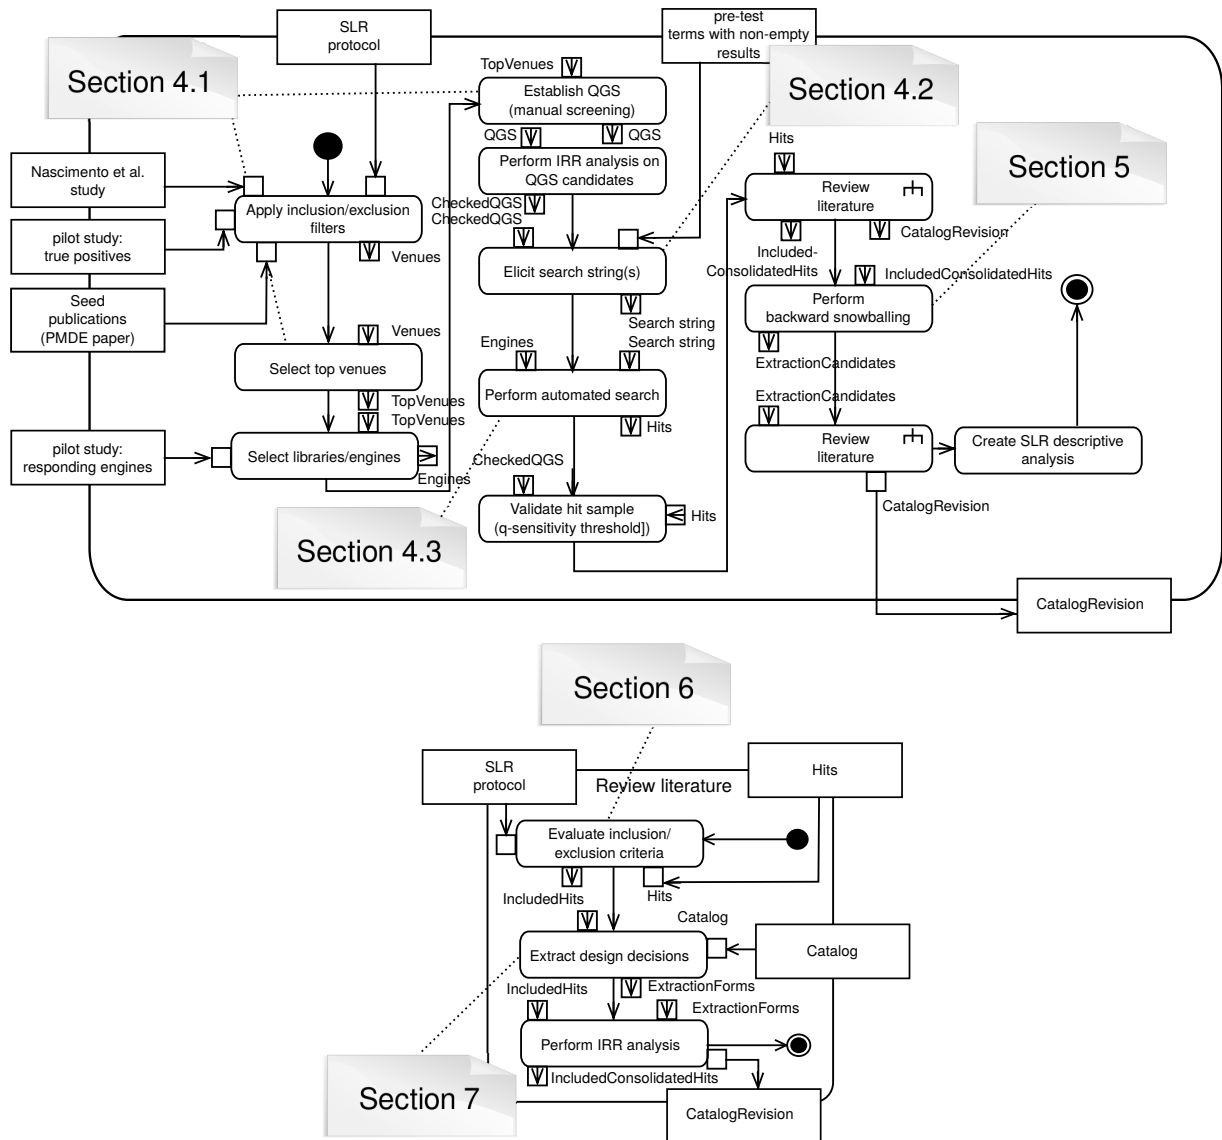


Figure 2: Procedural overview of the systematic review and the corresponding protocol sections providing the details on the procedural steps.

3 Overview

To answer the above research questions, we perform a systematic literature review (SLR). In particular, our systematic review includes five major steps (see also Figure 2):

0. *Preparation*: In [52], we documented a draft version of our decision-record catalog for selected phases of DSML development. This version of the catalog was based on a narrow and subjectively chosen set of DSML projects (documented via corresponding publications). In this context, we also drafted a first protocol for a systematic review based on the guidelines from [64]. This draft was used for running a pilot review in a Bachelor thesis project that was supervised by the protocol authors [36]. The pilot study was limited to a small number of search engines (e.g., without considering their coverage) and it applied ad hoc restrictions on the search hits. The pilot study helped revise the protocol for the actual review run (see also Figure 2). In addition, we tried to identify comparable secondary studies (e.g., literature surveys, systematic reviews) on the same subject or on closely related subjects. While there is secondary research on designing DSMLs in the context of the UML (see, e.g., [48, 105, 106, 6, 66, 94, 67, 115, 95, 97, 81]), we did only find two methodically comparable studies: a systematic mapping study on DSLs in the broadest sense by Nascimento et al. [74] and a systematic literature review on UML profiles [81]. However, while the former is not specific to UML-based DSMLs, the latter only reflects on a single UML extension technique. As a consequence, they did not qualify as adequate review designs for our SLR.
1. *Establishing a quasi-gold standard (QGS) corpus*: We will first build up a QGS corpus of reference publications, collected in a systematic process of manual search. A QGS can be used to evaluate the automated search conducted in an SLR (see [124]). The main objectives when using a QGS are to quantify the retrieval quasi-sensitivity (see below) of the automated search (per search engine, overall) and to provide means for refining the search terms in a stepwise manner. To create the QGS corpus, we will select top publication venues from our seed publications (see [52]), our pilot review (see [36]), and the third-party mapping study we identified (see [74]¹). By manually screening the corresponding proceedings and archives, we will then identify the publications for the QGS. Further details on the planned QGS procedure are reported in Section 4.
2. *Performing the automated search*: We will then apply the search strategy as elaborated on in Section 4. This involves defining (and continuously refining) the set of search terms, translating them into search-engine-specific representations, running the individual search operations, and collecting the results from the search engines in a processable manner. Based on the quasi-sensitivity computation allowed by the previously constructed QGS corpus, the automated search will be ended as soon as the quasi-sensitivity threshold is reached. Following [123], the quasi-sensitivity is defined as the ratio of relevant papers identified by the QGS retrieved through the automated search to the total number of relevant papers (i.e., the size of the QGS corpus). The threshold to be reached is a quasi-sensitivity level between 70% and 80% [123].
3. *Performing the first literature review*: In our SLR, reviewing the search hits involves both filtering them according to predefined selection criteria (see Section 6) and extracting design-decision data from the included search hits. The literature review is therefore tightly coupled with the step of data extraction (see Section 7).
4. *Performing backward snowballing to identify additional DSML projects*: To further extend the coverage of our SLR, we will perform an additional manual review of the bibliographies (i.e. the reference sections) extracted from the publications of the automated search. The goal of this backward snowballing [114] is to reduce the risk of missing relevant DSML development projects (see Section 5 for details).
5. *Performing a second literature review*: In a last step, we will review the snowballing hits, again by applying the respective selection criteria and by extracting the decisions according to our data-extraction guidelines (see Section 7).

At all stages of the review procedure, we will make sure that we follow established guidelines for designing, conducting, and reporting systematic literature reviews (in particular, [114, 64, 124, 59]). In addition, we use different, accepted statistical techniques of inter-rater reliability (IRR) analysis (e.g., the Kupper-Hafner Index [65]) to report on the level of agreement and disagreement, respectively, between the experts involved in reviewing publications for inclusion/exclusion and for extracting design decisions.

¹We received the data set of publications collected during this mapping study in private communication from the authors of [74]

4 Search Strategy

In revision 3 of this protocol, the original search strategy was superseded by a QGS-based one. The original search strategy (rev. 2) consisted of an subjective construction of a search string and an ad hoc selection of search engines. We report the details of the original search strategy in Section 4.0 to the extent the results of the original automated search entered the revised SLR design (e.g., to elicit the search string). The authoritative, QGS-based search strategy is documented starting with Section 4.1. All details of the pilot study are documented in Filtz [36].

Valid search terms considered in our SLR are both atomic and composite words, separated by whitespace or dash characters.

4.0 Pilot Search

We defined three groups of search terms: terminology denoting a relevant (meta-)modeling technology (technology^t), terminology specific to (meta-)modeling language engineering (language engineering^l), and terminology indicating the documentation of design rationale in general (documentation^d).

To form the actual, complex search string, we brought these three subsets into a disjunctive-composite form (see below).

We derived the actual search terms from the following sources:

1. *Research questions*: Derive major terms from the research questions. The terms derived from the five research questions are highlighted in Section 2.
2. *Primary studies*: Extract terms from the title, abstract, and keywords (if any) from the 18 seed publications, available at that time (Oct. 2012), on the 16 DSML projects that we considered initially (see also Section 4.1 and Table 2).

[109] : Extended Activity Models^t, ~~Interdependent Concern Behavior~~
[108] : ~~Process Modeling, Role-based Access Control, Role Engineering, Systems Modeling, UML^t, Extended UML Activity Models^t, Process-related RBAC Models~~
[90] : ~~Process-Related Duties, Extended UML Activity Diagrams^t, Extended UML Interaction Diagrams^t~~
[92] : ~~Access Control, Business Processes, Delegation, RBAC, Consistent Delegation, Process-Aware Information Systems~~
[91] : ~~Access Control, Delegation, RBAC, UML^t, Modeling Support^l, Roles, Tasks, Duties, Process-Related RBAC Context~~
[50] : Modeling Support^l, ~~Confidentiality, Integrity, Object Flows, Activity Models, Security Properties, Process Modeling, UML~~
[89] : ~~Consistency Checks, Duties, Extended UML2 Activity Models^t, Binding-of-duty, OCL^t (Object Constraint Language^t), RBAC, Security, Separation-of-Duty, UML^t~~
[49] : Integrity, Confidentiality, Annotations^l, Service Interfaces, Service-Oriented Architecture, Security Engineering, UML^t, Web Services, SoaML^t (**Service-oriented architecture Modeling Language^t**), Model-Driven Development^l
[55] : ~~Secure Object Flows, Process-driven SOAs, Integrated Model-driven Approach^l, Process modeling, Secure object flows, Security engineering, Service-oriented architecture, Model-driven Development^l, UML^l, SoaML^t, Web-services~~
[93] : ~~Context-Aware RBAC Models, Business Processes, Ubiquitous Computing Environments, Access Control, Business Process Modeling, Context Constraints, UML^t~~
[51] : UML Extension^l, Model-driven Specification^l, ~~Audit Rules, Model-driven Development^l, UML^t~~
[120] : Composition, Dynamic Programming Environments, Model Transformations
[8] : ~~Model-Driven Security, UML Models^t, Access Control Infrastructures, Software Engineering^l, Requirements/Specifications Languages^l, Requirements/Specifications Methodologies^l, Requirements/Specifications Tools^l, Design Tools^l, Design Techniques^l, Computer-aided Software Engineering^l, Object-oriented Design Methods, Management of Computing and Information Systems, Security, Protection, Design^l, Languages^l, Security, Role-Based Access Control, Model Driven Architecture^l, Unified Modeling Language^t, Object Constraint Language^t, Metamodeling^l, Security Engineering~~

[61] : ~~Secure Systems Development~~, UML^t
 [43] : ~~Security Engineering~~, ~~Service-Oriented Architectures~~
 [37] MDA¹ (**model-driven architecture**¹), ~~Access-Control Specifications~~, MOF^t, UML Profiles^t,
 MDD¹, UML^t, ~~CORBA~~, ~~J2EE~~, ~~Security~~
 [86] ~~Business process~~, ~~Security requirement~~, UML 2.0^t, Activity Diagrams^t, ~~Secure Business~~
~~Process Model Specification~~, Activity Diagram Profile^t
 [35] ~~Data Warehouses~~, Multidimensional Modeling¹, ~~Access-Control~~, ~~Audit~~, UML^t, ~~Audit~~
~~Model~~

3. *Secondary studies*: Extract terms from the title, abstract, and keywords (if any) from four secondary studies on DSML development and DSML design processes. This group of terms aims primarily at identifying search terms specific to explicit design-rationale documentation for DSMLs.

[78] : Modeling Language Design¹, Modeling languages¹, Design principles^d, UML^t, Unification¹
 [85] : ~~Lightweight Approach~~, Domain-Specific Modeling Languages Design¹, Model-Driven
 Engineering¹, UML^t, profiles^t, Domain-Specific Modeling Languages¹
 [94] : ~~Systematic Approach~~, Domain-Specific Language Design, UML, ...
 [20] : Customizing¹ (**customization**¹), UML^t
 [107] : Systematic Development¹, Domain-Specific Languages¹, ~~applied software engineering~~,
 Model-Driven Software Development¹ (**MDSD**¹), Language Engineering¹

After merging the three subsets, data cleansing was performed – this esp. includes:

- Removing duplicates;
- Reducing plural to singular forms;
- Appending the extended writing for acronyms and vice versa;
- Adding alternative noun forms for gerunds;
- Turning uppercase into lowercase writing;

Terms added due to data cleansing are written in bold font face in the term list above. This way, we obtained the search string in Listing 1.

Listing 1: The initial search string used for the pilot search (see [36]).

```
(meta object facility or MOF or unified modeling language or UML or
object constraint language or OCL or profile or UML profile or UML 2.0
or UML2 or UML 2 or extended activity diagram or extended activity
model or extended UML activity diagram or extended UML interaction
diagram or activity diagram profile)
and
(domain-specific modeling language or DSML or model-driven development
or MDD or model-driven engineering or MDE or modeling language design
or modeling language or unification or domain-specific modeling
language design or customizing or customization or model-driven
software development or MDSD or language engineering or modeling
support or activity model or SoaML or service-oriented architecture
modeling language or integrated model-driven approach or extension or
requirement language or specification language or requirement
methodology or specification methodology or requirement tool or
specification tool or design tool or model-driven architecture or MDA
or metamodeling)
and
(design decision or design-decision making or decision option or
decision driver or decision consequence or design documentation or
design principle or systematic development or software engineering or
design technique or computer-aided software engineering)
```

Table 1: Summary of filtering steps performed over the data set by Nascimento et al.; presence venue: conference, symposium, workshop; archival venue: journal, monograph

| Number of ... | Papers | Presence venues | Archival venues |
|------------------------------|--------|-----------------|-----------------|
| Complete data set | 2688 | 669 | 180 |
| Step 1: Included subset | 1440 | 435 | 131 |
| Step 2: DSML-specific subset | 163 | 91 | 23 |
| Step 3: DR-specific subset | 137 | 80 | 21 |

The resulting, complex search string comprised three clauses (technology, language, documentation) grouping 58 atomic and composite search terms. When expanded from its disjunctive-composite form, the search string yielded 5456 unique search triples. Each triple consists of three terms, one from each clause.

4.1 Quasi-Gold Standard Corpus (QGS)

For our SLR, we adopt the procedural guideline for QGS corpus construction by Zhang et al. [124]. This involves the following steps:

1. *Identify publication venues*: In a first step, we establish a pool of potential publication venues (journals and conference series) which are then screened for publications relevant to our research questions. In particular, we compiled the venue pool from three different sources: 1) the mapping study by Nascimento et al. [74], 2) the venues of our own DSML publications, and 3) the venues identified during our pilot review.

Mapping-study pool: Nascimento et al. [74] kindly provided their study data to us, in private communication. For their study, they collected and reviewed 2688 publications from 669 presence venues (i.e. conferences and workshops) and 180 archival venues (i.e. journals). The pool of potential venues is created in a procedure of three filtering steps (see also Table 1):

- (Step 1) From the initial set, we consider those publications (and the respective venues) which were finally included into the mapping study by Nascimento et al. [74]. This amounts to 435 presence and 131 archival venues for, in total, 1440 papers.
- (Step 2) We further restrict the manual screening to those venues that are specific to DSMLs. Nascimento et al. tagged these publications accordingly, allowing us to filter for the corresponding tag “DSML” in their data set. This gives us a subset of 91 presence and 23 archival venues, accounting for 163 DSML-specific publications—according to the working definitions and the coding applied by Nascimento et al. [74].
- (Step 3) Nascimento et al. categorized the publications in their data set into six types of research reports: validation research, evaluation research, solution proposal, philosophical papers, opinion papers, and experience papers (see Table 3 in [83]). For our SLR, we extract those publications (and their respective venues) which are likely to contain documented DSML design rationale: *solution proposal* or *experience paper*. This is because solution proposals (which document a novel DSML-based technique or an important extension to an existing DSML-based approach) and experience research reports (which reflect critically on DSML implementations in practice, based on the personal experience of the DSML engineers) are the two categories most likely to contain papers documenting design rationale. This gives us a final subset of 80 presence venues and 21 archival venues (contributing 137 publications) for the subsequent inclusion and screening steps. They are listed by number and their number of entries in the original data set in the two first subsections of Table 4 and 3, respectively. We, therefore, consider 11.9% of the venues found in the original data set by Nascimento et al., accounting for 5.1% of the total publications, for our QGS corpus construction.

When performing the identification substep, we found that two of the 21 journals selected from the mapping-study pool are monographs and were therefore mislabeled journal volumes [74]: Graph Transformations and Model-Driven Engineering, SENSORIA (see Table 4). We excluded the respective sources from the subsequent data collection steps.

Seed publications: Based on 10 DSML projects that have been conducted in our research group over a period of 5 years (2008–2012), we established a first version of our decision catalog ([52]; see P1–P10 in Table 2). In addition, we identified 6 third-party DSML approaches (see P11–P16

in Table 2) via backward snowballing. As a result, we consider a total set of 19 corresponding publications for identifying QGS venues. From these 19 publications, 13 publications document the authors’ DSML projects and 6 publications cover the six related projects (see Table 2). 7 out of the 19 publications are journal articles and, therefore, we add 6 additional journals (which have not been found in the mapping-study corpus [74], see above) to the pool of QGS candidate journals (see Table 5).

Table 2: Overview of seed publications.

| | Objectives | Domain |
|---|--|--|
| Authors’ DSML projects (P1–10) | | |
| P1 | An approach to model interdependent concern behavior using extended UML activity models [109]. | Separation of concerns |
| P2 | An integrated approach for modeling processes and process-related RBAC models (roles, hierarchies, statically and dynamically mutual exclusive tasks etc.) [108]. | Business processes, role-based access control (RBAC) |
| P3 | A UML extension for an integrated modeling of business processes and process-related duties; particularly the modeling of duties and associated tasks in business process models [90, 92]. | Business processes, process-related duties |
| P4 | An approach to provide modeling support for the delegation of roles, tasks, and duties in the context of process-related RBAC models [92, 91]. | Business processes, delegation of roles, tasks, and duties |
| P5 | A UML extension to model confidentiality and integrity of object flows in activity models [50]. | Data confidentiality and integrity |
| P6 | UML modeling support for the notion of mutual exclusion and binding constraints for duties in process-related RBAC models [89]. | RBAC (consistency checks for duties) |
| P7 | Incorporation of data integrity and confidentiality into the MDD of process-driven SOAs [49, 55]. | Integrity and confidentiality for service invocations |
| P8 | Integration of context constraints with process-related RBAC models and thereby supporting context-dependent task execution [93]. | Business processes, RBAC, context constraints |
| P9 | A generic UML extension for the definition of audit requirements and specification of audit rules at the modeling-level [51]. | Audit rules |
| P10 | An approach based on model transformations between the valid structural and behavioral runtime states that a system can have [120]. | Model transformation |
| Related, third-party DSML projects (P11–16) | | |
| P11 | A combination of UML modeling languages with security modeling languages for formalizing access control requirements [8]. | RBAC |
| P12 | A profile-based UML extension for secure systems development which can be employed to evaluate UML specifications for vulnerabilities using a formal semantics [61]. | Multiple security properties (e.g., integrity, secrecy, authenticity etc.) |
| P13 | An approach for the modeling and implementation of security-critical applications and inter-organizational workflows using model-driven security [43]. | SOA security |
| P14 | A MDD approach for the development of access control policies for distributed systems [37]. | View-based access control |
| P15 | An extension to UML activity diagrams which allows security requirements to be specified in business processes [86]. | Secure business process modeling |
| P16 | A UML extension to specify access control and audit properties in the multidimensional modeling of data warehouses [35]. | Access control, authorization, and audit rules |

Pilot publications: From our pilot corpus, we further consider three additional presence venues and six archival venues. These venues were uniquely found in our pilot and therefore those venues have not yet been included (see above).

To summarize: In order to establish the QGS corpus, we review 86 presence venues (conferences, symposia, workshops; see Table 3) and 33 journals (see Table 4) identified for 159 publications in three different publication corpora.

Table 3: Overview of candidate conference venues for QGS construction.

| | Name of venue | Entries # | Issues # | Listed with MS/AS (rank #) | Comment |
|-------------------------|---------------|-----------|----------|----------------------------|---------|
| Nascimento et al., 2012 | | | | | |
| * | MoDELS | 7 | 16 | 55 | x |
| | ECBS | 5 | 19 | | |
| | VL/HCC | 5 | 28 | | x |

| | Name of venue | Entries # | Issues # | Listed with | | Comment |
|---|---------------|-----------|----------|-------------------|-----|--------------------------------|
| | | | | MS/AS (rank #) | Xie | |
| | EDOC | 4 | 16 | | x | |
| | CAiSE | 3 | 24 | | x | |
| | SLE | 3 | | | | |
| * | ASE | 2 | 27 | 15 | x | |
| | SAC | 2 | 27 | 17 | | |
| | ACMSE | 2 | 50 | | | |
| * | GPCE | 2 | 11 | 42 | x | no screening hits |
| | ICEIS | 2 | 14 | | | |
| | CEC | 2 | 9 | | x | |
| | ICALT | 2 | 12 | | | |
| * | COMPSAC | 2 | 36 | 25 | x | |
| | EDOCW | 2 | | | | |
| * | ECMFA, | 2 | 8 | 95 | x | |
| | ECMDA-FA | | | | | |
| | ICSE | 2 | 34 | 1 | x | |
| * | EMSOFT | 1 | 12 | | x | |
| | DEBS | 1 | 32 | | | |
| | AAMAS | 1 | 19 | | | |
| | (COP) | 1 | | | | workshop |
| | SenSys | 1 | 10 | | | |
| | FML | 1 | | | | workshop |
| | ECSA | 1 | | 164 | | |
| | DSM | 1 | | | | workshop |
| | ATIO | 1 | 12 | | | |
| * | SAFECOMP | 1 | 31 | 75 | x | |
| | CCCM | 1 | | | | |
| | ESAW | 1 | | | | workshop |
| | OTM | 1 | 9 | | | |
| | SYNASC | 1 | 13 | | | |
| | ISC | 1 | 10 | | | |
| | SOCC | 1 | 9 | | | |
| | DSVIS | 1 | | | x | |
| | CSEDU | 1 | | | | |
| | WaGe | 1 | | | | workshop; colocated with GPC |
| | AOSE | 1 | | | x | workshop |
| | SCCC | 2 | 29 | 141 | | |
| | CEA | 1 | | | | |
| | EFTA | 1 | 17 | | | |
| | IAT | 1 | 11 | | | |
| * | REFSQ | 1 | 18 | 88 | x | no screening hits |
| | ICINCO | 1 | 9 | | | |
| | DATE | 1 | 17 | | | |
| | PERCOM | 1 | 10 | | | |
| | DAC | 1 | 49 | | | |
| | AMOST | 1 | | | | workshop; colocated with ICSTW |
| | ITSIM | 1 | 8 | | | |
| | APSCC | 1 | | | | |
| | ICIT | 1 | 18 | | | |
| | ISORC | 1 | 15 | | | |
| | SOSE | 1 | | | | |
| | INDIN | 1 | 11 | | | |
| | ITNG | 1 | 11 | | | |
| | WISES | 1 | | | | workshop |
| | ASRU | 1 | | | | |
| | WSC | 1 | 23 | | | |
| | ICSEA | 1 | | 184 | | |
| | FDL | 1 | 15 | 127 | | |
| | HICSS | 1 | 45 | | | |
| | ICCSE | 1 | 8 | | | |
| | FTDCS | 1 | | | | workshop |
| * | OOPSLA/ | 1 | 26 | 4 | x | |
| | SPLASH | | | | | |
| | ICSOC | 1 | 10 | | x | |
| | ESWC | 1 | 8 | | | |
| | ICOODB | 1 | | | | |
| | ISEC | 1 | | | | |
| | ER | 1 | 31 | | x | |
| * | SERP | 1 | 8 | 92 | x | |
| | SoMeT | 1 | 11 | 245 | | |
| | SIGMOD | 1 | 37 | | | |
| | DETC | 1 | 9 | | | |
| | EGOVIS | 1 | | | | |

| Name of venue | | Entries # | Issues # | Listed with | | Comment |
|--------------------|----|-----------|----------|----------------|-----|-----------------------------|
| | | | | MS/AS (rank #) | Xie | |
| BMFA | | 1 | | | | workshop; published in ICPS |
| EICS | | 1 | | | | |
| RTSS | | 1 | 32 | | | |
| ECDL | | 1 | 16 | | | |
| CRIWG | | 1 | | | | workshop |
| AGTIVE | | 1 | | | | |
| ICWE | | 1 | 12 | | x | |
| 10 | 80 | 113 | 53 | 16 | 20 | |
| Seed publications | | | | | | |
| MUSIC | | 1 | 3 | | | |
| SC | | 1 | 11 | | | |
| BIS | | 2 | 15 | | | |
| 0 | 3 | 4 | 3 | 0 | 0 | |
| Pilot publications | | | | | | |
| CIT | | 1 | 12 | | | |
| DaWaK | | 1 | 14 | | | |
| SysCon | | 1 | | | | |
| 0 | 3 | 3 | 2 | 0 | 0 | |
| 10 | 86 | 120 | 28 | 16 | 20 | 11 workshops |
| | | | (≤ 7) | | | |

2. *Select publication venues* Two researchers review the pool of publication venues to decide whether to screen them for publications to be included into the QGS corpus. The corresponding selection criteria are discussed in Section 6.1. Note that for establishing the QGS corpus, criteria evaluation is tightened as compared to later steps (e.g., engine-based search; see Section 6.4.1). In summary, the following major criteria are evaluated.

Archival venues (Journals)

- *Community relevance*: A journal must be acknowledged as relevant by a broad, public scientific audience (rather than by the reviewers alone); see C_2 in Section 6.1.

23 of the 31 journals are listed with ERA journal list [4].

- *Software-engineering focus*: A journal must have a clear and acknowledged focus on software-engineering topics. This is because we are interested in sources on DSML design rationale taking a software-engineering perspective, rather than a domain-specific angle (e.g., a DSML’s application and evaluation in a particular application domain); see C_3 in Section 6.1.

7 of the 23 ERA-listed journals [4] are contained in both software-engineering venue lists. That is, 16 journals which are not listed in both sources were dropped at this stage.

- *Content maturity*: It must be a peer-reviewed journal; see C_4 in Section 6.

All 7 remaining venues have a peer-review scheme in place.

Results: After having applied the two criteria, **7 out of 31 journals** were finally considered for the manual screening of QGS publications. The seven selected journals are marked by “*” in Table 4.

Presence venues (Conferences, symposia, workshops)

- *Community relevance*: The venue must have a regular publication history with respect to our review period; see C_2 in Section 6.1.

28 out of the remaining 75 venues have not been held regularly during our review period (and before).

Table 4: Pool of candidate journals for QGS; **ERA**: Excellence in Research for Australia Journal Ranking 2012 ([4]; subset of 304 journals categorized into “Computer Software (803)” and/or “Information Systems (806)”); **MS/AS**: Microsoft Academic Search (subset of 53 journals in category “Computer Science”/“Software Engineering”; Feb 4, 2013); **SJR**: SCImago Journal Rank ([99]; subset of 184 journals for subject area “Computer Science”, subject category “Software”, 2012)

| | Journal title | Entries # | Listed with | | |
|---------------------------|---|-----------|-------------|-------------------|-----------------|
| | | | ERA | MS/AS (rank #) | SJR (rank #) |
| Nasciemento et al. (2012) | | | | | |
| * | TSE | 3 | x | 1 | 7 |
| | IJSEKE | 2 | x | 29 | |
| | ComSIS | 2 | | | |
| | TOMACS | 1 | | | 88 |
| | ISSE | 1 | | 44 | 96 |
| | JSUSE | 1 | | | |
| | Computer | 1 | | | |
| | TTBE | 1 | | | |
| * | IETSoftw | 1 | x | 7 | 92 |
| | CJA | 1 | | | |
| | <i>(Graph Transformations and Model-Driven Engineering)</i> | | | | |
| | PRC | 1 | | | |
| | <i>(SENSORIA: Rigorous Software Engineering for Service-Oriented Systems)</i> | | | | |
| | Simulation | 1 | x | | 103 |
| | TII | 1 | x | | |
| | TEC | 1 | x | | |
| | TC | 1 | x | | |
| * | AES | 1 | x | 13 | 65 |
| | JSA | 1 | x | | |
| | VLC | 1 | x | | |
| | IJCIS | 1 | x | | |
| 3 | 19 (21) | 25 | 11 | 5 | 6 |
| Seed publications | | | | | |
| * | JOT | 1 | x | 28 | 115 |
| | IST | 1 | x | | |
| * | SoSyM | 1 | x | 21 | 30 |
| * | TOSEM | 1 | x | 5 | 13 |
| | ENTCS | 1 | x | | |
| | DSS | 2 | x | | |
| 3 | 6 | 7 | 6 | 3 | 3 |
| Pilot publications | | | | | |
| * | JSS | 1 | x | 6 | 40 |
| | IJWIS | 2 | x | | |
| | DKE | 1 | x | | |
| | JUCS | 1 | x | | |
| | IJOR | 1 | x | | |
| | ISF | 1 | x | | |
| 1 | 6 | 7 | 6 | 1 | 1 |
| 7 | 31 (33) | 39 | 23 | 9 | 10 |

- *Software-engineering focus*: For the same reasons given for journals (see above), we only consider venues having an accepted software-engineering focus (in the most inclusive sense); see C₃ in Section 6.1.

37 out of the remaining 47 venues are not listed by the two SE conferences list.

- *Content maturity*: Workshops are excluded; see C₄ in Section 6.1.

11 out of the 86 venues have a workshop format.

Results: After having applied the three criteria, **10 out of 86 venues** were finally considered for the manual screening of QGS publications. The ten selected venues are marked by “*” in Table 3.

3. *Manually search selected venues for gold-standard publications:* In a first round, two authors (Hoisl, Sobernig) screen all papers published in the previously selected publication venues in the review period (2005–2012). The selection criteria C₅–C₁₁ are reported in full detail in Section 6.1 and, specifically, in Section 6.4.1. Each author takes on a randomly chosen and possibly equally sized subset of journals and conferences for screening. Each author then revisits the paper candidates proposed by the other author in a second round. In case of disagreement on a paper’s inclusion or exclusion, the two authors jointly review the respective papers and find a common judgement (e.g., based on the full-text of the paper) in a third round. The level of agreement between the two authors about the candidate list of QGS papers is documented using the Kappa inter-rater statistic.

Table 5: Overview of venues manually searched for quasi gold-standard (QGS) publications, the number of publications considered for inclusion, and the publications actually incorporated into the QGS corpus; effective date of manual screening: Jan 25, 2013.

| Venue (# Num./Iss.) | Publisher | Engine | Papers | | |
|-----------------------------|-----------------------|---------------------|--------|--------|---------------------------------|
| | | | #fnd | #incl. | References |
| JOURNALS | | | | | |
| TSE (31.1–39.1; 65) | IEEE | IEEE Xplore | 5 | 2 | [29, 118] |
| IETSoftw (1.1–7.1; 36) | IEEE | IEEE Xplore | 5 | 3 | [98, 72, 71] |
| AES (36.1–42.12; 43–55; 97) | Elsevier | Scopus | 2 | 0 | |
| JOT (4.1–12.1; 56) | AITO | Scopus | 13 | 7 | [19, 111, 60, 24, 33, 110, 102] |
| JSS (74.1–86.1; 100) | Elsevier | Scopus | 16 | 6 | [87, 112, 25, 113, 45, 84] |
| TOSEM (14.1–21.4; 32) | ACM | ACM Digital Library | 2 | 1 | [100] |
| SoSyM (4.1–11.4; 32) | Springer | SpringerLink | 9 | 5 | [62, 1, 14, 126, 39] |
| Ven : 7 | Pub : 5 | Eng : 4 | Σ 52 | Σ 24 | |
| CONFERENCE PROCEEDINGS | | | | | |
| MoDELS (8) | Springer | SpringerLink | 8 | 3 | [32, 127, 27] |
| COMPSAC (8) | IEEE | IEEE Xplore | 4 | 2 | [119, 125] |
| ECMFA, ECMDA-FA (8) | Springer | SpringerLink | 9 | 3 | [30, 58, 10] |
| SERP (8) | CSREA Press | n/a | 1 | 0 | |
| OOPSLA (8) | ACM | ACM Digital Library | 1 | 1 | [122] |
| SAFECOMP (8) | Springer | SpringerLink | 6 | 4 | [13, 12, 46, 56] |
| ICSE (8) | ACM | ACM Digital Library | 2 | 0 | |
| REFSQ (8) | Springer ² | SpringerLink | 0 | 0 | |
| GPCE (8) | ACM | ACM Digital Library | 0 | 0 | |
| ASE (8) | IEEE | IEEE Xplore | 0 | 0 | |
| 10 | Pub : 4 | Eng : 4 | Σ 31 | Σ 13 | |
| 17 | Pub : 6 | Eng : 4 | Σ 83 | Σ 37 | |

Table 5 gives an overview of the scientific venues, journal volumes and conference proceedings, screened for publications qualifying to be included into the quasi-gold standard corpus:

- In total, we reviewed 418 volume numbers of the 7 journals selected in the previous step.
- 52 journal articles were initially considered QGS candidates by the two reviewing authors. These included articles from each of the 7 journals.
- 24 out of 52 journal articles were finally included into the QGS corpus, representing 6 out of 7 journals.
- We mined 80 proceeding issues of 10 conferences.
- In total, 31 proceedings articles were considered QGS candidates taken from 7 conferences. For three conferences (ASE, REFSQ, GPCE), the screening substep did not yield any search results.
- 13 out of the 31 proceedings articles were adopted as QGS publications, representing 5 out of 10 venues.
- The workload of publication screening was distributed equally. Out of the 17 screened venues, 9 were checked by Hoisl (4 journals, 5 conferences), 8 by Sobernig (3/5).

²Only covers years 2007 through 2012; 2005 and 2006 were self-published by a German university press.

- The QGS corpus, finally, consisted of 37 publications (i.e., 24 journal and 13 proceedings articles).
- The decision on including or excluding each of the 83 (52+31) publication items was initially performed by two authors of this SLR as raters separately, yielding 166 ratings in total.
- For the 52 journal articles, the two raters showed perfect agreement on approx. 79% of the publication items (percent agreement, $p_a = 0.789$). Chance-corrected agreement is at medium level $\kappa = 0.578$ (see Table 6a).
- For the 31 conference articles, the two raters agreed in 71% of the cases (percent agreement, $p_a = 0.71$), with $\kappa = 0.395$ (see Table 6b).
- In total, for all 83 articles, the two raters agreed in 75.9% of the cases (percent agreement, $p_a = 0.759$), with $\kappa = 0.513$ (see Table 6c).

Table 6: Distribution of publications by rater; each article was rated according to a two-level scale: y(es) for inclusion, n(o) for exclusion; p_a : percent agreement; $\hat{\kappa}_c$: Cohen’s Kappa statistic; $Var(\hat{\kappa}_c)$: leave-one-out Jackknife estimate of variance of Cohen’s Kappa statistic.

(a) 52 journal articles; $p_a = 0.789$; $\hat{\kappa}_c = 0.578$; $Var(\hat{\kappa}_c) \approx 0.0131$ (b) 31 conference articles; $p_a = 0.71$; $\hat{\kappa}_c = 0.395$; $Var(\hat{\kappa}_c) \approx 0.0276$

| | | RATER B | | |
|---------|---|---------|----|-------|
| | | n | y | Total |
| Rater A | n | 20 | 7 | 27 |
| | y | 4 | 21 | 25 |
| Total | | 24 | 28 | 52 |

| | | RATER B | | |
|---------|---|---------|----|-------|
| | | n | y | Total |
| Rater A | n | 7 | 2 | 9 |
| | y | 7 | 15 | 22 |
| Total | | 14 | 17 | 31 |

(c) 83 articles; $p_a = 0.759$; $\hat{\kappa}_c = 0.513$; $Var(\hat{\kappa}_c) \approx 0.0092$

| | | RATER B | | |
|---------|---|---------|----|-------|
| | | n | y | Total |
| Rater A | n | 27 | 9 | 36 |
| | y | 11 | 36 | 47 |
| Total | | 38 | 45 | 83 |

4. *Identify search engines*: Depending on the venues selected for QGS publication screening, we identify the candidate search engines for the automated search as follows:

(a) For each publisher, an authoritative search engine is considered.

The 6 publishers of the publication venues considered for screening were (ordered by the number venues) Springer (5 publication venues), ACM (4), IEEE (4), Elsevier (2), AITO (1), and CSREA Press (1); see also Table 5.

For these 6 publishers, the following 4 authoritative engines were selected (in the same order as above): SpringerLink (Springer), ACM Digital Library (ACM), IEEE Xplore (IEEE), and Scopus (Elsevier, AITO). To the best of our knowledge, there is no dedicated search engine available which covers the CSREA proceedings.

Figure 3a reports the per-venue overlap between these 4 search engines.

(b) We only consider search engines from which at least one publication entered the QGS corpus. This is because quantifying search validity (precision/recall) is only representative for search engines likely to yield a QGS corpus publication.

When considering the venues and engines of the finally adopted QGS corpus publications (see above), there remain 5 unique publishers: Springer (4), IEEE (3), ACM (3), Elsevier (1), and AITO (1).

For these 5 publishers, the 4 authoritative engines initially identified remain unchanged: SpringerLink (Springer), IEEE Xplore (IEEE), ACM Digital Library (ACM), and Scopus (Elsevier, AITO).

Figure 3b reports the remaining per-venue overlap between these 4 search engines, after having removed venues which have not entered the QGS. This way, there was no longer an overlap between ACM Digital Library and IEEE Xplore. Besides, the overall level of per-venue overlap was reduced (from 10 to 7 overlapping venues).

- (c) Engines reported as accepted and as widely adopted in primary SLR studies take precedence [18].
- (d) Engines which are publicly accessible for SE researchers (e.g., without institutional subscription) is given preference, to facilitate repeating the automated search in replication studies. Note that we refer to public access to the search facilities, and not e.g. to the full-text collection, if any.

The both criteria would have clearly favoured adopting ACM Digital Library and IEEE Xplore. In addition, the ACM Digital Library comes with an extended data base^a which potentially covers the required non-IEEE and the required non-ACM venues. Therefore, we further assessed the possibility of limiting our automated search to these two engines:

- The extended ACM Digital Library would overlap with IEEE Xplore regarding two venues (TSE, COMPSAC) from the QGS corpus. The COMPSAC overlap would have been specific to a subset of COMPSAC proceedings. ACM Digital Library only incorporates 12 COMPSAC proceedings out of 36 COMPSAC proceedings (as of 2012, according to DBLP). To reduce overlap, we limited the search in the ACM Digital Library to the ACM-only (base) full-text collection.
- Three out of four Springer venues (MoDELS, ECMFA, SAFECOMP) are not covered by neither the extended nor the base ACM Digital Library. Therefore, SpringerLink could not be removed from the engine list.
- The Elsevier and AITO venues (JOT, JSS) are also not covered by the base ACM Digital Library, requiring us to incorporate the Scopus engine as fourth one.
- Scopus, however, has a large, although often partial, overlap with the ACM Digital Library and IEEE Xplore. Scopus and the extended ACM Digital Library share nine QGS venues. 4 out of those 9 venues are only partially covered by Scopus (e.g., varying year ranges). For the base ACM Digital Library, the overlap amounts to two venues: TOSEM and OOPSLA/SPLASH representing 12 QGS publications (see also Figure 3b). For these two, the overlap covers all venue years. Between IEEE Xplore and Scopus, there is an overlap of another three venues: TSE, IETSoftw, and COMPSAC representing 4 QGS publications (see also Figure 3b). Two out of the three overlaps turned out to be partial. With SpringerLink, Scopus shares one venue (SoSyM; 7 QGS publications).

The overlap between Scopus, on the one hand, and the ACM Digital Library, IEEE Xplore, and SpringerLink, on the other hand, risks introducing duplicate hits in the automated search, which must be controlled explicitly (see ...).

^aThe base collection is named *ACM Publications and Affiliated Organizations*, the extended one *ACM Guide to Computing Literature*.

- (e) When multiple engines per venue are available, the one providing the most complete time coverage in terms of publication years (i.e., 2005-2012) takes precedence.

At this decision point, no alternative engines for a given venue providing different time coverages remained.

Venues only partly (SERP, REFSQ) covered by any of the available search engines had already been excluded in an earlier decision step (see above).

- (f) The objective is to adopt a minimum number of search engines covering a maximum number of venues in a minimally overlapping manner (see [124]).

For three engines—ACM Digital library (in its base resources collection), IEEE Xplore, and SpringerLink—there was no overlap in terms of QGS venues. The need to consult Scopus to include two critical QGS venues (JSS, JOT), however, introduces substantial overlap. Reducing this overlap by limiting our automated search to Scopus only was not an option, because Scopus lacks complete coverage of certain ACM and IEEE venues

(IETSoftw, COMPSAC), as well as all Springer venues. To mitigate the risks resulting from this unavoidable overlap, we thoroughly inspected the results of the automated search for duplicates etc.

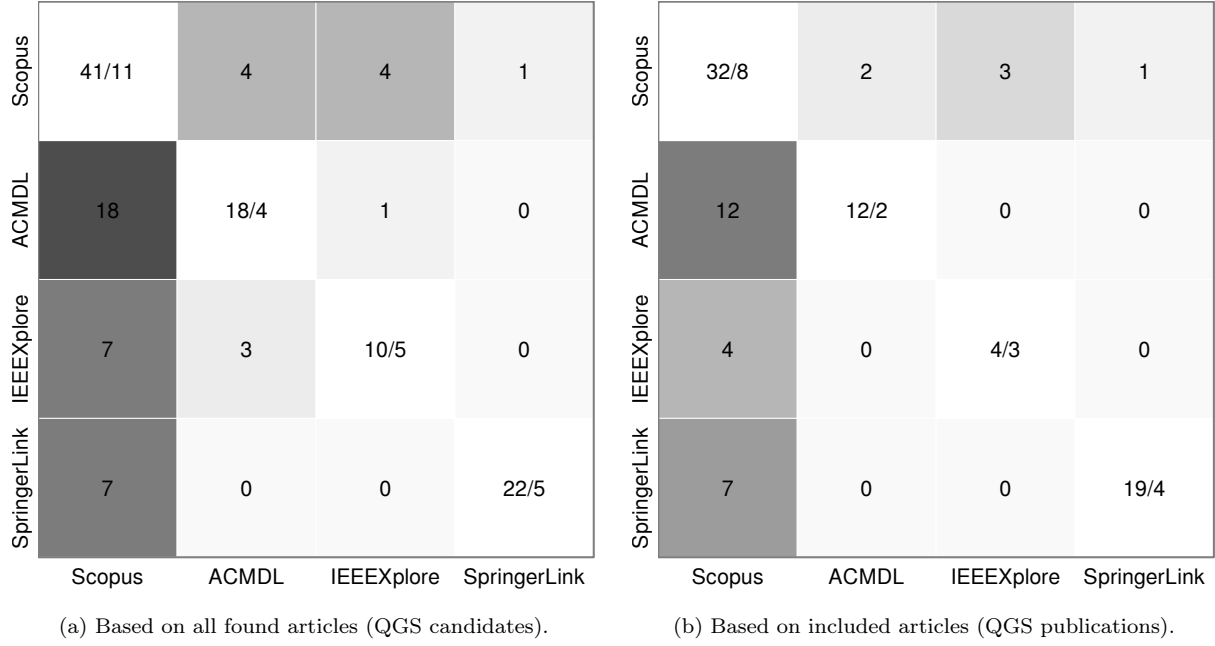


Figure 3: Matrix plots showing the per-venue (upper segment) and per-publication (lower segment) overlap between search engines. The diagonal depicts the non-unique publications/venues covered by each search engine.

Based on the decisions above, the following search engines were selected for the automated-search step:

- ACM Digital Library
- IEEE Xplore
- Scopus
- SpringerLink

4.2 Defining and Refining Search Terms

Starting with revision 3, the new strategy to construct the search string superseded the original strategy reported in Section 4.0. The new strategy involved using the systematically selected QGS corpus when constructing the final search string. The main advantage of this QGS-based strategy is avoiding an authors' bias in formulating the search string, which could otherwise result in search hits which are close to the terminology employed by the authors and found in application domains the authors are primarily looking at. In addition, the pilot search allowed us to refine certain details of the revised search strategy. These deviations from the procedure summarized in Section 4.0 are highlighted below.

We derive the initial search terms in multiple steps:

1. We extract terms from the publication items in the previously established QGS corpus. We mine the titles, abstracts, and publication-specific keywords (authors' keywords, publisher classification items) for critical terms. The publications in the QGS corpus represent primary sources, i.e. they document individual and multiple DSML designs in the context of their respective application domains. We, therefore, adopt a primarily subjective strategy to define the search terms (see [124]).
2. We then derive additional or complementary terms from the research questions, as stated in Section 2.

The revised procedure differed from the original in one important manner (see Section 4.0): We had learned from the pilot [36] that querying for terms that indicate the explicit description of DSML design rationale (e.g., “decision consequence”) is not likely to result in search hits. This reflects the more general observation in related literature that design rationale and its documentation are often not made explicit; and even if design rationale is documented, it is not reported using an agreed upon standard vocabulary. At the same time, the complexity of the expanded search string was considerable (i.e., 5456 tuples including the third clause vs. 496 excluding the third clause). Therefore, we dropped the third clause and with it the secondary studies as sources to extract search terms for our SLR.

Terms obtained from step 1: The initial set of search terms contains the following technical terms found in the titles, abstracts, and keywords of the publications forming the QGS corpus (see Section 4.1):

- [118] metamodel^l, **meta-model^l**, **meta model^l**
- [29] design pattern^d, stereotype^l, ~~constraint~~, profile^l, Unified Modeling Language^t, UML^t, ~~model-driven architecture~~, MDD
- [72] Unified Modeling Language^t, UML^t, Meta Object Facility^t, MOF^t, domain-specific language^l, DSL^l, profile^l.
- [71] ~~model-driven software development~~, MDSD, ~~language engineering~~, ~~model-driven development~~, MDD, ~~platform-independent language~~, Unified Modeling Language^t, UML^t, metamodel^l, profile^l
- [98] ~~model-driven engineering~~, MDE, domain-specific language^l, DSL^l, code generation^l
- [110] Unified Modeling Language^t, UML^t, ~~UML-2.0~~, ~~light-weight extension~~, meta-model^l, **meta model^l**, **metamodel^l**
- [33] Unified Modeling Language^t, UML^t, meta-level^l, **meta level^l**, **metalevel** profile^l, meta-model^l, **meta model^l**, **metamodel^l**, ~~XML metadata interchange~~, XMI
- [102] meta-model^l, Unified Modeling Language^t, UML^t, abstract syntax^l, Object Constraint Language^t, OCL^t
- [24] metamodel^l, **meta model^l**, **meta-model^l**
- [60] Meta Object Facility^t, **Meta Object Facility^t**, ~~MOF-2~~, metamodel^t, **meta model^l**, **meta-model^l**, ~~modeling abstraction~~, ~~model-view~~
- [111] Unified Modeling Language^t, UML^t, visual language^l, object constraint language^t, OCL^t, profile^l
- [19] Unified Modeling Language^t, UML^t, concrete syntax^l, metamodel^l, **meta model^l**, **meta-model^l**, profile^l, ~~model-versioning~~
- [84] MDD, ~~model-driven development~~, extension^l, Unified Modeling Language^t, UML^t, ~~UML-2.0~~
- [45] ~~model-driven development~~, domain-specific modeling^l, UML^t profile^l, ~~platform independent~~
- [113] ~~model-driven approach~~, UML^t, ~~model-driven development~~, profile^l, Unified Modeling Language^t, profile^l.
- [25] ~~model-driven development approach~~, ~~MDD approach~~, ~~MDD philosophy~~, ~~Model-Driven Development~~, MDD
- [112] MOF^t, **Meta Object Facility^t**, metamodel^l, **meta model^l**, **meta-model^l**, OCL^l, **Object Constraint Language^t**
- [87] Meta Object Facility^t, **MOF^t**, Object Constraint Language^t, **OCL^t**
- [100] profile^l, UML^t, **Unified Modeling Language^t**, specialization^l, refinement^l
- [1] UML^t, **Unified Modeling Language^t**, profile^l
- [62] UML^t, **Unified Modeling Language^t**, profile^l

- [39] ~~model-driven development~~, UML^t, **Unified Modeling Language**^t, profile^l, model-to-model transformation^l, **M2M transformation**^l, model-to-text transformation^l, **M2T transformation**^l, ~~Model-driven engineering~~
- [14] profile^l, Unified Modeling Language^t, UML^t
- [126] Unified Modeling Language^t, UML^t, profile^l, meta-model^l, **meta model**^t, **metamodel**^t, conceptual model^l
-
- [32] ~~Unified Modeling Language 2~~, UML-2, profile^l, ~~model-driven architecture~~, MDA
- [127] ~~Unified Modeling Language 2~~, UML-2, profile^l, ~~software modeling language~~
- [27] metamodel^l, **meta-model**^l, **meta model**^l, ~~model-driven architecture~~, MDA, platform-specific, ~~platform-independent~~, domain model^l, Meta Object Facility^t, MOF^t, ~~model-driven development~~, MDD, model transformation^l
- [119] ~~domain-specific graphical modeling~~, meta-model^l, metamodel^l, **meta model**^l, domain-specific modeling^l, DSM^l, Unified Modeling Language^t, UML^l, UML2.0, ~~model-driven architecture~~, MDA
- [125] Unified Modeling Language^t, UML^t
- [30] ~~Object Management Group~~, ~~OMG~~, Unified Modeling Language^t, UML^t, meta-model^l, **meta-model**^l, **meta model**^l
- [58] : Systems Modeling Language^t, SysML^t, Unified Modeling Language^t, UML^t, profile^l
- [10] Systems Modeling Language^t, SysML^t, domain-specific language^l, DSL^l, Unified Modeling Language^t, UML^t, profile^l
- [122] UML-2, extension^l, **Unified Modeling Language**^t, UML^t, **Object Constraint Language**^t, OCL^t
- [13] ~~model-driven approach~~, ~~model construction~~, extension^l, profile^l, model-to-model transformation^l, **M2M transformation**^l, model generation^l, model transformation^l, UML^t, **Unified Modeling Language**^t
- [46] UML^t, **Unified Modeling Language**^t, profile^l, tool^d
- [56] UML^t, **Unified Modeling Language**^t, profile^l, OCL^t, **Object Constraint Language**^l, ~~constraint~~, ~~model-based development~~
- [12] UML^t, profile^l, UML-2.0, Unified Modeling Language^d, ~~domain-specific modeling language~~, tool^d, generation

Terms from step 2: The research questions yield the following search terms (as identified by *underlining* the atomic and non-atomic words in the research questions 1–5): domain-specific modeling^l, DSM^l, design decision^d, design-decision making^d, decision option^d, decision driver^d, Meta Object Facility^t, MOF^t, Unified Modeling Language^t, UML^t

After merging the two subsets, data cleansing is performed:

1. Removing duplicates;
2. Reducing plural to singular forms;
3. Appending the extended writing for acronyms and vice versa;
4. Adding established synonyms or spellings (e.g. dashed or whitespace-separated spellings of composite nouns), as found in secondary studies on DSML development;
5. Adding alternative noun forms for gerunds;
6. Turning uppercase into lowercase writing;
7. Adding alternative BE/AE spellings of a word.

Compared to the original search procedure (see Section 4.0), we added the two cleansing steps 4 & 7 because the pilot search has shown that these are critical to obtain relevant hits.

For steps 3 and 4, we consult the previously identified secondary studies on DSL and DSML development (e.g., [78, 94, 20, 107, 85, 74]).

Note that in contrast to the original procedure (see Section 4.0), we do not derive search terms from secondary studies directly. We rather use them for the above cleansing operations. This is due to the decision to drop the third search clause on design documentation (see above). Besides, by the time of the authoritative second search, a fifth secondary study was added for consideration (i.e., [74]).

We group the above terms into a disjunctive-composite form as documented in Section 4.0. Terms denoting a relevant modeling technology (technology^t) form one clause, a relevant notion of modeling language engineering (language engineering^l) a second clause. Terms within a clause are linked by XOR connectives (i.e., exclusive-or). The two clauses are joined by AND connectives.

Listing 2: The QGS search string used for the automated search.

(OCL **or** UML **or** object constraint language **or** meta object facility **or** MOF **or** unified modeling language **or** SysML **or** systems modeling language) **and** (customization **or** customisation **or** metamodel **or** meta-model **or** meta model **or** stereotype **or** profile **or** domain-specific language **or** DSL **or** code generation **or** meta-level **or** metalevel **or** meta level **or** extension **or** abstract syntax **or** visual language **or** concrete syntax **or** domain-specific modeling **or** DSM **or** specialization **or** specialisation **or** refinement **or** model-to-model transformation **or** model-to-text transformation **or** M2T transformation **or** M2M transformation **or** conceptual model **or** domain model **or** model transformation **or** model generation)

The resulting, complex search string comprised two clauses (technology, language) grouping 38 atomic and composite search terms. When expanded from its disjunctive-composite form, the search string yielded 240 unique search pairs. Each pair consists of two terms, one out of each clause.

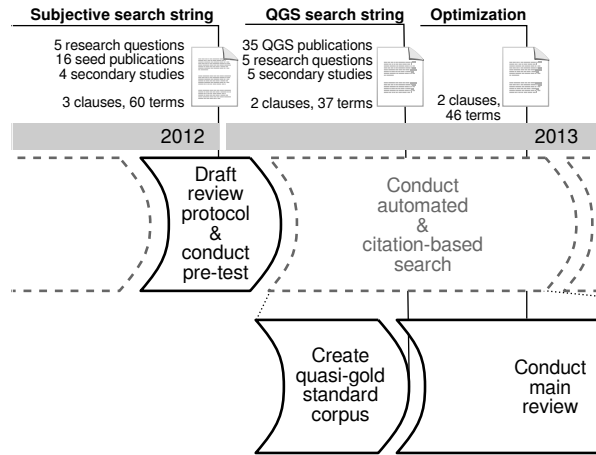


Figure 4: Stepwise extraction of search terms and construction of a search string.

We continuously evaluate the performance of the engine-based search by computing the quasi-sensitivity of the conducted search over all selected engines (i.e. their respective result sets). Following [123], the quasi-sensitivity is defined as the ratio of relevant papers identified by the QGS retrieved through the automated search to the total number of relevant papers (i.e., the size of the QGS corpus). The objective is to reach a quasi-sensitivity level between 70% and 80% (see [123]).

The automated search and its repeated, stepwise sensitivity validation via the QGS corpus allowed for unanticipated changes to the first version of the search (see Listing 2) to maximize the QGS coverage of the combined search hits over the four search engines. To expand the search to effectively include a maximum number of QGS publications, we modified the search string in Listing 2 as follows:

- We added two composite search terms to the technology clause “sysml profile”, “uml profile”, and “uml2 profile” introducing a one-word overlap with the language-engineering clause (“profile”).
- We added term variants containing major version numbers in the technology clause: “uml2”, “uml2.0”, “uml 2.0”, “mof2”, “mof 2.0”, and “mof2.0”.
- We added two term variants (“model to model transformation”, “model to text transformation”) to the language clause.

Listing 3: The revised search string used for the automated search.

```
(ocl or uml or object constraint language or meta object facility or
mof or unified modeling language or sysml or systems modeling language
or sysml profile or uml profile or uml2 profile or uml2 or uml2.0 or
uml 2.0 or mof2 or mof 2.0 or mof2.0)
and
(customisation or customization or metamodel or meta-model or meta
model or stereotype or profile or domain-specific language or DSL or
code generation or meta-level or metalevel or meta level or extension
or abstract syntax or visual language or concrete syntax or
domain-specific modeling or DSM or specialization or specialisation or
refinement or model-to-model transformation or model to model
transformation or model-to-text transformation or model to text
transformation or M2T transformation or M2M transformation or
conceptual model or domain model or model transformation or model
generation)
```

The resulting, complex search string comprised two clauses (technology, language) grouping 49 atomic and composite search terms. When expanded from its disjunctive-composite form, the search string yielded 544 unique search pairs. Each pair consists of two terms, one from each clause.

Using the above search string (and engine-specific extensions), we maximized the quasi-sensitivity in our search to an acceptable level of approximately $\sim 75.7\%$ [123]; that is, 28 out of the 37 QGS publications are contained by the set of 4695 total search hits. See also Sections 4.3 and 4.6.

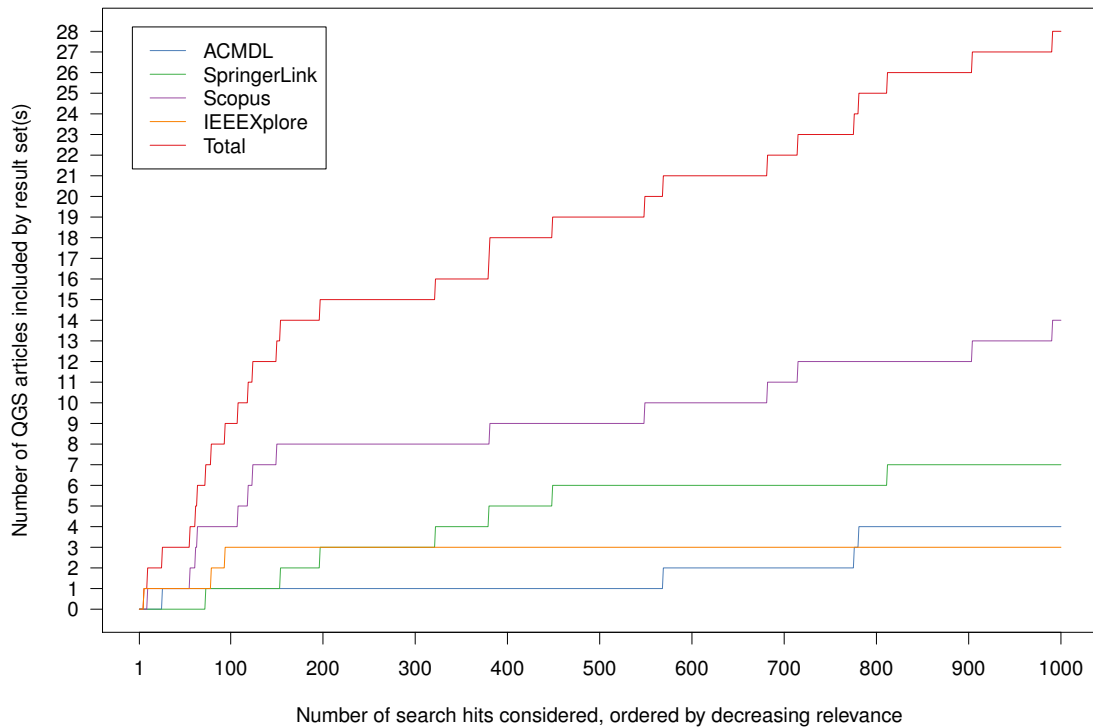


Figure 5: QGS articles found in search results per search engine/method.

Figure 5 illustrates the cumulative numbers of QGS publications found within each of the four relevance-ordered result sets yielded by the main search. On the x-axis, the hit ranks in each result set are shown. On the y-axis, the cumulative numbers of QGS publications found up to a certain hit rank are printed. In total, 15 of the 28 QGS publications (~54%) were found when considering search hits up to the 200th one in each result set, 21 out of 28 (75%) were ranked up the 600th. In the lowest hit range up to rank 200, a QGS publication was therefore found every ~13th publication, in average. In upper ranges, the hit probability decreased to every ~62th publication and below, above rank 200. We capped each result set at the rank of the last QGS publication found in the respective result set: ACM Digital Library at position 781, IEEE Xplore at 94, Scopus at 991, and SpringerLink at 812. This way, with a total number of 2678 reviewed search hits, we incorporated all retrieved QGS publications (28) while limiting an otherwise excessive review workload.

Table 7: QGS articles found in different range steps of result hits (by increments of 275 hits per step), following the relevance ordering of the result sets (for the main search hits) and the order of manual review for the snowballing candidates.

| Result range | ACMDL | SpringerLink | Scopus | IEEEExplore | Snowballing | Total | Recall |
|--------------|-------|--------------|--------|-------------|-------------|-----------|--------|
| 1–275 | 1 | 3 | 8 | 3 | 0 | 15 (52%) | .405 |
| 276–550 | 1 | 6 | 10 | 3 | 0 | 20 (69%) | .541 |
| 551–825 | 4 | 7 | 12 | 3 | 0 | 26 (90%) | .703 |
| 826–1100 | 4 | 7 | 14 | 3 | 0 | 28 (97%) | .757 |
| 1101–1375 | 4 | 7 | 14 | 3 | 0 | 28 (97%) | .757 |
| 1376–1650 | 4 | 7 | 14 | 3 | 0 | 28 (97%) | .757 |
| 1651–1925 | 4 | 7 | 14 | 3 | 0 | 28 (97%) | .757 |
| 1926–2200 | 4 | 7 | 14 | 3 | 1 | 29 (100%) | .784 |
| 2201–2337 | 4 | 7 | 14 | 3 | 1 | 29 (100%) | .784 |

4.3 Engine-based Search

Prior to revision 3 of this protocol, and the adoption of a QGS-based approach in more recent revisions, we planned to use a different set of search engines (e.g., Google Scholar, ScienceDirect) and the way of documenting the engine-based search. Please see [36] for details on the search as planned prior to revision 3.

4.4 Assessing Engine Capabilities

The search procedure using the search engines that were selected in the previous step (see Section 4.1) will be prepared as follows. For each search engine, we will first establish its capabilities:

- (1) Search site: URL
- (2) Support for complex queries (i.e., nested, boolean query expressions & metadata fields)? **yes/no**
- (3) Indexes full text of publications (rather than providing access to full text)? **yes/no**
- (4) Indexes abstract of publications (i.e., queries are evaluated also against abstract texts and the search can be restricted to abstracts)? **yes/no**
- (5) Indexes title of publications (i.e., queries are evaluated also against title texts and the search can be restricted to titles)? **yes/no**
- (6) Indexes author-provided keywords of publications (i.e., queries are evaluated also against keywords and the search can be restricted to keywords)? **yes/no**
- (7) Contains publications in languages other than English (i.e., the full-text language is not English)? **yes/no**
- (8) Allows for restricting the search to ranges of publication years? **yes/no**
- (9) Allows for restricting the search to venue types (e.g., conferences, journals)? **yes/no**
- (10) Are there per-query restrictions (e.g., capped result sets, limited number of expression components etc.)? **yes/no**
- (11) Allows for controlling the ordering of the result set (e.g., sort by relevance, sort by publication date)? **yes/no**

(12) Allows for controlling the output format of result sets? **yes/no**

(13) Allows for exporting the references lists of individual search hits/ publications? **yes/no**

Table 8: Overview of capabilities and restrictions of each search engine

| | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) | | (11) | (12) | (13) |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|------|---|------|
| ACM Digital Library | yes | yes | yes | yes | yes | no | yes | yes | yes (paging, results not exportable) | | yes | partly yes (search hits as markup, single bibliographical records in various formats) | no |
| IEEE Xplore | yes | yes | yes | yes | yes | no | yes | yes | yes (15 search terms, export of 2000 results max.) | | yes | yes (csv, markup) | no |
| Scopus | yes | no | yes | yes | yes | yes | yes | yes | yes (download of 2000 results max. incl. keywords/abstracts) | | yes | yes (e.g., csv, Mendeley, RefWorks, BibTeX) | no |
| SpringerLink | yes | yes | no | yes | no | yes | yes | yes | yes (export of 1000 results max.) | | yes | yes (csv, markup) | no |

We consulted the following search sites (1) of the four selected engines:

- ACM Digital Library *Advanced Search*:
<http://dl.acm.org/advsearch.cfm>
- IEEE Xplore *Command Search*:
<http://ieeexplore.ieee.org/search/advsearch.jsp?expression-builder>
- Scopus *Advanced Search*:
<https://www.scopus.com/search/form.url?display=advanced>
(Assuming an existing, institutionalized access to Scopus.)
- SpringerLink *Advanced Search*:
<http://link.springer.com/advanced-search>

The capabilities and restrictions are summarized in Table 8. The key findings were:

- Ad (2): All four search engines allowed for expressing and for processing complex, nested search expressions using basic boolean operators. Therefore, we could run single, manual searches for IEEE Xplore, Scopus, SpringerLink. ACM Digital Library was an exception, due to restrictions of the result presentation. However, even for ACM Digital Library, there was no need for transforming the generic search string (e.g., into a series of atomic, pairwise sub-queries).
- Ad (3): Three of the four engines operate on full-text collections (ACM Digital Library, IEEE Xplore, and SpringerLink), Scopus is a pure bibliographical search engine. To this end, the evaluation of the search strings was expected to be performed on different grounds. Therefore, and as the objective was to have the engine-based search evaluate primarily against title, abstract, and keywords, we adapted the implementations of the generic search string specific to the full-text engines accordingly, if supported; see Items (4)–(6).
- Ad (4)–(6): Having the objective to assess titles, abstracts, and keywords, and as a result of the different nature of three out of four search engines (see Item 3), we aimed at turning the generic search string into engine-specific strings which are evaluated against these three metadata fields of each stored publication. All four engines provide access to the publication titles. Abstracts metadata is accessible for all except for SpringerLink. Similarly, author keywords are available in three engines (Scopus, IEEE Xplore, and ACM Digital Library), SpringerLink does not allow to elicit the search implementation in this respect. Note that accessibility (in our definition) implies having control over this metadata. SpringerLink may certainly include abstract and author keywords in search evaluation, but this behavior cannot be controlled by the reviewer.

The four engines differed in the way a search that has been restricted to the metadata fields needed to be expressed: ACM Digital Library offers metadata-restrictions using a web form or metadata prefixes in the boolean query expression. Due to the need of automating the ACM search (see Item 12), we adopted the prefix annotation of the search-string implementation. IEEE Xplore *Command Search* offers a global switch (“Metadata only”) or prefixes to prepended to the search terms (e.g., **Abstract:term**). We opted for the switch-based restriction, therefore avoiding introducing redundant search terms due to the documented query restrictions (see

Item 10). In Scopus, the defaults in the advanced search mode imply a restriction to title, abstract, and keywords (note, keywords include also publisher-provided keywords). SpringerLink did not allow for limiting the search to all of the three metadata entries. Thus, for SpringerLink we could not control the results in this respect.

- Ad (7): While the ACM Digital Library and IEEE Xplore maintain only a corpus of publications having an English full-text body, Scopus and SpringerLink may also return non-English publications (e.g., Scopus just requires an additional English abstract). Therefore, we added language constraints to the query implementations of the latter two. Scopus provides a dedicated metadata constraint (i.e., a field code), SpringerLink provides a corresponding filter control.
- Ad (8): All four search engines allowed us to query the years of publication (2005–2012); the query implementations were extended accordingly. Except for Scopus, we also could define start and end years. Scopus required us to add an exclusive-or clause of 8 metadata terms (one per year). Running the search early in 2013 (end of January), we actually set the end years to 2013 to cover more recent additions to the searched publication collections.
- Ad (9): The objective is to obtain search hits which correspond to the relevant venue types, that is archival venues (journals) and presence venues (conferences); see also Section 6. ACM Digital Library allows for limiting the search to journal, proceedings (including workshops) and ACM transactions through the web UI or metadata prefixes (**PublishedAs**). We used the latter due to the automation need (see Item 12). IEEE Xplore allows for filtering the initial search hits for “Conference Publications” and for “Journals & Magazines” via the web UI. Scopus, again, provides metadata annotations (field code **DOCTYPE**) to restrict a search to those venue types (i.e., **ar** for journal articles, **cp** for conference proceedings). SpringerLink allows for filtering different publication types (e.g., book chapters, articles), however, these Springer-specific categories did not match with our categorization (e.g., many conference articles are listed as chapters in LNCS proceedings, while others are not). Therefore, we did not apply this filter.
- Ad (10): The four search engines presented very unique challenges resulting from various per-query restrictions, some constraining the query itself, others constraining the result set which was extractable.

None of the four engines imposed any *actual* restrictions on the query length (e.g., clauses, terms) or on the nesting depth which would apply to our generic search string. While IEEE Xplore *Command Search* announces a maximum of 15 search terms, our generic search string (which counted more than 15 search terms being connected by boolean operators) was accepted and processed.

Regarding result-set extraction, we encountered important limitations, however. ACM Digital Library does not impose a general capping, but the presentation of the result sets as a paged collection of mark-up documents required custom application support to retrieve the complete result set. As a result, we could not run a single, manual query for ACM Digital Library. We rather had to iterate the paging ranges running individual, batched HTTP requests. This was because of restrictions on the result presentation (ACM Digital Library) and/or restrictions on the size of the query expressions (ACM Digital Library, SpringerLink).

Scopus and SpringerLink allowed only 2000 and 1000 search hits, respectively, to be stashed away in a processable representation including the metadata (in particular abstracts, keywords) necessary for the selection decisions. Likewise, IEEE Xplore has a download cap of 2000 search hits.

- Ad (11): All four engines provided control over ordering of the results, depending on various criteria (e.g., by publication year, by author, by relevance, by recency). When running the searches, we used relevance-based orderings applied via the web UIs or by parametrizing the HTTP requests accordingly. We considered relevance-based ordering important given the ruling caps imposed on exporting result sets from some search engines (see Item 10).
- Ad (12): To some extent, all four engines provided at least two alternative representations of the search hits: a markup based (e.g., HTML, XHTML) or a non-markup, yet structured textual representation such as comma-separated value lists (csv). For IEEE Xplore, Scopus, and SpringerLink we opted for csv, mainly because it was the only non-markup option available (IEEE Xplore, Scopus) and because this representation can easily be converted in a spreadsheet (for the review and selection phase). The ACM Digital Library was more challenging. First,

there was no built-in markup-based export facility available to persist the result set. Second, the result set was presented as paged markup. Therefore, for ACM Digital Library only, we automated the search to some extent: Initially, we performed a direct HTTP request to obtain the paged markup to extract the ACM-specific publication identifier from the markup. Then, for each identifier, we ran another HTTP request to obtain the bibliographical record (i.e., as a BibTeXentry) corresponding to every identifier.

- Ad (13): None of the four search engines and the respective digital libraries or portals allowed for exporting the references lists of individual search hits and publications (e.g., into a processable format, along with the main publication record). For the step of backward snowballing (see Section 5), we therefore manually extracted reference lists from the markup records of the individual papers (which were found during the main search) into a spreadsheet document for the subsequent manual review.

4.5 Performing Engine Searches

Depending on a search engine’s capabilities, the generic search string (see Section 4) will be converted into an engine-specific variant. For instance, if complex queries are not supported, the generic search string will be expanded into simple, flat variants (e.g., term tuples assuming an implicit conjunction between them). If time-range restrictions and constraints over metadata fields (e.g., publication language) can be expressed, the generic search string will be extended to represent as many search constraints as possible. The resulting, engine-specific search strings will be documented as follows:

- Exact search string(s);

The exact search strings for the four search engines are listed in the Appendix; see Section B.

- Date of running the search(es);

- ACM Digital Library: Feb 1, 2013 (both, retrieving search & extracting ACM identifiers as well as retrieving bibliographical record for each identifier);
- IEEE Xplore: Feb 1, 2013;
- Scopus: Feb 1, 2013;
- SpringerLink: Feb 1, 2013;

- Number of results;

In total, we obtained a result set of 5778 publications from the four search engines (see also Table 12):

- ACM Digital Library: 933 (uncapped exports, equals total hits);
- IEEE Xplore: 1845 (capping at 2000 did not apply; total hits: 1845);
- Scopus: 2000 (capped results; total hits: 16579);
- SpringerLink: 1000 (capped exports; total hits: 8526);

- Modifications or extensions to the basic search string, required by a search-engine’s capabilities (see above) or resulting from the stepwise sensitivity-based refinement (e.g., added terms to have a QGS publication enter the result set; see also Section 4.2);

We modified the engine-specific implementations as follows:

- ACM Digital Library
 - * Adding HTTP query parameter `since_year=2005`
 - * Adding HTTP query parameter `before_year=2013`
 - * Adding a clause of 3 search terms prefixed with `PublishedAs` to restrict publication types (see Item 9): `(PublishedAs:journal OR PublishedAs:proceeding OR Pub-`

lishedAs:transaction)

- * Adding a metadata-only clause to constrain the search to the targeted technology context (UML, MOF, SysML; see Items 4–6): ((Keywords:UML OR Keywords:"unified modeling language" OR Keywords:MOF OR Keywords:"meta object facility" OR Keywords:SysML OR Keywords:"systems modeling language") OR (Abstract:UML OR Abstract:"unified modeling language" OR Abstract:MOF OR Abstract:"meta object facility" OR Abstract:SysML OR Abstract:"systems modeling language"))

– IEEE Xplore:

- * (Command search page) Checking Metadata only;
- * (Result page) Setting Publication Year: 2005–2013;
- * (Result page) Setting Content Type: Conference Publications, Journals & Magazines;

– Scopus

- * Adding a clause of 9 metadata terms LIMIT-TO(PUBYEAR, yyyy) to limit the search to the review years: (LIMIT-TO(PUBYEAR, 2013) OR LIMIT-TO(PUBYEAR, 2012) OR LIMIT-TO(PUBYEAR, 2011) OR LIMIT-TO(PUBYEAR, 2010) OR LIMIT-TO(PUBYEAR, 2009) OR LIMIT-TO(PUBYEAR, 2008) OR LIMIT-TO(PUBYEAR, 2007) OR LIMIT-TO(PUBYEAR, 2006) OR LIMIT-TO(PUBYEAR, 2005));
- * Adding a clause of 2 metadata terms LIMIT-TO(DOCTYPE, value): (LIMIT-TO(DOCTYPE, "cp") OR LIMIT-TO(DOCTYPE, "ar"));
- * Adding a clause of 1 metadata term LIMIT-TO(LANGUAGE, value) to restrict result to English full-text publications (see Item 7): LIMIT-TO(LANGUAGE, "English");

– SpringerLink

- * (Result page) Setting Language to English (see Item 7);
- * (Result page) Setting Discipline to Computer Science;
- * (Result page) Setting Subdiscipline to SWE;
- * (Result page) Setting Date published to 2005–2013;

- Specific conditions for each search (e.g., custom automation support);

The search in ACM Digital Library was scripted, based on low-level HTTP requests, to tackle the paged presentation of the result set and to retrieve the bibliographical records. For the remaining three engines, we instrumented the browser and web UI of the respective engines.

4.6 Post-processing Result Sets

Automated metadata processing Based on our experience from our pilot study, we run the following cleansing operations on the bibliographical metadata:

- Selecting a metadata subset of each result set for further review, in particular for the selection decisions as defined in Section 6. We expect to find the following metadata entries to be extractable automatically: Unique identifier (DOI), Authors, Title, Publication Year, Page Range, URL (see also Section 7).

The correspondences we used for extracting key metadata fields from the four resulting data sets as required by Section 7, are documented in Table 9. Metadata missing from some result sets (namely: Abstract, Keywords) was accessed by the reviewers by consulting the external resources (as identifiable by the DOI or the URL), rather than replicating these metadata.

- Adding missing Document Object Identifiers (DOIs), e.g. by extracting them from other metadata fields such as URLs. For those that cannot be established without manual intervention by the authors, a temporary auto-generated identifier will be added.

Automated duplicate marking We mark duplicate publications (duplicates, hereafter) in several incremental steps. Note that a duplicate is the repeated occurrence of exactly the same publication within one (intra-source duplicate) or between two or more result sets (inter-source duplicate).

Table 9: Correspondences between key metadata fields in the result sets, as retrieved by the four search engines; n/a: not available in result set.

| | ACM DL | IEEE Xplore | Scopus | SpringerLink |
|-------------------|------------|-------------------------------------|----------------------------|---------------------|
| DOI | DOI | DOI | DOI | Item.DOI |
| Authors | Author | Authors | Authors | Authors |
| Title | Title | Document.Title | Title | Publication.Title |
| Publication Year | Year | Publication.Year | Year | Publication.Year |
| Page Range | Pages | Start.Page, End.Page | Page.start, Page.end | n/a |
| URL | URL | PDF.Link | Link | URL |
| Publisher | Publisher | Publisher | Publisher | n/a (Springer only) |
| Abstract | n/a | Abstract | Abstract | n/a |
| Keywords | n/a | Author.Keywords | Author.Keywords | n/a |
| Engine identifier | Identifier | PDF.Link (arnumber query parameter) | Link (eid query parameter) | URL |

First, we will assess the DOI coverage (i.e. the number of search hits having a DOI relative to the total number of hits) in each result set. Based on the DOI coverage, we will then decide how to proceed in detecting intra-source and inter-source duplicates.

From 5778 search hits, 5072 or 87.8% provided a DOI. 706 hits or 12.2% lacked a DOI. SpringerLink provided full DOI coverage, Scopus the lowest DOI coverage with only 29.5% (456/1544) of its hits having a DOI (see Table 12).

In case of missing DOIs, detecting intra-source duplicates will be tackled using engine-provided identifiers.

For this purpose, we used four metadata fields documented in Table 9.

As for missing DOIs for detecting inter-source duplicates, we will resort to a matching strategy using the publication titles plus manual reviews:

1. By matching publication titles literally and exactly.
2. By computing the pairwise Jaccard similarity [75] of publication titles:
 - We first tokenize and process all publication titles into a unique, canonical form: stopwords removal, punctuation removal, stemming. For this purpose, we will use the standard transformations available in the R package `tm` [34].
 - Publications of titles having a Jaccard similarity of exactly 1 will be manually reviewed.

Table 10: Overview of engine/engine overlap in terms of duplicated DOIs. Each cell of the lower segment represents the absolute number of DOIs contained at least once in a pair of two result sets. The upper cells contain the ratios of duplicated DOIs between two result sets and the total number of non-unique hits between in the two result sets. The diagonale represents the summed number of DOIs, each appearing at least in one or more result sets, contained by one result set.

| | ACMDL | IEEE Xplore | Scopus | SpringerLink |
|--------------|------------|-------------|------------|--------------|
| ACMDL | 226 | 1.5% | 6.3% | 2.7% |
| IEEE Xplore | 42 | 413 | 10% | 0% |
| Scopus | 184 | 385 | 959 | 14.8% |
| SpringerLink | 53 | 0 | 443 | 457 |

The findings of the duplication-detection step were the following (see Table 12):

- *DOI coverage*: By propagating DOIs between duplicated hits in different data sets, we improved the overall DOI coverage from 87.8% to 90.6% (or from 5072 to 5232 search hits out of 5778).
- *Intra-source duplicates*
 - ACM Digital Library, IEEE Xplore and SpringerLink did not contain duplicates identifiable in this step, regardless of the detection strategy used.
 - For Scopus, we found 10 intra-source duplicates in total; 7 using the DOIs, 3 additional based on title matching.

Table 11: Overview of engine/engine overlap in terms of duplicated publication titles (exact and validated Jaccard matches, no DOIs available). Each cell of the lower segment represents the absolute number of non-unique titles contained at least once in a pair of two result sets. The upper cells contain the ratios of non-unique titles in two result sets and the total number of non-unique hits in the two result sets. The diagonale represents the total number of non-unique titles, each appearing at least in one or more result sets, contained by one result set.

| | ACMDL | IEEEExplore | Scopus | SpringerLink |
|--------------|-----------|-------------|-----------|--------------|
| ACMDL | 16 | 0.2% | 0.4% | 0% |
| IEEEExplore | 6 | 15 | 0.3% | 0% |
| Scopus | 11 | 10 | 20 | 0% |
| SpringerLink | 0 | 0 | 0 | 0 |

• *Inter-source duplicates*

- In total, we found 1001 unique DOIs with at least one occurrence in at least two result sets: 948 re-occurred in 2 result sets, 53 occurred in three result sets.
- Nearly half of the DOIs retrieved from Scopus and SpringerLink were not unique to these two sets: Scopus contained 959 non-unique DOIs (present in at least one other result set) or 48% (959/2000); SpringerLink 47.5% (457/1000; see Tables 10 and 12).
- Considering pairs of result sets: The maximum DOI overlap of 14.8% was found between Scopus and SpringerLink, followed by 6.3% between Scopus and the ACM Digital Library (see Tables 10).
- From the remaining hits which do not contain a DOI, we found 25 non-unique titles over all four data sets.
- Scopus contained the maximum of 20 publications having no DOI and a non-unique title.
- Scopus contributed to the maximum pairwise overlap observed, e.g., between Scopus and ACM Digital Library as well as between Scopus and IEEE Xplore (see Tables 11).
- In addition to exact title matching, title matching based on Jaccard similarity yielded another 8 duplicate candidates. Manual review confirmed that 6 from these are actual duplicates.

Table 12: Results of the different duplicate-marking steps; intra-source: within the result of one engine; inter-source: between the result sets of the 4 engines.

| | ACM Digital Library | IEEE Xplore | Scopus | SpringerLink | Σ |
|------------------------------|---------------------|-------------|--------|--------------|----------|
| # search hits | 933 | 1 845 | 2 000 | 1 000 | 5 778 |
| # duplicated hits | 80 | 132 | 747 | 124 | 1 083 |
| # cleaned hits | 853 | 1 713 | 1 253 | 876 | 4 695 |
| before DOI cleansing | | | | | |
| # hits without DOI | 180 | 70 | 456 | 0 | 706 |
| # hits with DOI | 753 | 1 775 | 1 544 | 1 000 | 5 072 |
| after DOI cleansing | | | | | |
| # hits without DOI | 149 | 66 | 331 | 0 | 546 |
| # hits with DOI | 784 | 1 779 | 1 669 | 1 000 | 5 232 |
| intra-source duplicates | | | | | |
| # based on DOI | 0 | 0 | 7 | 0 | 7 |
| # based on title match | 0 | 0 | 3 | 0 | 3 |
| # based on engine identifier | 0 | 0 | 0 | 0 | 0 |
| inter-source duplicates | | | | | |
| # based on DOI | 226 | 413 | 959 | 457 | n/a |
| # based on title match | 16 | 15 | 20 | 0 | n/a |

The removal procedure for duplicates was performed in the following way:

- The objective is to preserve the engine-based relevance ordering. That is, maintain those (duplicated) occurrences which rank higher in the relevance-ordered result sets.
- In turn, removing only the relatively lower-ranked (duplicated) occurrences makes non-duplicated search hits become positioned higher in the ordered, cleansed result sets.

- *Overall duplicate removal*: Based on these findings, we removed 1083 duplicated hits or 18.7% of the total search hits over all four result sets. The authoritative combined data set for the actual selection step therefore contained 4695 publications.
- In relative terms, we found, verified and removed the largest number of duplicates from Scopus: 774 duplicates or 38.7% (774/2000). Scopus is followed by SpringerLink with 12.4% of removed duplicates (124/1000), ACM Digital Library with 9.6% (80/933), and IEEE Xplore with 7.2% (132/1845).
- This finding matched our initial intuition concerning the expected overlap between Scopus and the other three engines, stated earlier (see Section 4.1).
- Limitations of the duplicate detection procedure:
 - *Metadata quality*: We encountered a number of metadata defects which limit the effectiveness of either duplicate detection strategy (DOI, title matching, engine identifier):
 - * Mistyped or inconsistent DOIs: We found at least one DOI which was mistyped in two sources (containing a dash rather than an underscore). Due to this sort of inconsistency, the DOI-based detection strategy might have missed actual duplicates. In one case, we found two different DOIs pointing to one and the same publication.
 - * Title matching was certainly affected by character-set encoding issues, turning special characters into a different encoding or encoding representation. We encountered 5 different cases for different dash and wildcard characters. The Jaccard similarity check helped us to find these cases though.
 - * The engine-specific identifiers did not help detect duplicates not already properly sorted out by the search engine. For example, the intra-source duplicates in Scopus could not be detected in this way.
 - *Title ambiguity*: Title matching (whether in an exact or similarity-based manner) is only a weak indicator because of the possibility of title sharing between follow-up publications of the same authors or similar corner cases. Manual review was essential, but caused a considerable effort.
- As a result, we identified manually another 33 duplicates in the collection of 4695 hits during the selection procedure.

Sensitivity analysis The quasi-sensitivity is defined as the ratio of relevant papers identified by the QGS retrieved through the automated search to the number of total number of relevant papers (i.e. the size of the QGS corpus; [123]). The objective is to reach a quasi-sensitivity level between 70% and 80% [123].

Based on the unprocessed and the cleansed result sets, we will compute the following statistics related to the analysis of quasi-sensitivity:

- Quasi-sensitivity ratio per engine/result set: The number of QGS publications expected to be covered by a search engine (given its publisher, see Table 5) relative to the number of these QGS publications actually retrieved from this engine.

The raw data is summarized in Table 13. columns 1 (expected) and 2 (intra-source):

- The result set retrieved from ACM DL contained all of the two expected QGS publications (quasi-sensitivity ratio of 1).
- The result set retrieved from IEEE Xplore contained three out of seven expected QGS publications (quasi-sensitivity ratio of ~ 0.43).
- The result set retrieved from Scopus contained seven out of 13 expected QGS publications (quasi-sensitivity ratio of ~ 0.54).
- The result set retrieved from SpringerLink contained seven out of 15 expected QGS publications (quasi-sensitivity ratio of ~ 0.47).

- Quasi-sensitivity ratio across all engines/ result sets: The number of QGS publications retrieved from all selected search engines relative to the total number of QGS publications (see Section 4.1).

Table 13: Overview of per-engine quasi-sensitivity for the four search engines and the respective result sets.

| | expected | intra-source | extra-source | inter-source |
|--------------|----------|--------------|--------------|--------------|
| ACMDL | 2 | 2 | 1 | 2 |
| IEEE Xplore | 7 | 3 | 4 | 5 |
| Scopus | 13 | 7 | 0 | 7 |
| SpringerLink | 15 | 7 | 13 | 14 |

- The total, unique search hits retrieved from all four search engines (4695) contained 28 (i.e., sum of column 4, inter-source, of Table 13), out of 37 QGS publications. This yields a quasi-sensitivity ratio of ~ 0.76 .
- More than 70% of the expected QGS publications linked to ACMDL, IEEE Xplore, and SpringerLink could be found either in the respective engine itself or any of the other engines (inter-source).
- The lowest inter-source sensitivity was obtained for Scopus: Only 7 out of 13 expected QGS publications (~ 0.54) could be found in Scopus itself and the three other engines.

- **Overlap:** Number of QGS publications co-occurring in the different result sets.

The raw data are depicted in Table 14:

- There was no overlap in terms of QGS publications between IEEE Xplore and ACM Digital Library, on the one hand, as well as between SpringerLink and IEEE Xplore.
- The maximum QGS overlap was observed between SpringerLink and Scopus with nearly half (42.9%) of the total expected QGS publications (28; see Table 13) co-occurring between the two.
- The result set of Scopus was involved in most co-occurrences (25); see Table 14.

Table 14: Overview of co-occurring QGS publications between the four search engines. Each cell of the lower segment represents the absolute number of QGS publications co-occurring once in a pair of two result sets. The upper cells contain the ratios of QGS publications co-occurring in two result sets and the total number of expected QGS publications over the two result sets. The diagonale represents the summed number of co-occurring QGS publications, each appearing once in the given result set and the other result sets.

| | ACMDL | IEEE Xplore | Scopus | SpringerLink |
|--------------|-------|-------------|--------|--------------|
| ACMDL | 6 | 0% | 33.3% | 17.6% |
| IEEE Xplore | 0 | 4 | 15% | 0% |
| Scopus | 5 | 3 | 25 | 42.9% |
| SpringerLink | 3 | 0 | 12 | 13 |

5 Snowballing Strategy

To ensure that we obtain a paper corpus which represents a preferably complete selection of relevant literature on UML-based DSML designs, we will run a citation-based search. In particular, we adopted the steps described by [59, 114] to establish the following snowballing guideline:

1. *Start set:* Initially, a set of papers to extract the references must be identified by the reviewers. This set must contain only papers which also satisfy the selection criteria (see Section 6) to which candidate papers retrieved by snowballing are subject during evaluation. In addition, any authors' bias should be minimized when establishing the start set. Therefore, this start set will be formed by the finally included papers from the main search step (see Section 4.3).
2. *Iterations:* We are interested in prior work on DSML designs which is considered relevant and which is therefore referenced by authors of the start set (*backward snowballing*). The initial iteration will

be run based on the start set (see above). Subsequent iterations will be performed on papers selected during the prior iteration. This will be continued till no further paper is included. The following sub-steps are performed repeatedly, for each iteration.

3. *References extraction*: To extract the references from the start-set publications, we will consider the capabilities, if any, for retrieving references of papers from the respective digital libraries that we used to run the engine-based search (see Section 4.4). In any case, and for the follow-up iterations based on third-party sources, we will manually extract the references into a spreadsheet document. The minimum entries per reference record are:

- Publication title
- Publication venue
- Authors list

See also Section 7.

4. *Postprocessing*: For each iteration, the candidate papers extracted initially will be processed to mark duplicates, using the procedure (if applicable) as outlined in Section 4.6.

The postprocessing sub-step could not be realized because of the lacking and heterogeneous nature of the reference records. We resorted to manual duplicate detection.

5. *Selection*: The postprocessed references will be evaluated against the selection criteria defined in Section 6. The selection tasks will be split between the authors, so that each author reviews an equally sized subset of candidate papers. A second reviewer will check a 20% random sample drawn from the subset reviewed by another reviewer, by making the selection decision independently from the first reviewer. See also Section 6.4.3.
6. *Quality Assessment*: The candidate papers for inclusion will be further assessed according to the procedure defined in Section 6.3.
7. *Data extraction*: The included papers will be subjected to the decision-data extraction procedure defined in Section 7. These papers form the start set for the subsequent iteration (see above).

6 Selection Criteria

6.1 Inclusion & Exclusion

For evaluating a publication for inclusion or exclusion, we distinguish between venue-specific and publication-specific criteria. The former are to be evaluated first (as a venue-based decision may apply to several publications under evaluation), the latter are evaluated afterwards and only iff the venue-specific criteria are met by the publication. Within each set of criteria, the order of evaluation is based on experiences drawn from the pilot study. Criteria are considered earlier if the evaluation has the potential of being reused for multiple publications (e.g., venue-specific ones) and/or the criteria can be checked in an assisted and guided manner (e.g., by verifying an item against a check list). Criteria requiring an in-depth analysis of publication content are positioned at the end of the evaluation orders.

The venue-specific criteria are (in their order of evaluation):

- C₁ *Time coverage*: The publication venue must cover a time period between 2005–2012, that is, the venue must have a regular record of publishing in this time span. The start year follows from the release of UML 2.0 specification in July 2005. Work published until Jan 30, 2013 is included in the systematic review. For presence venues, evaluating this criterion is inherently linked to evaluating C₂ (see below).
- C₂ *Community relevance*: We want to include publication venues considered relevant by sources beyond the venue’s native community and the authors’ judgment alone.
 - For our SLR, a *journal* must be listed with the *Excellence in Research for Australia Journal List 2012* (ERA; [4]) as one of the 304 journals categorized into *Computer Systems* (803) and/or *Information Systems* (806). We adopt this journal list because it results from a public and international consultation of the various scientific communities, it does not impose prescriptive journal ranks, it has already been used for systematic reviews, and it has been acknowledged

by international research bodies (WKWI³). Using the 2012 edition of the ERA journal list also guarantees that journals over our entire review period are potentially covered (2005-2012).

- As for a *conference*, there must be a continuous publishing history. A presence venue (conference, symposium) must have been held at a regular basis during the review period. By regular, we mean repeatedly according to the conference format (yearly, biyearly etc.). For yearly venues, for example, this is equal to eight issues corresponding to the SLR period of 2005–2012. However, if a venue has changed the format within the review period (e.g., from an annual to a biannual scheme) this mark can differ. In doubt about a changing venue’s schedule (e.g., because the scheme change has not been announced explicitly or it cannot be induced from reviewing a bibliographical data base), the venue is accepted under this criterion. A regular publication history is considered an indicator of acceptance and support of a venue by its scientific community and by other stakeholders (e.g., publishers, bibliographical data bases such as DBLP, and industry sponsors). Note that for presence venues, applying this criterion equals evaluating C₁.

C₃ *Software-engineering focus*: We include publications having a software-engineering audience because we are interested in DSML design decisions primarily from a software-engineering perspective (e.g., separation of concerns), methodologies (e.g., MDSD), as well as SE-specific methods/tools (e.g., model transformations). Therefore, we consider only dedicated software-engineering venues (rather than conferences that aim at a specific application domain, such as health-care for example):

- A *journal* must have a clear and acknowledged focus on software-engineering topics. A journal’s software-engineering profile is judged according to the authors’ expertise (two of which are senior software-engineering researchers) and by verifying whether the journal is contained in the 1) 53 journals in category *Computer Science*, subcategory *Software Engineering* of Microsoft Academic Search (as of Feb 4, 2013) and/or in the 2) 184 journals in the subject area *Computer Science*, subject category *Software*, of the 2012 *SCImago Journal Rank* list (SJR; [99]).

Both journal lists are publicly available and allow for discriminating between software-engineering venues and other venues independently from each other (i.e., based on different bibliographical data sets and on classifications developed independently).

We do *not* consider, even if available any journal ranks in our inclusion/exclusion decision (e.g. the SJR indicator). The only criterion is the condition of being listed with the sources above.

- A *conference* is considered as having an accepted software-engineering focus (in the most inclusive sense) when it is contained in the list of 169 software-engineering conferences maintained by Tao Xie ([117]; as of Feb 4, 2013) and/or in the Microsoft Academic Search list of 284 software-engineering venues (as of Feb 4, 2013). This way, we base this selection decision on two independent sources.

C₄ *Mature content*: A *peer-review procedure* must be in place for a venue as a first prerequisite to identify mature and rigorous research content (i.e., research results including research evaluation). As for presence venues we exclude *workshops*. A presence venue is qualified as a workshop if the proceedings title identifies the venue as such and/or the main, supporting venue (e.g. a conference or symposium) lists the venue as a workshop event (e.g. in its CFP or at its website, if available). As for archival venues, formats other than periodicals (e.g. a monograph such as a *festschrift*, an article collection, or a research report) are excluded.

The publication-specific criteria are (in order of their evaluation):

C₅ *Full-text accessibility*: The publication’s full-text must be accessible to the authors, either via the publisher’s digital libraries (assuming suitable subscriptions of the authors and their institutions), the author’s Web page or third-party online locations (e.g., Citeseer). Full-text availability is critical for evaluating the publication-specific criteria C₆ through C₁₁.

From all 4695 unique search hits (see Section 4.6), 47 publications turned out not to be accessible to the authors and were therefore excluded.

C₆ *Publication language*: The publication full-text must be written in English or, alternatively, there must be an English version available/accessible. It is not sufficient to have (additional) English title, abstract, keywords and other metadata only.

³<http://wi.vhbonline.org/index.php?id=104>

- C₇ *Primary study*: We include only a *primary study*, i.e. papers falling into the two following categories according to [116]: 1) Proposal of DSML solution and/or 2) DSML personal experience paper. In particular, a publication will be excluded:
- if it is not related to a DSL or DSML based on the UML (according to title, keywords, and abstract). In case of disagreement on the selection decision, the full content of the paper must be considered;
 - if it represents a *secondary study* on DSMLs (e.g., an SLR on DSLs or DSMLs);
- C₈ *Publication type*: A candidate publication will be excluded:
- if it was not published as a regular research paper and special-issue research paper in a journal venue. Article types such as editorial papers and columns as well as book chapters and technical reports are excluded;
 - if it was not published as a full research papers in a presence venue. Therefore, short and position papers, as well as notes on posters, talks, tutorials, and tool demos are excluded;
- C₉ *UML version match*: The publication and the DSML must be based on the UML version 2.0 (implying MOF 2.0) or newer. This is because, in our catalog, we assume the availability of UML 2.x and MOF 2.x extension features. Note that this criterion is also meant to eliminate publications which have been published post 2005 but use earlier UML/MOF revisions (see also C₁).
- C₁₀ *Originality*: The candidate publication (provided that the publication is accepted as primary study under C₇) must be the original published work documenting a DSML design. Any follow-up, extending, or promoted publications will be excluded (e.g., proceedings papers extended to yield a journal article) based on the publication year (or other date stamps indicating a precedence order between two publications). Nevertheless, subsequent publications, while not being included in the paper corpus initially and reported as part of the SLR, will be consulted for clarifying details on a DSML design (e.g. to clarify deviating judgements between the co-reviewers when codifying the design decisions). Extensions of prior UML-based DSMLs (e.g. by adding a new UML profile or by extending a previously reported metamodel extension) will be recorded as a separate DSML design. In case of doubt, a candidate publication is accepted under this criterion.
- C₁₁ *Minimum coverage*: The publication documents design details (e.g., abstract syntax, concrete syntax, constraints, behavioral specification) of a DSML or a set of related DSMLs based on the MOF/UML. The match is assessed by reviewing the publication’s full-text. Minimum coverage must be the description of the language model definition (D1) and formalization decisions (D2).

6.2 Selection States

During the selection process as documented in Section 6.1, a given publication under review keeps a number of intermediate selection states to finally reach a final decision state (i.e., **excluded** or **included**). The statechart in Figure 6 documents the three main evaluation steps towards a selection decision and the resulting, valid state transitions:

1. If any of the venue-specific criteria (C₁–C₄) evaluates to false, a publication will be **excluded** because it does Not Match the venue-specific Criteria (**NMC**). Likewise, if the publication-specific criteria on the full-text accessibility (C₅) or on the publication language (C₆) do not hold, the publication will also be marked **NMC** and will therefore be **excluded**.
2. If not already **excluded** and if the publication-specific criterion on a topical match (C₇) evaluates to false, a publication is **excluded** because it is considered Off Topic (**OT**).
3. If not already **excluded** and if any of the remaining publication-specific criteria (C₈–C₁₁) evaluates to false, a publication is **excluded** because it is considered Not Matching these publication-specific Criteria (i.e., again **NMC**).

For documentation and analysis purposes, the final selection states (**included**, **excluded.NMC**, **excluded.OT**) are recorded (see also Section 7).

Table 15 aggregates the number of papers excluded during the selection procedure, grouped by exclusion criteria. In total, 5731 reviews were conducted by three different reviewers. All articles considered (5023) were reviewed by at least one reviewer. Excluded articles were classified according to three criteria: **NMC** (article does not match inclusion criteria), **OT** (article is off topic; i.e. it does not deal with UML-based DSML developments), and **ERR** (article contains serious errors). The first review excluded 4859 articles (81% **NMC**, 18% **OT**, <1% **ERR**; see Table 16). We selected

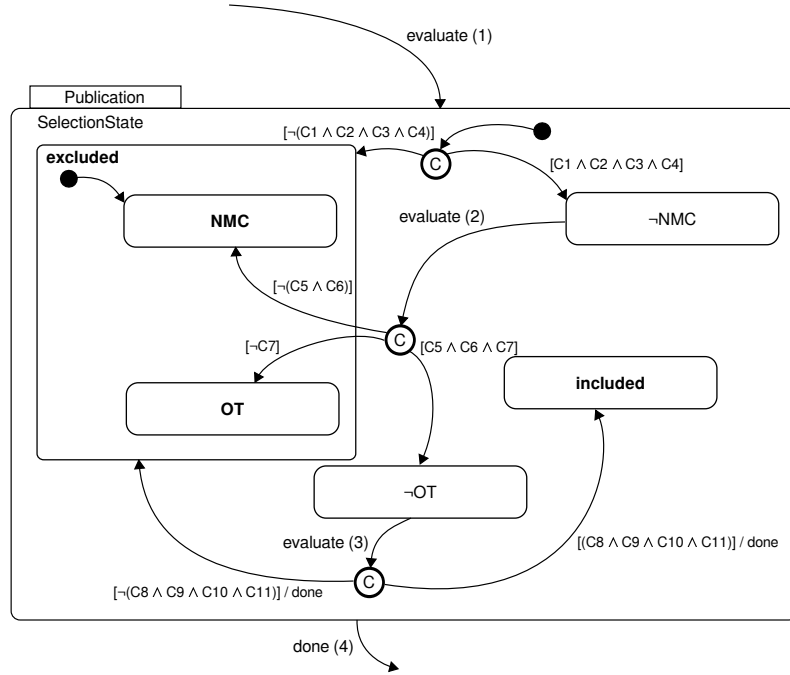


Figure 6: Selection states (i.e., NMC, OT, excluded, included) of a publication under review, following from the evaluation order between venue-specific and publication-specific criteria.

190 articles (21%) of all ERR- and OT-classified articles (903) as well as all included articles (100) from the first reviewer for a second classification by a different reviewer. Additionally, there were a few articles the first reviewer was not sure about whether they should be included or excluded (31). These, as well as all duplicates (33) were also double-checked. Thus, the second reviewers classified 354 articles of which 240 articles were excluded (20% NMC, 74% OT, 6% ERR; see Table 16). The final decision was made by comparing both reviews for all 354 articles and, if differences had occurred, by agreeing on a final decision by both reviewers. The final decision excluded 237 articles (18% NMC, 76% OT, 6% ERR; see Table 16), leaving 117 articles in the paper corpus (84 unique articles and 33 duplicates).

Table 15: Overview of excluded/included papers during selection (OT, NMC) and quality assessment (duplicates, erroneous studies).

| Hits/papers | ACMDL | IEEEExplore | Scopus | SpringerLink | Main Search | Snowballing | QGS | Total |
|--------------|-------|-------------|--------|--------------|-------------|-------------|-----|-------|
| Total | 933 | 1845 | 2000 | 1000 | 5778 | 2337 | 37 | 8152 |
| Unique | 853 | 1713 | 1253 | 876 | 4695 | 2337 | 37 | 7069 |
| Considered | 781 | 94 | 991 | 812 | 2678 | 2337 | 8 | 5023 |
| excluded.OT | 186 | 11 | 266 | 241 | 704 | 170 | 2 | 876 |
| excluded.NMC | 571 | 73 | 681 | 543 | 1868 | 2128 | 1 | 3997 |
| ERR | 8 | 3 | 9 | 5 | 25 | 6 | 2 | 33 |
| Duplicated | 1 | 1 | 3 | 3 | 8 | 25 | 0 | 33 |
| Included | 15 | 6 | 32 | 20 | 73 | 8 | 3 | 84 |

Table 16: Classification of excluded articles (reviewer 1 / reviewer 2 / final decision).

| Classif. | ACMDL | SpringerLink | Scopus | IEEEExplore | Snowballing | QGS | Total |
|----------|---------------|---------------|---------------|-------------|----------------|-----------|------------------|
| NMC | 559 / 15 / 12 | 530 / 14 / 14 | 671 / 13 / 10 | 70 / 1 / 3 | 2125 / 4 / 3 | 1 / 0 / 0 | 3956 / 47 / 42 |
| OT | 190 / 31 / 32 | 240 / 52 / 52 | 256 / 57 / 58 | 11 / 4 / 3 | 174 / 32 / 33 | 2 / 2 / 2 | 873 / 178 / 180 |
| ERR | 6 / 5 / 5 | 4 / 3 / 3 | 9 / 5 / 5 | 3 / 0 / 0 | 6 / 0 / 0 | 2 / 2 / 2 | 30 / 15 / 15 |
| Total | 755 / 51 / 49 | 774 / 69 / 69 | 936 / 75 / 73 | 84 / 5 / 6 | 2305 / 36 / 36 | 5 / 4 / 4 | 4859 / 240 / 237 |

6.3 Quality Assessment

To further assess the quality of the papers that we considered as inclusion candidates (see Section 6.1), we evaluated the papers and their content regarding two aspects: 1) duplicate publications and 2) the correctness of the DSML design documentation:

1. *Duplicates*: The duplicate-detection procedure as part of our data cleansing step risks missing

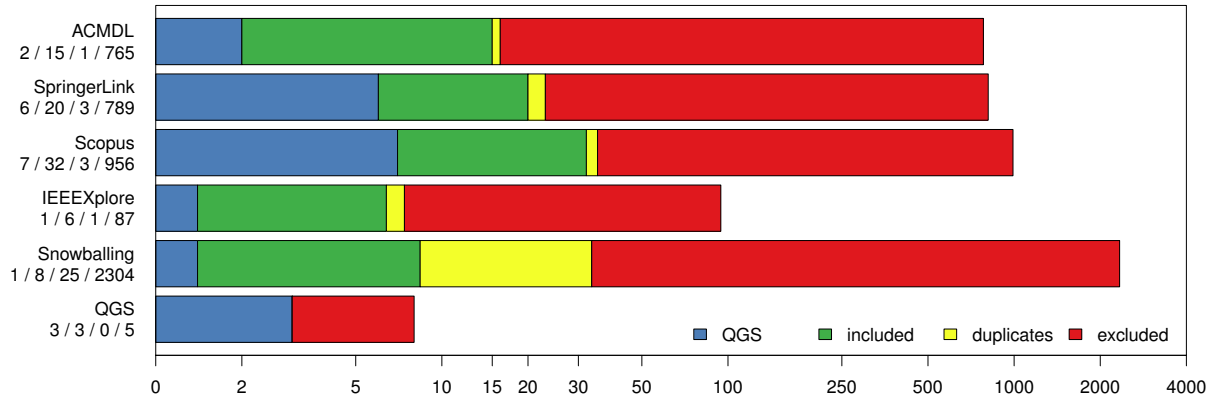


Figure 7: Classification of articles found per search engine/method. Please read the figures on the x-axis as follows: *number of QGS articles in included articles / number of included articles / number of duplicated articles / number of excluded articles*.

Table 17: Classification of articles found.

| Classification | ACMDL | SpringerLink | Scopus | IEEEExplore | Snowballing | QGS | Total |
|----------------|--------|--------------|--------|-------------|-------------|-------|---------|
| Included (QGS) | 15 (2) | 20 (6) | 32 (7) | 6 (1) | 8 (1) | 3 (3) | 84 (20) |
| Duplicates | 1 | 3 | 3 | 1 | 25 | 0 | 33 |
| Excluded | 765 | 789 | 956 | 87 | 2304 | 5 | 4906 |
| Total | 781 | 812 | 991 | 94 | 2337 | 8 | 5023 |

duplicates. For example because an identical publication could be listed with two separate DOIs (e.g., due to parallel publishing channels for proceedings articles). Similarly, title matching might have missed duplicates because of different practices of reporting main and subtitles of publications. Therefore, during manual quality assessment, we assess the manually inspected publications for duplicates (e.g., by maintaining a reference list of DSML project names, author names etc.).

From the 106 candidate publications from the main search, 8 previously undetected duplicates were found (see Table 15). Backward snowballing yielded another 25 duplicates; resulting in 33 duplicates in total.

2. *Correctness*: The papers finally included in our selection (see Section 6.1) are subjected to an assessment of the correctness of the documented DSML design, especially the formalized design options. To the extent the DSML documentation permits such an assessment, the reviewers will evaluate whether the modeling and specification artifacts violate, for example, syntactic and/or semantic rules set by the (meta-)modeling language (CMOF, UML Infrastructure, UML Superstructure). In contrast to related work (see, e.g., [40]), we explicitly factor out interpreting intended domain semantics and application scenarios of DSMLs (e.g. whether the terminology used for model elements matches common domain vocabulary or whether models are unambiguously defined in terms of linguistic concepts). Included papers, which exhibit formalization and/or critical documentation defects, will be marked **ERR**oneous (**ERR**). In the following, such publications are excluded from the extraction of encoded DSML design decisions. In case of doubts and/or an unresolvable disagreement between reviewers (i.e., the two independent data extractors; see Section 7.2), the paper is excluded from decision extraction. However, formalization and documentation defects will be explicitly documented in the resulting research report. Focus will be set on the definition and formalization of the DSML language model because this particular design decision is mandatory in language model driven DSML development.

Based on the state of relevant literature (see, e.g., [5, 7, 21, 23, 31, 40, 48, 81]) and on our experience, including the pilot study, we will assess the included publications for (but not limited to) the following types of formalization and design-documentation defects (depending on the corresponding

Table 18: Included articles per publication medium and year.

| Medium | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | Total |
|--------------------|------|------|------|------|------|------|------|------|------|-------|
| Conference article | 11 | 14 | 4 | 4 | 4 | 7 | 10 | 0 | 0 | 54 |
| Journal article | 0 | 2 | 4 | 5 | 6 | 2 | 5 | 5 | 1 | 30 |
| Total | 11 | 16 | 8 | 9 | 10 | 9 | 15 | 5 | 1 | 84 |

extension technique):

- Defects in language model formalization (see, e.g., [40]), such as, not standard compliant metamodel definitions or ambiguous specifications for metamodel elements.
- Defects in applying UML profiles (see, e.g., [81]) and/or defects in usage of the stereotype mechanism (see, e.g., [48]), such as, missing or underspecified profile definitions or syntactical and semantic defects in stereotype specifications. Defects in the usage of profiles/stereotypes are not only facilitated by their ambiguous definition in the UML specification, but also because the profile/stereotype specification has changed in UML 2.x compared to previous versions UML 1.x (see, e.g. [7, 48]).
- Defects because of tool-specific definitions and limitations, such as, using implementation-specific, not standard compliant syntax and semantics or insufficient support of MOF-compliant metamodeling layers (see, e.g., [5, 31]).
- Defects related to the specification of language model constraints, such as, logical errors, ambiguous definitions, or syntactically incorrect formal constraints (see, e.g., [21, 23]).

From the 106 candidate publications from the main search, 25 were marked ERR (see Table 15).

During backward snowballing, we identified 6 additional erroneous publications; adding up to 31.

By evaluating the QGS articles neither found via the main search nor via backward snowballing, we identified 2 additional erroneous publications; summing up to 33 in total.

6.4 Applications of Selection Criteria

During the different review phases, i.e. establishing the QGS corpus (see Section 4.1), running engine-based search (see Section 4.1), and performing the final backward-snowballing search (see Section 5), the selection criteria take effect differently.

6.4.1 QGS-specific Selection Process

We applied the selection criteria for the identification of suitable publication venues when establishing the QGS corpus (see Section 4.1). However, for this purpose, the criteria and the procedure are slightly modified, primarily to increase the inclusion barrier for prospective QGS publications:

- *Venue identification*: In this step, the venue-specific criteria C_1 – C_4 are evaluated. For a publication venue to be acceptable under C_3 , the venue must be listed with *both* sources (MS/AS [73] as well as SJR [99] and Xie [117], respectively). To the extent venue identification is the base for the search-engine selection, these criteria affect the engine selection.
- *Paper screening*: The papers are screened based on title, abstract and keywords. Due to the extensiveness of the this manual screening step (see Section 4.1), the publication-specific criteria C_5 – C_{10} are *not* evaluated when deciding whether a paper is incorporated into the QGS corpus or not.
- Quality assessment (see Section 6.3) and decision-data extraction (see Section 7) are not performed immediately.

6.4.2 Engine-specific Selection Process

The second application of the selection criteria differs in two main aspects from the first one (see Section 6.4.1): On the one hand, the publication-specific criteria are evaluated. On the other hand, venue selection is less restrictive than for QGS construction.

- *Venue identification*: In this step, the venue-specific criteria C_1 – C_4 are evaluated. For a venue to be acceptable under C_3 , the venue must be listed with *at least one* of the sources (MS/AS [73] as well as SJR [99] and Xie [117], respectively).
- *Paper screening*: For this step, the publication-specific criteria C_5 – C_{11} are evaluated.
- Quality assessment (see Section 6.3) and decision-data extraction (see Section 7) are performed immediately.

6.4.3 Snowballing-specific Selection Process

In this third application, we applied the exact same evaluation steps as for the engine-specific selection; see Section 6.4.2.

6.5 Selection Validity

The IRR statistics used will be Cohen’s Kappa $\widehat{\kappa}_C$ for the selection decisions. Hits rated by just one author, originating from collecting inter-ratings only from a subset of co-reviewed search hits, will be considered when computing the Kappa coefficient (i.e., to establish the chance agreement). However, every search hit is reviewed by at least one author (see above and also Section 7.2).

Table 19 summarizes the collected ratings of the 2,678 search hits into the two categories **included** (“y”) and **excluded** (“n”):

- 2,400 hits were only reviewed by one author.
- 278 hits were reviewed by two authors.
- Percent agreement (p_a) amounted to ≈ 0.885 .
- Cohen’s Kappa $\widehat{\kappa}_c$ including missing data amounted to ≈ 0.875 .

Table 19: 2,678 rating items; $p_a \approx 0.885$; $\widehat{\kappa}_c \approx 0.875$; $Var(\widehat{\kappa}_c) \approx 0.0004$

| | | RATER B | | | |
|---------|----|---------|----|------|-------|
| | | n | y | NA | Total |
| Rater A | n | 183 | 2 | 2400 | 2585 |
| | y | 30 | 63 | 0 | 93 |
| | NA | 0 | 0 | 0 | 0 |
| Total | | 213 | 65 | 2400 | 2678 |

Tables 20–22 summarize the collected ratings for each of the three snowballing iterations into the two categories **included** (“y”) and **excluded** (“n”). As the reference items of iteration were rated separately from each other, we do also report the reliability analyses separately:

- The numbers of references only reviewed by one author were 2054 (1st iteration), 194 (2nd iteration), and 20 (3rd iteration).
- The numbers of references reviewed by two authors were 62 (1st iteration), 6 (2nd iteration), 1 (3rd iteration).
- Percent agreement (p_a) amounted to ≈ 0.968 (1st iteration), ≈ 0.833 (2nd iteration), and 1 (3rd iteration).
- Cohen’s Kappa $\widehat{\kappa}_c$ including missing data amounted to ≈ 0.967 (1st iteration), ≈ 0.829 (2nd iteration), and 1 (3rd iteration).

Table 20: 1st iteration of snowballing procedure (2116 rating items); $p_a \approx 0.968$; $\widehat{\kappa}_c \approx 0.967$

| | | RATER B | | | |
|---------|----|---------|---|------|-------|
| | | n | y | NA | Total |
| Rater A | n | 56 | 1 | 2054 | 2111 |
| | y | 1 | 4 | 0 | 5 |
| | NA | 0 | 0 | 0 | 0 |
| Total | | 57 | 5 | 2054 | 2116 |

7 Data Extraction

The data extraction procedure described below applies to the sub-steps of establishing the QGS corpus (see Section 4.1), to the main engine-based search (see Section 4.1), and to the final backward-snowballing

Table 21: 2nd iteration of snowballing procedure (200 rating items); $p_a \approx 0.833$; $\hat{\kappa}_c \approx 0.829$

| | | RATER B | | | |
|---------|----|---------|---|-----|-------|
| | | n | y | NA | Total |
| Rater A | n | 5 | 1 | 194 | 200 |
| | y | 0 | 0 | 0 | 0 |
| | NA | 0 | 0 | 0 | 0 |
| Total | | 5 | 1 | 194 | 200 |

Table 22: 3rd iteration of snowballing procedure (21 rating items); $p_a = 1$; $\hat{\kappa}_c = 1$

| | | RATER B | | | |
|---------|----|---------|---|----|-------|
| | | n | y | NA | Total |
| Rater A | n | 1 | 0 | 20 | 21 |
| | y | 0 | 0 | 0 | 0 |
| | NA | 0 | 0 | 0 | 0 |
| Total | | 1 | 0 | 20 | 21 |

search (see Section 5).

7.1 Data Records

The data records are stored and maintained as Google Drive spreadsheets. For each search engine, there will be one sheet named after the respective search engine. The column “organization” in each sheet follows from the record structure given below. The data extracted by the two different data extractors will be maintained in the same sheet. However, by controlling column visibility, the two data extractors will be blinded for the data extracted by its alter. Although the intention is to arrive at a full (and if needed, negotiated) agreement on each publication, we compute inter-rater reliability statistics to reflect on the state of agreement before negotiation and the complexity of negotiating an agreement. The IRR statistics used will be Cohen’s Kappa for the inclusion/exclusion decisions and the Kupper-Hafner Index [65] on ratings for the design-decision data.

In our pilot review, and before revision 3 of this document, the data items recorded per publication slightly differed from the ones in the authoritative review (see below). The original data-extraction procedure, as of revision 2 of this protocol, is described in full detail in [36]. The main differences arise from additional search engines (and their characteristics; e.g., Google Scholar, MS Academic Search) used for the pilot and different analyses planned for the pilot. In our pilot, we did not include the DOI as a record item which complicated duplicate cleansing. Therefore, we changed our extraction procedure accordingly. Based on the pilot search, we also aimed to identify search terms which did not produce any hits to further revise our search string. Therefore, we also collected the search terms responsible for each search hit. The remainder of the record entries per publication were re-adopted for the main review, despite some relabeling (e.g., annotator vs. extractor).

For each paper in the corpus, a basic data record is created. The data for this record is extracted from the paper content and its accompanying bibliographical metadata, as provided by the search engine returning the respective paper as search hit. Depending on the data-extraction capabilities of the search engine, some data entries are created manually or adopted in a semi-automated manner.

- *Data extractor #1*: Name of the reviewer (Hoisl, Sobernig, Strembeck) a) running the authoritative search yielding the publication as search hit, b) making a first selection decision according to the criteria in Section 6, and c) extracting the first corresponding data record about the selected search hit (publication).
- *Data extractor #2*: Name of the reviewer (Hoisl, Sobernig, Strembeck) a) making a second, independent selection decision according to the criteria in Section 6 and b) extracting the second corresponding data record about the selected search hit (publication). The person must be different from the person acting as first extractor.
- *Unique identifier*: If available, we retrieve the *Document Object Identifier* (DOI) to disambiguate the publication item within each search-engine result set and in the total result set. If missing, we generate an identifier for the disambiguation purpose in our review.

- *Authors*: The list of publication authors as retrieved from the respective search engine.
- *Title*: The publication title as retrieved by the respective search engine.
- *Publication year*: The year of publication as retrieved by the respective search engine.
- *Range of page numbers*: The range between start and final page as retrieved by the respective search engine.
- *URL*: The locator as retrieved by the search engine. DOI-resolver locators, if available, are preferred over engine-specific or publisher-specific ones.
- *Venue*: The publication venue of the article. Often synonymous with the title of the containing publication, if applicable (e.g., a proceedings or journal title).
- *Publisher*: The publisher which is responsible for the corresponding publication (e.g., a proceedings or journal publisher).
- *Abstract*: The publication’s English abstract, if available.
- *Keywords*: The keywords provided by the authors of the publication, if available.
- *Comments*: Allows the two extractors to leave auxiliary notes. For *excluded* papers, the two extractors signal the reason for exclusion (see also Sections 6.2 and 6.3):
 - N(ot) M(atching) C(riteria), **NMC**;
 - O(ff) T(opic), **OT**;
 - ERR(oneous);

Note that, as we employed a single, complex search string for each of the four selected search engines, there was no need to separately store the corresponding search string producing the publication as search hit [36].

Apart from the entries *data extractor #1*, *data extractor #2*, and *search engine*, all fields per item could be extracted automatically from the result sets returned by the search engines. While deviating in their labeling, all required data was available from the search engines and could be aligned with little effort. Extracting DOIs, however, led to missing data: Not for all items, a DOI was returned. Rather than iterating over the entire search hits to identify missing DOIs, we manually added them if needed for included papers (e.g., to complete their bibliographical record and for identifying duplicates).

For the papers resulting from the step of engine-based search (see ...), two additional fields were recorded.

- *Search engine*: The name of the search engine yielding the publication as search hit. The possible engine values are set by the engine selection outlined in Section 4.1.
- *Search datetime*: A datetime stamp indicating when the search yielding the publication as hit was executed.

Note that, as all four search engines allowed for complex search queries, the *Search datetime* for all publication items of a given, engine-specific result set are the same.

For the papers included into the review result set (according to Section 6), we extract further data on DSML design decisions:

- *DSML name*: If identifiable from the paper, the name given to the DSML by the publication’s authors (e.g., project or working title, acronyms, UML package names). If not identifiable, we assigned a name based on cues by the authors (paper title, names of central model elements etc.).
- *Application or target domain(s) of DSML*; as identified by the publication’s authors or as identified by the reviewers through studying the papers, through reading the running & motivating examples given, and/or the application cases reported.
- *Affected UML diagram types*; by studying the definitions of the corresponding UML profile or UML metamodel extensions (e.g., as indicated by the specific UML superstructure packages providing the extended metaclasses). We consider the 14 diagram types as enumerated by Annex A in [77], in particular Figure A.5:

- Activity diagram;
 - Class diagram;
 - Communication diagram;
 - Composite structure diagram;
 - Deployment diagram;
 - Interaction overview diagram;
 - Object diagram;
 - Package diagram;
 - Profile diagram;
 - State machine diagram;
 - Sequence diagram;
 - Timing diagram;
 - Use case diagram;
- *D1*: Zero or more decision options recovered for the given DSML, taken at the decision point *language-model definition* according to the two data extractors. See the catalog for available options [54].
 - *D2*: Zero or more decision options recovered for the given DSML, taken at the decision point *language-model formalization* according to the two data extractors. See the catalog for available options [54].
 - *D3*: Zero or more decision options recovered for the given DSML, taken at the decision point *language-model constraints* according to the two data extractors. See the catalog for available options [54].
 - *D4*: Zero or more decision options recovered for the given DSML, taken at the decision point *concrete-syntax definition* according to the two data extractors. See the catalog for available options [54].
 - *D5*: Zero or more decision options recovered for the given DSML, taken at the decision point *behavior specification* according to the two data extractors. See the catalog for available options [54].
 - *D6*: Zero or more decision options recovered for the given DSML, taken at the decision point *platform integration* according to the two data extractors. See the catalog for available options [54].

The above D1–D6 entries are recorded threefold for each publication. Once for each data extractor, respectively, and a third time to represent the negotiated agreement of the two reviewers in case of an initial disagreement.

Data extraction was performed on the 84 finally included papers (see also Section 6.3). During data extraction (especially of DSML names, author lists, diagram types, and application domains) we identified non-original and complementary papers which document one and the same DSML (e.g., different design fragments, different application scenarios, at different research stages). This is a deviation from the original protocol, as we expected to trap non-original publications during the selection procedure (see C_{10} in Section 6.1). In total, we identified 8 publications out of 84 included ones covering 4 unique DSMLs (see Table 24). As a result, data extraction was performed on 80 rather than 84 items. Complementary publications per DSML (i.e., two each) were both considered for extracting the design-decision data (e.g., by forming the union of decision-option sets, of the affected diagram types etc.).

Decision Phases All of the 80 DSMLs covered the phases of language-model definition (D1) and language-model formalization (D2), respectively. This was also a minimum requirement on a DSML design to become included which was evaluated during the different selection stages (see, e.g., Section 6.1). For the remaining four decision phases (D3–D6), we recorded whether any decision was taken at all for a given DSML. For D3 (language-model constraints) and D4 (concrete syntax), important shares of the DSMLs involved one or several documented decisions. 32 of 80 DSMLs did not document language-model constraints (D3; e.g., OCL expressions) beyond the constraints expressed directly via formalized language models. Only 7 DSMLs did not involve any decision on the concrete syntax (D4) of the DSML. For the remaining decision phases of behavioral specification (D5)

⁴*Projects per option*: The percentage of projects which applied the design option.

⁵*Option per decision*: The percentage of an option chosen at a design decision point.

Table 23: Applied design options of included DSML projects. Note: For D2, a special-purpose option code “(2.4)” was introduced having 11 occurrences which are excluded from the descriptive analysis here; see also Section 6.2.

| Option | # | p/o ⁴ | o/d ⁵ | Total |
|--------|-----|------------------|------------------|-------|
| O1.1 | 80 | 100% | 72% | 111 |
| O1.2 | 5 | 6% | 5% | |
| O1.3 | 3 | 4% | 3% | |
| O1.4 | 23 | 29% | 21% | |
| O2.1 | 4 | 5% | 5% | 85 |
| O2.2 | 62 | 78% | 73% | |
| O2.3 | 17 | 21% | 20% | |
| O2.4 | 2 | 2% | 2% | |
| O3.1 | 31 | 39% | 32% | 98 |
| O3.2 | 0 | 0% | 0% | |
| O3.3 | 0 | 0% | 0% | |
| O3.4 | 35 | 44% | 36% | |
| O3.5 | 32 | 40% | 33% | 157 |
| O4.1 | 62 | 78% | 39% | |
| O4.2 | 14 | 18% | 9% | |
| O4.3 | 3 | 4% | 2% | |
| O4.4 | 1 | 1% | 1% | 81 |
| O4.5 | 1 | 1% | 1% | |
| O4.6 | 69 | 86% | 44% | |
| O4.7 | 7 | 9% | 4% | |
| O5.1 | 1 | 1% | 1% | 91 |
| O5.2 | 1 | 1% | 1% | |
| O5.3 | 2 | 2% | 2% | |
| O5.4 | 0 | 0% | 0% | |
| O5.5 | 77 | 96% | 95% | 623 |
| O6.1 | 4 | 5% | 4% | |
| O6.2 | 16 | 20% | 18% | |
| O6.3 | 7 | 9% | 8% | |
| O6.4 | 1 | 1% | 1% | 623 |
| O6.5 | 9 | 11% | 10% | |
| O6.6 | 54 | 68% | 59% | |
| Total | 623 | | | |

and platform integration (D6), the consulted sources did not report any decision for the majority of the 80 DSMLs; i.e., for 77 and 54 out of 80, respectively.

Table 23 summarizes the collected option codes per decision phase for 80 DSML designs. The option codes are the final ones, in doubt negotiated between the rater pairs.

Decision Options In total, we extracted decisions mapping to 623 option codes across all the 80 DSML projects. 170 were no-option codes signalling the actual lack of documented decisions for certain decision phases (see also above). Table 23 shows the number of applied design options of included DSML projects.

For the decision phase of language-model definition (D1), we marked 111 option codes over all 80 DSMLs. Each of the four available option codes was identified at least once.

- For 52 DSMLs, we found just a single applied option. 25 DSMLs applied two and three DSML designs applied three out of four possible options. Not a single design used all four options.
- All 80 DSML design reports described the language-model definition using a textual, natural-language representation (O1.1). In 52 DSMLs, this style of defining the language model is the

Table 24: Overview of the rationale for considering 8 publications documenting 4 DSML designs.

| Publications | DSML | Comment |
|--|-----------|---|
| Gilmore et al. [39] Mayer et al. [69] | UML4SOA | [39] covers UML4SOA in an overview to emphasize on an extension part for non-functional properties (NF), while [69] gives more details. However, UML4SOA contained the NFP part right from the beginning, as documented in deliverables of the underlying SENSORIA project. |
| Bernardi et al. [14] Bernardi et al. [13] | MARTE-DAM | [13] elaborates on the details of the redundancy and maintenance parts of MARTE-DAM, while [14] covers the rest; see https://bitbucket.org/mberenguer/marte-dam/wiki/Home for an integrated overview. |
| Hatebur and Heisel [47] Hatebur and Heisel [46] | UML4PF | [46] is about the tool support which supports the approach based on problem frames more generally presented in [47] |
| Panesar-Walawege et al. [80] Panesar-Walawege et al. [79] | IEC61508 | [79] presents an application case of the IEC61508 implementation to the Petroleum industry, [80] captures the approach more generally. |

only adopted option at all. These correspond directly to the 52 DSMLs with a single decision option only, see above.

- 23 reported DSMLs provide a formal diagrammatic definition (O1.4) of their language model prior to actually formalizing (implementing) the language model on top of UML. In all 23 cases, this decision option is accompanied by a textual, natural-language representation (O1.1) as a complementary way of defining the language model.

As for implementing the language model using UML (D2), we noted 85 option codes in total. Each available option code was marked at least for one DSML design.

- For 75 out of the 80 DSMLs, we observed only one formalization applied in this decision phase. Five projects adopt two options out of the four available ones.
- More than 3/4 of the DSML projects ($\approx 78\%$) involved the creation of one or a set of complementing UML profiles (O2.2) to realize the language model.
- $\approx 21\%$ of the DSMLs (17/80) extend the UML metamodel in a non-intrusive manner, i.e., without modifying the UML metamodel (O2.3).
- Only 3 of the 17 DSMLs based on a UML metamodel extensions (O2.3) pair with UML profiles (O2.2), leaving 14 DSMLs as pure UML metamodel extensions.
- Only 2 DSMLs explicitly modify the conditions of the UML metamodel (O2.4) along with extending it (e.g., adding metaclasses; O2.3).

As for expressing language-model constraints beyond the intrinsic constraints contained by formal language models (D3), we extracted 98 option codes, out of which 32 were no-option codes (O3.5). In the remainder of 66 option codes, only two out of the four available options were found applied: constraint-language expressions (O3.1) and textual annotations (O3.4). Two options were not found applied in any of the 80 reviewed DSML designs at all: code annotations (O3.2) and translational constraining (O3.3).

- The two observed option codes (i.e., O3.1, O3.4) take approximately equal shares in the total occurrences (O3.1: 31, O3.4: 35).
- In 30 DSMLs, only one option was adopted. Both, O3.1 and O3.4 are adopted equally often (13 and 17 times, respectively).
- In the remaining 18 DSMLs, both O3.1 and O3.4 are used in a complementary manner.

Codifying the design decisions on the concrete syntaxes of the 80 DSMLs yielded the largest number of recorded option codes (157). Only seven DSMLs did not document any decision on a concrete syntax or did not foresee a concrete syntax at all (e.g., because the primary intention of the DSML is serving as an intermediate representation in a model-to-model transformation scenario). Each of the available six options (O4.1–O4.5) has been found applied at least once.

- Comparatively many DSML projects (49) took two complementing decision options on concrete-syntax style. In 17 projects, only one decision option was applied, in 14 DSMLs there were three options out of the six available ones.
- The two most frequently found decision options are model annotations (O4.1: 62 DSMLs) and the unmodified reuse of UML diagram symbols (O4.6: 69 DSMLs).
- The most frequently applied solitary concrete-syntax option is symbol reuse (O4.6: 6 DSMLs).
- 48 of the 49 two-options DSML designs have O4.1 and O4.6 as the option pair.
- A dedicated UML diagram-syntax extension (O4.2; e.g., by introducing new symbols through resampling existing ones) is only adopted in 14 DSMLs.
- Intermediate syntax styles such as mixed syntaxes (O4.3), frontend syntaxes (O4.4), and alternative syntaxes (O4.5) are found in at least one but not more than three DSMLs.

A comparatively large number of DSML documentations remain silent or lack a behavioral specification (D5). This is reflected by the lowest count of 81 option codes of all decisions phases, including 77 no-option codes (O5.5) recorded for this decision phase. Only four DSMLs modify and/or extend the underlying UML behaviors. Two DSMLs document these behavioral-semantics refinements in an

informal textual manner (O5.3), the remaining two adopt a UML M1 model representation (O5.1) and a formal textual specification (O5.2), respectively. Only one of these four DSMLs applies two options in a complimentary manner, the remaining three picked a single option only. Constraining model execution (O5.4) as one option identified by our catalog out of the four available (O5.1–O5.4) was not found applied in any DSML.

Platform integration (D6) was documented in terms of 91 option codes. At a level comparably low with respect to D5, decisions on platform-integration techniques supported by a DSML (D6) were not documented by $\approx 68\%$ of the projects (O6.6: 54 DSMLs). In the remainder of 26 DSMLs, each of the available platform-integration techniques (O6.1–O6.5) was applied at least once.

- 19 DSMLs applied a single platform-integration option, four DSMLs were found to realize a combination of three options, and three DSMLs combined two options each.
- The single, most frequently applied option are DSMLs supporting generation templates (O6.2), with 20% (16/80) of the DSMLs. Generation templates (O6.2) are also the most frequently employed solitary decision option with 12 out of 19 DSMLs.
- Generation templates are followed by M2M transformations (O6.5: 9 DSMLs) and API-based generators for platform-specific models (O6.3: 7). Model-to-model transformations (O6.5) are found mostly (i.e., in 6 out of 7 DSMLs) in combination with at least one other option.
- Intermediate model representations (O6.1: 4 DSMLs) and model execution (O6.4: 1) are the comparatively least frequently found options.

7.2 Procedure

For each result set (per search engine), two authors (Hoisl, Sobernig, Strembeck) will be nominated as the two data extractors per search hit (per publication), in a way that preserves mutual exclusion. Once the target size of the per-researcher subsets has been established (based on the cutoff computation from the QGS-based sensitivity analysis; see Section 4.1), the actual subset for each researcher will be computed. The objective is to balance the workload between the three researchers (in both roles) as far as possible.

Both data extractors assess the hits (publications) in each result set independently from each other. Each extractor verifies the automatically extracted data record for each publication (see Section 7.1). Second, each data extractor applies the inclusion & exclusion criteria (see Section 7.1). If included, each data extractor continues by extracting the design-decision data from the included publication in a third step (see Section 7.1).

Each second data checker applies the same three-step sequence. However, the number of publications rated and reviewed by each of the data extractors per result set can differ from each other. All candidate papers for the QGS publication corpus are reviewed by two independent extractors (see Section 4.1). For the engine-based and snowballing searches, however, the publication-set to be verified by the second extractor is a subset of the extractor’s papers to balance between the checking effort and the need for accuracy (which is particularly critical for corner cases such as OT and ERR ratings; see above). The second extractor’s subset will be established as follows:

1. By considering all publications included by the first data extractor (i.e., to check for false positives).
2. By omitting all publications excluded by the first data extractor because they do not match the objectively verifiable inclusion criteria (NMC; see above).
3. The remainder are publications excluded by the first data extractor because of being OT or ERR (see above). The checker’s subset will contain a randomized 20% sample drawn from this remainder to check for false negatives.⁶

Table 25 documents the final role/engine assignments to each of the three reviewers. The workload in terms of unique publications rated as both extractor and checker distributes as follows: 1. Hoisl: 3471; 2. Sobernig: 1981; 3. Strembeck: 95. A balanced workload could not be achieved due to individual time constraints in the respective review period, access limitations to publisher databases (e.g., personalized VPN-based access to Scopus) while—at the same time—maintaining mutual exclusion between checker and extractor roles.

If there is a disagreement in the extracted data between the two independently operating extractors, the two extractors will re-read the paper and reach a final decision in a joint session.

⁶Picking a sample size of 20% was a heuristic based on our pilot observation that approx. 17% of the reviewed publications were included.

Table 25: Overview of role/engine assignments for the three researchers. Within braces, the number of investigated and rated publications per role/engine are depicted.

| | Extractor #1 | Extractor #2 |
|-----------------------------|------------------------------|---------------------------|
| QGS | | |
| QGS corpus | Hoisl (46), Sobernig (37) | Sobernig (46), Hoisl (37) |
| DSML selection ^a | Sobernig (8) | Hoisl (7) |
| Main search | | |
| ACM DL | Hoisl (782) | Sobernig (65) |
| IEEE Xplore | Strembeck (95) | Hoisl (13) |
| Scopus | Hoisl (992) | Sobernig (108) |
| SpringerLink | Sobernig (813) | Hoisl (92) |
| Snowballing | | |
| Pool 1 | Hoisl (1481), Sobernig (635) | Sobernig (48), Hoisl (14) |
| Pool 2 | Sobernig (200) | Hoisl (6) |
| Pool 3 | Sobernig (21) | Hoisl (1) |

^aOnly those QGS publications not already retrieved by the main search.

7.3 Reliability

The extraction procedure will produce independent ratings of two reviewers (see Section 7.2) on both the selection state (included, excluded) of a publication and on the decision options detected by reflecting on the documented DSML design. To quantify the level of agreement between these independent ratings (i.e., the inter-rater reliability), two different inter-rater reliability statistics are required to accommodate different measurement scales underlying these two different ratings (selection state vs. decision options):

- *Cohen’s Kappa coefficient* $\hat{\kappa}_c$ [26] for two raters and two-level categorical ratings: The independently collected ratings on the selection state have two mutually exclusive levels: included vs. excluded. The $\hat{\kappa}_c$ is suitable for quantifying agreement on this two-level categorical scale. We will report both the percentagewise agreement and the chance-corrected agreement. We will adopt a variant of the $\hat{\kappa}_c$ which deals with missing ratings explicitly [42]. Ratings missing from a second rater are due to the fact that the co-rated publications only represent a subset of the totally reviewed publications (see Section 7.2).
- *Kupper-Hafner (KH) index* [65] for two raters and n-level nominal ratings: Each rater (that is, either the extracting or the checking reviewer) must assign at least one or multiple decision options per decision point (D1–D6) to a DSML design. This translates into a decision-data set having a multi-level nominal scale. The available levels of each decision point are the available decision options for this decision point according to our catalog [54]. We will report the Kupper-Hafner index [65] based on the levels actually selected by both reviewers (i.e., reflecting agreement on included levels only) and based on the total levels available for assignment (i.e., reflecting agreement on excluded levels). Again, we will report the uncorrected and chance-corrected variants of the KH index.

- Deviation: For D2, an additional, fifth level was introduced to indicate the potential of a UML metamodel modification, rather than a factual one (i.e., O2.4), due to an incomplete design documentation. For the sake of the reliability study, this nominal rating is reported as a separate level.
- Table 26 summarizes the obtained agreement levels (and corresponding variance estimates) per decision phase for 62 co-rated DSML designs.
- For 18 DSML designs, only one rating by one rater or even not a single but the final (negotiated) rating by both reviewers was available. This is, for instance, due to an initial disagreement about including or excluding a DSML design between the two raters.

To quantify the level of statistical insecurity underlying our data-generating process, for both statistics, we will additionally report the Jackknife estimate of variance.

The extraction of decision data according to the catalog [54] was first performed independently by two authors in case of taking a positive selection decision on a DSML. In a second iteration, in case of an initial disagreement, a final extraction including an agreed code marking of decisions was negotiated between the two authors. An initial disagreement could result from an opposing selection

Table 26: Inter-rater reliability per decision phase (D1–D6); Kupper-Hafner (KH) Index; 18 out of 80 items (DSMLs) were not co-rated (missing ratings); $\hat{\pi}$, $\hat{\pi}^*$: Percent agreement (excl., incl. missing ratings); \hat{C} , \hat{C}^* : Chance-corrected KH indices (excl., incl. missing ratings); $Var(\dots)$: leave-one-out Jackknife variance estimate

| | D1 | D2 | D3 | D4 | D5 | D6 |
|--------------------|--------|--------|--------|--------|--------|--------|
| $\hat{\pi}$ | 0.77 | 0.91 | 0.60 | 0.83 | 0.95 | 0.64 |
| $Var(\hat{\pi})$ | 0.0009 | 0.0009 | 0.0029 | 0.0017 | 0.0008 | 0.0036 |
| \hat{C} | 0.64 | 0.89 | 0.50 | 0.77 | 0.94 | 0.56 |
| $Var(\hat{C})$ | 0.0022 | 0.0014 | 0.0046 | 0.0029 | 0.0012 | 0.0053 |
| $\hat{\pi}^*$ | 0.85 | 0.96 | 0.84 | 0.94 | 0.98 | 0.87 |
| $Var(\hat{\pi}^*)$ | 0.0004 | 0.0002 | 0.0005 | 0.0002 | 0.0001 | 0.0004 |
| \hat{C}^* | 0.77 | 0.95 | 0.80 | 0.92 | 0.98 | 0.84 |
| $Var(\hat{C}^*)$ | 0.0012 | 0.0003 | 0.0008 | 0.0003 | 0.0002 | 0.0007 |

decision (e.g., author A included while author B excluded the paper) and/or, for DSMLs included by both authors, from applying different codes for the decision options observed for a documented DSML design. From the 80 DSML designs under consideration, 62 DSMLs received two independent ratings initially. In 18 cases, there was only one or even no independent extraction decision recorded a decision-data rating. However, for all 80 DSMLs considered, there was a third, negotiated extraction decision and corresponding option sets.

For the 62 co-rated DSML designs, we can report the extent to which the rater pairs agreed in applying codes for decision options as defined by the catalog [54] (see Table 26). This agreement level signals how reliable the finally recorded option sets per DSML are in terms of different raters being in agreement without negotiation. For all decision phases (D1–D6), the raters showed a chance-corrected agreement \hat{C} of at least or more than 0.5, indicating the agreement per DSML in terms of the overlap of decision options marked by both reviewers relative to the maximum overlap possible, on average over all 62 DSMLs. By incorporating agreement in terms of decision options excluded by both authors, an overall agreement level after removing chance \hat{C}^* of equal to and greater than 0.75 for each decision phase can be reported. A closer look reveals:

- While generally starting at an acceptable level, the comparatively lowest agreement levels (i.e., based on the overlap between selected decision options) could be obtained for decision options observed for language-model constraints (D3; $\hat{C} \approx 0.5$) and platform integration (D6; $\hat{C} \approx 0.56$).
- Medium agreement levels (i.e., based on the overlap between selected decision options) were reached for language-model definition (D1; $\hat{C} \approx 0.64$) and for concrete-syntax decisions (D4; $\hat{C} \approx 0.77$).
- Comparatively high agreement levels (i.e., based on the overlap between selected decision options) are found for language-model formalization (D2; $\hat{C} \approx 0.89$) and for behavior specification (D5; $\hat{C} \approx 0.94$).

8 Data Analysis

To detect patterns in the observed DSML designs, based on their representations as decision-option sets, we apply a frequent item-set analysis [16]. In the following, we introduce key concepts (e.g., support, closedness, maximality, freeness) of this data-mining technique by giving an example from the data set actually obtained from our SLR. For the actual analysis, we processed our data set and computed the characteristic set restrictions using *arules* [44].

The task of identifying frequent patterns of option sets is specific to a given *base* of decision codes. In the following, the base consists of the six codes representing decision points on our catalog: *d1–d6*. In addition, such an analysis incorporates a collection of *observed* option sets which will be given by 10 aggregated option sets from Table 27. An observed option set represents a complete DSML design. Any observed option set is a subset of the base. Given the above base, there are 16 possible, unique option sets which can be expressed using the six decision codes. The resulting design space of 16 option sets at the decision-point level is shown in Figure 8. By studying the data base of 10 observed option sets alone, we obtain three initial observations:

- *Uniquely observed option sets*: In the collection of 10 observed option sets, there are 5 *uniquely*

Table 27: A sample of 10 DSMLs extracted from the SLR result set for illustration purposes. The *source* indicates the corresponding SLR publication, the DSML’s application *domain(s)* encoded according to ACM CCS, the UML *diagram type(s)* tailored by a DSML, and two representations of the decision-*option sets*: atomic (option level) and aggregated (decision-point level).

| DSML (Source) | Domain(s) | Diagram type(s) | Option set | |
|---------------------------|---|----------------------------|---|---|
| | | | atomic | aggregated |
| CompSize [68] | embedded systems, metrics, measurement, estimation | component, class | {1.1, 2.2, 3.5, 4.1, 4.6, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> , <i>d4</i> } |
| EIS [76] | enterprise information systems | component, activity | {1.1, 2.2, 3.4, 4.1, 4.2, 4.6, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> , <i>d3</i> , <i>d4</i> } |
| UACL [88] | telecommunications, availability | component, class | {1.1, 1.4, 2.2, 3.1, 3.4, 4.1, 4.6, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> , <i>d3</i> , <i>d4</i> } |
| MoDePeMART [17] | software performance, measurement, metrics | class, state machine | {1.1, 1.4, 2.2, 3.5, 4.1, 4.6, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> , <i>d4</i> } |
| UML-GUI [103] | graphical user interfaces | component, class | {1.1, 1.2, 2.1, 3.5, 4.7, 5.5, 6.3} | { <i>d1</i> , <i>d2</i> , <i>d6</i> } |
| SMF [71] | safety critical systems, software safety, fault tree analysis | use case, class, component | {1.1, 1.3, 1.4, 2.2, 3.5, 4.1, 4.6, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> , <i>d4</i> } |
| BIT [2] | software testing, debugging | class | {1.1, 2.2, 3.1, 4.1, 4.6, 5.5, 6.1, 6.2, 6.5} | { <i>d1</i> , <i>d2</i> , <i>d3</i> , <i>d4</i> , <i>d6</i> } |
| UML-PMS [41] | ubiquitous and mobile computing, performance | activity | {1.1, 2.2, 3.4, 4.1, 4.6, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> , <i>d3</i> , <i>d4</i> } |
| SECRDW [101] | data warehouses, security requirements | package, class | {1.1, 2.3, 3.5, 4.7, 5.5, 6.6} | { <i>d1</i> , <i>d2</i> } |
| UML4SOA [69] | service-oriented architectures | activity, class, component | {1.1, 2.2, 2.3, 3.1, 4.1, 4.2, 4.6, 5.5, 6.1, 6.3, 6.5} | { <i>d1</i> , <i>d2</i> , <i>d3</i> , <i>d4</i> , <i>d6</i> } |

observed option sets. See the corresponding 5 nodes in the Hasse graph in Figure 8, represented by solid rectangles. Conversely, there are 11 out of 16 potential option sets which cannot be found in the collection as-is (see the dashed rectangles in Figure 8).

- *Repeatedly observed option sets*: Each of the 5 unique option sets has at least one or more occurrences in the database. For example, there are three DSMLs sharing the aggregated option set $\{d1, d2, d4\}$ (i.e., CompSize, MoDePeMART, and SMF). Likewise, we find only one DSML (SECRDW) whose documented design reflects decisions for two decision points: $\{d1, d2\}$.
- By looking at the cardinalities of uniquely observed option sets we also learn about, e.g., the minimum number (2) or the maximum number (5) of decisions or decision points considered in the collection of 10 DSMLs. In other words, no DSML design involves decisions at all six decision points.

While immediately useful, we can gain additional insights from contrasting the observed option sets to the hierarchical structure of possible option (sub-)sets (see Figure 8). On the one hand, by considering the observed sets alone, we do not learn about characteristic subsets of options being recurring sets throughout the collection of 10 DSMLs. For example, while the option set $\{d1, d2\}$ has been found to represent a concrete DSML design (SECRDW; see above), we omit how often this set re-appears as a proper subset of the remaining 9 option sets. On the other hand, we do not learn whether there are other patterns of options re-occurring as characteristic subsets only throughout the observed base of DSMLs. In Figure 8, this is exemplified by the possible option set $\{d1, d2, d3\}$ which does not characterize a single DSML design as-is (i.e., it is not contained by the collection), but will be found shared as part of the observed option sets of 5 DSMLs.

The *support* *s* of a given option set is expressed as the number of observed option sets in the collection in which it is contained as a subset [16]. The support can be computed for all 16 possible option sets on the design space depicted in Figure 8. For example, the support of option set $\{d1, d2\}$ amounts to 10 (in absolute terms; relative support is 10/10 or 0.1). In fact, this subset is contained by all ten DSMLs while there is only one DSML which is described by this option set exactly. A support of 0 indicates that an option set is not present as-is in the collection *and* that it is not contained by any option superset residing at the next-lower levels of the design space (assuming the top-down ordering in Figure 8). Consider the example of $\{d1, d2, d5\}$. There is no DSML which is exactly characterized by these three decision-

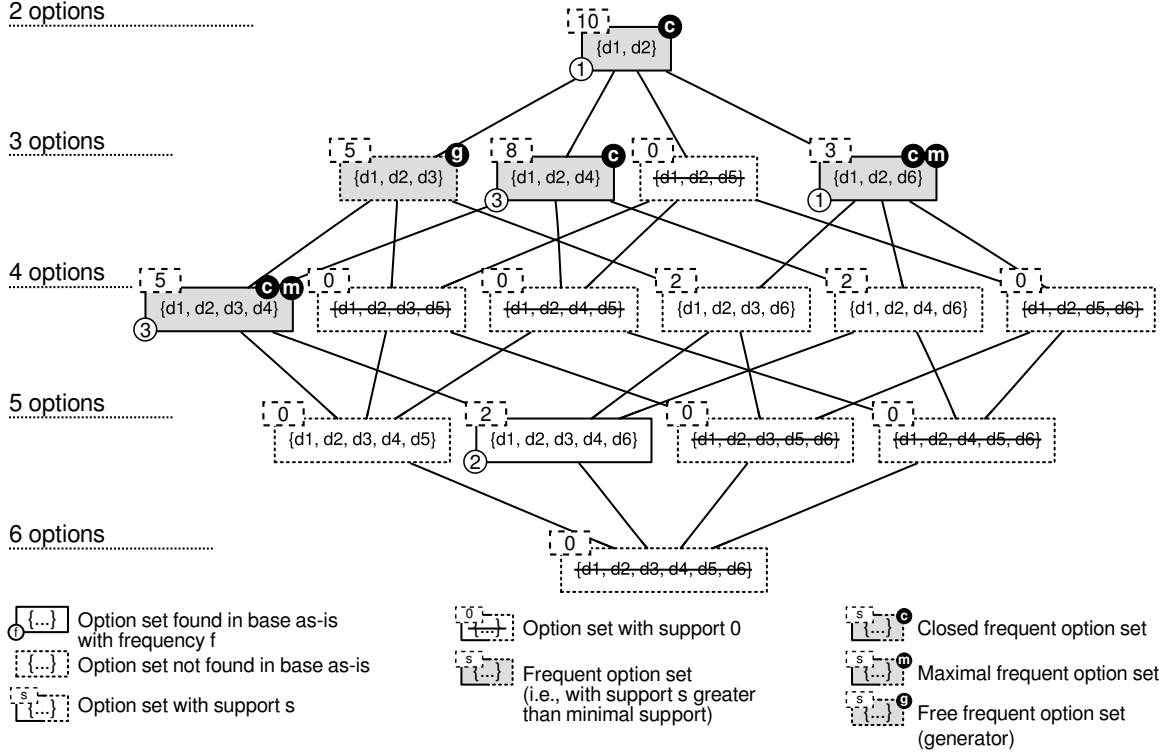


Figure 8: Visualization of the design space of decision points spawned by our decision-records catalog as a Hasse diagram of $\{O : O \in (\{d1, d2, d3, d4, d5, d6\}, \subseteq) \wedge \{d2\} \subset O \wedge \{d1\} \subset O\}$. Edges point downwards, omitting edge directions. Information from a frequent-item-set analysis using the base of 10 observed option sets in Table 27 is superimposed onto the Hasse graph.

point codes and there is no DSML which contains this subset. This notion of support—in contrast to occurrence frequency of unique option sets in the collection—allows for applying a number of restrictions on the option sets: minimum support (frequency), closedness, maximality, and freeness. By combining these restrictions when filtering the total number of option sets expressible, we can identify characteristic option sets of interest (such as prototype designs, see Table 28 below).

- *Frequent option sets* [9, 16]: Typically, we are interested in finding option sets out of the total design space which have a *minimum support*. Minimum support reflects the requirement that a given option set must occur or be contained by a minimum number of option sets, i.e., DSMLs. All (observed and possible) option sets having a support s equal to or greater than the minimum support s_{min} are called *frequent* option sets. In our running example based on the DSMLs in Table 27, we apply a $s_{min} = 3$. An option is frequent if it has a support of 3 or more, that is, it is found in at least three different DSML projects. This results in five frequent option sets in our example (see also the greyed rectangles in Figure 8): $\{d1, d2\}$, $\{d1, d2, d3\}$, $\{d1, d2, d4\}$, $\{d1, d2, d6\}$, and $\{d1, d2, d3, d4\}$.
- *Frequent-closed option sets* [16]: An option set is said to be *closed* if it is frequent and if none of its proper option supersets has a support equal to or less than the support of this option set. In our example, we find four option sets out of the five frequent ones in this condition: $\{d1, d2\}$, $\{d1, d2, d4\}$, $\{d1, d2, d6\}$, and $\{d1, d2, d3, d4\}$ (see the nodes marked “c” in Figure 8). The option set $\{d1, d2, d3\}$ is not closed because its $\{d1, d2, d3, d4\}$ has the same support of 5.

In other words, an option set is closed if no proper option superset containing a given option set is contained by the observed option sets, in which the option set is contained, in the collection. This can be the case under three conditions important to us:

1. If a frequent option set corresponds to at least one observed option set as-is: An example is $\{d1, d2\}$ for SECRDW. In this case, none of its supersets (e.g., $\{d1, d2, d4\}$) can naturally be part of this observed set. Conversely, $\{d1, d2, d3\}$ is not closed because it does not appear as-is in the collection, only as a subset of $\{d1, d2, d3, d4\}$ (e.g., for EIS and UACL) and of $\{d1, d2, d3, d4, d6\}$ (i.e., for BIT and UML4SOA).
2. If a frequent option set represents the least-common frequent subset for (some of) its proper option supersets as contained in the observed option sets of the collection: Consider extending the example based on Table 27 and Figure 8. In its given setting, $\{d1, d2, d3\}$ is not

closed (see above). If one added *one* DSML which is described by the observed option set $\{d1, d2, d3, d5, d6\}$, then $\{d1, d2, d3\}$ would become closed because it qualifies as the least-common subset contained in both the 5 observed option sets containing $\{d1, d2, d3, d4\}$ and the newly added one. Technically, this would be reflected in an increased support of $\{d1, d2, d3\}$ (6), therefore, surpassing the support of $\{d1, d2, d3, d4\}$ (5).

3. If both conditions 1) and 2) above hold for a frequent option set. This is the case for $\{d1, d2\}$. First, it appears as-is as an observed option set (SECRDW, see Table 27). Second, it turns out to be the least-common frequent subset for the observed option sets containing $d3/d4$ and $d6$ (i.e., BIT and UML4SOA).

In summary: All closed option sets are frequent ones. The subset of closed option sets can potentially be smaller than the number of total frequent subsets (i.e., four of five option sets in our example), but this is not necessarily the case. Non-closed frequent option sets are subsets of one or several closed option supersets.

- *Maximal-frequent option sets* [16]: The set of frequent options sets is a subset of the design space which represents minimum support (or adoption of certain options) in the studied DSML projects. This subset, however, contains redundant information. For example, $\{d1, d2\}$ is included by all other four frequent option sets which are proper supersets of the former. Any of these supersets represent the condition of $\{d1, d2\}$ being frequent.

A frequent option set is called *maximal* if none of its proper subsets is frequent (i.e., has equal to or more than the minimum support). This notion is suitable for removing the redundancy by upward containment between frequent option sets and to establish a potentially smaller subset of characteristic frequent option sets which is capable of representing all other frequent option sets.

In our example, we find two maximal-frequent option sets: $\{d1, d2, d6\}$ and $\{d1, d2, d3, d4\}$ (see also the nodes marked “m” in Figure 8). The remainder of 3 frequent option sets are all subsets of these two option sets. The maximal subset of the set of frequent option sets, therefore, exhibits those frequent option sets with maximum cardinality (3 and 4 decision points, respectively). From a design-space perspective, a maximal option set reflects a frequent configuration of a maximal number of decision options taken jointly—besides summarizing the entire sub-space of frequent option sets. Applied to the 10 DSMLs, we can therefore state that a critical number of DSMLs take decisions at up to three and 4 decision points, but never at 5 or 6 decision points. In addition, based on this sample, we could summarize that most frequently DSMLs either take decisions at decisions points $d3$ and/or $d4$ or—mutually exclusive—at $d6$, if any decision beyond $d1$ and $d2$ at all.

All maximal option sets are closed. Therefore, the set of maximal option sets is a subset of the closed subset of option sets.

- *Free frequent option sets* [9, 16]: An option set is considered a free option set (a.k.a. generator) if it is the minimal (i.e., the smallest in terms of options contained) subset among all the option subsets appearing in an observed option set. It is minimal in the sense that there are no smaller option sets (i.e., the proper subsets of the free set) which appear as-is in an observed option set. A free option set (generator) is called frequent if it has at least minimum support.

Of particular interest to us are the free item sets which form the closed frequent item sets as found for the selected DSMLs. As stated above, the closed frequent item sets serve as a compact representation of the entire observed frequent design space (i.e., all frequent option sets can be expressed as subsets of the closed option sets). However, as the largest frequent building blocks (in terms of options contained) found in observed DSMLs, they are not as selective when characterizing observed option sets. For instance, to find the observed option sets containing $d3$, we take the closed set $\{d1, d2, d3, d4\}$ marked in Figure 8, and match it against the 10 observed option sets. This will yield 5 option sets. This result, however, contains noise because the 5 option sets are also those containing $d3$ jointly with $d4$.

According to the above definition, $\{d1, d2, d3\}$ is found to be a frequent generator of the closed set $\{d1, d2, d3, d4\}$ in the sense that it is capable of matching all observed option sets while being of smaller size in terms of options. By being smaller, it is more informative because it can be more easily combined e.g. with other smaller closed or generator sets (e.g., $\{d1, d2, d4\}$ in Figure 8) to describe the observed design space. Combining the comparatively larger closed sets as descriptors suffers from more redundancy, such as $\{d1, d2, d4\}$ and $\{d1, d2, d3, d4\}$ differing only by one option.

It also follows from the above definition that a free option set or generator cannot correspond to an observed option set; it is a building block only.

Table 28: Overview of the option-set constructs (option subsets) considered for the analysing frequent patterns in the selected DSMLs. Each construct is defined as a set of restrictions (e.g., closedness, maximality, freeness) over the space of (frequent) options obtained from existing DSMLs.

| | Option (sub-)set | Description | Restrictions: <i>An option set which ...</i> |
|-----|--|--|---|
| I | Largest, highly shared option-subset | A largest (i.e., of maximal size) design fragment which is frequently observed and has a relatively high support. | <ul style="list-style-type: none"> • is closed <i>and</i> • is <i>not</i> maximal <i>and</i> • is <i>not</i> total |
| II | Largest, lowly shared option-subset | A largest (i.e., of maximal size) design fragment which is frequently observed and has a relatively low support. | <ul style="list-style-type: none"> • is maximal <i>and</i> • is <i>not</i> total |
| III | Prototype option-sets with frequent extensions | An option set which represents a highest-common, largest option-subset which was also frequently found in complete DSML design. Because for this option set frequently occurring supersets exist, this prototype design is often extended (<i>evolutionary</i> prototype) by adding other (frequently observed) options. | <ul style="list-style-type: none"> • is closed <i>and</i> • is not <i>not</i> maximal <i>and</i> • is total <i>and</i> • is of frequency greater than or equal to minimum support |
| IV | Prototype option-sets with infrequent extensions | An option set which represents a lowest-common, largest option-subset which was also frequently found in complete DSML design. Because for this option set no frequent supersets exist, this prototype option-sets is often employed as is. Extensions that add options to this (<i>evolutionary</i>) prototype are rarely observed. | <ul style="list-style-type: none"> • is maximal <i>and</i> • is total <i>and</i> • is of frequency greater than or equal to minimum support |
| V | Smallest common option-subset | A frequent option set which is also the smallest (i.e., of minimal size) recurring design fragment in the observed designs (e.g., a prototype option-set) and in design fragments which contain this option subset. We distinguish between two kinds of smallest common option-subsets: (1) Option subsets specific to one decision point; (2) Option subsets specific to two or more decision points. | <ul style="list-style-type: none"> • is free <i>and</i> • is frequent <i>and</i> • is contained by at least one largest option-subset (I, II, III, IV) <i>and</i> • no containing largest option-subsets (I, II, III, IV) has greater support |

Decision-option Sets We performed an analysis as introduced in Section 8 to describe frequent patterns in the data base of 80 observed option sets. To run the following computations, we processed the data set of 80 option sets to exclude the no-option codes, so that absence of all option codes at a given decision point indicates absence of a decision. We, therefore, considered 24 different option codes, yielding a potential design space of $2^{24} - 1$ option sets. Under our working assumption of minimally included decision options, this is constrained to a space of $15 * 15 * 2^{16}$ potential option sets. In the following, we consider an option set or option-set pattern to be frequent if it is found for three or more DSMLs.

Unique option sets are non-duplicated observed option sets (see Section 8). The set of 80 observed option sets contains 53 unique (non-duplicated) option sets. Table 29 summarizes important observations on this option subset:

- 39 out of 53 uniquely observed option sets have exactly one occurrence, i.e., they represent exactly one DSML.
- The remaining 14 unique option sets have two or more occurrences. However, not more than 5 DSMLs share exactly one observed option set (see Table 29).
- The 53 unique option sets contain at minimum 2 options (see, e.g., SECRDW) and at maximum 10 options (out of 24 possible ones; see, e.g., UML4SOA).
- The 14 unique option sets which are found shared between two or more DSMLs contain at minimum 3 (see, e.g., UML4SPM) and at maximum 7 options (see, e.g., Aspect-SM).

In the space of $15 * 15 * 2^{16}$ potential sets of options, we found 188 frequent options sets; that is option sets which are contained partly or fully in more than 3 observed option sets, each specific to one DSML. These 188 frequent option sets are all contained as subsets of 40 closed and 20 maximal option sets (see Section 8). 23 frequent option sets represent at least one DSML directly as an observed option set, 165 of the frequent option sets are only subsets of observed option sets which are shared between DSMLs.

We found that three options (O3.2, O3.3, and O5.4) are not contained by any of the option sets of the 80 DSMLs. Considering minimum support by three DSMLs, 8 more options are found missing from the 188 frequent option sets, that is, they are not featured by any of the 188 frequent option sets: O2.4, O4.3, O4.4, O4.5, O5.1, O5.2, O5.3, and O6.4. In other words, they are not found in any expressible option set over three or more DSMLs. From a total of 24 options, 16 are frequently found (in the sense of being contained in option sets of above minimum support).

We found the following kinds of option sets, as defined in Section 8 (see I–V in Table 28). In our pool of 80 DSMLs, we found two proper option subsets which qualify as smallest recurring option-subsets, with the options in each option-subset stemming from one decision point (see Table 30). The two smallest common option-subsets *specific to one decision point* have a size of two options each and relate to decision points on constraining the language model (D3) and on platform integration (D6). For all the other four decision points, we could not find any smallest option subsets. The option subset {3.1, 3.4} serves as the smallest common descriptor regarding language-model constraints (D3) in 18 DSML projects. It reflects that in these projects language-model constraints are consistently defined using both a constraint-expression language as well as auxiliary or complimentary textual constraint definitions in natural language. As for platform integration (D6), the smallest common descriptor shared by three DSMLs in the combination of M2T generator templates (O6.2) and M2M transformations (O6.5). This option subset reflects that there is a two-level model transformation chain being employed in the three approaches (PIM-PIM-PSM): First, platform-independent models (PIM) are transformed into another PIM representation which is then transformed into a structured textual, platform-specific (PSM) representation. For example, in UML2Alloy [3], extended UML class models (PIM) are processed into models of an Alloy metamodel (PIM) which are finally turned into textual Alloy definitions accepted by an Alloy model checker (PSM).

We extracted 7 different smallest option subsets which involve minimum two options from two different decision points (see Table 31). The smallest common option-subsets *specific to two or more decision points* found are specific to options at decision points D1, D2, D3, D4, and D6. Four out of seven option subsets contain two to three options between language-model formalization (D2) and language-model constraining (D3). The three option subsets {2.2, 3.4}, {2.2, 3.1}, and {2.2, 3.1, 3.4} represent that applying one or several UML profiles is associated with defining language-model constraints either textually only (30 DSMLs), or using a constraint-expression language only (26), or both (13). On the contrary, metamodel extensions (O2.3) are found frequently combined with both constraint-definition strategies {2.3, 3.1, 3.4}, rather than either of the two exclusively. Metamodel extensions (O2.3) are also commonly—though at the minimum-support level—applied together with diagrammatic syntax extensions (O4.2; i.e., introducing new UML diagram notational elements) and M2M transformation (O6.5). Finally, 22 of the 80 DSMLs adopt UML profiles (O2.2) for realizing a formally defined language model (O1.4) and share this proper option subset as a smallest descriptor. The 80 DSMLs contain 7 distinct prototype option-sets (see Tables 32 and 35), that is, option sets which are frequent and describe entire DSML designs, with and without extensions. Six prototype option-sets come *with frequent extensions* (see Table 32). For example, the option set of UML-PMS [41] describes five observed and complete DSML designs (frequency) while it is found as a large option subset in 25 other DSMLs (*support – frequency*) in an extended form. 5 prototype option-sets involve UML profiles only (O2.2), just one frequently found prototype option-set builds on metamodel extensions only (O2.3; e.g., UML4SPM [11]). All six designs involve at least one concrete-syntax decision option (see also Figure 9, indicating D4 as mandatory). The only platform-integration option found adopted in 3 prototype option-sets (and 12 more extensions of it) are M2T generator templates (O6.2).

A seventh prototype option-set was found which comes *with infrequent extensions*, that is, while it is realized by three DSMLs (i.e., UML-AOF, PredefinedConstraints, and UML-PMS; see Table 35) it is found extended twice (*support – frequency*). The option subset reflects a widely documented and recommended—but not necessarily frequently used—way of creating a UML-based DSML using UML profiles, by two-option strategies to define the language model (O1.1, O1.4) and the language-model constraints (O3.1, O3.4), respectively. The concrete-syntax choices (O4.1, O4.6) are inherent to UML profile usage.

The 7 prototype option-sets which are realized as-is for 24 out of 80 DSMLs and are observed with extensions for up to 25 DSMLs are summarized in terms of their commonalities and differences as a feature diagram in Figure 9. The 7 designs are combinations of 9 options. By looking at these 9 options and their characteristic combinations (see Tables 32 and 35) at least 30% (24/80) of the 80 DSMLs can be described in their entirety (prototype option-set).

The observed design space of 80 DSMLs contains 17 largest common option-subsets (see Tables 33 and 34). 8 are of comparatively high (4–10; see Table 33) and 9 are of comparatively low support (3–5). 10 subsets result in profile-only designs (2.2), 6 in DSMLs based on metamodel extensions (2.3). A single option subset is found for building mixed designs (3 designs; see Table 34).

In total, these 17 largest option subsets characterize 75 of the 80 DSML designs. The option subsets are made up by 12 different options specific to 5 different decision points (see Figure 10). Each of the 17 option subsets involves at least one decision option on language-model constraining (D3) or on the concrete syntax (D4) or on platform integration (D6). The feature model of prototype option-sets in Figure 9 is a specialization of the more general feature model describing the observed largest option subsets, adding two major restrictions: First, a prototype option-set must involve a concrete-syntax decision (D4 becomes mandatory) which is not the case for a largest option subset. Second, frequently observed designs do not take decisions on platform integration at all (D6) or adopt only M2T generator templates (O6.2). The largest option subsets, which describe a larger variety of observed designs than the prototype option-sets alone, reflect all four platform-integration options (O6.1–O6.2, O6.5) which were found adopted in the 80 DSMLs.

Table 29: Overview of the degree of sharing (frequency class) of a unique option set, count of unique option sets found per frequency class, and the number of options contained by a unique option set (cardinalities); as observed for the 53 unique option sets.

| Freq. class | Count | Cardinality range (min–max) | Unique option sets (ex.; DSML) |
|----------------|-------|--------------------------------|---|
| 5 | 2 | 5–5 | {1.1, 2.2, 3.4, 4.1, 4.6}; UML-PMS |
| 4 | 2 | 3–5 | {1.1, 2.3, 4.6}; UML4SPM |
| 3 | 3 | 5–7 | {1.1, 2.2, 4.1, 4.6, 6.2}; WS-CM |
| 2 | 7 | 4–7 | {1.1, 1.4, 2.2, 3.1, 4.1, 4.6, 6.2}; Aspect-SM |
| Σ | 14 | 3–7 | |
| 1 | 39 | 2–10 | {1.1, 2.3}; SECRDW {1.1, 2.2, 2.3, 3.1, 4.1, 4.2, 4.6, 6.1, 6.3, 6.5}; UML4SOA |
| Σ | 53 | 2–10 | |

Table 30: Overview of the 2 smallest common option-subsets *specific to one decision point* (ordered by decreasing absolute support).

| Decision point | Option subset | Support (abs.) |
|----------------|---------------|----------------|
| D3 | {3.1, 3.4} | 18 |
| D6 | {6.2, 6.5} | 3 |

Table 31: Overview of the 7 smallest common option-subsets *specific to one decision point* (ordered by decreasing absolute support).

| Decision points | Option subset | Support (abs.) |
|-----------------|-----------------|----------------|
| D2, D3 | {2.2, 3.4} | 30 |
| D2, D3 | {2.2, 3.1} | 26 |
| D1, D2 | {1.4, 2.2} | 22 |
| D2, D3 | {2.2, 3.1, 3.4} | 13 |
| D2, D3 | {2.3, 3.1, 3.4} | 5 |
| D2, D4 | {2.3, 4.2} | 3 |
| D2, D6 | {2.3, 6.5} | 3 |

Table 32: Overview of the six prototype option-sets which are frequently extended (ordered by decreasing absolute support). A corresponding feature model which represents the commonalities and differences between all prototype option-sets is shown in Figure 9.

| Prototype | Support (abs.) | Frequency (abs.) | DSMLs (ex.) |
|--------------------------------|----------------|------------------|---|
| {1.1, 2.2, 3.4, 4.1, 4.6} | 30 | 5 | UML-AOF, PredefinedConstraints, UML-PMS |
| {1.1, 2.2, 3.1, 4.1, 4.6} | 26 | 4 | REMP, CUP, UML4PF |
| {1.1, 1.4, 2.2, 4.1, 4.6} | 22 | 5 | SPArch, MoDePeMART, RichService |
| {1.1, 2.2, 4.1, 4.6, 6.2} | 15 | 3 | DPL, WCAAUML, WS-CM |
| {1.1, 2.2, 3.1, 3.4, 4.1, 4.6} | 13 | 3 | ArchitecturalPrimitives, SHP, C2style |
| {1.1, 2.3, 4.6} | 10 | 4 | UML2Ext, UML4SPM, MDATC |

Table 33: Overview of 8 largest option subsets of *relatively high support* (i.e., frequently supported; ordered by decreasing absolute support).

| Prototype | Support (abs.) |
|--------------------------------|----------------|
| {1.1, 1.4, 2.2, 3.1, 4.1, 4.6} | 10 |
| {1.1, 2.3, 3.1} | 6 |
| {1.1, 2.3, 3.4} | 6 |
| {1.1, 2.2, 4.1, 4.6, 6.5} | 6 |
| {1.1, 2.2, 4.1, 4.6, 6.3} | 5 |
| {1.1, 2.2, 3.1, 4.1, 4.6, 6.5} | 5 |
| {1.1, 2.2, 4.1, 4.6, 6.1, 6.5} | 4 |
| {1.1, 1.4, 2.2, 4.1, 4.6, 6.2} | 4 |

Table 34: Overview of 9 largest option subsets of *relatively low support* (i.e., infrequently supported; ordered by decreasing absolute support).

| Prototype | Support (abs.) |
|-------------------------------------|----------------|
| {1.1, 2.3, 3.1, 3.4} | 5 |
| {1.1, 2.3, 6.5} | 3 |
| {1.1, 2.3, 3.1, 4.6} | 3 |
| {1.1, 2.3, 3.4, 4.6} | 3 |
| {1.1, 2.2, 2.3, 4.1, 4.6} | 3 |
| {1.1, 2.2, 4.1, 4.6, 6.3, 6.5} | 3 |
| {1.1, 1.4, 2.2, 4.1, 4.6, 6.5} | 3 |
| {1.1, 2.2, 3.4, 4.1, 4.6, 6.5} | 3 |
| {1.1, 2.2, 3.1, 4.1, 4.6, 6.1, 6.5} | 3 |

Table 35: Overview of one prototype option-sets which is infrequently extended. A corresponding feature model which represents the commonalities and differences between all prototype option-sets is shown in Figure 9.

| Prototype | Support (abs.) | Frequency (abs.) | DSMLs (ex.) |
|-------------------------------------|----------------|------------------|-----------------------------|
| {1.1, 1.4, 2.2, 3.1, 3.4, 4.1, 4.6} | 5 | 3 | UACL, SafeUML, and IEC61508 |

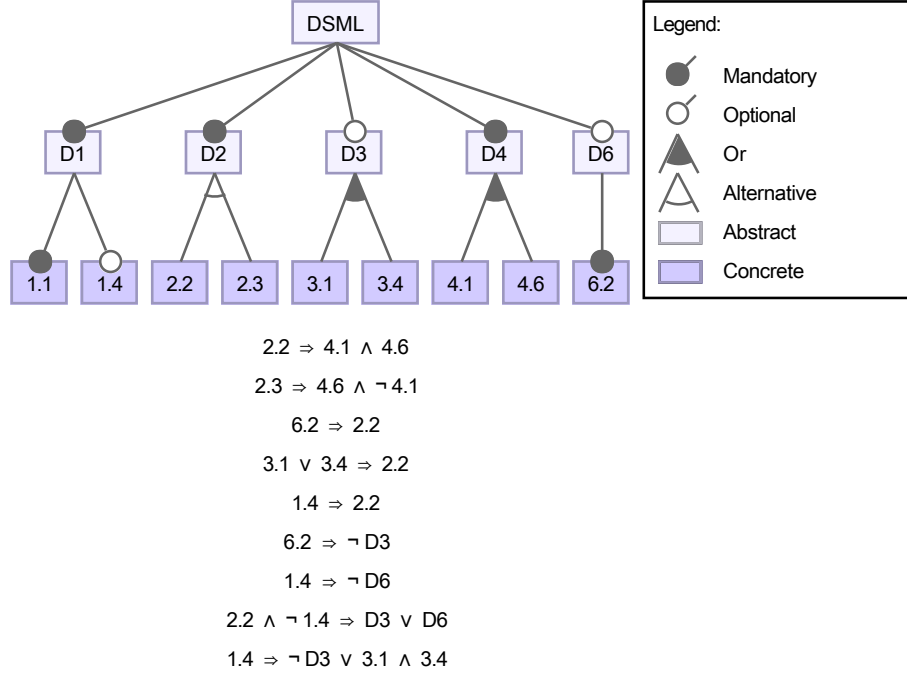


Figure 9: A feature model which represents the prototype option-sets found in the pool of 80 DSMLs; that is, each configuration of the feature space represents one of the 7 observed prototype option-sets listed in Tables 32 and 35.

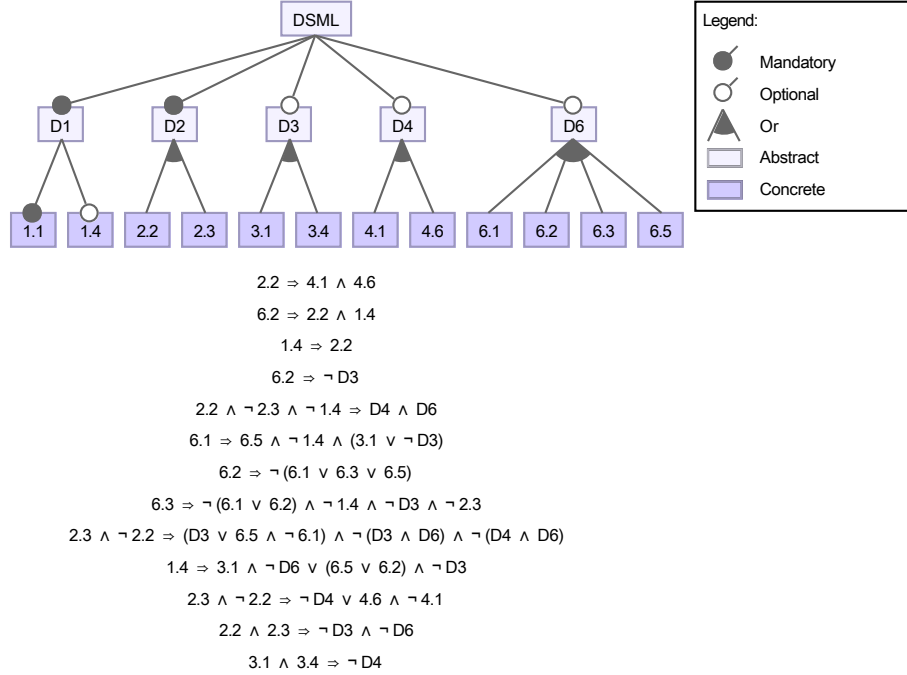


Figure 10: A feature model which represents the largest option subsets found in the pool of 80 DSMLs; that is, each configuration of the feature space represents one of the 17 observed option subsets listed in Tables 32 and 35.

References

- [1] Shaukat Ali, Lionel C. Briand, and Hadi Hemmati. Modeling robustness behavior using aspect-oriented modeling to support robustness testing of industrial systems. *Software & Systems Modeling*, 11(4):633–670, 2012. doi: 10.1007/s10270-011-0206-z.
- [2] Everton L.G. Alves, Patricia D.L. Machado, and Franklin Ramalho. Automatic Generation of built-in Contract Test Drivers. *Software & Systems Modeling*, pages 1–25, 2012.
- [3] K. Anastasakis, B. Bordbar, G. Georg, and I. Ray. On Challenges of Model Transformation from UML to Alloy. *Software & Systems Modeling*, 9(1):69–86, 2010. URL <http://www.scopus.com/inward/record.url?eid=2-s2.0-72549094932&partnerID=40&md5=1cb63a89bc679155b4da04572f53852d>.
- [4] ARC. Excellence in Research for Australia (ERA) journal list. Technical report, Australian Research Council, 2012. URL http://www.arc.gov.au/era/era_2012/era_journal_list.htm.
- [5] Colin Atkinson and Thomas Kühne. Concepts for comparing modeling tool architectures. In Lionel Briand and Clay Williams, editors, *Model Driven Engineering Languages and Systems*, volume 3713 of *LNCS*, pages 398–413. Springer, 2005. ISBN 978-3-540-29010-0. doi: 10.1007/11557432_30. URL http://dx.doi.org/10.1007/11557432_30.
- [6] Colin Atkinson and Thomas Kühne. A tour of language customization concepts. *Advances in Computers*, 70:105–161, 2007. doi: 10.1016/S0065-2458(06)70003-1.
- [7] Colin Atkinson, Thomas Kühne, and Brian Henderson-Sellers. Systematic stereotype usage. *Software and Systems Modeling*, 2(3):153–163, 2003. ISSN 1619-1366. doi: 10.1007/s10270-003-0027-9. URL <http://dx.doi.org/10.1007/s10270-003-0027-9>.
- [8] D. Basin, J. Doser, and T. Lodderstedt. Model driven security: From UML models to access control infrastructures. *ACM Transactions on Software Engineering and Methodology (TOSEM)*, 15(1):39–91, 2006.
- [9] Yves Bastide, Nicolas Pasquier, Rafik Taouil, Gerd Stumme, and Lotfi Lakhal. Mining minimal non-redundant association rules using frequent closed itemsets. In *Proc. of the 1st International Conference on Computational Logic (CL 2000)*, volume 1861 of *LNCS*, pages 972–986. Springer, 2000. doi: 10.1007/3-540-44957-4_65.
- [10] Razieh Behjati, Tao Yue, Shiva Nejati, Lionel Briand, and Bran Selic. Extending SysML with AADL concepts for comprehensive system architecture modeling. In *Proc. 7th European Conf. Modelling Found. Applicat. (ECMFA’11)*, volume 6698 of *LNCS*, pages 236–252. Springer, 2011. doi: 10.1007/978-3-642-21470-7_17.
- [11] Reda Bendraou, Marie-Pierre Gervais, and Xavier Blanc. UML4SPM: A UML2.0-Based Metamodel for Software Process Modelling. In Lionel Briand and Clay Williams, editors, *Model Driven Eng. Languages Syst.*, volume 3713 of *LNCS*, pages 17–38. Springer, 2005. ISBN 978-3-540-29010-0. doi: 10.1007/11557432_3. URL http://dx.doi.org/10.1007/11557432_3.
- [12] Kirsten Berkenkötter and Ulrich Hannemann. Modeling the railway control domain rigorously with a UML 2.0 profile. In *Proc. 25th Int. Conf. Comput. Safety, Reliability, Security (SAFECOMP’06)*, volume 4166 of *LNCS*, pages 398–411. Springer, 2006. doi: 10.1007/11875567_30.
- [13] Simona Bernardi, Francesco Flammini, Stefano Marrone, José Merseguer, Camilla Papa, and Valeria Vittorini. Model-driven availability evaluation of railway control systems. In *30th Int. Conf. Comput. Safety, Reliability, Security (SAFECOMP’11)*, volume 6894 of *LNCS*, pages 15–28. Springer, 2011. doi: 10.1007/978-3-642-24270-0_2.
- [14] Simona Bernardi, José Merseguer, and Dorina C. Petriu. A dependability profile within MARTE. *Software & Systems Modeling*, 10(3):313–336, 2011. doi: 10.1007/s10270-009-0128-1.
- [15] Arnaud Blouin, Benoît Combemale, Benoit Baudry, and Olivier Beaudoux. Kompren: modeling and generating model slicers. *Softw. & Syst. Modeling*, pages 1–17, 2012. doi: 10.1007/s10270-012-0300-x. Online first.
- [16] Christian Borgelt. Frequent item set mining. *Wiley Int. Rev. Data Min. and Knowl. Disc.*, 2(6): 437–456, November 2012. doi: 10.1002/widm.1074.

- [17] Marko Bošković and Wilhelm Hasselbring. Model Driven Performance Measurement and Assessment with MoDePeMART. In Andy Schürr and Bran Selic, editors, *Model Driven Eng. Languages Syst.*, volume 5795 of *LNCS*, pages 62–76. Springer, 2009. ISBN 978-3-642-04424-3. doi: 10.1007/978-3-642-04425-0_6. URL http://dx.doi.org/10.1007/978-3-642-04425-0_6.
- [18] Pearl Brereton, Barbara A. Kitchenham, David Budgen, Mark Turner, and Mohamed Khalil. Lessons from applying the Systematic Literature Review Process within the Software Engineering Domain. *Journal of Systems and Software*, 80(4):571–583, April 2007.
- [19] Petra Brosch, Martina Seidl, Manuel Wimmer, and Gerti Kappel. Conflict Visualization for Evolving UML Models. *Journal of Object Technology*, 11(3):2:1–30, October 2012. ISSN 1660-1769. doi: 10.5381/jot.2012.11.3.a2. URL http://www.jot.fm/contents/issue_2012_10/article2.html.
- [20] James Bruck and Kenn Hussey. Customizing UML: Which Technique is Right for You? Available at: http://www.eclipse.org/modeling/mdt/uml2/docs/articles/Customizing_UML2_Which_Technique_is_Right_For_You/article.html, 2008. IBM.
- [21] Achim D. Brucker, Jürgen Doser, and Burkhart Wolff. Semantic issues of OCL: Past, present, and future. In *Proc. of the 6th Workshop on OCL for (Meta-)Models in Multiple Application Domains*, pages 213–228, 2006.
- [22] Xavier Burgués, Xavier Franch, and Josep M. Ribó. Improving the accuracy of uml metamodel extensions by introducing induced associations. *Softw. & Syst. Modeling*, 7(3):361–379, 2008. doi: 10.1007/s10270-007-0062-z.
- [23] Jordi Cabot. Ambiguity issues in OCL postconditions. In *Proc. of the 6th Workshop on OCL for (Meta-)Models in Multiple Application Domains*, pages 194–204, 2006.
- [24] Antonio Cicchetti, Davide Di Ruscio, and Alfonso Pierantonio. A Metamodel Independent Approach to Difference Representation. *Journal of Object Technology*, 6(9):165–185, October 2007. ISSN 1660-1769. doi: 10.5381/jot.2007.6.9.a9. URL http://www.jot.fm/contents/issue_2007_10/paper9.html. TOOLS EUROPE 2007 — Objects, Models, Components, Patterns.
- [25] Pedro J. Clemente, Juan Hernández, José María Conejero, and Guadalupe Ortiz. Managing cross-cutting concerns in component based systems using a model driven development approach. *Journal of Systems and Software*, 84(6):1032–1053, 2011. doi: 10.1016/j.jss.2011.01.053.
- [26] Jacob Cohen. A coefficient of agreement for nominal scales. *Educational and Psychological Measurement*, 20(1):37–46, 1960. doi: 10.1177/001316446002000104.
- [27] António Miguel Rosado da Cruz and João Pascoal Faria. A metamodel-based approach for automatic user interface generation. In *Proc. 13th Int. Conf. Model Driven Eng. Languages Syst. (MoDELS’10)*, volume 6394 of *LNCS*, pages 256–270. Springer, 2010.
- [28] J. Dingel, Z. Diskin, and A. Zito. Understanding and improving UML package merge. *Softw. & Syst. Modeling*, 7(4):443–467, 2008. doi: 10.1007/s10270-007-0073-9.
- [29] Jing Dong, Sheng Yang, and Kang Zhang. Visualizing design patterns in their applications and compositions. *IEEE Transactions on Software Engineering*, 33(7):433–453, 2007. doi: 10.1109/TSE.2007.1012.
- [30] Ralf Ellner, Samir Al-Hilank, Johannes Drexler, Martin Jung, Detlef Kips, and Michael Philippsen. eSPeM – A SPEM extension for enactable behavior modeling. In *Proc. 6th European Conf. Modelling Found. Applicat. (ECMFA’10)*, volume 6138 of *LNCS*, pages 116–131. Springer, 2010. doi: 10.1007/978-3-642-13595-8_11.
- [31] Vincent Englebert and Patrick Heymans. Towards more extensible metaCASE tools. In John Krogstie, Andreas Opdahl, and Guttorm Sindre, editors, *Advanced Information Systems Engineering*, volume 4495 of *LNCS*, pages 454–468. Springer, 2007. ISBN 978-3-540-72987-7. doi: 10.1007/978-3-540-72988-4_32. URL http://dx.doi.org/10.1007/978-3-540-72988-4_32.
- [32] Vina Ermagan and Ingolf H. Krüger. A UML2 profile for service modeling. In *Proc. 10th Int. Conf. Model-Driven Eng. Languages Syst. (MoDELS’07)*, volume 4735 of *LNCS*, pages 360–374. Springer, 2007. doi: 10.1007/978-3-540-75209-7_25.
- [33] Joerg Evermann. A Meta-Level Specification and Profile for AspectJ in UML. *Journal of Object Technology*, 6(7):27–49, August 2007. ISSN 1660-1769. doi: 10.5381/jot.2007.6.7.a2. URL http://www.jot.fm/contents/issue_2007_08/article2.html.

- [34] Ingo Feinerer, Kurt Hornik, and David Meyer. arules—a computational environment for mining association rules and frequent item sets. *Journal of Statistical Software*, 25(5):1–54, 2008.
- [35] Eduardo Fernández-Medina, Juan Trujillo, Rodolfo Villarroel, and Mario Piattini. Access control and audit model for the multidimensional modeling of data warehouses. *Decision Support Systems*, 42(3):1270–1289, December 2006. doi: 10.1016/j.dss.2005.10.008.
- [36] Erwin Filtz. Systematic literature review and evaluation of dsml-design decisions. Bachelor thesis, Vienna University of Economics and Business, March 2013.
- [37] T. Fink, M. Koch, and K. Pauls. An mda approach to access control specifications using mof and uml profiles. *Electronic Notes in Theoretical Computer Science*, 142:161–179, 2006.
- [38] Giovanni Giachetti, Beatriz Marín, and Oscar Pastor. Using UML as a domain-specific modeling language: A proposal for automatic generation of UML profiles. In *Proc. 21st Int. Conf. Advanced Inform. Syst. Eng. (CAISE’09)*, volume 5565 of *LNCS*, pages 110–124. Springer, 2009. doi: 10.1007/978-3-642-02144-2_13.
- [39] S. Gilmore, L. Gönczy, N. Koch, P. Mayer, M. Tribastone, and D. Varró. Non-functional properties in the model-driven development of service-oriented systems. *Software & Systems Modeling*, 10(3): 287–311, 2011.
- [40] Cesar Gonzalez-Perez and Brian Henderson-Sellers. *Metamodelling for Software Engineering*. John Wiley & Sons, 2008.
- [41] Vincenzo Grassi. Performance Analysis of Mobile Systems. In Marco Bernardo and Alessandro Bogliolo, editors, *Formal Methods for Mobile Computing*, volume 3465 of *LNCS*, pages 107–154. Springer, 2005. ISBN 978-3-540-25697-7. doi: 10.1007/11419822_4. URL http://dx.doi.org/10.1007/11419822_4.
- [42] Kilem L. Gwet. *Handbook of Inter-Rater Reliability*. Advanced Analytics, LLC, 3rd edition, 2012.
- [43] Michael Hafner and Ruth Breu. *Security Engineering for Service-Oriented Architectures*. Springer, 2009.
- [44] Michael Hahsler, Bettina Grün, and Kurt Hornik. arules—a computational environment for mining association rules and frequent item sets. *Journal of Statistical Software*, 14(15):1–25, 2005.
- [45] David Hästbacka, Timo Vepsäläinen, and Seppo Kuikka. Model-driven development of industrial process control applications. *Journal of Systems and Software*, 84(7):1100–1113, 2011. doi: 10.1016/j.jss.2011.01.063.
- [46] Denis Hatebur and Maritta Heisel. A UML profile for requirements analysis of dependable software. In *Proc. 29th Int. Conf. Comput. Safety, Reliability, Security (SAFECOMP’10)*, volume 6351 of *LNCS*, pages 317–331. Springer, 2010. doi: 10.1007/978-3-642-15651-9_24.
- [47] Denis Hatebur and Maritta Heisel. Making Pattern- and Model-Based Software Development More Rigorous. In Jin Song Dong and Huibiao Zhu, editors, *Formal Methods and Softw. Eng.*, volume 6447 of *LNCS*, pages 253–269. Springer, 2010. ISBN 978-3-642-16900-7. doi: 10.1007/978-3-642-16901-4_18. URL http://dx.doi.org/10.1007/978-3-642-16901-4_18.
- [48] B. Henderson-Sellers and C. Gonzalez-Perez. Uses and abuses of the stereotype mechanism in UML 1.x and 2.0. In *Proc. 9th Int. Conf. Model Driven Eng. Languages Syst. (MoDELS’06)*, volume 4199 of *LNCS*, pages 16–26. Springer, 2006. doi: 10.1007/11880240_2.
- [49] Bernhard Hoisl and Stefan Sobernig. Integrity and confidentiality annotations for service interfaces in SoaML models. In *Proc. Int. Workshop on Security Aspects of Process-aware Information Systems (SAPAIS’11)*, pages 673–679. IEEE, 2011.
- [50] Bernhard Hoisl and Mark Strembeck. Modeling support for confidentiality and integrity of object flows in activity models. In *Proc. 14th Int. Conf. Business Information Systems*, volume 97 of *LNBP*, pages 278–289. Springer, 2011.
- [51] Bernhard Hoisl and Mark Strembeck. A UML extension for the model-driven specification of audit rules. In *Proc. 2nd Int. Workshop on Information Systems Security Engineering*, volume 112 of *LNBP*, pages 16–30. Springer, 2012.

- [52] Bernhard Hoisl, Stefan Sobernig, Sigrid Schefer-Wenzl, Mark Strembeck, and Anne Baumgrass. Design Decisions for UML and MOF based Domain-specific Language Models: Some Lessons Learned. In *Proc. of the 2nd Workshop on Process-based approaches for Model-Driven Engineering*, pages 303–314, 2012.
- [53] Bernhard Hoisl, Stefan Sobernig, Sigrid Schefer-Wenzl, Mark Strembeck, and Anne Baumgrass. A Catalog of Reusable Design Decisions for Developing UML- and MOF-based Domain-Specific Modeling Languages. Available at: <http://epub.wu.ac.at/3578>, 2012. Technical Reports / Institute for Information Systems and New Media (WU Vienna), 2012/01.
- [54] Bernhard Hoisl, Stefan Sobernig, and Mark Strembeck. A Catalog of Reusable Design Decisions for Developing MOF- and UML-based Domain-specific Modeling Languages. Available at: <http://epub.wu.ac.at/4312/>, 2014. Technical Reports / Institute for Information Systems and New Media (WU Vienna), 2014/03.
- [55] Bernhard Hoisl, Stefan Sobernig, and Mark Strembeck. Modeling and enforcing secure object flows in process-driven SOAs: An integrated model-driven approach. *Software & Systems Modeling*, 13(2):513–548, 2014.
- [56] Michaela Huhn and Axel Zechner. Analysing dependability case arguments using quality models. In *Proc. 28th Int. Conf. Comput. Safety, Reliability, Security (SAFECOMP’09)*, volume 5775 of *LNCS*, pages 118–131. Springer, 2009. doi: 10.1007/978-3-642-04468-7_11.
- [57] Ethan Jackson and Janos Sztipanovits. Formalizing the structural semantics of domain-specific modeling languages. *Softw. & Syst. Modeling*, 8(4):451–478, 2009. ISSN 1619-1366. doi: 10.1007/s10270-008-0105-0.
- [58] Vaibhav Jain, Anshul Kumar, and Preeti R. Panda. A SysML profile for development and early validation of TLM 2.0 models. In *7th Proc. European Conf. Modelling Found. Applicat. (ECMFA’11)*, volume 6698 of *LNCS*, pages 299–311. Springer, 2011. doi: 10.1007/978-3-642-21470-7_21.
- [59] Samireh Jalali and Claes Wohlin. Systematic literature studies: database searches vs. backward snowballing. In *Proc. ACM-IEEE Int. Symp. Empirical Software Eng. Measurement (ESEM’12)*, pages 29–38. ACM, 2012. doi: 10.1145/2372251.2372257.
- [60] Harshavardhan Jegadeesan and Sundar Balasubramaniam. An mof2-based services metamodel. *Journal of Object Technology*, 7(8):71–96, 2008. doi: 10.5381/jot.2008.7.8.a1.
- [61] Jan Jürjens. *Secure Systems Development with UML*. Springer, 2005.
- [62] Slim Kallel, Mohamed Hadj Kacem, and Mohamed Jmaiel. Modeling and enforcing invariants of dynamic software architectures. *Software and System Modeling*, 11(1):127–149, 2012.
- [63] Barbara Kitchenham. Procedures for performing systematic reviews. Joint Technical Report (Keele University Technical Report, NICTA Technical Report) TR/SE-0401, 0400011T.1, Keele University & National ICT Ltd., July 2004.
- [64] Barbara Kitchenham, Emilia Mendes, and Guilherme Travassos. Protocol for systematic review of within- and cross-company estimation models. Review Protocol, Version 14, last accessed: Oct 17, 2012, 2006. URL <http://www.dur.ac.uk/ebse/study.php?type=protocol&id=5>.
- [65] Lawrence L. Kupper and Kerry B. Hafner. On assessing interrater agreement for multiple attribute responses. *Biometrics*, 45(3):957–967, 1989.
- [66] François Lagarde, François Terrier, Charles André, and Sébastien Gérard. Constraints modeling for (profiled) UML models. In *Proc. of the 3rd European Conference on Model Driven Architecture – Foundations and Applications*, volume 4530 of *LNCS*, pages 130–143. Springer, 2007.
- [67] François Lagarde, Espinoza Huáscar, François Terrier, Charles André, and Sébastien Gérard. Leveraging patterns on domain models to improve uml profile definition. In José Luiz Fiadeiro and Paola Inverardi, editors, *Proc. 11th Int. Conf. Fundamental Approaches to Softw. Eng. (FASE’08)*, volume 4961 of *LNCS*, pages 116–130. Springer, 2008. doi: 10.1007/978-3-540-78743-3_10.
- [68] Kenneth Lind and Rogardt Heldal. A Model-based and Automated Approach to Size Estimation of Embedded Software Components. In *Proc. of the 14th Int. Conf. Model Driven Eng. Languages Syst.*, pages 334–348. Springer, 2011. ISBN 978-3-642-24484-1. URL <http://dl.acm.org/citation.cfm?id=2050655.2050688>.

- [69] P. Mayer, A. Schroeder, and N. Koch. MDD4SOA: Model-Driven Service Orchestration. In *Proc. of the 12th International Conference on Enterprise Distributed Object Computing*, pages 203–212, 2008. doi: 10.1109/EDOC.2008.55.
- [70] M. Mernik, J. Heering, and A. Sloane. When and How to Develop Domain-specific Languages. *ACM Computing Surveys (CSUR)*, 37(4):316–344, 2005. ISSN 03600300. doi: 10.1145/1118890.1118892. URL <http://portal.acm.org/citation.cfm?id=1118890.1118892>.
- [71] M.A. de Miguel, J.F. Briones, J.P. Silva, and A. Alonso. Integration of safety analysis in model-driven software development. *IET Software*, 2(3):260–280, 2008. doi: 10.1049/iet-sen:20070050.
- [72] N. Moreno, P. Fraternali, and Antonio Vallecillo. WebML Modelling in UML. *IET Software*, 1(3): 67–80, 2007. ISSN 1751-8806.
- [73] MSAS. Microsoft academic search journal list. Available at <http://academic.research.microsoft.com/?SearchDomain=2&SubDomain=4&entitytype=4>, Feb 2013.
- [74] Leandro Marques do Nascimento, Daniel Leite Viana, Paulo A. M. Silveira Neto, Dhiego A. O. Martins, Vinicius Cardoso Garcia, and Silvio R. L. Meira. A systematic mapping study on domain-specific languages. In *Proc. 7th Int. Conf. Softw. Eng. Advances (ICSEA’12)*, pages 179–187. IARIA, 2012.
- [75] Felix Naumann and Melanie Herschel. *An Introduction to Duplicate Detection*. Synthesis Lectures on Data Management. Morgan & Claypool Publishers, 2010.
- [76] M. Nikolaidou, N. Alexopoulou, A. Tsadimas, A. Dais, and D. Anagnostopoulos. Accommodating EIS UML 2.0 Profile using a Standard UML Modeling Tool. In *Proc. Int. Conf. Softw. Engineering Advances*, 2007. doi: 10.1109/ICSEA.2007.13.
- [77] Object Management Group. OMG Unified Modeling Language (OMG UML), Superstructure. Available at: <http://www.omg.org/spec/UML>, August 2011. Version 2.4.1, formal/2011-08-06.
- [78] R. Paige, J. Ostroff, and P. Brooke. Principles for Modeling Language Design. *Information and Software Technology*, 42(10):665–675, 2000. doi: 10.1016/S0950-5849(00)00109-9.
- [79] Rajwinder Kaur Panesar-Walawege, Mehrdad Sabetzadeh, and Lionel Briand. Using UML Profiles for Sector-specific Tailoring of Safety Evidence Information. In *Proc. of the 30th International Conference on Conceptual Modeling*, pages 362–378. Springer, 2011. ISBN 978-3-642-24605-0. URL <http://dl.acm.org/citation.cfm?id=2075144.2075180>.
- [80] R.K. Panesar-Walawege, M. Sabetzadeh, and L. Briand. A Model-driven Engineering Approach to Support the Verification of Compliance to Safety Standards. In *Proc. of the 22nd International Symposium on Software Reliability Engineering*, pages 30–39, 2011. doi: 10.1109/ISSRE.2011.11.
- [81] Jesus Pardillo. A systematic review on the definition of UML profiles. In *Proc. 13th Int. Conf. Model Driven Eng. Languages Syst. (MoDELS’10)*, volume 6394 of *LNCS*, pages 407–422. Springer, 2010. doi: 10.1007/978-3-642-16145-2_28.
- [82] Jesús Pardillo and Cristina Cachero. Domain-specific language modelling with UML profiles by decoupling abstract and concrete syntaxes. *Journal of Systems and Software*, 83(12):2591–2606, 2010. doi: 10.1016/j.jss.2010.08.019.
- [83] Kai Petersen, Robert Feldt, Shahid Mujtaba, and Michael Mattsson. Systematic mapping studies in software engineering. In *Proc. 12th Int. Conf. Evaluation and Assessment in Software Engineering (EASE’08)*, EASE’08, pages 68–77. British Computer Society, 2008.
- [84] Mónica Pinto, Lidia Fuentes, and Luis Fernández. Deriving detailed design models from an aspect-oriented ADL using MDD. *Journal of Systems and Software*, 85(3):525–545, 2012. doi: 10.1016/j.jss.2011.05.026.
- [85] S. Robert, S. Gérard, F. Terrier, and F. Lagarde. A Lightweight Approach for Domain-Specific Modeling Languages Design. In *Proc. 35th EUROMICRO Conf. Softw. Engineering and Advanced Applications*, pages 155–161. IEEE, 2009. ISBN 978-0-7695-3784-9. doi: <http://doi.ieeecomputersociety.org/10.1109/SEAA.2009.81>.
- [86] Alfonso Rodríguez, Eduardo Fernández-Medina, Juan Trujillo, and Mario Piattini. Secure business process model specification through a uml 2.0 activity diagram profile. *Decision Support Systems*, 51(3):446–465, 2011. doi: 10.1016/j.dss.2011.01.018.

- [87] Jungwoo Ryoo and Hossein Saiedian. AVDL: A highly adaptable architecture view description language. *Journal of Systems and Software*, 79(8):1180–1206, 2006.
- [88] P. Salehi, A. Hamoud-Lhadj, P. Colombo, F. Khendek, and M. Toeroe. A UML-Based Domain Specific Modeling Language for the Availability Management Framework. In *Proc. of the 12th International Symposium on High-Assurance Systems Engineering*, pages 35–44, 2010. doi: 10.1109/HASE.2010.21.
- [89] Sigrid Schefer. Consistency checks for duties in extended UML2 activity models. In *Proc. International Workshop on Security Aspects of Process-aware Information Systems (SAPAIS’11)*, pages 680–685. IEEE, 2011.
- [90] Sigrid Schefer and Mark Strembeck. Modeling process-related duties with extended UML activity and interaction diagrams. *Electronic Communications of the EASST*, 37, 2011.
- [91] Sigrid Schefer and Mark Strembeck. Modeling support for delegating roles, tasks, and duties in a process-related rbac context. In *Proc. Int. Workshop Information Systems Security Engineering (WISSE’11)*, volume 83 of *LNBIP*, pages 660–667. Springer, 2011.
- [92] Sigrid Schefer-Wenzl and Mark Strembeck. An approach for consistent delegation in process-aware information systems. In *Proc. 15th Int. Conf. Business Information Systems (BIS’12)*, volume 117 of *LNBIP*, pages 60–71. Springer, 2012.
- [93] Sigrid Schefer-Wenzl and Mark Strembeck. Modeling context-aware RBAC models for business processes in ubiquitous computing environments. In *Proc. 3rd Int. Conf. on Mobile, Ubiquitous and Intelligent Computing*, pages 126–131. IEEE, 2012. doi: 10.1109/MUSIC.2012.29.
- [94] Bran Selic. A systematic approach to domain-specific language design using UML. In *Proc. 10th IEEE Int. Symp. Object-Oriented Real-Time Distributed Computing (ISORC’07)*, pages 2–9. IEEE, 2007. doi: 10.1109/ISORC.2007.10.
- [95] Bran Selic. The theory and practice of modeling language design for model-based software engineering - a personal perspective. In *Proc. Int. Summer School Generative Transformational Techniques Softw. Eng. (GTTSE’09)*, volume 6491 of *LNCS*, pages 290–321. Springer, 2009. doi: 10.1007/978-3-642-18023-1_7.
- [96] Sagar Sen, Naouel Moha, Benoit Baudry, and Jean-Marc Jézéquel. Meta-model pruning. In *Proc. 12th Int. Conf. Model Driven Eng. Languages Syst. (MoDELS’12)*, volume 5795 of *LNCS*, pages 32–46. Springer, 2009. doi: 10.1007/978-3-642-04425-0_4.
- [97] Keng Siau and Yuhong Tian. A semiotic analysis of unified modeling language graphical notations. *Requirements Engineering*, 14(1):15–26, 2009. doi: 10.1007/s00766-008-0071-7.
- [98] A.R. da Silva, J. Saraiva, D. Ferreira, R. Silva, and C. Videira. Integration of RE and MDE paradigms: the ProjectIT approach and tools. *IET Software*, 1(6):294–314, 2007. doi: 10.1049/iet-sen:20070012.
- [99] SJR. Scimago journal & country rank. Available at <http://www.scimagojr.com/journalrank.php>, Feb 2013.
- [100] Colin Snook and Michael Butler. UML-B: Formal modeling and design aided by UML. *ACM Transactions on Software Engineering and Methodology*, 15(1):92–122, 2006. doi: 10.1145/1125808.1125811.
- [101] Emilio Soler, Juan Trujillo, Eduardo Fernández-Medina, and Mario Piattini. Building a Secure Star Schema in Data Warehouses by an Extension of the Relational Package from CWM. *Computer Standards & Interfaces*, 30(6):341–350, 2008. ISSN 0920-5489. doi: <http://dx.doi.org/10.1016/j.csi.2008.03.002>. URL <http://www.sciencedirect.com/science/article/pii/S0920548908000226>.
- [102] Stéphane S. Somé. A meta-model for textual use case description. *Journal of Object Technology*, 8(7):87–106, 2009. doi: 10.5381/jot.2009.8.7.a2.
- [103] Cheeyang Song, Eunsook Cho, and Chuljin Kim. An Integrated GUI-Business Component Modeling Method for the MDD- and MVC-Based Hierarchical Designs. *International Journal of Software Engineering and Knowledge Engineering*, 21(3):447–490, 2011.
- [104] D. Spinellis. Notable Design Patterns for Domain-specific Languages. *Journal of Systems and Software*, 56(1):91–99, 2001. ISSN 01641212. doi: 10.1016/S0164-1212(00)00089-3. URL <http://linkinghub.elsevier.com/retrieve/pii/S0164121200000893>.

- [105] Mirosław Staron and Claes Wohlin. An industrial case study on the choice between language customization mechanisms. In *Proc. 7th Int. Conf. Product-Focused Softw. Process Improvement (PROFES'06)*, volume 4034 of *LNCS*, pages 177–191. Springer, 2006. doi: 10.1007/11767718_17.
- [106] Mirosław Staron, Ludwik Kuzniarz, and Claes Wohlin. Empirical assessment of using stereotypes to improve comprehension of UML models: A set of experiments. *J. Syst. Softw.*, 79(5):727–742, 2006. doi: 10.1016/j.jss.2005.09.014.
- [107] M. Strembeck and U. Zdun. An Approach for the Systematic Development of Domain-Specific Languages. *Software: Practice and Experience*, 39(15):1253–1292, 2009.
- [108] Mark Strembeck and Jan Mendling. Modeling process-related RBAC models with extended UML activity models. *Information and Software Technology*, 53(5):456–483, 2011.
- [109] Mark Strembeck and U. Zdun. Modeling interdependent concern behavior using extended activity models. *Journal of Object Technology*, 7(6):143–166, 2008.
- [110] Jagadish Suryadevara and R. K. Shyamasundar. UML-based approach to specify secured, fine-grained concurrent access to shared resources. *Journal of Object Technology*, 6(1):107–119, 2007. doi: 10.5381/jot.2007.6.1.a3.
- [111] Jagadish Suryadevara, Lawrence Chung, and R. K. Shyamasundar. cmUML – a UML based framework for formal specification of concurrent, reactive systems. *Journal of Object Technology*, 7(8):187–207, 2008. doi: 10.5381/jot.2008.7.8.a7.
- [112] Chouki Tibermachine, Régis Fleurquin, and Salah Sadou. A family of languages for architecture constraint specification. *Journal of Systems and Software*, 83(5):815–831, 2010.
- [113] Alexandre Torres, Renata de Matos Galante, and Marcelo Soares Pimenta. A synergistic model-driven approach for persistence modeling with UML. *Journal of Systems and Software*, 84(6):942–957, 2011.
- [114] Jane Webster and Richard T. Watson. Analyzing the past to prepare for the future: Writing a literature review. *MIS Quarterly*, 26(2):pp. xiii–xxiii, 2002.
- [115] Ingo Weisemöller and Andy Schürr. A comparison of standard compliant ways to define domain specific languages. In *Workshops Proc. 10th Int. Conf. Model Driven Eng. Languages Syst. (MoDELS'07)*, volume 5002 of *LNCS*, pages 47–58, 2008. doi: 10.1007/978-3-540-69073-3_6.
- [116] Roel Wieringa, Neil Maiden, Nancy Mead, and Colette Rolland. Requirements Engineering Paper Classification and Evaluation Criteria: A Proposal and a Discussion. *Requirements Engineering*, 11(1):102–107, December 2005.
- [117] Tao Xie. Software engineering conferences. Available at <http://web.engr.illinois.edu/~taoxie/seconferences.htm>, Feb 2013.
- [118] Stefanos Zachariadis, Cecilia Mascolo, and Wolfgang Emmerich. The satin component system – A metamodel for engineering adaptable mobile systems. *IEEE Transactions on Software Engineering*, 32(11):910–927, 2006. doi: 10.1109/TSE.2006.115.
- [119] Rabih Zbib, Ashish Jain, Devasis Bassu, and Hiralal Agrawal. Generating domain specific graphical modeling editors from meta models. In *30th Annu. Int. Comput. Softw. Applicat. Conf. (COMPSAC'06)*, pages 129–138. IEEE, 2006. doi: 10.1109/COMPSAC.2006.48.
- [120] U. Zdun and M. Strembeck. Modeling composition in dynamic programming environments with model transformations. In *Proc. 5th Int. Symposium on Software Composition (SC'06)*, volume 4089 of *LNCS*, pages 178–193. Springer, 2006.
- [121] U. Zdun and M. Strembeck. Reusable Architectural Decisions for DSL Design: Foundational Decisions in DSL Development. In *Proc. of the 14th European Conference on Pattern Languages of Programs*, pages 1–37, July 2009.
- [122] Uwe Zdun and Paris Avgeriou. Modeling architectural patterns using architectural primitives. In *Proc. 20th Annu. ACM SIGPLAN Conf. Object-oriented Programming, Syst., Languages, Applicat. (OOPSLA'05)*, pages 133–146. ACM, 2005. doi: 10.1145/1094811.1094822.
- [123] He Zhang, Muhammad Ali Babar, and Paolo Tell. Identifying Relevant Studies in Software Engineering. *Information and Software Technology*, 53(6):625–637, June 2011.

- [124] He Zhang, Muhammad Ali Babar, and Paolo Tell. Identifying relevant studies in software engineering. *Inform. Software Tech.*, 53(6):625–637, 2011. doi: 10.1016/j.infsof.2010.12.010.
- [125] Yan Zhang, Yi Liu, Le Zhang, Zhiyi Ma, and Hong Mei. Modeling and Checking for Non-functional Attributes in Extended UML Class Diagram. In *Proc. 32nd Annual IEEE Int. Conf. Computer Softw. and Applications*, pages 100–107, Washington, DC, USA, 2008. IEEE Computer Society. ISBN 978-0-7695-3262-2. doi: 10.1109/COMPSAC.2008.72. URL <http://dx.doi.org/10.1109/COMPSAC.2008.72>.
- [126] G. Zoughbi, L. Briand, and Y. Labiche. Modeling safety and airworthiness (RTCA DO-178B) information: Conceptual model and UML profile. *Software & Systems Modeling*, 10(3):337–367, 2011. doi: 0.1007/s10270-010-0164-x.
- [127] Gregory Zoughbi, Lionel Briand, and Lionel Labiche. A UML profile for developing airworthiness-compliant (RTCA DO-178B), safety-critical software. In *Proc. 10th Int. Conf. Model Driven Eng. Languages Syst. (MoDELS'07)*, volume 4735 of *LNCS*, pages 574–588. Springer, 2007. doi: 10.1007/978-3-540-75209-7_39. URL [å](#).

A Abbreviations

Table 36: Journal, conferences and beyond

| Journal names | |
|---------------|--|
| AES | Advances in Engineering Software |
| BIS | International Conference on Business Information Systems |
| CJA | Chinese Journal of Aeronautics |
| ComSIS | Computer Science and Information Systems |
| CSI | Computer Standards & Interfaces |
| DETC | International Design Engineering Technical Conferences |
| DKE | Data & Knowledge Engineering |
| DSS | Decision Support Systems |
| ENTCS | Electronic Notes in Theoretical Computer Science |
| IETSoftw | IET Software |
| IJCIS | International Journal of Cooperative Information Systems |
| IJICIC | International Journal of Innovative Computing, Information and Control |
| IJOR | International Journal of Operational Research |
| IJSEKE | International Journal of Software Engineering and Knowledge Engineering |
| IJWIS | International Journal of Web Information Systems |
| ISeB | Information Systems and e-Business Management |
| ISF | Information Systems Frontiers |
| ISSE | Innovations in Systems and Software Engineering |
| IST | Information and Software Technology |
| JOT | Journal of Object Technology |
| JRPIT | Journal of Research and Practice in Information Technology |
| JSA | Journal of Systems Architecture |
| JSS | Journal of Systems and Software |
| JSUSE | Shenzhen Daxue Xuebao (Ligong Ban)/ Journal of Shenzhen University Science and Engineering |
| JSW | Journal of Software |
| JUCS | Journal of Universal Computer Science |
| PRC | Plastics, Rubber and Composites: Macromolecular Engineering |
| SCP | Science of Computer Programming |
| SOCA | Service Oriented Computing and Applications |
| SoSyM | Software & Systems Modeling |
| SP&E | Software: Practice and Experience |
| TC | IEEE Transactions on Computers |
| TEC | IEEE Transactions on Evolutionary Computation |
| TII | IEEE Transactions on Industrial Informatics |
| TOMACS | ACM Transactions on Modeling and Computer Simulation |
| TOSEM | ACM Transactions on Software Engineering and Methodology |

| | |
|------------------|--|
| TSE | IEEE Transactions on Software Engineering |
| TTBE | WIT Transactions on The Built Environment |
| VLC | Journal of Visual Languages & Computing |
| Conference names | |
| AAMS | International Conference on Autonomous Agents and Multiagent Systems |
| ACMSE | ACM Annual Southeast Regional Conference |
| AGTIVE | International Symposium on Applications of Graph Transformations with Industrial Relevance |
| AMOST | Workshop on Advances in Model-Based Testing |
| AOSE | International Workshop Agent-Oriented Software Engineering |
| APSCC | IEEE Asia-Pacific Services Computing Conference |
| ASE | ACM/IEEE International Conference on Automated Software Engineering |
| ASRU | IEEE Workshop on Automatic Speech Recognition and Understanding |
| ATIO | Aviation Technology, Integration and Operations Conference |
| BMFA | Workshop on Behavioral Modelling – Foundations and Applications |
| CAiSE | International Conference on Advanced Information Systems Engineering |
| CCCM | International Colloquium on Computing, Communication, Control, and Management |
| CEA | International Conference on Computer Engineering and Applications |
| CEC | Conference on Commerce and Enterprise Computing |
| CIT | IEEE International Conference on Computer and Information Technology |
| COMPSAC | Computer Software and Applications Conference |
| COP | International Workshop on Context-Oriented Programming |
| CRIWG | International Workshop on Groupware |
| CSEDU | International Conference on Computer Supported Education |
| CSMR | European Conference on Software Maintenance and Reengineering |
| DAC | Design Automation Conference |
| DATE | Design, Automation, and Test in Europe |
| DaWaK | International Conference on Data Warehousing and Knowledge Discovery |
| DEBS | International Conference on Distributed Event-based Systems |
| DSM | Domain-Specific Modeling |
| DSVIS | International Conference on Interactive Systems: Design, Specification, and Verification |
| ECBS | International Conference and Workshops on the Engineering of Computer-Based Systems |
| ECDL | European Conference on Digital Libraries |
| ECMDA-FA | European Conference on Model Driven Architecture – Foundations and Applications |
| ECMFA | European Conference on Modelling Foundations and Applications |
| ECSA | European Conference on Software Architecture |
| EDOC | International Enterprise Distributed Object Computing Conference |
| EDOCW | International Enterprise Distributed Object Computing Conference Workshops |
| EFTA | IEEE International Conference on Emerging Technologies and Factory Automation |
| EGOVIS | International Conference on Electronic Government and the Information Systems Perspective |
| EICS | Symposium on Engineering Interactive Computing Systems |
| EMSOFT | International Conference on Embedded Software |
| ER | International Conference on Conceptual Modeling |
| ESAW | International Workshop on Engineering Societies in the Agents World |
| ESEC | European Software Engineering Conference |
| ESWC | European Semantic Web Conference on The Semantic Web: Research and Applications |
| FASE | International Conference on Fundamental Approaches to Software Engineering |
| FDL | Forum on Specification Design Languages |
| FML | International Workshop on Formalization of Modeling Languages |
| GPC | International Conference on Grid and Pervasive Computing |
| GPCE | Generative Programming and Component Engineering Conference |
| HASE | IEEE International Symposium on High Assurance Systems Engineering |
| HICSS | Hawaii International Conference on System Sciences |
| IAT | International Conference on Intelligent Agent Technology |
| ICALT | International Conference on Advanced Learning Technologies |
| ICCSE | International Conference on Computer Science Education |
| ICEIS | International Conference on Enterprise Information Systems |
| ICINCO | International Conference on Informatics in Control, Automation and Robotics |

| | |
|----------|--|
| ICIT | IEEE International Conference on Industrial Technology |
| ICOODB | International Conference on Objects and Databases |
| ICSE | International Conference on Software Engineering |
| ICSEA | International Conference on Software Engineering Advances |
| ICSOC | International Conference on Service-oriented Computing |
| ICSTW | International IEEE Conference on Software Testing, Verification and Validation |
| ICWE | International Conference on Web Engineering |
| ICWS | IEEE International Conference on Web Services |
| INDIN | IEEE International Conference on Industrial Informatics |
| ISC | IEEE Southeastcon Conference |
| ISEC | India Software Engineering Conference |
| ISORC | IEEE International Symposium on Object and Component-oriented Real-Time Distributed Computing |
| ISSRE | IEEE International Symposium on Software Reliability Engineering |
| ITNG | International Conference on Information Technology |
| ITSIM | International Symposium in Information Technology |
| MoDELS | International Conference on Model Driven Engineering Languages and Systems |
| MUSIC | International Conference on Mobile, Ubiquitous and Intelligent Computing |
| OOPSLA | Object-Oriented Programming, Systems, Languages & Applications Conference |
| OTM | On the Move Confederated International Conferences (CoopIS, DOA, GADA, IS, and ODBASE) |
| PERCOM | IEEE International Conference on Pervasive Computing and Communications |
| QSIC | International Conference on Quality Software |
| REFSQ | International Working Conference on Requirements Engineering: Foundation for Software Quality |
| RTSS | Real-Time Systems Symposium |
| SAC | ACM Symposium on Applied Computing |
| SAFECOMP | International Conference on Computer Safety, Reliability, and Security |
| SAM | System Analysis and Modelling Conference |
| SC | International Symposium on Software Composition |
| SCC | IEEE International Conference on Services Computing |
| SCCC | International Conference of the Chilean Computer Science Society |
| SEAA | Euromicro Conference on Software Engineering and Advanced Applications |
| SEFM | International Conference on Software Engineering and Formal Methods |
| SEKE | International Conference on Software Engineering and Knowledge Engineering |
| SenSys | ACM Conference on Embedded Networked Sensor Systems |
| SERP | International Conference on Software Engineering Research and Practice |
| SFM | International Conference on Formal Methods for the Design of Computer, Communication, and Software Systems |
| SIGMOD | ACM International Conference on Management of Data |
| SLE | International Conference on Software Language Engineering |
| SOCC | IEEE International System-on-Chip Conference |
| SoMeT | Conference on New Trends in Software Methodologies, Tools and Techniques |
| SOSE | International Symposium on Service-oriented System Engineering |
| SPLASH | ACM SIGPLAN Conference on Systems, Programming, Languages and Applications: Software for Humanity |
| SPLC | International Software Product Line Conference |
| SYNASC | International Symposium on Symbolic and Numeric Algorithms for Scientific Computing |
| SysCon | IEEE Systems Conference |
| VL/HCC | Visual Languages and Human-Centric Computing Symposium |
| WaGe | Third International Workshop on Workflow Management and Applications in Grid Environments |
| WISES | International Workshop on Intelligent Solutions in Embedded Systems |
| WSC | Winter Simulation Conference |
| Various | |
| AITO | Association Internationale pour les Technologies Objets |
| ICPS | International Conference Proceeding Series |

B Engine-specific Search Strings

Listing 4: ACM Digital Library, submitted via direct, batched HTTP requests.

```
("SysML profile" OR "UML profile" OR "UML2 profile" OR UML2 OR UML2.0
OR "UML 2" OR "UML 2.0" OR MOF2 OR "MOF 2" OR "MOF 2.0" OR MOF2.0 OR
UML OR "unified modeling language" OR MOF OR "meta object facility" OR
SysML OR "systems modeling language" OR OCL OR "object constraint
language")
AND
(customisation OR customization OR metamodel OR "meta-model" OR "meta
model" OR stereotype OR profile OR "domain-specific language" OR
"domain specific language" OR "code generation" OR "meta-level" OR
metalevel OR "meta level" OR extension OR "abstract syntax" OR "visual
language" OR "concrete syntax" OR "domain-specific modeling" OR
"domain specific modeling" OR DSM OR specialization OR specialisation
OR refinement OR "model-to-model transformation" OR "model to model
transformation" OR "M2M transformation" OR "model-to-text
transformation" OR "model to text transformation" OR "M2T
transformation" OR "model transformation" OR "conceptual model" OR
"domain model" OR "model generation")
AND
(PublishedAs:journal OR PublishedAs:proceeding OR
PublishedAs:transaction)
AND
((Keywords:UML OR Keywords:"unified modeling language" OR Keywords:MOF
OR Keywords:"meta object facility" OR Keywords:SysML OR
Keywords:"systems modeling language")
OR
(Abstract:UML OR Abstract:"unified modeling language" OR Abstract:MOF
OR Abstract:"meta object facility" OR Abstract:SysML OR
Abstract:"systems modeling language"))
```

Listing 5: IEEEExplore, submitted and refined via the web UI (form).

```
("SysML profile" OR "UML profile" OR "UML2 profile" OR UML2 OR UML2.0
OR "UML 2" OR "UML 2.0" OR MOF2 OR "MOF 2" OR "MOF 2.0" OR MOF2.0 OR
UML OR "unified modeling language" OR MOF OR "meta object facility" OR
SysML OR "systems modeling language" OR OCL OR "object constraint
language")
AND
(customisation OR customization OR metamodel OR "meta-model" OR "meta
model" OR stereotype OR profile OR "domain-specific language" OR
"domain specific language" OR "code generation" OR "meta-level" OR
metalevel OR "meta level" OR extension OR "abstract syntax" OR "visual
language" OR "concrete syntax" OR "domain-specific modeling" OR
"domain specific modeling" OR DSM OR specialization OR specialisation
OR refinement OR "model-to-model transformation" OR "model to model
transformation" OR "M2M transformation" OR "model-to-text
transformation" OR "model to text transformation" OR "M2T
transformation" OR "model transformation" OR "conceptual model" OR
"domain model" OR "model generation"))
```

The actual URL used for dispatching and for reproducing the IEEEExplore search is shown below, containing the URL-encoded search string from Listing 5:

```
http://ieeexplore.ieee.org/search/searchresult.jsp?bulkSetSize=1845&refinements%
3D4291944822%2C4291944246%26ranges%3D2005_2013_p_Publication_Year%26matchBoolean%3Dtrue%
26searchField%3DSearch_All%26queryText%3D%28%28%22SysML+profile%22+OR+%22UML+profile%
22+OR+%22UML2+profile%22+OR+UML2+OR+UML2.0+OR+%22UML+2%22+OR+%22UML+2.0%22+OR+MOF2+OR+
%22MOF+2%22+OR+%22MOF+2.0%22+OR+MOF2.0+OR+UML+OR+%22unified+modeling+language%22+OR+
MOF+OR+%22meta+object+facility%22+OR+SysML+OR+%22systems+modeling+language%22+OR+OCL+OR+
```

```
%22object+constraint+language%22%29+AND+%28customisation+OR+customization+OR+metamodel+
OR+%22meta-model%22+OR+%22meta+model%22+OR+stereotype+OR+profile+OR+%22domain-specific+
language%22+OR+%22domain+specific+language%22+OR+%22code+generation%22+OR+%22meta-level%
22+OR+metalevel+OR+%22meta+level%22+OR+extension+OR+%22abstract+syntax%22+OR+%22visual+
language%22+OR+%22concrete+syntax%22+OR+%22domain-specific+modeling%22+OR+%22domain+
specific+modeling%22+OR+DSM+OR+specialization+OR+specialisation+OR+refinement+OR+
%22model-to-model+transformation%22+OR+%22model+to+model+transformation%22+OR+%22M2M+
transformation%22+OR+%22model-to-text+transformation%22+OR+%22model+to+text+transformation%
22+OR+%22M2T+transformation%22+OR+%22model+transformation%22+OR+%22conceptual+model%22+OR+
%22domain+model%22+OR+%22model+generation%22%29%29
```

Listing 6: Scopus, submitted via web UI (form).

```
("SysML profile" OR "UML profile" OR "UML2 profile" OR uml2 OR uml2.0
OR "UML 2" OR "UML 2.0" OR mof2 OR "MOF 2" OR "MOF 2.0" OR mof2.0 OR
uml OR "unified modeling language" OR mof OR "meta object facility" OR
sysml OR "systems modeling language" OR ocl OR "object constraint
language")
AND
(customisation OR customization OR metamodel OR "meta-model" OR "meta
model" OR stereotype OR profile OR "domain-specific language" OR
"domain specific language" OR "code generation" OR "meta-level" OR
metalevel OR "meta level" OR extension OR "abstract syntax" OR "visual
language" OR "concrete syntax" OR "domain-specific modeling" OR
"domain specific modeling" OR dsm OR specialization OR specialisation
OR refinement OR "model-to-model transformation" OR "model to model
transformation" OR "M2M transformation" OR "model-to-text
transformation" OR "model to text transformation" OR "M2T
transformation" OR "model transformation" OR "conceptual model" OR
"domain model" OR "model generation")
AND
(LIMIT-TO(PUBYEAR, 2013) OR LIMIT-TO(PUBYEAR, 2012) OR
LIMIT-TO(PUBYEAR, 2011) OR LIMIT-TO(PUBYEAR, 2010) OR
LIMIT-TO(PUBYEAR, 2009) OR LIMIT-TO(PUBYEAR, 2008) OR
LIMIT-TO(PUBYEAR, 2007) OR LIMIT-TO(PUBYEAR, 2006) OR
LIMIT-TO(PUBYEAR, 2005)) AND (LIMIT-TO(DOCTYPE, "cp") OR
LIMIT-TO(DOCTYPE, "ar")) AND (LIMIT-TO(LANGUAGE, "English"))
```

Listing 7: SpringerLink, submitted via web UI (form).

```
("SysML profile" OR "UML profile" OR "UML2 profile" OR UML2 OR
UML2.0 OR "UML 2" OR "UML 2.0" OR MOF2 OR "MOF 2" OR "MOF 2.0" OR
MOF2.0 OR UML OR "unified modeling language" OR MOF OR
"meta object facility" OR SysML OR "systems modeling language" OR
OCL OR "object constraint language")
AND
(customisation OR customization OR metamodel OR "meta-model" OR
"meta model" OR stereotype OR profile OR "domain-specific language" OR
"domain specific language" OR "code generation" OR "meta-level" OR
metalevel OR "meta level" OR extension OR "abstract syntax" OR
"visual language" OR "concrete syntax" OR "domain-specific modeling" OR
"domain specific modeling" OR DSM OR specialization OR
specialisation OR refinement OR "model-to-model transformation" OR
"model to model transformation" OR "M2M transformation" OR
"model-to-text transformation" OR "model to text transformation" OR
"M2T transformation" OR "model transformation" OR "conceptual model" OR
"domain model" OR "model generation")
```

C Venue Lists

Table 37: **MS/AS**: Microsoft Academic Search ([73]; subset of 53 journals in category “Computer Science”/“Software Engineering”; retrieved on Feb 4, 2013)

| Journal | Publication count | MS/AS rating |
|--|-------------------|--------------|
| TSE - IEEE Transactions on Software Engineering | 3928 | 183 |
| SOFTWARE - IEEE Software | 4071 | 108 |
| ACM Sigsoft Software Engineering Notes | 5021 | 85 |
| SPE - Software - Practice and Experience | 3247 | 80 |
| TOSEM - ACM Transactions on Software Engineering and Methodology | 332 | 69 |
| JSS - Journal of Systems and Software | 3168 | 61 |
| IET Software/IEE Proceedings - Software | 594 | 57 |
| FAC - Formal Aspects of Computing | 1037 | 56 |
| BIT - Bit Numerical Mathematics | 2790 | 51 |
| INFOSOF - Information & Software Technology | 2904 | 46 |
| ISJ - Information Systems Journal | 395 | 45 |
| ENVSOFT - Environmental Modelling and Software | 1866 | 44 |
| AES - Advances in Engineering Software | 2901 | 42 |
| FMSD - Formal Methods in System Design | 615 | 42 |
| STTT - International Journal on Software Tools for Technology Transfer | 535 | 41 |
| ESE - Empirical Software Engineering | 491 | 36 |
| RE - Requirements Engineering | 363 | 36 |
| STVR - Software Testing, Verification & Reliability | 497 | 33 |
| ASE - Automated Software Engineering | 445 | 33 |
| SMR - Journal of Software Maintenance and Evolution: Research and Practice | 527 | 32 |
| SOSYM - Software and System Modeling | 357 | 31 |
| CONSTRAINTS - Constraints - An International Journal | 433 | 29 |
| CSI - Computer Standards & Interfaces | 2272 | 28 |
| EWC - Engineering With Computers | 742 | 28 |
| SOPR - Software Process: Improvement and Practice | 505 | 28 |
| ANSOFT - Annals of Software Engineering | 375 | 28 |
| Quality and Reliability Engineering International | 1988 | 26 |
| JOT - Journal of Object Technology | 752 | 26 |
| IJSEKE - International Journal of Software Engineering and Knowledge Engineering | 728 | 26 |
| Concurrent Engineering: R&A - Concurrent Engineering: Research and Applications | 654 | 26 |
| TAPOS - Theory and Practice of Object Systems | 127 | 26 |
| SQJ - Software Quality Journal | 478 | 22 |
| Artificial - Advanced Engineering Informatics | 458 | 22 |
| CEE - Computers & Electrical Engineering | 1507 | 21 |
| STP - Software - Concepts and Tools / Structured Programming | 182 | 21 |
| CSSE - Computer Systems: Science & Engineering | 336 | 19 |
| ISEM - Information Systems and E-business Management | 230 | 15 |
| IJCIA - International Journal of Computational Intelligence and Applications | 263 | 14 |
| JETC - ACM Journal on Emerging Technologies in Computing Systems | 137 | 14 |
| JSI - Journal of Systems Integration | 233 | 11 |
| STT - Softwaretechnik-trends | 189 | 11 |
| ACM Sigcpr Computer Personnel | 274 | 10 |
| KES Journal - International Journal of Knowledge-based and Intelligent Engineering Systems | 223 | 10 |
| ISSE - Innovations in Systems and Software Engineering | 178 | 9 |
| ACM Sigapp Applied Computing Review | 159 | 9 |

| Journal | Publication count | MS/AS rating |
|---|----------------------|-----------------|
| Robotica | 68 | 8 |
| SOFO - Software Focus | 66 | 7 |
| ISI - Ingénierie Des Systèmes D'information | 342 | 6 |
| ECEASST - Electronic Communication of The European Association of Software Science and Technology | 166 | 6 |
| LOGIN - Log in | 671 | 5 |
| ICOM - Zeitschrift Für Interaktive Und Kooperative Medien | 399 | 4 |
| ACM Sigsoc Bulletin | 197 | 4 |
| CSI - Computer Standards & Interfaces | 1 | 0 |

Table 38: **MS/AS**: Microsoft Academic Search ([73]; subset of 284 conferences in category “Computer Science”/“Software Engineering”; retrieved on Feb 4, 2013)

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| ICSE - International Conference on Software Engineering | 4715 | 118 |
| ITC - International Test Conference | 4476 | 89 |
| CAV - Computer Aided Verification | 1071 | 88 |
| OOPSLA - Conference on Object-Oriented Programming Systems, Languages, and Applications | 1822 | 59 |
| SPIN - International Workshop on Model Checking of Software | 644 | 59 |
| ICSM - International Conference on Software Maintenance | 1489 | 57 |
| TACAS - Tools and Algorithms for Construction and Analysis of Systems | 669 | 56 |
| CP - Principles and Practice of Constraint Programming | 1245 | 54 |
| IFIP - World Computer Congress | 2831 | 49 |
| Requirements Engineering | 406 | 47 |
| Dagstuhl Seminars | 3061 | 46 |
| SAS(WSA) - Static Analysis Symposium/Workshop on Static Analysis | 556 | 46 |
| AOSD - Aspect-Oriented Software Development | 347 | 46 |
| WCRE - Working Conference on Reverse Engineering | 650 | 45 |
| ASE - Automated Software Engineering | 1208 | 44 |
| ESEC - European Software Engineering Conference | 691 | 44 |
| SAC - ACM Symposium on Applied Computing | 4617 | 43 |
| UML - The Unified Modeling Language | 476 | 42 |
| FM - World Congress on Formal Methods | 785 | 39 |
| ISSRE - International Symposium on Software Reliability Engineering | 870 | 37 |
| ICPC - International Conference on Program Comprehension | 634 | 37 |
| RTA - Rewriting Techniques and Applications | 698 | 36 |
| TAPSOFT - Theory and Practice of Software Development | 393 | 35 |
| ISSTA - International Symposium on Software Testing and Analysis | 359 | 35 |
| COMPSAC - International Computer Software and Applications Conference | 3409 | 34 |
| Fall Joint Computer Conference | 310 | 34 |
| METRICS - IEEE International Software Metrics Symposium | 337 | 33 |
| INRIA - INRIA | 290 | 32 |
| FASE - Fundamental Approaches to Software Engineering | 397 | 31 |

| Conference | Publication count | MS/AS rating |
|---|----------------------|-----------------|
| TOOLS - Technology of Object-Oriented Languages and Systems | 1424 | 30 |
| WETICE - Workshop on Enabling Technologies: Infrastructure for Collaborative Enterprises | 1206 | 30 |
| FoSSaCS - Foundations of Software Science and Computation Structure | 399 | 30 |
| FMCAD - Formal Methods in Computer-Aided Design | 348 | 30 |
| VMCAI - Verification, Model Checking and Abstract Interpretation | 278 | 30 |
| ISMM - International Symposium on Memory Management | 231 | 30 |
| ICSR - International Conference on Software Reuse | 335 | 29 |
| CSMR - Conference on Software Maintenance and Reengineering | 724 | 28 |
| SPLC - Software Product Lines | 396 | 28 |
| SEKE - Software Engineering and Knowledge Engineering | 1832 | 27 |
| FGCS - Fifth Generation Computer Systems | 346 | 27 |
| WOSP - Workshop on Software and Performance | 231 | 27 |
| Generative Programming and Component Engineering | 226 | 27 |
| AMAST - Algebraic Methodology and Software Technology | 472 | 26 |
| COORDINATION - Coordination Models and Languages | 295 | 26 |
| APSEC - Asia-Pacific Software Engineering Conference | 1308 | 25 |
| WICSA - Working IEEE/IFIP Conference on Software Architecture | 414 | 25 |
| SOFTVIS - Software Visualization | 186 | 25 |
| EUROMICRO - Conference on Software Engineering and Advanced Applications | 1153 | 23 |
| LOPSTR - Logic Program Synthesis and Transformation | 402 | 23 |
| MPC - Mathematics of Program Construction | 220 | 23 |
| IWSSD - International Workshop on Software Specifications & Design | 148 | 23 |
| VEE - International Conference on Virtual Execution Environments | 111 | 23 |
| ICSP - International Conference on the Software Process | 87 | 23 |
| CMG - Computer Measurement Group Conference | 3155 | 22 |
| MODELS - Model Driven Engineering Languages and Systems | 536 | 22 |
| SCM - System Configuration Management | 216 | 22 |
| FIW - Feature Interactions in Telecommunications and Software Systems | 208 | 22 |
| PASTE - Workshop on Program Analysis For Software Tools and Engineering | 110 | 22 |
| ICECCS - International Conference on Engineering of Complex Computer Systems | 710 | 21 |
| IEEE International Conference on Formal Engineering Methods | 428 | 21 |
| MSR - Mining Software Repositories | 267 | 21 |
| CBSE - Component-Based Software Engineering | 229 | 21 |
| ISESE - International Symposium on Empirical Software | 207 | 21 |
| CSC - ACM Annual Computer Science Conference | 1756 | 20 |
| QEST - Quantitative Evaluation of Systems | 388 | 20 |
| RE - IEEE Int. Conf. on Requirements Engineering | 104 | 20 |
| Australian Software Engineering Conference | 540 | 19 |
| HASE - High-Assurance Systems | 415 | 19 |

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| IFM - Integrated Formal Methods | 207 | 19 |
| FORMATS - Formal Modeling and Analysis of Timed Systems | 184 | 19 |
| IWPSE - International Workshop on Principles of Software Evolution | 172 | 19 |
| Formal Methods for Components and Objects | 133 | 19 |
| FroCos - Frontiers of Combining Systems | 132 | 19 |
| XP Universe - Extreme Programming | 646 | 18 |
| SAFECOMP - International Conference on Computer Safety, Reliability and Security | 471 | 18 |
| SEFM - Conference on Software Engineering and Formal Methods | 337 | 18 |
| SCAM - Source Code Analysis and Manipulation | 229 | 18 |
| Meta-Level Architectures and Reflection | 57 | 18 |
| ISCIS - International Symposium on Computer and Information Sciences | 870 | 17 |
| Ershov Memorial Conference | 405 | 17 |
| WIKIS - International Symposium on Wikis | 177 | 17 |
| SSR - ACM SIGSOFT Symposium on Software Reusability | 68 | 17 |
| ICSP - International Software Process Workshop | 628 | 16 |
| QSIC - International Conference on Quality Software | 556 | 16 |
| PROFES - Product Focused Software Process Improvement | 399 | 16 |
| OOIS - Object Oriented Information Systems | 394 | 16 |
| EWSPT - European Workshop on Software Process Technology | 244 | 16 |
| REFSQ - Requirements Engineering: Foundation for Software Quality | 200 | 16 |
| SOCO - Software Composition | 114 | 16 |
| FATES/RV - International Workshop on Formal Approaches to Testing of Software | 74 | 16 |
| WOSS - Workshop on Self-Healing Systems | 49 | 16 |
| SERP - Software Engineering Research and Practice | 1041 | 15 |
| SEW - Annual Software Engineering Workshop | 279 | 15 |
| ICCBSS - International Conference on COTS-Based Software Systems | 195 | 15 |
| ECMDAFA - European Conference on Model Driven Architecture - Foundations and Applications | 155 | 15 |
| SELMAS - Software Engineering for Large-Scale Multi-Agent Systems | 99 | 15 |
| CD - IFIP/ACM Working Conference on Component Deployment | 86 | 15 |
| Software Product Family Engineering | 76 | 15 |
| AMAST - Algebraic Methodology and Software Technology | 50 | 15 |
| Automatic Verification Methods for Finite State Systems | 35 | 15 |
| COMPOS - Compositionality: The Significant Difference | 26 | 15 |
| ACS/IEEE International Conference on Computer Systems and Applications | 1232 | 14 |
| ATVA - Automated Technology for Verification and Analysis | 256 | 14 |
| DFG Projects | 182 | 14 |
| STEP - Software Technology and Engineering Practice | 180 | 14 |
| CTRS - Conditional Term Rewriting Systems | 126 | 14 |
| ISAS - International Service Availability Symposium | 105 | 14 |
| School on Formal Methods for the Design of Computer, Communication and Software Systems | 80 | 14 |
| GCSE - Generative and Component-Based Software Engineering | 55 | 14 |

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| ICFPC - Formalization of Programming Concepts | 49 | 14 |
| ICGSE - IEEE International Conference on Global Software Engineering | 242 | 13 |
| ISOTAS - International Symposium on Object Technologies for Advanced Software | 53 | 13 |
| IRI - Information Reuse and Integration | 973 | 12 |
| ICST - International Conference on Software Testing, Verification, and Validation | 604 | 12 |
| ISOLA - Leveraging Applications of Formal Methods | 313 | 12 |
| OSS - Open Source Software | 237 | 12 |
| FMICS - Formal Methods for Industrial Critical Systems | 119 | 12 |
| SEE - Software Engineering Environments | 105 | 12 |
| PDSE - International Symposium on Software Engineering for Parallel and Distributed Systems | 103 | 12 |
| VISSOFT - Visualizing Software for Understanding and Analysis | 89 | 12 |
| EWSA - European Workshop on Software Architecture | 65 | 12 |
| GTTSE - Generative and Transformational Techniques in Software Engineering | 40 | 12 |
| Ontologies in Agent Systems | 31 | 12 |
| SNPD - Software Engineering, Artificial Intelligence, Networking and Parallel/Distributed Computing | 1702 | 11 |
| SE - Software Engineering | 558 | 11 |
| ESEM - Empirical Software Engineering and Measurement | 470 | 11 |
| FDL - Forum on specification & Design Languages | 288 | 11 |
| Modellierung | 218 | 11 |
| IESA - Interoperability for Enterprise Software and Applications | 213 | 11 |
| JCKBSE - Joint Conference on Knowledge-Based Software Engineering | 160 | 11 |
| SAM - System Analysis and Modeling | 73 | 11 |
| Software Engineering and Middleware Engineering Distributed Objects | 67 | 11 |
| ETX - Eclipse Technology eXchange | 66 | 11 |
| Learning Software Organizations | 61 | 11 |
| AGILEDC - Agile Development Conference | 49 | 11 |
| WSE - Website Evolution | 47 | 11 |
| FMSP - Formal Methods in Software Practice | 33 | 11 |
| SAIG - Semantics, Applications, and Implementation of Program Generation | 29 | 11 |
| MDAFA - Model Driven Architecture Foundations and Applications | 29 | 11 |
| SEAA - Software Engineering and Advanced Applications | 364 | 10 |
| SCCC - International Conference of the Chilean Computer Science Society | 333 | 10 |
| IASTEDSEA - Software Engineering and Applications | 148 | 10 |
| EPEW - European Performance Engineering Workshop | 121 | 10 |
| TAICPART - Testing: Academic & Industrial Conference - Practice And Research Techniques | 109 | 10 |
| APAQS - Asia-Pacific Conference on Quality Software | 88 | 10 |
| QOSA - Quality of Software Architectures | 77 | 10 |
| SOQUA - Software Quality | 75 | 10 |
| TAP - Tests and Proofs | 60 | 10 |
| WIFT - Workshop on Industrial-Strength Formal Specification Techniques | 40 | 10 |
| CASSIS - Construction and Analysis of Safe, Secure, and Interoperable Smart Devices | 29 | 10 |

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| FCA - Formal Concept Analysis | 19 | 10 |
| ACISICIS - ACIS International Conference on Computer and Information Science | 966 | 9 |
| IASTEDSE - Software Engineering | 269 | 9 |
| JCIT - Jerusalem Conference on Information Technology | 219 | 9 |
| EUROSPI - European Conference on Software Process Improvement | 110 | 9 |
| HVC - Haifa Verification Conference | 109 | 9 |
| VSTTE - Verified Software: Theories, Tools, Experiments | 58 | 9 |
| Program Construction | 34 | 9 |
| Reflection and Software Engineering | 18 | 9 |
| Software Engineering Research and Applications | 444 | 8 |
| WER - Workshop em Engenharia de Requisitos | 250 | 8 |
| TASE - Theoretical Aspects of Software Engineering | 218 | 8 |
| SOCA - Service-Oriented Computing and Applications | 218 | 8 |
| ECSA - European Conference on Software Architecture | 188 | 8 |
| Formale Beschreibungstechniken | 116 | 8 |
| IWFM - Irish Workshop in Formal Methods | 69 | 8 |
| FSEN - Fundamentals of Software Engineering | 64 | 8 |
| ICMT - International Conference on Model Transformation | 56 | 8 |
| ACL2 - International Workshop on the ACL2 Theorem Prover and Its Applications | 54 | 8 |
| KORSO | 42 | 8 |
| ESPRIT ARES Workshops | 34 | 8 |
| IW-SAPF - International Workshop on Software Architectures for Product Families | 28 | 8 |
| UNI/IIST - Anniversary Colloquium of UNU/IIST | 27 | 8 |
| SDE - Software Development Environments | 25 | 8 |
| SEM - Software Engineering and Middleware | 23 | 8 |
| Semantics of Concurrent Computation | 19 | 8 |
| Temporal Logic in Specification | 16 | 8 |
| SCESM - Scenarios and state machines: models, algorithms, and tools | 16 | 8 |
| Object Modeling with the OCL | 13 | 8 |
| CSSE - International Conference on Computer Science and Software Engineering | 1593 | 7 |
| ICSOFTE - International Conference on Software and Data Technologies | 723 | 7 |
| ICETET - International Conference on Emerging Trends in Engineering & Technology | 713 | 7 |
| CAINE - Computer Applications in Industry and Engineering | 602 | 7 |
| ICSEA - International Conference on Software Engineering Advances | 481 | 7 |
| SWSTE - IEEE International Conference on Software - Science, Technology and Engineering | 79 | 7 |
| International Computing Symposium | 71 | 7 |
| BDIM - International Workshop on Business-Driven IT Management | 48 | 7 |
| European Conference on Software Quality | 45 | 7 |
| Radical Innovations of Software and Systems Engineering in the Future | 26 | 7 |
| RODIN - RODIN Project | 25 | 7 |
| A-MOST - Advances in Model-Based Software Testing | 14 | 7 |
| NEMS - Nano/Micro Engineered and Molecular Systems | 1944 | 6 |

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| DEPCOS - International Conference on Dependability of Computer Systems | 196 | 6 |
| Fault-Tolerant Computing Systems / Fehlertolerierende Rechensysteme | 192 | 6 |
| IASSE - International Conference on Intelligent and Adaptive Systems and Software Engineering | 166 | 6 |
| LMO - Langages et Modèles à Objets | 137 | 6 |
| IWSM - International Workshop on Software Measurement | 99 | 6 |
| C3S2E - Canadian Conference on Computer Science & Software Engineering | 87 | 6 |
| RISE - Rapid Integration of Software Engineering Techniques | 46 | 6 |
| SEAFOOD - Software Engineering Approaches for Offshore and Outsourced Development | 45 | 6 |
| Global Constraint Optimization and Constraint Satisfaction | 32 | 6 |
| SPLST - Symposium on Programming Languages and Software Tools | 25 | 6 |
| Performance Engineering | 24 | 6 |
| ROOM - Rigorous Object-Oriented Methods | 20 | 6 |
| Component-Based Software Quality | 18 | 6 |
| ESERNET - Experimental Software Engineering Network | 16 | 6 |
| Algebraic and Coalgebraic Methods in the Mathematics of Program Construction | 9 | 6 |
| PAP - International Conference and Exhibition on Practical Applications of Prolog | 8 | 6 |
| SESPSDE - Software Engineering Symposium on Practical Software Development Environments | 8 | 6 |
| Verification and Validation of Enterprise Information Systems | 136 | 5 |
| FIFF Jahrestagung | 127 | 5 |
| IFIP TC2 Publications | 60 | 5 |
| BCS-FACS Publications | 44 | 5 |
| GSEM - Grid Services Engineering and Management | 43 | 5 |
| VaMoS - Variability Modelling of Software-Intensive Systems | 35 | 5 |
| Semantics of Specification Languages | 19 | 5 |
| Larch - International Workshop on Larch | 17 | 5 |
| RTSE - Requirements Targeting Software and Systems Engineering | 15 | 5 |
| Formal Methods and Testing | 12 | 5 |
| Fachtagung Prozessrechner | 304 | 4 |
| SEDE - Software Engineering and Data Engineering | 271 | 4 |
| ITEE - Information Technologies in Environmental Engineering | 163 | 4 |
| Conference Internationale Associant Chercheurs Vietnamiens et Francophones en Informatique | 82 | 4 |
| Software Quality and Productivity | 61 | 4 |
| ISEC - India Software Engineering Conference | 46 | 4 |
| PROSPECTRA | 41 | 4 |
| TEX for Scientific Documentation | 38 | 4 |
| ISIM - International Conference on Information System Implementation and Modeling | 35 | 4 |
| TFM - Teaching Formal Methods | 31 | 4 |
| IPSEN | 29 | 4 |
| RIMS Symposia on Software Science and Engineering | 29 | 4 |
| The Analysis of Concurrent Systems | 27 | 4 |
| ISCNZ - Information Systems Conference of New Zealand | 25 | 4 |
| Portability of Numerical Software | 24 | 4 |
| ASWSD - Automotive Software Workshop | 23 | 4 |

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| WWV - Automated Specification and Verification of Web Sites | 23 | 4 |
| Problems and Methodologies in Mathematical Software Production | 22 | 4 |
| COODBSE - Colloquium on Object Orientation in Databases and Software Engineering | 19 | 4 |
| VISSAS - Verification of Infinite-State Systems with Applications to Security | 17 | 4 |
| WOODPECKER - Workshop on Open Distribute Processing: Enterprise, Computation, Knowledge, Engineering and Realisation | 10 | 4 |
| FMSB - Formal Methods in Systems Biology | 9 | 4 |
| WACC - Work Activities Coordination and Collaboration | 8 | 4 |
| Umwelt - Informatik für den Umweltschutz | 278 | 3 |
| JIISIC - Ibero-American Symposium on Software Engineering and Knowledge Engineering | 187 | 3 |
| SoMeT - Software Methodologies, Tools and Techniques | 130 | 3 |
| EUNIS - European University Information Systems | 82 | 3 |
| ISESS - International Symposium on Environmental Software Systems | 35 | 3 |
| ACIT - Automation, Control, and Information Technology | 29 | 3 |
| iStar - International i* Workshop | 21 | 3 |
| PSSE - Pernambuco Summer School on Software Engineering | 18 | 3 |
| Personal Computing | 15 | 3 |
| ICEISSAM - Software Audit and Metrics | 12 | 3 |
| CIP-Project | 11 | 3 |
| COEA - Component-Oriented Enterprise Applications | 10 | 3 |
| WISER - Workshop on Interdisciplinary Software Engineering Research | 6 | 3 |
| Publications of the German Chapter of the ACM | 141 | 2 |
| EBUSINESS - E-Business | 141 | 2 |
| SEUH - Software Engineering im Unterricht der Hochschulen | 119 | 2 |
| SETP - Software Engineering Theory and Practice | 64 | 2 |
| International Working Conference on Model Realism | 54 | 2 |
| CAL - Conférence francophone sur les Architectures Logicielles | 44 | 2 |
| HINC - History of Nordic Computing | 41 | 2 |
| Managing Information Technology's Organisational Impact | 21 | 2 |
| Software-Entwicklung | 21 | 2 |
| Software Management | 20 | 2 |
| The IOTA Programming System | 18 | 2 |
| Objective Software Quality | 18 | 2 |
| German-Argentinian Workshop on Information Technology | 13 | 2 |
| MASSA - Multiagent Systems and Software Architecture | 10 | 2 |
| CIbSE - Conferencia Iberoamericana de Software Engineering | 73 | 1 |
| WIMAW - Management der Anwendungsentwicklung und -wartung | 68 | 1 |
| GMMEMV - Elektromagnetische Verträglichkeit in der KFZ-Technik | 47 | 1 |
| Frauenarbeit und Informatik | 36 | 1 |
| UH - Unternehmen Hochschule | 26 | 1 |
| Software-Architektur | 13 | 1 |

| Conference | Publication count | MS/AS rating |
|--|----------------------|-----------------|
| ADIS - Apoyo a la Decisión en Ingeniería del Software / Decision Support in Software Engineering | 12 | 1 |
| DDOPS - Development and Deployment of Product Software | 6 | 1 |
| IR Workshop | 1 | 1 |
| SETA - Symposium on Environments and Tools for Ada | 1 | 1 |
| SCSS - International Conference on Complex, Intelligent and Software Intensive Systems | 2 | 1 |
| Testen, Analysieren und Verifizieren von Software | 17 | 0 |
| Portable Software | 12 | 0 |
| ENASE - International Conference on Evaluation of Novel Approaches to Software Engineering | 2 | 0 |
| ACM SIGSOFT FSE - ACM SIGSOFT International Symposium on the Foundations of Software Engineering | 1 | 0 |

Table 39: **SJR**: SCImago Journal Rank ([99]; subset of 184 journals for subject area “Computer Science”, subject category “Software”, 2012)

| Journal |
|---|
| Foundations and Trends in Machine Learning |
| Proceedings of the Annual ACM Symposium on Theory of Computing |
| ACM Transactions on Database Systems |
| Briefings in Bioinformatics |
| Proceedings of the ACM SIGACT-SIGMOD-SIGART Symposium on Principles of Database Systems |
| IEEE Transactions on Software Engineering |
| Theory and Practice of Logic Programming |
| Mathematical Programming |
| Proceedings of the IEEE International Conference on Computer Vision |
| Proceedings of the Annual ACM-SIAM Symposium on Discrete Algorithms |
| Empirical Software Engineering |
| ACM Transactions on Software Engineering and Methodology |
| ACM Transactions on Programming Languages and Systems |
| Journal of Statistical Software |
| Journal of Mathematical Imaging and Vision |
| Journal of Functional Programming |
| ACM Transactions on Graphics |
| Communications of the ACM |
| Proceedings - International Conference on Data Engineering |
| IEEE Transactions on Multimedia |
| Random Structures and Algorithms |
| Transactions on Data Privacy |
| IEEE Transactions on Computational Intelligence and AI in Games |
| IEEE Software |
| Artificial Intelligence and Law |
| IEEE/ACM International Conference on Computer-Aided Design, Digest of Technical Papers |
| IEEE Micro |
| SIGMOD Record |
| Software and Systems Modeling |
| ACM Transactions on Mathematical Software |
| Software Testing Verification and Reliability |
| IEEE Internet Computing |
| ACM Transactions on Autonomous and Adaptive Systems |
| Journal of Scientific Computing |
| Algorithmica |

Journal

Journal of Computer Security
IEEE Transactions on Reliability
Conference Record of the Annual ACM Symposium on Principles of
Programming Languages
Journal of Systems and Software
Journal of Software Maintenance and Evolution
Science of Computer Programming
IEEE Transactions on Visualization and Computer Graphics
Automated Software Engineering
International Journal of Web and Grid Services
Discrete Optimization
Journal of Visual Communication and Image Representation
Journal of Logic and Algebraic Programming
Proceedings - International Conference on Software Engineering
IEEE Transactions on Autonomous Mental Development
Formal Aspects of Computing
International Journal of Innovative Computing, Information and Control
Computer Graphics Forum
Journal of Artificial Intelligence
CMES - Computer Modeling in Engineering and Sciences
Computer Standards and Interfaces
Computer Supported Cooperative Work
Proceedings of the IEEE Computer Society Conference on Computer Vision and
Pattern Recognition
IEEE Transactions on Affective Computing
Computer Journal
Optimization Methods and Software
ACM Transactions on Design Automation of Electronic Systems
ACM SIGPLAN Notices
Natural Language Engineering
Advances in Engineering Software
Transactions on Embedded Computing Systems
Performance Evaluation
Concurrency Computation Practice and Experience
Journal of Web Engineering
Proceedings - Graphics Interface
Journal of Simulation
International Journal for Numerical Methods in Biomedical Engineering
Journal of Ambient Intelligence and Smart Environments
Transactions on Architecture and Code Optimization
Proceedings of the Annual Symposium on Computational Geometry
Service Oriented Computing and Applications
Computer Aided Geometric Design
Software Quality Journal
Zidonghua Xuebao/Acta Automatica Sinica
BIT Numerical Mathematics
Multimedia Tools and Applications
Computer Methods and Programs in Biomedicine
IEEE Multimedia
Software - Practice and Experience
Fundamenta Informaticae
Computer Languages, Systems and Structures
Journal of Computer Science
ACM Transactions on Modeling and Computer Simulation
Entertainment Computing
International Journal of Data Warehousing and Mining
Computers and Graphics
IET Software
Information Management and Computer Security
Presence: Teleoperators and Virtual Environments

Journal

Jisuanji Xuebao/Chinese Journal of Computers
Innovations in Systems and Software Engineering
Journal of Computer Science and Technology
Proceedings of the National Conference on Artificial Intelligence
Ruan Jian Xue Bao/Journal of Software
IEEE Computer Graphics and Applications
ACM Journal on Emerging Technologies in Computing Systems
Visual Computer
Simulation
Proceedings - Symposium on Computer Arithmetic
IET Image Processing
IET Computers and Digital Techniques
International Journal of Agent-Oriented Software Engineering
International Journal of Ad Hoc and Ubiquitous Computing
IET Information Security
Microprocessors and Microsystems
Proceedings - IEEE International Conference on Robotics and Automation
International Journal of Web Based Communities
Neural Network World
Computer Animation and Virtual Worlds
Journal of Object Technology
International Journal of Digital Content Technology and its Applications
Journal of Research and Practice in Information Technology
International Journal of Electronic Government Research
Jisuanji Yanjiu yu Fazhan/Computer Research and Development
IEEE International Conference on Fuzzy Systems
ZWF Zeitschrift fuer Wirtschaftlichen Fabrikbetrieb
Informatica
Xitong Fangzhen Xuebao/Acta Simulata Systematica Sinica
International Journal of Digital Earth
IET Computer Vision
Journal of Software
International Journal of Software Engineering and Knowledge Engineering
IEICE Transactions on Communications
Peer-to-Peer Networking and Applications
International Journal of Computational Science and Engineering
IEICE Transactions on Information and Systems
Jisuanji Fuzhu Sheji Yu Tuxingxue Xuebao/Journal of Computer-Aided Design
and Computer Graphics
International Journal of Modelling and Simulation
International Journal of Communication Networks and Information Security
Computers in Cardiology
Pollack Periodica
Journal of Decision Systems
Webology
Proceedings of the International Workshop on Rapid System Prototyping
International Geoscience and Remote Sensing Symposium (IGARSS)
International Journal of Computer Games Technology
International Journal of Digital Crime and Forensics
Proceedings of the International Joint Conference on Neural Networks
International Journal of Network Management
International Journal of Embedded Systems
Programming and Computer Software
International Journal of Computers for Mathematical Learning
Design Automation for Embedded Systems
Journal of Communications Software and Systems
Journal of WSCG
International Journal of Ambient Computing and Intelligence
International Journal of Information and Computer Security
Journal of Physical Agents

Journal

Proceedings of the IEEE International Conference on Industrial Technology
International Journal of Automation and Control
Proceedings of the IEEE Symposium on Computer-Based Medical Systems
International Journal of Cognitive Informatics and Natural Intelligence
Computer Software
WSEAS Transactions on Signal Processing
Informatologia
Synthesis Lectures on Network Simulation
Information Security Journal
International Journal of Mobile Network Design and Innovation
Cognitive Technologies
Understanding Complex Systems
Reliable Computing
Cutter IT Journal
International Journal of Open Source Software and Processes
Journal of Digital Forensic Practice
Shu Ju Cai Ji Yu Chu Li/Journal of Data Acquisition and Processing
IEEE International Professional Communication Conference
Computer Assisted Mechanics and Engineering Sciences
ABB Review
IEEE Conference Record of Annual Pulp and Paper Industry Technical
Conference
Synthesis Lectures on Mobile and Pervasive Computing
Modelling, Measurement and Control C
International Journal of High Performance Computing and Networking
Systems Science
Modelling, Measurement and Control B
Advances in Modeling and Analysis C
Ada User Journal
HP Laboratories Technical Report
International Journal of Simulation: Systems, Science and Technology
International Journal of Imaging and Robotics
