

Neutrosophic Sets and Systems

Volume 38

Article 24

11-30-2020

Blockchain Risk Evaluation on Enterprise Systems using an Intelligent MCDM based model

Ahmed Abdel-Monem

Amal Abdel Gawad

Heba Rashad

Follow this and additional works at: https://digitalrepository.unm.edu/nss_journal

Recommended Citation

Abdel-Monem, Ahmed; Amal Abdel Gawad; and Heba Rashad. "Blockchain Risk Evaluation on Enterprise Systems using an Intelligent MCDM based model." *Neutrosophic Sets and Systems* 38, 1 (2020). https://digitalrepository.unm.edu/nss_journal/vol38/iss1/24

This Article is brought to you for free and open access by UNM Digital Repository. It has been accepted for inclusion in *Neutrosophic Sets and Systems* by an authorized editor of UNM Digital Repository. For more information, please contact amywinter@unm.edu, lsloane@salud.unm.edu, sarahrk@unm.edu.



Blockchain Risk Evaluation on Enterprise Systems using an Intelligent MCDM based model

Ahmed Abdel-Monem¹, Amal Abdel Gawad², and Heba Rashad³

¹Faculty of Computers and Informatics, Zagazig University, Egypt; ahmed.abdelmon3m15@gmail.com

²Faculty of Computers and Informatics, Zagazig University, Egypt; amgawad2001@yahoo.com

³Faculty of Computers and Informatics, Zagazig University, Egypt; heba_mrmr_0@yahoo.com

* Corresponding author: Ahmed Abdel-Monem (ahmed.abdelmon3m15@gmail.com)

Abstract: Blockchain technology (BT) has become popular in the firms in the present time, however, implementation of BT includes several risk factors from various points of view. Some of these risks can be serious for the processes of firms. These risks should be cautiously recognized and analyzed to reduce the negative impacts of them. Assessment of the risks can be recognized as a multi-criteria decision making (MCDM) problem. In this work, the risks that will occur when implementing BT are assessed by using MCDM methodology built on Single Valued Neutrosophic Sets (SVNSs), Analytic Hierarchy Process (AHP), and Decision Making and Trial Evaluation Laboratory (DEMATEL) methods. The main and sub-criteria risks are collected via a company in the smart village in Egypt and from previous research, hence, the hierarchical form of the problem is built. AHP is used to show the importance of risk factors and the relationships between risk factors obtained by using the DEMATEL method. The main goal of this study is to aid the firms mainly and the firm in Egypt especially to determine which risks are more serious and to which of them causing effect and are being affected. In this study 8 main criterion and 28 sub-criteria, risks are used. As result, the security risk is important in the main risks but energy costs and data leaks are important in sub risks.

Keywords: Blockchain technology (BT), Risks, SVNSs, AHP, DEMATEL

1. Introduction

Firms, industries, and businesses have a critical choice and decision in implementing new technology. The processes of the organization are affected by modern technology. For this reason, the implementation of new technology should be considered seriously. These days, technology can be found anywhere, 67% of adults use the internet based on a survey from 40 states. smartphones have also become common [1]. Technology has been profiled in several parts from the manufacture to service segment. It grows the well-being and life standard of people [2]. Technology choice depends on the competitiveness

and effectiveness of organizations [3]. Applying BT in firms has become more popular in the present time because of its importance. The transactions can be done by using a decentralized mechanism because BT is a distributed database. In BT, some blocks are related to each other and they cover many transactions. The transaction should be confirmed in terms of validness before adding to the system as a new block [4]. The chain of transactions can be represented as the blockchain. In Bitcoin, these transactions are public [5]. BT guarantees the transactions more secure for industries, businesses, organizations, and governments, hence the common use of BT will have a big influence on the firms in the future. The transaction data is reserved in various nodes in blockchain and it is known as a dispersed ledger. In the dispersed ledger, every user can enter the public ledger system. This can generate a stable environment and doesn't depend on third parties. The technology reduces system failure and other connected risks in the chain. BT can be a great area for keeping significant information. BT allows users to monitor prior transactions [6]. Implementing a new BT includes various risk factors from various parts. To apply BT at the maximum level, these risks should be assessed cautiously. In this research, these risks have been assessed in multi-criteria decision making (MCDM) and these are ranked by using Single Valued Neutrosophic Sets (SVNSs), Analytic Hierarchy Process (AHP), and Decision Making and Trial Evaluation Laboratory (DEMATEL). SVNSs are used to deal with uncertainties [7] and likely risk factors are hierarchical based on their importance by AHP [8] and the relationship between them with DEMATEL [9]. To get the best of information, ranking BT risks by using the MCDM technique has not been studied yet. This work will provide a decision to the firms to decide which of these risks are more serious and which of them should be reduced primarily. The remainder of the paper follows as section 2 provides a brief description of blockchain technologies. SVNSs are summarized in section 3. The proposed MCDM methodology based on SVNSs is presented in section 4. Section 5 shows the application for risk assessments of BT by using AHP and DEMATEL. The attained outcomes and future research directions have been discussed in section 6.

2. Blockchain Technologies

BT is considered as one of the most significant creations after the Internet [10]. BT and Internet technology are different in some significant parts. On the Internet, only the information and the copies of things are moved but the original information cannot. In BT, the value of the things is reserved in a time-stamped transaction in a common ledger in a safe way [11]. BT is an information technology [11] and is based on a dispersed ledger technology [6]. With this technology, there is no need to depend on a third party. In BT, when a transaction is done, it should be confirmed. The transaction is only accepted when the agreement is ensured. Then, the information about the transaction is kept on a new block and the new block is added after the other blocks on the chain [6]. Once the information is confirmed and added to the chain, it cannot be removed anymore [6, 10]. BT has become common with Bitcoin implementation [11, 12] and is used in various parts like the Internet of things, economics, and medicine, etc. [13]. Though BT suggests various chances for firms, it can only add value to the products if the processes are appropriate for BT implementation. For example, if there is a need for data transparency or immutability, BT will be beneficial, but if the transaction speed is important, BT will not be suitable [14].

3. The Proposed Model for Risk Evaluation of Blockchain Technologies

In this research, MCDM methodology based on SVNSs, AHP, and DEMATEL methods are suggested for risk assessment of BTs. Three key steps in methodology. The first step, factors of risk is recognized by conducting a literature review and specialist reviews. Then BT risk factors are determined and the

hierarchical structure of the problem is built. In the second step, the risk factors are assessed. For the second step to be achieved AHP method is used to attain main and sub-criteria weights and the DEMATEL method is used to show the importance of main and sub-criteria and the relationship between them. Finally, the risks are ranked according to the weights of the AHP method and showing the impact of the relationship between main and sub-criteria. The detailed framework of the proposed methodology is shown in figure 1.

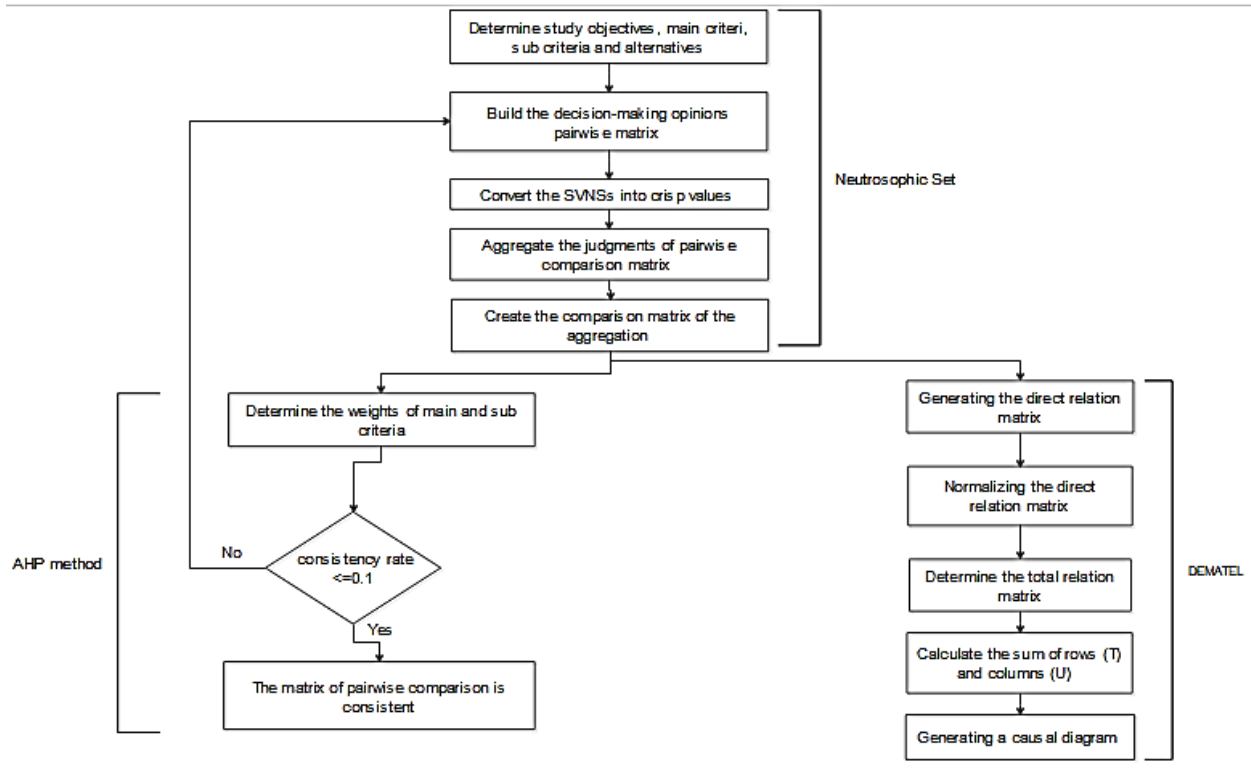


Fig 1. Steps of SVN's, AHP, and DEMATEL methodology

3.1. Neutrosophic theory

The neutrosophic set can model the decision maker’s perspectives in the neutrosophic single value scale [15] and apply aggregation to produce the final vision. Neutrosophic set multiplications and calculations are illustrated in [16]. The steps of the neutrosophic theory are illustrated in [17]:

Step 1. Build the decision-making opinions pairwise matrix according to SVN's scale in table 1 using the mentioned form:

$$L^E = \begin{bmatrix} l_{11}^E & \dots & l_{1y}^E \\ \vdots & \ddots & \vdots \\ l_{x1}^E & \dots & l_{xy}^E \end{bmatrix} \tag{1}$$

Where E pointed to the number of decision-makers.

Table1. Single valued Neutrosophic scale

Linguistic term	SVNSs
Extremely evil	(0.00,1.00,1.00)
Very Highly evil	(0.10,0.90,0.90)
Very evil	(0.20,0.85,0.80)
Evil	(0.30,0.75,0.70)
Medium evil	(0.40,0.65,0.60)
Medium	(0.50,0.50,0.50)
Medium better	(0.60,0.35,0.40)
Better	(0.70,0.25,0.30)
Very better	(0.80,0.15,0.20)
Very Highly better	(0.90,0.10,0.10)
Extremely better	(1.00,0.00,0.00)

Step 2. Convert the SVNSs into crisp values by the use of the score function [18]:

$$V(I_{mn}^E) = \frac{2+T_{mn}^E - I_{mn}^E - F_{mn}^E}{3} \tag{2}$$

$T_{mn}^E, I_{mn}^E, F_{mn}^E$ presents truth, indeterminacy, and falsity of the SVNSs.

Step 3. Aggregate the judgments of the pairwise comparison matrix as

$$l_{mn} = \frac{\sum_{E=1}^E l_{mn}^E}{E} \tag{3}$$

Step 4. Create the comparison matrix of the aggregation as following:

$$L = \begin{bmatrix} l_{11} & \dots & l_{1n} \\ \vdots & \ddots & \vdots \\ l_{m1} & \dots & l_{mn} \end{bmatrix} \tag{4}$$

3.2. The AHP method

The steps of the AHP method are shown in [17] as :

Step 1: Calculate the weights of the main criteria and sub-criteria.

Step 1.1: Calculate the normalization using the following equation.

$$w_m^x = \frac{w_m}{\sum_{m=1}^x w_m}; m = 1,2,3, \dots \dots x \tag{5}$$

Step 1.2: Calculate the row average.

$$w_m = \frac{\sum_{n=1}^y (l_{mn})}{y}; m = 1,2,3, \dots \dots x; n = 1,2,3, \dots \dots y; \tag{6}$$

Step 2: Check the consistency of matrix to ensure the consistency the pair-wise comparison matrix [17].

3.3. The DEMATEL method

The steps of the DEMATEL method are illustrated in [19].

Step 1: Generating the direct relation matrix

The matrix of direct relation $s \times s$ is obtained through step 4 in neutrosophic theory.

Step 2: Normalizing the direct relation matrix.

The normalized direct relation matrix uses the following equation:

$$B = \frac{1}{\max_{1 \leq x \leq s} \sum_{y=1}^s l_{mn}} \quad (7)$$

$$V = B \times L \quad (8)$$

Step 3: Determine the total relation matrix.

This step uses the Matlab software to obtain an identity matrix using the following equation:

$$O = V(I - V)^{-1} \quad (9)$$

Step 4: Calculate the sum of rows (T) and columns (U)**Step 5:** Generating a causal diagram

The causal diagram is attained by $(T + U)$ and $(T - U)$ is the outcome of the DEMATEL method.

4. Application

The case study for assessing risk factors of BT, in this section. A company in the smart village in Egypt needs to implement BT for its operations. But the managers recognize that some risks can happen during the implementation of operations, so they decided to assess these risks and calculate which of them have more important before the implementation. In the beginning, the factors of risks are collected by using previous work [10, 11, 13, 20-25] and decision-makers. As a consequence of this, 8 main criteria and 28 sub-criteria are calculated for risk assessment of BT as shown in Figure 2. Then three specialists assessed these main and sub-criteria by using AHP and DEMATEL method.

Evaluating Blockchain Technology Risks

Evaluating Blockchain Technology Risks	C1-Environmental/Cultural	S1: Negative image of BT
		S2: Uncertainty of customers
	C 2- legal and regulatory challenges	S3: Unclear Legal Jurisdictions
		S4: Regulatory barriers
		S5: Antitrust
	C3- Energy	S6: High consumption
		S7: Importing energy efficiency
		S8: Energy intensive cryptocurrency validation process
C4- Adoption challenges	S9: System speed	
	S10: User experience	
	S11: Lack of knowledge	
	S12: Technology usability	
C5- Organizational and strategic	S13: Need of skilled worker	
	S14: Resistance to changing technology	
	S15: Lack of equipment and tool	
	S16: Lack of management support	
C6- Technical	S17: Lack of customer awareness	
	S18: Access to technology	
	S19: Limited transaction capacity	
	S20: Scaling due to processing requirements	
	S21: Untasted code	
C7- Financial	S22: Usage cost	
	S23: Training cost	
	S24: Energy cost	
C8- Security	S25: Cyberattacks	
	S26: Privacy	
	S27: Shared data among multiple peer	
	S28: Data leaks	

Fig 2. Evaluation risk factors (Criteria and sub-criteria)

4.1. Neutrosophic theory results

The neutrosophic set can model the decision maker’s perspectives in neutrosophic single value scale as shown in table 1 and apply aggregation to produce the final vision. The steps of the neutrosophic theory are showed as follows:

Step 1: Build the decision-making opinions pairwise matrix according to SVNss scale using Eqs. (1).

Step 2: Convert the SVNss into crisp values by the use of the score function using Eqs. (2).

Step 3: Aggregate the judgments of the pairwise comparison matrix using Eqs. (3.)

Step 4: Create the comparison matrix of the aggregation as shown in table 2 using Eqs. (4).

4.2. The AHP results

Step 1: Compute the normalization matrix using Eq. (5) As shown in table 3.

Table 2. Crisp value of aggregated pairwise comparison matrix of criteria.

C _x	C ₁	C ₂	C ₃	C ₄	C ₅	C ₆	C ₇	C ₈
C ₁	1	0.577333	0.494	0.577333	0.388667	0.316333	0.649333	0.605333
C ₂	1.748918	1	0.716	0.394	0.538333	0.538667	0.538667	0.427333
C ₃	2.206193	1.415172	1	0.538667	0.460667	0.499667	0.460667	0.394
C ₄	1.748918	3.232941	1.874459	1	0.461	0.505	0.394	0.610667
C ₅	2.714845	1.952573	2.513728	2.203655	1	0.605	0.649333	0.538333
C ₆	3.562138	1.874459	2.078114	2.260107	1.819944	1	0.538667	0.460667
C ₇	1.5478	2.751943	2.28177	3.464899	1.5478	1.874459	1	0.499667
C ₈	1.74183	3.157365	3.464899	1.673342	1.952573	2.28177	2.078114	1

Step 1.2: Determine the weights of criteria, local and global sub-criteria using Eq. (6) as shown in table 4. Figure 3 shows the weights of the main criteria.

Table 3. Normalization values of main criteria.

C _{yz}	C ₁	C ₂	C ₃	C ₄	C ₅	C ₆	C ₇	C ₈
C ₁	0.06146	0.03617	0.034251	0.047666	0.047578	0.041509	0.102925	0.133451
C ₂	0.107489	0.06265	0.049643	0.03253	0.0659	0.070683	0.085384	0.094209
C ₃	0.135594	0.08866	0.069334	0.044474	0.056392	0.065565	0.07302	0.086861
C ₄	0.107489	0.202543	0.129963	0.082563	0.056433	0.066265	0.062453	0.134627
C ₅	0.166855	0.122328	0.174286	0.18194	0.122414	0.079387	0.102925	0.11868
C ₆	0.21893	0.117434	0.144084	0.186601	0.222787	0.131218	0.085384	0.101558
C ₇	0.095128	0.172408	0.158204	0.286072	0.189473	0.245963	0.158509	0.110156
C ₈	0.107054	0.197808	0.240235	0.138156	0.239023	0.29941	0.3294	0.220459

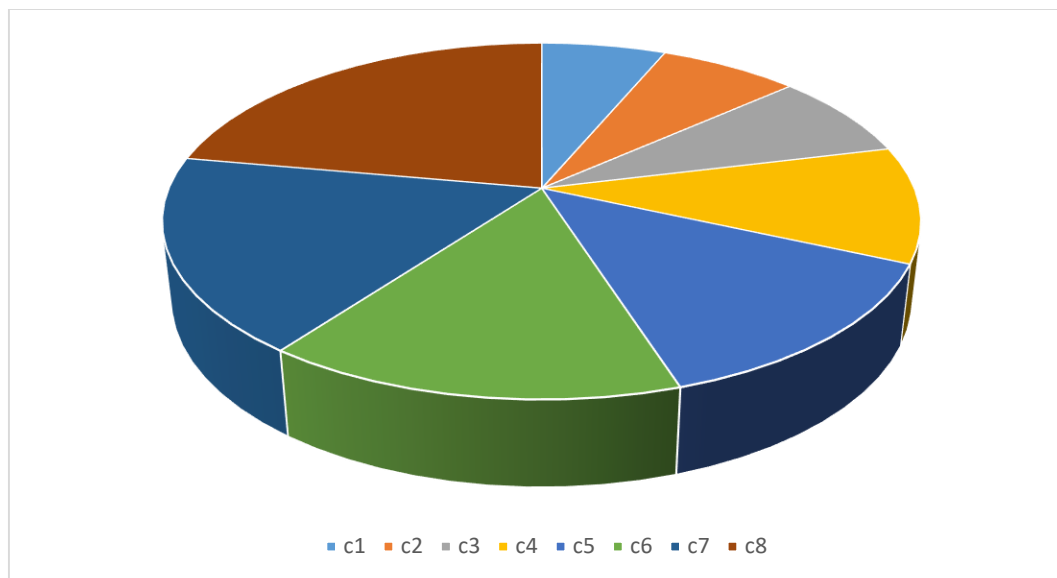


Fig 3. Weights of main criteria.

Step 2: The Consistency Ratio (CR) = 0.10. according to [17] such that $CR \leq 0.1$, therefore, the matrix of pairwise comparison is consistent. Table 5 displays the importance of local and global weights of main and sub-criteria based on AHP calculations. Hence C_8 (security) is the most important in the main criteria and C_1 (Environmental/Cultural) is the least important in the main criteria. For sub-criteria S_{24} (Energy cost) is the most important in sub-criteria and S_9 (System speed) is the least important in sub-criteria.

Table 4. Weights of main criteria, local and global sub-criteria.

Main Criteria	Sub criteria	Weights	Local weights	Global
C ₁		0.063126		
	S ₁		0.32903	0.02077
	S ₂		0.67097	0.042356
C ₂		0.071061		
	S ₃		0.283611	0.020154
	S ₄		0.315125	0.022393
	S ₅		0.401263	0.028514
C ₃		0.077487		
	S ₆		0.236806	0.018349
	S ₇		0.305799	0.023695
	S ₈		0.457395	0.035442
C ₄		0.105292		
	S ₉		0.137244	0.014451
	S ₁₀		0.204308	0.021512
	S ₁₁		0.349301	0.036779
	S ₁₂		0.309147	0.032551
C ₅		0.133602		

	S13	0.159466	0.021305
	S14	0.292025	0.039015
	S15	0.247912	0.033122
	S16	0.300597	0.04016
C₆		0.150999	
	S17	0.122023	0.018425
	S18	0.200505	0.030276
	S19	0.198784	0.030016
	S20	0.226835	0.034252
	S21	0.251853	0.03803
C₇		0.176989	
	S22	0.211513	0.037435
	S23	0.286858	0.050771
	S24	0.501629	0.088783
C₈		0.221443	
	S25	0.14637	0.032413
	S26	0.25559	0.056599
	S27	0.238016	0.052707
	S28	0.360024	0.079725

4.3. The DEMATEL results

Step 1: Generating the direct relation matrix in table 5 of the main criteria and direct relation matrix for the sub-criteria of security criteria in table 5.

Step 2: Normalizing the direct relation matrix for the main criteria in table 6 using Eqs. (7, 8).

Step 3: Determine the total relation matrix using Eq. (9) In table 7.

Step 4: Calculate the sum of rows (T) and columns (U) in table 8 and rank according to the importance of the main criteria in table 8.

Step 5: Generating a causal diagram as shown in figure 4. It shows the security, financial, technical, and organizational is the most important main criteria. C₅ (Organizational), C₆ (Technical), C₇ (Financial), C₈ (Security) are causing effect while others are being affected

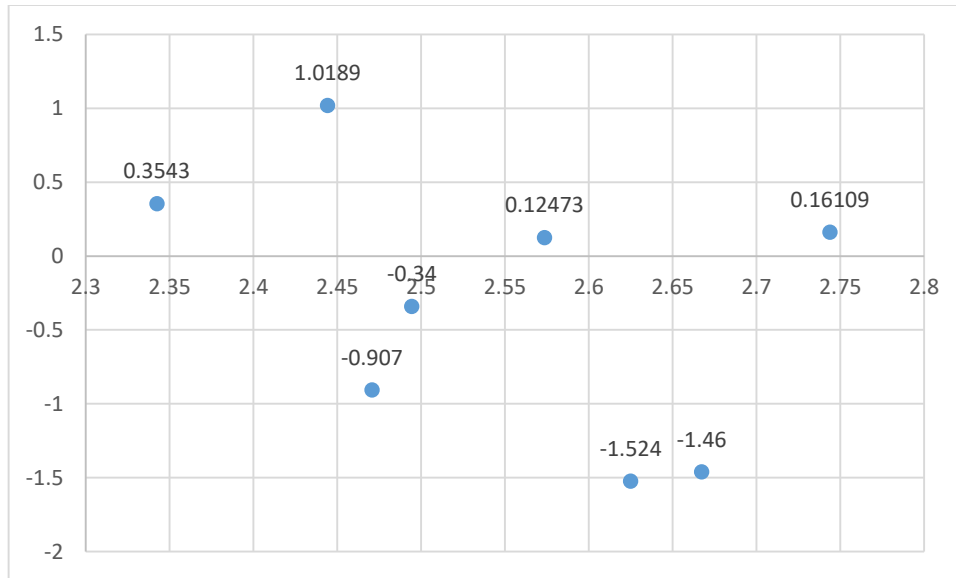


Fig 4. The causal diagram for the main criteria.

Table 5. The direct relation matrix for sub-criteria of security.

S_{yz}	S_{25}	S_{26}	S_{27}	S_{28}
S_{25}	1	0.394	0.671667	0.671667
S_{26}	4.051484	1	0.677333	0.571667
S_{27}	1.687315	1.540713	1	0.671667
S_{28}	1.687315	2.69554	1.687315	1

Table 6. Normalization of direct relation matrix of main criteria.

C_{yz}	C_1	C_2	C_3	C_4	C_5	C_6	C_7	C_8
C_1	0.0578	0.03337	0.028553	0.03337	0.022465	0.018284	0.037531	0.034988
C_2	0.101087	0.0578	0.041385	0.022773	0.031116	0.031135	0.031135	0.0247
C_3	0.127518	0.081797	0.0578	0.031135	0.026627	0.028881	0.026627	0.022773
C_4	0.101087	0.186864	0.108344	0.0578	0.026646	0.029189	0.022773	0.035297
C_5	0.156918	0.112859	0.145293	0.127371	0.0578	0.034969	0.037531	0.031116
C_6	0.205892	0.108344	0.120115	0.130634	0.105193	0.0578	0.031135	0.026627
C_7	0.089463	0.159062	0.131886	0.200271	0.089463	0.108344	0.0578	0.028881
C_8	0.100678	0.182496	0.200271	0.096719	0.112859	0.131886	0.120115	0.0578

Table 7. Total relation matrix of main criteria.

C_{yz}	C_1	C_2	C_3	C_4	C_5	C_6	C_7	C_8
C_1	0.121175	0.094524	0.081078	0.076915	0.05188	0.046394	0.062404	0.053891
C_2	0.176417	0.124154	0.098908	0.0713	0.064241	0.061554	0.059248	0.04676
C_3	0.211359	0.154533	0.119665	0.082342	0.062187	0.061692	0.057744	0.047614
C_4	0.220165	0.289444	0.193498	0.123948	0.074857	0.074542	0.065226	0.069124
C_5	0.307497	0.250131	0.257612	0.216011	0.11798	0.091106	0.090063	0.074551
C_6	0.376721	0.260514	0.247866	0.233394	0.173768	0.119465	0.089823	0.075681
C_7	0.295829	0.347913	0.287103	0.32493	0.173242	0.183664	0.124348	0.084594

C ₈	0.348777	0.401178	0.387831	0.254874	0.219212	0.228671	0.20381	0.123685
----------------	----------	----------	----------	----------	----------	----------	---------	----------

Table 7. The sum rows and columns of the main criteria.

C _{yz}	T	U	T+U	T - U	Ranking
C ₁	0.588261	2.079	2.6673	-1.46	5
C ₂	0.702581	1.9224	2.625	-1.524	1
C ₃	0.797136	1.6736	2.4707	-0.907	7
C ₄	1.110804	1.3837	2.4945	-0.34	4
C ₅	1.40495	0.9374	2.3424	0.3543	8
C ₆	1.577232	0.8671	2.4443	1.0189	6
C ₇	1.821624	0.7527	2.5737	0.12473	2
C ₈	2.168039	0.5759	2.7439	0.16109	3

Figure 5 shows S₂ (Uncertainty of customers) is causing effect while S₁ (Negative image of BT) is being affected in C₁ (Environmental/Cultural). Figure 6 shows S₅ (Antitrust) is causing effect while S₃ (Unclear Legal Jurisdictions) and S₄ (Regulatory barriers) are being affected in C₂ (legal and regulatory challenges). Figure 7 shows S₈ (Energy-intensive cryptocurrency validation process) is causing effect while S₆ (High consumption) and S₇ (Importing energy efficiency) are being affected in C₃ (Energy). Figure 8 shows S₁₁ (Lack of knowledge) and S₁₂ (Technology usability) are causing effect while S₉ (System speed) and S₁₀ (User experience) are being affected in C₄ (Adoption challenges). Figure 9 shows S₁₄ (Resistance to changing technology) and S₁₆ (Lack of management support) are causing effect while S₁₃ (Need of skilled worker) and S₁₅ (Lack of equipment and tool) are being affected in C₅ (Organizational and strategic). Figure 10 shows S₂₀ (Scaling due to processing requirements) are S₂₁ (Untested code) are causing effect while S₁₇ (Lack of customer awareness), S₁₈ (Access to technology), and S₁₉ (Limited transaction capacity) are being affected in C₆ (Technical). Figure 11 shows S₂₄ (Energy cost) is causing effect while S₂₂ (Usage cost) and S₂₃ (Training cost) are being affected in C₇ (Financial). Figure 12 shows S₂₇ (Shared data among multiple peers) and S₂₈ (Data leaks) are causing effect while S₂₅ (Cyberattacks) and S₂₆ (Privacy) are being affected in C₈ (Security).

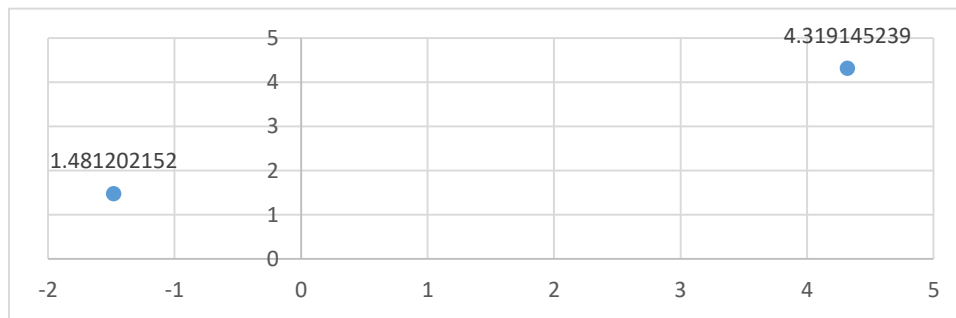


Fig 5. The causal diagram for C₁ (Environmental) sub-criteria.

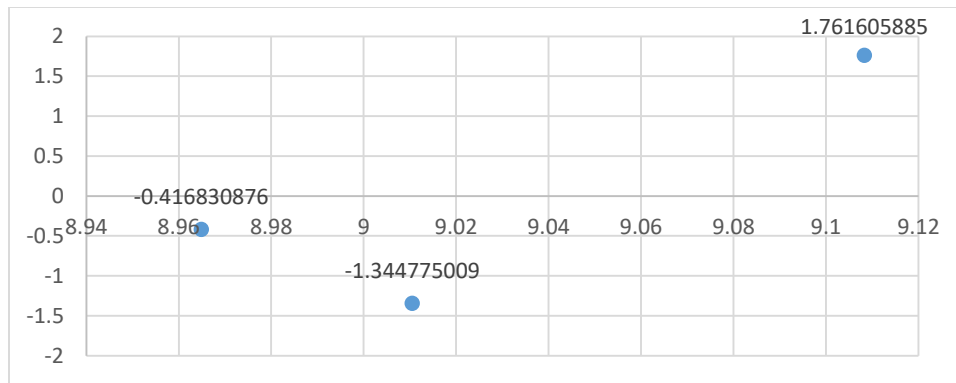


Fig 6. The causal diagram for C₂ (legal and regulatory challenges) sub-criteria.

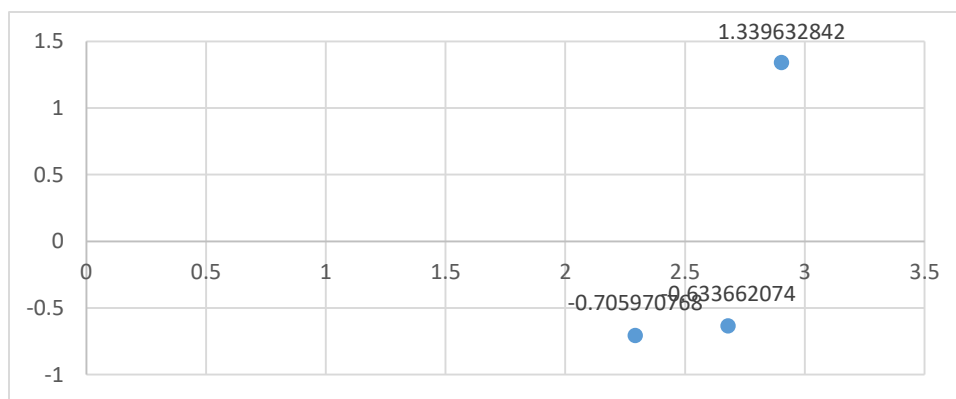


Fig 7. The causal diagram for C₃ (Energy) sub-criteria.

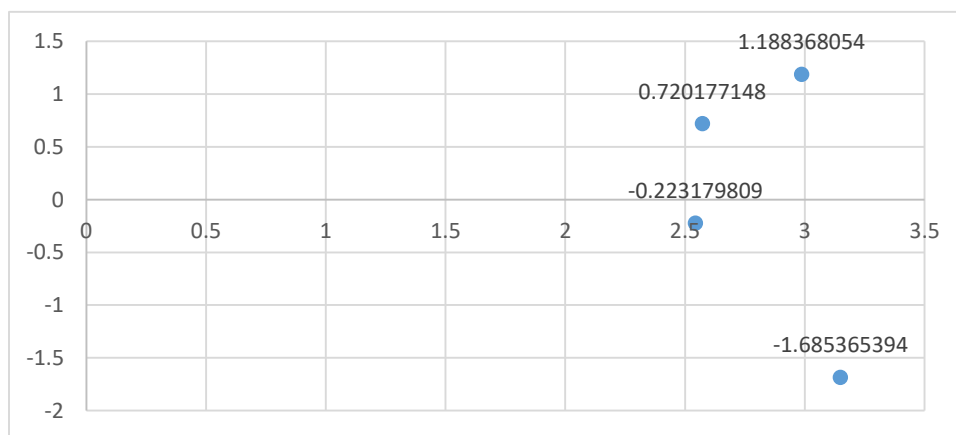


Fig 8. The causal diagram for C₄ (Adoption challenges) sub-criteria.

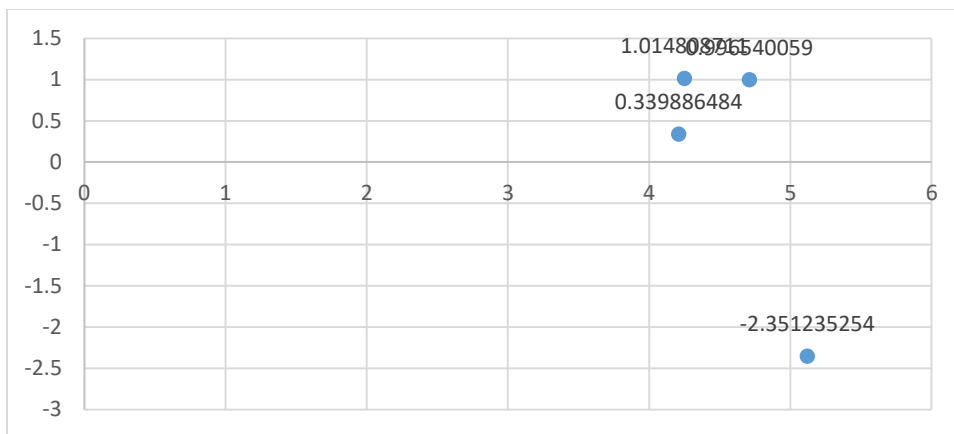


Fig 9. The causal diagram for C₅ (Organizational and strategic) sub-criteria.

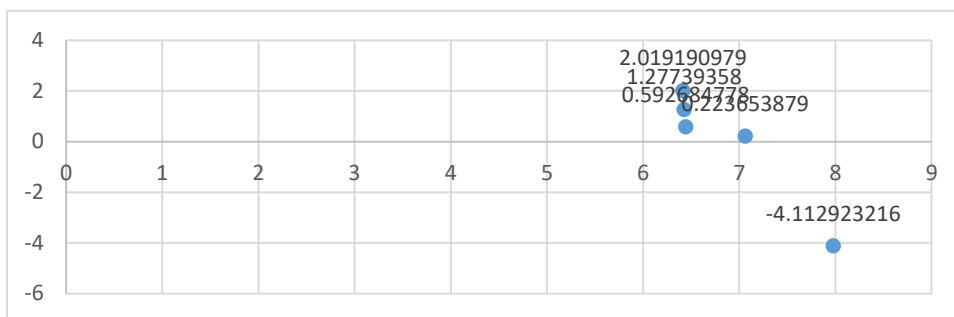


Fig 10. The causal diagram for C₆ (Technical) sub-criteria.

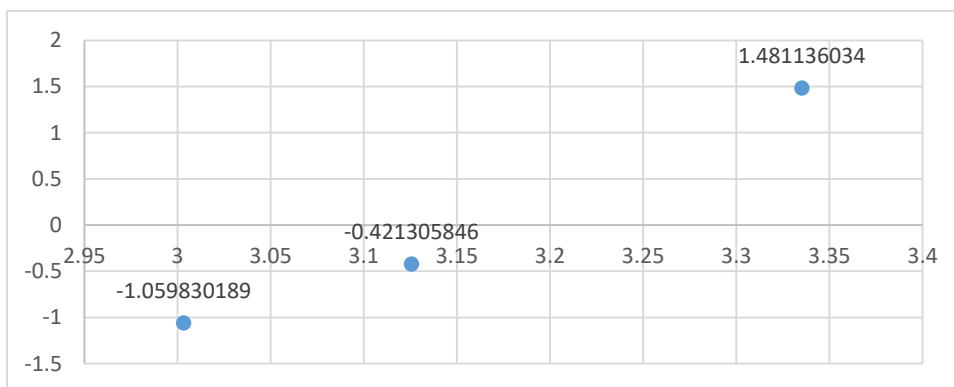


Fig 11. The causal diagram for C₇ (Financial) sub-criteria.

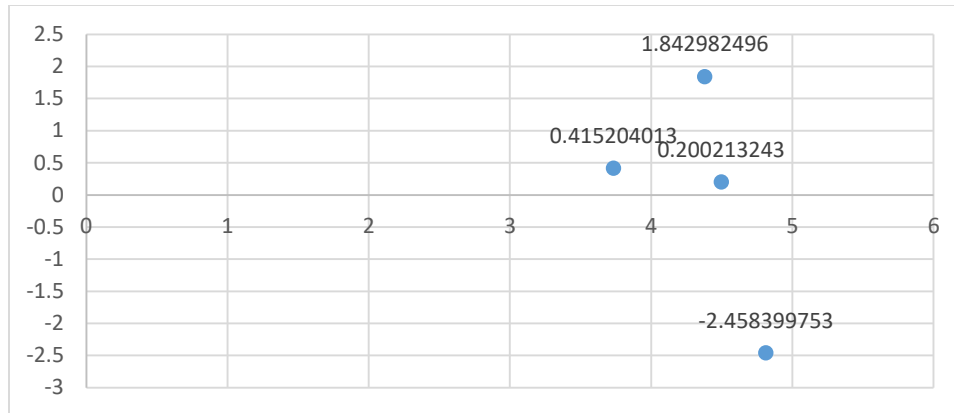


Fig 12. The causal diagram for Cs (Security) sub-criteria.

5. Conclusion and Future Works

BT is one of the most significant creations of the Internet. The usage of this system has become fairly common for firms. Though, implementing a new BT system in firms includes different risk factors. Consequently, firms need to address and analyze these risks. For this goal, the risks of BT in a firm are measured and ranked by using SVNSSs, AHP, and DEMATEL method. In this ranking process, Energy, environmental/cultural, financial, security, organizational, technical, legal, and regulatory challenges and adoption challenges risks are taken into account. 28 sub-risks covered by these risks are assessed under these groups. As a result, security is considered as the most significant risk factor among the eight risks and energy cost, and data leaks are ranked as the first and second important sub-risks correspondingly. DEMATEL results show security, financial cost, technical and organizational are causing effect while others are being affected. So the administrators should give more importance to these types of risks. For future research, the scope of the problem can be extended and the solutions of minimizing the risks for BT can be added as alternatives and the problem can be solved by MCDM techniques.

References

1. Wyant, J. and J.-H. Baek, *Re-thinking technology adoption in physical education*. Curriculum Studies in Health and Physical Education, 2019. **10**(1): p. 3-17.
2. Renn, O. and C. Benighaus, *Perception of technological risk: insights from research and lessons for risk communication and management*. Journal of Risk Research, 2013. **16**(3-4): p. 293-313.
3. Farshidi, S., et al., *A decision support system for software technology selection*. Journal of Decision systems, 2018. **27**(sup1): p. 98-110.
4. Chen, R.-Y., *A traceability chain algorithm for artificial neural networks using T-S fuzzy cognitive maps in blockchain*. Future Generation Computer Systems, 2018. **80**: p. 198-210.
5. Prybila, C., et al., *Runtime verification for business processes utilizing the Bitcoin blockchain*. Future Generation Computer Systems, 2017.
6. Ølnes, S., J. Ubacht, and M. Janssen, *Blockchain in government: Benefits and implications of distributed ledger technology for information sharing*. 2017, Elsevier.
7. Yang, H.-L., et al., *A hybrid model of single valued neutrosophic sets and rough sets: single valued neutrosophic rough set model*. Soft Computing, 2017. **21**(21): p. 6253-6267.
8. Nabeeh, N.A., et al., *An integrated neutrosophic-topsis approach and its application to personnel selection: A new trend in brain processing and analysis*. IEEE Access, 2019. **7**: p. 29734-29744.

9. Liu, F., et al., *A multicriteria model for the selection of the transport service provider: A single valued neutrosophic DEMATEL multicriteria model*. Decision Making: Applications in Management and Engineering, 2018. **1**(2): p. 121-130.
10. Efanov, D. and P. Roschin, *The all-pervasiveness of the blockchain technology*. Procedia Computer Science, 2018. **123**: p. 116-121.
11. Saberi, S., et al., *Blockchain technology and its relationships to sustainable supply chain management*. International Journal of Production Research, 2019. **57**(7): p. 2117-2135.
12. Sikorski, J.J., J. Haughton, and M. Kraft, *Blockchain technology in the chemical industry: Machine-to-machine electricity market*. Applied Energy, 2017. **195**: p. 234-246.
13. Li, X., et al., *A survey on the security of blockchain systems*. Future Generation Computer Systems, 2017.
14. Casino, F., T.K. Dasaklis, and C. Patsakis, *A systematic literature review of blockchain-based applications: current status, classification and open issues*. Telematics and Informatics, 2019. **36**: p. 55-81.
15. Kazimieras Zavadskas, E., R. Baušys, and M. Lazauskas, *Sustainable assessment of alternative sites for the construction of a waste incineration plant by applying WASPAS method with single-valued neutrosophic set*. Sustainability, 2015. **7**(12): p. 15923-15936.
16. Nabeeh, N.A., A. Abdel-Monem, and A. Abdelmouty, *A Novel Methodology for Assessment of Hospital Service according to BWM, MABAC, PROMETHEE II*. Neutrosophic Sets and Systems, 2020. **31**(1): p. 5.
17. Nabeeh, N.A., A. Abdel-Monem, and A. Abdelmouty, *A Hybrid Approach of Neutrosophic with MULTIMOORA in Application of Personnel Selection*. Neutrosophic Sets and Systems, 2019: p. 1.
18. Wang, H., et al., *Single valued neutrosophic sets*. 2010: Infinite study.
19. Abdel-Basset, M., et al., *A hybrid approach of neutrosophic sets and DEMATEL method for developing supplier selection criteria*. Design Automation for Embedded Systems, 2018. **22**(3): p. 257-278.
20. Abdel-Basset, M., Gamal, A., Chakraborty, R. K., & Ryan, M. A new hybrid multi-criteria decision-making approach for location selection of sustainable offshore wind energy stations: A case study. Journal of Cleaner Production, 280, 124462.
21. Abdel-Basset, M., Manogaran, G. and Mohamed, M., 2019. A neutrosophic theory based security approach for fog and mobile-edge computing. Computer Networks, 157, pp.122-132.
22. Abdel-Basset, M., Mohamed, R., & Elhoseny, M. (2020). <? covid19?> A model for the effective COVID-19 identification in uncertainty environment using primary symptoms and CT scans. Health Informatics Journal, 1460458220952918.
23. Abdel-Basset, M., Gamal, A., Chakraborty, R. K., & Ryan, M. J. (2020). Evaluation of sustainable hydrogen production options using an advanced hybrid MCDM approach: A case study. International Journal of Hydrogen Energy.
24. Abdel-Basset, Mohamed, et al. "Evaluation framework for smart disaster response systems in uncertainty environment." Mechanical Systems and Signal Processing 145 (2020): 106941.
25. Abdel-Basset, Mohamed, et al. "A novel decision-making model for sustainable supply chain finance under uncertainty environment." Journal of Cleaner Production (2020): 122324.
26. Min, H., *Blockchain technology for enhancing supply chain resilience*. Business Horizons, 2019. **62**(1): p. 35-45.

Received: June 20, 2020. Accepted: Nov 30, 2020