

2012

Performance Assessment of Feasible Scheduling Multiprocessor Tasks Solutions by using DEA FDH method

M. S. Hosseini Shirvani

Department of Computer Engineering, Sari Branch, Islamic Azad University, Sari, Iran,
mirsaeid_hosseini@yahoo.com

Hamid Alinejad-Rokny

Department of Computer Engineering, Science and Research Branch, Islamic Azad University, Tehran, Iran,
alinejad@ualberta.ca

Follow this and additional works at: <https://digitalcommons.aaru.edu.jo/isl>

Recommended Citation

S. Hosseini Shirvani, M. and Alinejad-Rokny, Hamid (2012) "Performance Assessment of Feasible Scheduling Multiprocessor Tasks Solutions by using DEA FDH method," *Information Sciences Letters*: Vol. 1 : Iss. 2 , Article 6.

Available at: <https://digitalcommons.aaru.edu.jo/isl/vol1/iss2/6>

This Article is brought to you for free and open access by Arab Journals Platform. It has been accepted for inclusion in Information Sciences Letters by an authorized editor. The journal is hosted on Digital Commons, an Elsevier platform. For more information, please contact rakan@aarj.edu.jo, marah@aarj.edu.jo, u.murad@aarj.edu.jo.



Performance Assessment of Feasible Scheduling Multiprocessor Tasks Solutions by using DEA FDH method

M. H. Shirvani¹ and H. Alinejad-Rokny²

¹Department of Computer Engineering, Sari Branch, Islamic Azad University, Sari, Iran

²Department of Computer Engineering, Science and Research Branch, Islamic Azad University, Tehran, Iran

alinejad@ualberta.ca

Abstract: In this paper, an attempt has been made to investigate how DEA FDH method based on linear programming can select one or more efficient scheduling solutions on multiprocessor tasks obtained by any heuristic algorithms through some feasible solutions for NP-complete problems. This article will consider the problem of scheduling multiprocessor tasks with multi-criteria, namely, minimizing total completion time (makespan) and minimizing the number of tardy tasks and shows that most efficient schedule(s) will be determined.

Keywords: DEA, FDH, NP-complete, makespan, Multiprocessor tasks, feasible solution, efficient schedule.

INTRODUCTION

New science of DEA based on linear programming was introduced by Charnes, Cooper, and Rhodes (CCR) (1978). In this science the goal is decision making, so the decision making units (DMUs) are the principles. Actually, by consuming suitable input(s) and output(s), DMUs are formed. Every feasible solution of NP- complete problem can be considered as DMU within which one or more efficient solution must be identified. As a matter of fact its the weakness that convex DEA method or CCR does not observe inefficient solutions but the non-convex DEA method i.e. FDH presented earlier by Deprins et al.(1984) observes hidden inefficient and refers them to efficient solution set. There are many case studies that are accomplished by means of DEA method in DMUs. For example, Tulkens(1993) extended FDH and used in retail banking, courts, and urban transit. Also Kuosmanen and Post(2002) applied another kind of DEA-quadratic for evaluating economical efficiency and Pendharkar (2005) proposed a DEA based approach for data processing.

In computer science we can use DEA method for the assessment of NP-Complete problem solutions. NP-Complete are those problems that according to input parameter (n), there is no polynomial time algorithm for them(Cormen et al.,2009); for example traveler salesperson problem(Neopolitan and Naimipour,2009), kanapsack (0/1), and problem of scheduling multiprocessor tasks specially by adding some criteria to the problem like minimizing the mean of execution time, minimizing the mean weighted

Corresponding Author: Hamid Alinejad-Rokny Email: alinejad@ualberta.ca

of execution time etc(Drozdowski et al,1999). The complete execution of NP problems wastes a very long time on computers even for years. To solve this problem we can use heuristic Algorithms. The heuristic algorithms produce feasible solutions but the goal is to select the most efficient ones. In this article, the problem of scheduling multiprocessor tasks in order to minimizing execution time (makespan) and minimizing a number of tardy tasks along with some feasible solution obtained by any heuristic algorithms are taken in to account. This paper shows that how DEA FDH method selects the most efficient solutions. In the second part we are going to present DEA FDH method and in the third part we will discuss the problem of scheduling multiprocessor tasks. So remarkable results will be shown in conclusion part.

2. Literature Review:

DEA method is used for decision making. Suppose that we have n decision making units (DMUs) and for each DMU we consume p parameters as input(s) and q parameters as output(s). For example DMU_k is $(\mathbf{x}_k, \mathbf{y}_k)$ where $\mathbf{x}_k = (x_{1k}, \dots, x_{pk})$ and $\mathbf{y}_k = (y_{1k}, \dots, y_{qk})$. As CCR model (Amin and Hosseini-shirvani,2009) dose not observe some inefficient units we use FDH model. Non-convex FDH model is defined for k th DMU as below (Charnes et al,1978)

$$\begin{aligned} \theta_k^* &= \min \theta \\ \text{s.t.} \\ & - \sum_{j=1}^n x_{ij} \lambda_j + x_{ik} \theta \geq 0 \quad i=1, \dots, p \\ & \sum_{j=1}^n y_{rj} \lambda_j \geq y_{rk} \quad r=1, \dots, q \\ & \lambda_j \geq 0, \lambda_j \in \{0,1\} \quad j=1, \dots, n \end{aligned}$$

Despite CCR, in FDH model λ_j is binary (0 or 1). Aforementioned model will rank DMUs according to their efficiencies. In the following section new application of DEA FDH on specific problem will be explained.

3. Assessment For Feasible Solutions On Scheduling Multiprocessor Tasks:

Parallel processing has committed a very extensive growth in computer and industrial engineering(Drozdowski et al,1999). The most important parameter is its speed or performance. Therefore, the need for optimal parallel algorithm is thoughtful (Drozdowski,1996). The problem of scheduling multiprocessor tasks are denoted by $\alpha|\beta|\delta$ notation(Blazewicz et al.,1996; Veltman et al.,1990) where

α is processor's characteristics,

β is the time needed for execution,

and δ is multi-criteria.

For instance, $P2|pmtn, r_j|\sum c_j$ (Du et al,1988), $P2|size_j|\sum w_j c_j$ (Labetoulle et al,1984), $P|p_j = 1, r_j, d_j|\sum c_j$ (Simon, 1983) etc. The problem of $P2|pmtn, r_j|\sum c_j$ means that we have two identical uniform processors and task division is forbidden and all tasks have different release time. Consequently, the criterion is to minimize makespan. All problems aforesaid are NP-Complete (Drozdowski et al,1999). In the circumstance above, we have to use heuristic algorithms and the objective is to select the most efficient feasible solution(s). Assume that set N includes n tasks as $N = \{t_1, t_2, \dots, t_n\}$ which are to be executed on p identical parallel processors. Every task may need one or more processors simultaneously. Our problem is $P2|size_j, r_j = 0, d_j|\sum c_j \text{ and } \sum u_j$ where,

- (i) Every $task_j$ has execution time $size_j$.
- (ii) Tasks are independent.
- (iii) Task division is forbidden (McNaughton, 1959).
- (iv) All tasks are ready at time=0.
- (v) Every $task_j$ has due date as d_j .

Objectives are to minimize makespan and the number of tardy tasks. Makespan is computed as:

$$makespan = C_{max}^S = \{C_j^S : j = 1, \dots, n\}$$

Whereas the number of tardy tasks is calculated as:

$$N_t^S = \sum_{j=1}^n u_j^S$$

where,

$$u_j^S = \begin{cases} 1 & \text{if } c_j^S > d_j \\ 0 & \text{otherwise} \end{cases}$$

Suppose that we have two identical parallel processors with four tasks indicated in Table 1:

Table 1. Task Characteristics

Task No.	$size_j$	due date (d_j)
t_1	1	2
t_2	1	2
t_3	2	3
t_4	3	4

By means of four different heuristic algorithms four feasible schedules have been made as shown in Figure 1. Notice that tardy tasks are highlighted.

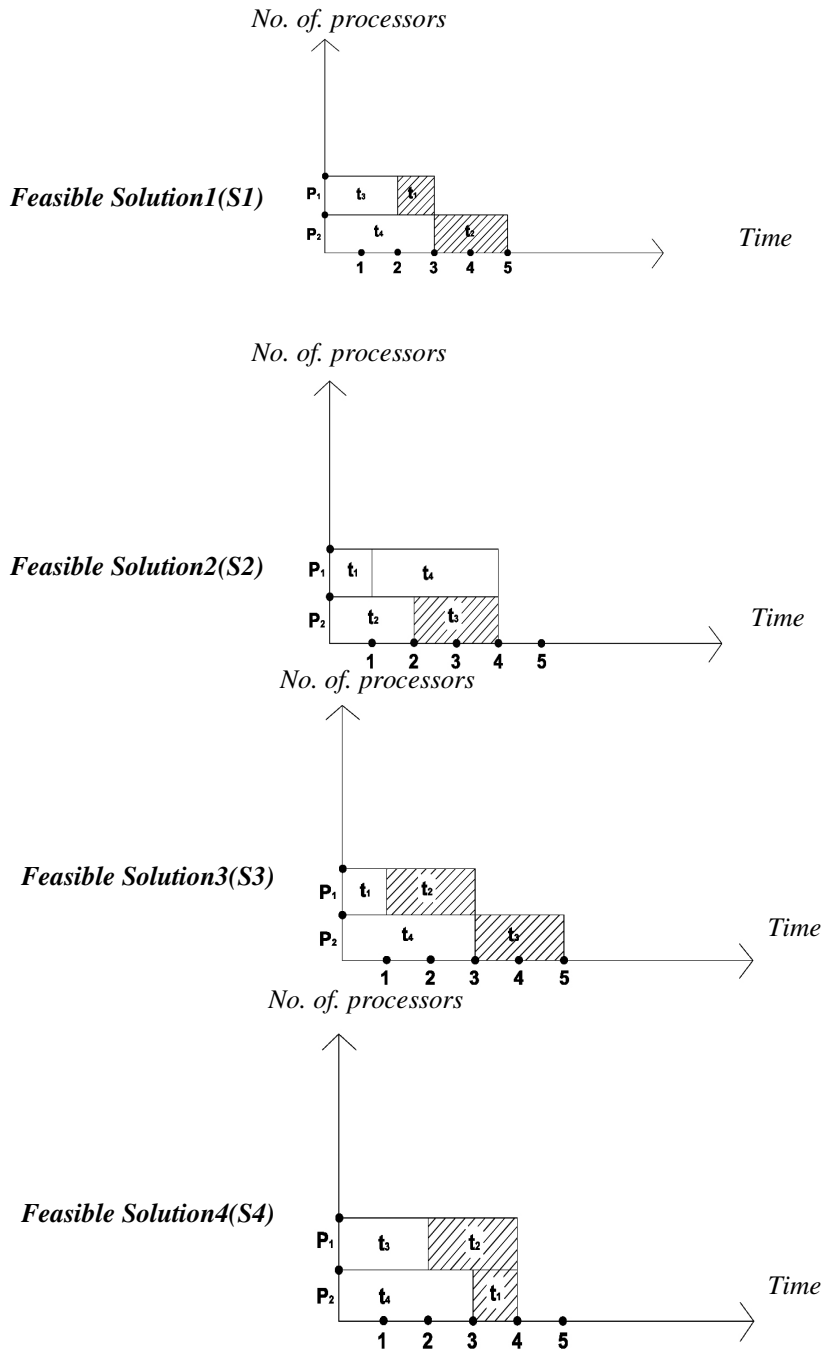


Figure 1. Feasible Schedules

Every feasible solution is DMU. Based on multi- criteria we can construct input(s) and output(s) for each DMU; for example we can consider two inputs like the number of tardy tasks as I_1 and makespan as I_2 whereas only one output is the number of tasks without tardiness as O_1 . Every DMU traits for our problem are illustrated in Table 2:

Table 2.Inputs and Output for DEA

<i>DMU No.</i>	<i>Tardy tasks (I₁)</i>	<i>Makespan (I₂)</i>	No. of tasks Without Tardiness (<i>O₁</i>)
Solution1(S1)	2	5	2
Solution2(S2)	1	4	3
Solution3(S3)	2	5	2
Solution4(S4)	2	4	2

Now, among some feasible scheduling solution, we compute the efficiency of **DMU₄** by using DEA FDH method as:

$$\begin{aligned} \theta_4^* &= \min \theta \\ \text{s.t.} \\ &-2\lambda_1 - \lambda_2 - 2\lambda_3 - 2\lambda_4 + 2\theta \geq 0 \\ &-5\lambda_1 - 4\lambda_2 - 5\lambda_3 - 4\lambda_4 + 4\theta \geq 0 \\ &2\lambda_1 + 3\lambda_2 + 2\lambda_3 + 2\lambda_4 \geq 2 \\ &\lambda_1, \lambda_2, \lambda_3, \lambda_4 \in \{0,1\} \end{aligned}$$

Regarding the above problem solution in DEA-solver provided by (Cooper et al,2006) the following optimal solution will be obtained:

$$(\lambda_1^*, \lambda_2^*, \lambda_3^*, \lambda_4^*, \theta_4^*) = (0, 1, 0, 0, 1)$$

It means that this method will consider second feasible scheduling solution (S2) as a reference set. If the above method is operated on the other units, all of them will converge to S2 as an optimal solution set.

Conclusion:

In this paper new application of DEA FDH method has been investigated, as though for NP – complete problems like scheduling multiprocessor tasks with multi-criteria feasible solutions given by heuristic algorithms are available and finally optimal solution have been identified by this method.

REFERENCES

- [1] Amin, Gholam R., Hosseini Shirvanin, M.S., (2009). Evaluation of scheduling solutions in parallel processing using DEA FDH model, *Journal of Industrial Engineering International*, 2009, 5(9), 58-62
- [2] Blazewicz, J., Ecker, K., Pesch, E., Schmidt, G. and Weglarz, J.; (1996). Scheduling computer and manufacturing processes, *Heidelberg: Springer*.
- [3] Charnes, A., Cooper, W.W., Rhodes, E. (1978). Measuring the efficiency of decision-making units. *European Journal of Operational Research*, 2, 429-444.
- [4] Cormen, H.T., Leiserson, Ch., Rivest, R., and Stein, C., 2009. Introduction To Algorithms. Third ed: MIT Press.

- [5] Cooper, W. W., Seiford, L. M. and Tone, K., (2006). Introduction to Data Envelopment Analysis and its Uses with DEA-Solver Software and References, *Springer*.
- [6] Deprins, D., Simar, L., and Tulkens, H., (1984). Measuring labor-efficiency in post offices, the performance of public enterprises: Concepts and measurements. *Amsterdam: North-Holland Publishing Company*.
- [7] Drozdowski, M., Dell’Olmo, P.,(1999). Scheduling multiprocessor tasks for mean flow time criterion. *Computer & Science Research*, 27(2000) 571-585
- [8] Drozdowski, M. ; (1996).Scheduling multiprocessor tasks - an overview, *European Journal of Operational Research*,**94**,215-30.
- [9] Du, J. , Leung, JY-T and Young, GH.; (1988), Minimizing mean flow time with release time constraints. *Technical Report, Computer Science Program, University of Texas at Dallas*.
- [10] Kuosmanen, T., Post, T., 2003, Measuring economic efficiency with incomplete price information. *European Journal of Operational Research*,168,340-344.
- [11]Labetoulle, J. , Lawler, EL. , Lenstra, JK. and Rinnoy Kan, AHG.; (1984) , Preemptive scheduling of uniform machines subject to release dates. In: Pulleyblank WR, editor , Progress in combinatorial optimization. *New York: Academic Press*,245-61.
- [12]McNaughton, R.; (1959). Scheduling with deadlines and loss functions , *Management Science* , **6**,1-12.
- [13]Neopolitan, R.,and Naeimipour, K., 2009. Foundation of Algorithm. Fourth edition:Harvard business school press
- [14]Pendharkar, P. C., (2005). A Data Envelopment Analysis-Based Approach for Data Preprocessing, *IEEE Transactions on Knowledge and Data Engineering*, **17**(10), 1379-1388.
- [15]Simons, B.; (1983) . Multiprocessor scheduling of unit-time jobs with arbitrary release times and deadlines , *SIAM Journal on Computing* , **12**,294-9.
- [16]Tulkens, H., 1993, On FDH efficiency analysis: Some methodological issues and applications to retail banking, Courts, and urban transit. *Journal of Productivity Analysis*, 4(1-2),183-210.
- [17]Veltman, B. , Lageweg, BJ. and Lenstra, JK.; (1990) . Multiprocessor scheduling with communications delays , *Parallel Computing* , **16**,173-82.