



Strathprints Institutional Repository

Sales Fidalgo, Joana Alexandra and Zografos, Konstantinos and Laura, Casanellas and Lindner, Anke and Oliveira, Monica (2015) Microfluidic bifurcating networks for power-law fluids. In: 6th International Symposium on Bifurcations and Instabilities in Fluid Dynamics 2015, 2015-07-15 - 2015-07-17, ESPCI. ,

This version is available at <http://strathprints.strath.ac.uk/55071/>

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Unless otherwise explicitly stated on the manuscript, Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Please check the manuscript for details of any other licences that may have been applied. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<http://strathprints.strath.ac.uk/>) and the content of this paper for research or private study, educational, or not-for-profit purposes without prior permission or charge.

Any correspondence concerning this service should be sent to Strathprints administrator: strathprints@strath.ac.uk

Microfluidic bifurcating networks for power-law fluids

Joana Fidalgo¹, Konstantinos Zografos¹, Laura Casanellas², Anke Lindner² & Mónica S. N. Oliveira¹

¹James Weir Fluids Laboratory, Department of Mechanical and Aerospace Engineering, University of Strathclyde, Glasgow G1 1XJ, UK.

²Physique et Mécanique des Milieux Hétérogènes (PMMH), UMR 7636 CNRS – ESPCI ParisTech – Université Pierre et Marie Curie - Université Paris Diderot 10, rue Vauquelin, 75231 Paris Cedex 05, France.

Abstract Microfluidics, Bifurcating networks, Biomimetics, Murray's Law, non-Newtonian fluids

Bifurcating networks are widely found in nature and are often responsible for controlling fluids that exhibit complex rheological behaviour. Examples are the vascular branching network that drives blood throughout the human body, the oxygen respiratory system in the human lungs and the bifurcating formations of xylem responsible for the distribution of water and other nutrients in plants and trees. Here, we take advantage of the biomimetic principles obtained by studying these natural systems to design fluid distribution networks for use in lab-on-a-chip devices. The novel biomimetic design rule we have recently proposed allows us to generate bifurcating microfluidic networks of rectangular cross-section for use with power-law and Newtonian fluids [1]. The design is based on Murray's law, which was originally derived for blood flow in the vascular system, using the principle of minimum work. Murray [2] considered Newtonian fluid flows to predict the optimum ratio between the diameters of the parent and daughter vessels in networks with circular cross-section to obtain a uniform wall-shear stress along the network. In our study, we have extended the relationship to consider the flow of power-law fluids in planar geometries (i.e. geometries of rectangular cross-section with constant depth) typical of lab-on-a-chip applications. Furthermore, the design rule has been generalised to consider a range of shear-stress distributions via a branching parameter, offering the ability to precisely control the shear-stress distribution and predict the flow resistance along the bifurcating network.

This novel design rule has been validated numerically by means of computational fluid dynamics simulations performed using a finite-volume code under creeping flow conditions for various branching parameters and power-law fluids, ranging from shear-thinning to shear-thickening. Furthermore, we have studied experimentally the flow of a Newtonian and various shear-thinning fluids in the proposed micro-networks fabricated in PDMS by soft-lithography. A set of experiments have been carried out including pressure drop measurements and micro-particle image velocimetry to validate the kinematics along the networks. The limits of operation in terms of Reynolds number have been assessed and the results demonstrate the potential of our design for use in practical conditions.

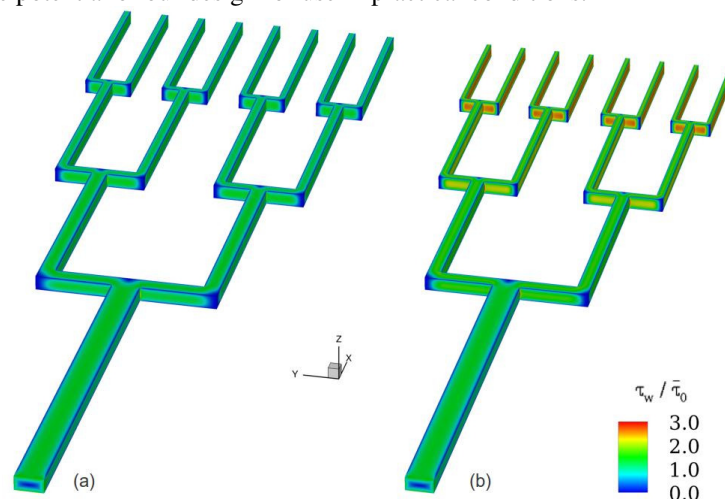


Figure 1: Contour plots of the normalised wall shear-stresses along the bifurcating networks designed for a shear-thinning fluid for a) $X = 1$ (uniform wall shear-stress distribution along the network) and for b) $X = 1.25$ (increasing wall shear-stress distribution along the network).

References

[1] K. Zografos, R. W. Barber, D. R. Emerson, M. S. N. Oliveira, A novel design rule for constant depth microfluidic networks for power-law fluids, Submitted to *Microfluidics Nanofluidics* (2015).

[2] C.D. Murray, The physiological principle of minimum work: I. The vascular system and the cost of blood volume. *Proc Natl Acad Sci USA* **12**, 207–214 (1926).