

IVTH INTERNATIONAL CONFERENCE ON TIMES OF POLYMERS (TOP) AND COMPOSITES

Ischia, Italy

21 - 24 September 2008

EDITORS

Domenico Acierno
*University of Naples Federico II
Naples, Italy*

Alberto D'Amore
Luigi Grassia
*The Second University of Naples - SUN
Aversa, Italy*

SPONSORING ORGANIZATIONS

The Second University of Naples, Department of Aerospace
and Mechanical Engineering
University of Naples Federico II, Department of Materials
and Production Engineering

**AMERICAN
INSTITUTE
OF PHYSICS**

**Melville, New York, 2008
AIP CONFERENCE PROCEEDINGS ■ 1042**

Editors

Domenico Acierno

Department of Materials and Production Engineering
University of Naples Federico II
Piazzale Tecchio
I-80125 Naples
Italy
E-mail: acierno@unina.it

Alberto D'Amore
Luigi Grassia

The Second University of Naples - SUN
Department of Aerospace and Mechanical Engineering
Real Casa dell'Annunziata
Via Roma, 29
81031 Aversa, (CE)
Italy
E-mail: alberto.damore@unina2.it
luigi.grassia@unina2.it

Authorization to photocopy items for internal or personal use, beyond the free copying permitted under the 1978 U.S. Copyright Law (see statement below), is granted by the American Institute of Physics for users registered with the Copyright Clearance Center (CCC) Transactional Reporting Service, provided that the base fee of \$23.00 per copy is paid directly to CCC, 222 Rosewood Drive, Danvers, MA 01923, USA. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. The fee code for users of the Transactional Reporting Services is: 978-0-7354-0570-7/08/\$23.00

© 2008 American Institute of Physics

Permission is granted to quote from the AIP Conference Proceedings with the customary acknowledgment of the source. Republication of an article or portions thereof (e.g., extensive excerpts, figures, tables, etc.) in original form or in translation, as well as other types of reuse (e.g., in course packs) require formal permission from AIP and may be subject to fees. As a courtesy, the author of the original proceedings article should be informed of any request for republication/reuse. Permission may be obtained online using Rightslink. Locate the article online at <http://proceedings.aip.org>, then simply click on the Rightslink icon/"Permission for Reuse" link found in the article abstract. You may also address requests to: AIP Office of Rights and Permissions, Suite 1N01, 2 Huntington Quadrangle, Melville, NY 11747-4502, USA; Fax: 516-576-2450; Tel.: 516-576-2268; E-mail: rights@aip.org.

L.C. Catalog Card No. 2008933961

ISBN 978-0-7354-0570-7
ISSN 0094-243X

Printed in the United States of America

EFFECTS OF THE BIODEGRADATION ON BIODEGRADABLE POLYMER BLENDS AND POLYPROPYLENE

R.C.T., Pereira^{*1,3}, S. M. M., Franchetti^a, J. A. M., Agnelli², L.H.C., Mattoso³

¹ Department of Biochemistry and Microbiology, University State "Júlio de Mesquita Filho", UNESP, Rio Claro, SP, Brazil

² Department of Materials Engineering, Federal University of São Carlos, UFSCar, São Carlos, SP, Brazil

³ Embrapa Agricultural Instrumentation, CNPDIA/EMBRAPA, São Carlos, SP, Brazil

ABSTRACT

The large use of plastics in the world generates a large amount of waste which persists around 200 years in the environment. To minimize this effect is important to search some new polymer materials: the blends of biodegradable polymers with synthetic polymers. It is a large area that needs an intensive research to investigate the blends properties and its behavior face to the different treatments to aim at the biodegradation. The blends used in this work are: some biodegradable polymers such as: poly(hydroxybutyrate) (PHB) and poly(ϵ -polycaprolactone) (PCL) with a synthetic polymer, polypropylene (PP), in lower concentration. These blends were prepared using an internal mixer (Torque Rheometer), and pressed. These films were submitted to fungus biotreatment. The films analyses will be carried out by Fourier Transform Infrared (FTIR), UV-Vis absorption (UV-Vis), Scanning Electronic Microscopy (SEM), DSC and TGA.

1 INTRODUCTION

From the last decade of 20th century one of the rapidly growing areas for the use of plastics is packaging. Convenience and safety, low price and good aesthetic qualities are the most important factors determining rapid growth in the use of plastics for manufacturing of packing. Recently, out of total plastic production, 41% is used in packing industries, and 47% of them is used for the packing of foodstuffs [1]. These are generally made from polyolefins (e.g. polypropylene (PP), polyethylene (PE)), polystyrene (PS), poly(vinyl chloride) (PVC), etc., are mostly produced from fossil fuels, consumed and discarded into the environment, ending up as spontaneously undegradable wastes. That means, amounting to 40% of packaging refuse, is practically eternal, and the question of what to do with plastics refuse is becoming a global environmental problem, Ray and Bousmina [1]. To minimize this effect is important to search some new polymer materials: the blends of biodegradable polymers with synthetic polymers. It is a large area that needs an intensive research to investigate the blends properties and its behavior face to the different treatments to aim at the biodegradation. The blends used in this work are: some biodegradable polymers such as: poly(hydroxybutyrate-co-valerate) (PHB-V) and poly(ϵ -polycaprolactone) (PCL) with a synthetic polymer, polypropylene (PP), in lower concentration. These blends were prepared using an internal mixer (Torque Rheometer), and pressed. These films were submitted to fungus biotreatment. The films analyses will be carried out by Fourier Transform Infrared (FTIR), UV-Vis absorption (UV-Vis), Scanning Electronic Microscopy (SEM), DSC and TGA.

2 PROCEDURE

In this work, the blends were prepared using biodegradable polymers such as PHB-V or PCL (80wt%) and PP (20wt%) (homopolymer and copolymer) as synthetic polymer in a internal mixer (Torque Rheometer) and pressed. The films obtained were submitted Biotreatment using *Phanerochaete chrysosporium* Burds for 4 months.

*Rejane Cristina Trombini Pereira – Department of Biochemistry and Microbiology, University State "Julio de Mesquita Filho", UNESP, Av. 24A, 1515 CEP 13506-900
Rio Claro-SP-Brazil e-mail: rejpereira@hotmail.com

3 RESULTS

The Fig. 1 presents SEM micrographs of the blends before and after biotreatment using *Phanerochaete chrysosporium* Burds for 4 months

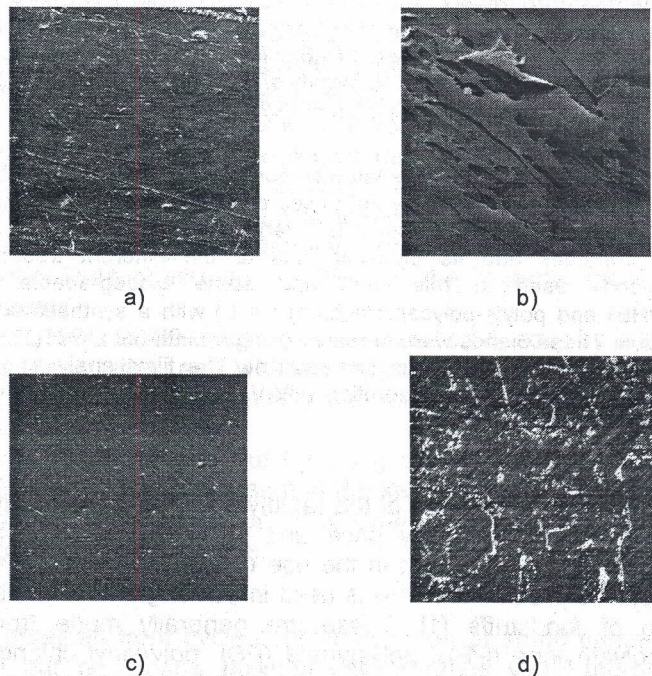


Figure 1: SEM micrographs of blends a) PHB/PP (x200) and e) PCL/PP (x200), before the biotreatment and c) PHB/PP (x200), g) PCL/PP (x200) after biotreatment for 4 months.

4 CONCLUSIONS

Analysing the results of SEM we can note macrophasis morphological modifications. In the blends using PHB, as a biodegradable polymer, is possible to see degradation by layers. Results of FTIR provided us more informations about the structural changes after the biotreatment, for example, PCL presents these modifications between $1400-1000\text{cm}^{-1}$. We also can see a variation to TG peaks to more high temperature after biodegradation for PHB-V/PP homopolymer blends and for PP homopolymer in the PCL/PP blends. We suppose that these variations in the temperature of the TG peaks can be because the modification in the crystallinity of these blends with the biotreatment. These results can be noted in the DSC analysis too. Other studies have been done about the biodegradation of these polymer blends and other kinds of polymers studied by our research group, Campos et al [2].

ACKNOWLEDGEMENTS

FAPESP, EMBRAPA-CNPDIA São Carlos-SP Brazil, Prof. Dr. Marco Aurélio De Paoli, Maria Luiza (Unesp-R. Claro-SP - Br), Lea (Unicamp -Campinas- SP-Br)

REFERENCES

1. Ray, S.S. and Bousmina M., Progress in Materials Science, **50**, 962-1069, 2005.
2. Campos, A.; Martins-Franchetti, S.M.; Agnelli, J.A.M. Brazilian Journal of Microbiology, **34**, Supl. 1, 111-113, 2003.