



Cooperative Emission of a Coherent Superflash of Light

Cc Kwong, T Yang, Ms Pramod, K Pandey, D Delande, R Pierrat, D.

Wilkowski

► To cite this version:

Cc Kwong, T Yang, Ms Pramod, K Pandey, D Delande, et al.. Cooperative Emission of a Coherent Superflash of Light. Physical Review Letters, American Physical Society, 2014, 113, pp.223601. . <10.1103/PhysRevLett.113.223601>. ">http://journals.aps.org/prl>. <10.1103/PhysRevLett.113.223601>. ">http://journals.aps.org/prl>. <10.1103/PhysRevLett.113.223601>. ">http://journals.aps.org/prl>. <10.1103/PhysRevLett.113.223601>. ">http://journals.aps.org/prl>. <10.1103/PhysRevLett.113.223601>. ">http://journals.aps.org/prl>. <10.1103/PhysRevLett.113.223601>. http://journals.aps.org/prl>. <10.1103/PhysRevLett.113.223601>. http://journals.aps.org/prl. <10.1103/PhysRevLett.113.223601>. http://journals.aps.org/prl.

HAL Id: hal-00994145 https://hal.archives-ouvertes.fr/hal-00994145v2

Submitted on 4 Dec 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Cooperative Emission of a Coherent Superflash of Light

C. C. Kwong,¹ T. Yang,² M. S. Pramod,² K. Pandey,² D. Delande,³ R. Pierrat,⁴ and D. Wilkowski^{1,2,5}

¹School of Physical and Mathematical Sciences, Nanyang Technological University, 637371 Singapore, Singapore

²Centre for Quantum Technologies, National University of Singapore, 117543 Singapore, Singapore

³Laboratoire Kastler Brossel, UPMC-Paris 6, ENS, CNRS; 4 Place Jussieu, 75005 Paris, France

⁴ESPCI ParisTech, PSL Research University, CNRS,

Institut Langevin, 1 rue Jussieu, F-75005, Paris, France

⁵Institut Non Linéaire de Nice, Université de Nice Sophia-Antipolis, CNRS UMR 7335, 06560 Valbonne, France

(Dated: December 4, 2014)

We investigate the transient coherent transmission of light through an optically thick cold strontium gas. We observe a coherent superflash just after an abrupt probe extinction, with peak intensity more than three times the incident one. We show that this coherent superflash is a direct signature of the cooperative forward emission of the atoms. By engineering fast transient phenomena on the incident field, we give a clear and simple picture of the physical mechanisms at play.

PACS numbers: 42.50.Md, 42.25.Dd

For many decades, coherent transient phenomena have been used to characterize decays and dephasing in resonantly driven two-level systems [1, 2]. A rich variety of systems, with their own particularities, ranging from NMR [3, 4] to electromagnetic resonances in atoms [5-8], molecules [9–12] and nuclei [13, 14], have been used. A simple situation arises when an electromagnetic wave is sent through a sample composed of atomic (or molecular) scatterers. The abrupt switch off of a monochromatic quasiresonant excitation leads to free induction decay in the forward direction [9]. Temporal shapes and characteristic decay times of free induction decay depend on quantities such as laser frequency detuning [5], optical thickness [8, 15], and on the presence of inhomogeneous broadening [9] and nonlinearities [16]. For an optically thick medium, since the incoming light is almost completely depleted by scattering in the stationary regime, the free induction decay signal takes the form of a coherent flash of light [8]. Its duration is reduced with respect to the single scatterer lifetime by a factor of the order of the optical thickness [8]. Consequently, its experimental observation, using standard optical transitions (lifetime in the nanosecond range), is rather challenging [17]. In this Letter, we solve this issue by performing free induction decay on the intercombination line of a cold strontium atomic gas. We gain physical insight into coherent transmission, and observe a coherent superflash of light, i.e., a transmitted intensity larger than the incident one [see Fig. 1(c)]. The superflash is due to strong phase rotation and large amplitude of the forward scattered field which are directly measured in our experiment.

Related effects have been observed in Mössbauer spectroscopy experiments, where a temporal phase change in the γ radiation can lead to transient oscillations of the intensity transmitted through a sample [13, 14]. These oscillations are rather small, typically of the order of 1%. This is because the γ emitter used has a short coherence time. Note that no superflash was ever observed. In a refined " γ echo" experiment, a coincidence detection made it possible to shift the phase of the emitter at a specific time during its exponential decay, leading to a revival of the forward transmitted intensity [18]. Laser spectroscopy is, however, a much easier and flexible tool. First, the temporal or spectral properties of the source can be tuned almost at will, and second, a dilute cold atomic gas can be thought of as a collection of independent identical highly-resonant two-level systems.

We first consider a scheme where a laser beam is sent through a slab uniformly filled with resonant pointlike scatterers. In the stationary regime, scattering leads to an attenuation of the intensity, $I_t = |E_t|^2$, of the transmitted coherent field E_t , according to the Beer-Lambert law

$$I_t = I_0 \exp\left(-b\right),\tag{1}$$

where $I_0 = |E_0|^2$ is the intensity of the incident field E_0 and b is the optical thickness of the medium. The power lost in the coherent transmission, $\propto 1 - e^{-b}$, leaves the medium in all directions [19, 20]. In general, since the positions of the scatterers are random, the reemitted field is incoherent (i.e., the phase of the incident field is lost). This statement is, however, not true in the forward direction, where the phase of the scattered field does not depend on the (transverse) positions of the scatterers [38]. This cooperative effect of the atomic ensemble in the forward direction has already been explored by several authors, for example in superradiance laser [21, 22], superradiance of a single photon emission [23], and in the underlying mechanical effects on the atomic cloud [24]. Importantly, the attenuation of the transmitted field can be interpreted as the result of a destructive interference between the incident field and the field scattered in the forward direction. Denoting the forward scattered electric field by E_s , one has at any time

$$E_t = E_0 + E_s. \tag{2}$$

For the useful case of a monochromatic field at frequency ω in the stationary regime, such an equality can be written for the complex field amplitudes. A geometrical representation of Eq. (2) is shown in Fig. 1(a), where the angle θ_s represents the relative phase between E_s and E_0 . In general, the fields have two polarization components, so vectors should be used. Here, we consider a simpler situation where all fields have the same polarization.

In the stationary regime, energy conservation imposes $I_t \leq I_0$. In other words, $|E_t| \leq |E_0|$, and therefore, $|E_s| \leq 2|E_0|$. However, since the forward scattered field is built upon the incident field, one might believe that its amplitude is bounded as such, $|E_s| \leq |E_0|$. As a key result of this Letter, we show that the latter intuitive picture is incorrect. Indeed, we predict a forward scattered intensity I_s arbitrarily close to $4I_0$ and experimentally observe $I_s/I_0 = 3.1$. The experimental value is mainly limited by the maximum optical thickness that can be obtained with our experimental setup. Hence, apart from the energy conservation argument, we find no other basic principles or theorems, such as causality or Kramers-Kronig relations, that limit the amplitude of the forward scattered field.

The system under investigation consists of a lasercooled ⁸⁸Sr atomic gas. The details of the cold atoms production line are given in Ref. [25]. The last cooling stage is performed on the ${}^{1}S_{0} \rightarrow {}^{3}P_{1}$ intercombination line at transition wavelength $\lambda = 689$ nm, with a bare linewidth of $\Gamma/2\pi = 7.5$ kHz. The number of atoms is $2.5(5) \times 10^8$. The temperature of the cold gas is $T = 3.3(2) \,\mu\text{K}$, corresponding to an rms velocity of $\bar{v} = 3.4\Gamma/k$. Here, $k = 2\pi/\lambda$ is the wave vector of the transition. The cloud has an oblate ellipsoidal shape with an axial radius $240(10) \ \mu m$ and an equatorial radius $380(30) \ \mu m$ with a peak density around $\rho = 4.6 \times 10^{11} \text{ cm}^{-3}$. Using shadow imaging technique, we measure along an equatorial direction of the cloud, an optical thickness at resonance of $b_0 = 19(3)$. We note that $k\ell \simeq 500$, where ℓ is the light scattering mean free path. Since $k\ell \gg 1$, the system is deeply in the dilute regime. Hence, all collective behaviors in dense media such as Dicke superradiance in free space [26–29], recurrent scattering [30, 31], Lorentz-Lorenz and collective Lamb shift [32–34], can be disregarded. Atomic collisions are also negligible over the duration of the experiment in our dilute cold gas.

A probe laser beam is then sent across the cold atomic gas along an equatorial axis. The probe (diameter 150 µm) is tuned around the resonance of the intercombination line. Its power is 400(40) pW, corresponding to $0.45(5)I_{\text{sat}}$, where $I_{\text{sat}} = 3 \,\mu\text{W/cm}^2$ is the saturation intensity of the transition. The probe is switched on for 40 µs such that the stationary regime is reached without introducing significant radiation pressure on the atoms. The same probe sequence is repeated 1 ms later without the atoms to measure I_0 . The transmitted photons along the propagation direction are collected on a photodetec-

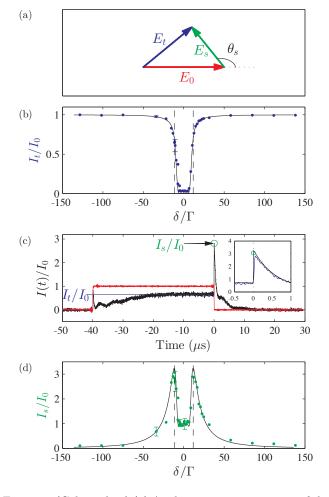


Figure 1: (Color online) (a) A schematic representation of the electric fields in the complex plane. (b) Transmission I_t/I_0 in the stationary regime as a function of the probe detuning δ/Γ . The blue dots are the experimental data and the black solid line is the theoretical prediction. (c) Temporal evolution of the normalized transmitted intensity for $\delta = -11.2\Gamma$. The red curve shows the normalized incident intensity, the black curve the experimental signal, the blue line the level of I_t/I_0 and the green open circle the value of I_s/I_0 . The inset is a zoom around t = 0 of the coherent superflash, with the black curve showing the theoretical prediction assuming instantaneous switch off of the probe. (d) I_s/I_0 in the stationary regime as a function of the probe detuning. The black solid line is the theoretical prediction and the green dots are the experimental data. The vertical dashed lines at $|\delta| = 11.7\Gamma$ in (b) and (d) show the expected positions of the maximum values of the forward scattered intensity. In the experiment, $T = 3.3(2) \,\mu\text{K}$ and $b_0 = 19(3)$, the other parameters being given in the text.

tor, leading to a transverse integration of the intensity. During probing, we apply a bias magnetic field of 1.4 G along the beam polarization to address a two-level system corresponding to the ${}^{1}S_{0}, m = 0 \rightarrow {}^{3}P_{1}, m = 0$ transition.

First, we look at the stationary regime. We plot, in Fig. 1(b), I_t/I_0 as a function of the probe frequency detuning δ . To compare with analytical predictions, we model the ellipsoid geometry of the cloud by a slab geometry. In the frequency domain, the coherent transmitted electric field through the slab is given by

$$E_t(\omega) = E_0(\omega) \exp\left[i\frac{n(\omega)\omega L}{2c}\right].$$
 (3)

We define, $n(\omega)$, ω , c, and L, respectively, as the complex refractive index, the laser optical frequency, the speed of light in vacuum, and the thickness of the slab along the laser beam. For a dilute medium, we have $n(\omega) =$ $1 + \rho \alpha(\omega)/2$ [35]. The two-level atomic polarizability is given by

$$\alpha(\omega) = -\frac{3\pi\Gamma c^3}{\omega^3} \frac{1}{\sqrt{2\pi}\bar{v}} \int_{-\infty}^{+\infty} \mathrm{d}v \frac{\exp\left(-v^2/2\bar{v}^2\right)}{\delta - kv + i\Gamma/2}, \quad (4)$$

where the integration is carried out over the thermal Gaussian distribution of the atomic velocity v along the beam propagation direction (Doppler broadening). By inserting, in Eq. (3), the polarizability, the measured values of the atomic density, and the temperature, we compute the transmitted intensity I_t and show the results in Fig. 1(b). The effective slab thickness of the cloud is chosen to match the measured optical thickness. The theoretical prediction agrees very well with the experimental data. However, close to resonance, the measured transmission is slightly higher than predicted. This mismatch is due to the finite transverse size of the cloud, which allows few photons in the wings of the laser beam to be directly transmitted.

We now take advantage of the finite response time of the light-atom system to measure the forward scattered intensity directly. For this purpose, we abruptly switch off the probe beam. The switching time is 40 ns (i.e. ~ 500 times faster than the excited state lifetime $\Gamma^{-1} = 21 \ \mu s$). According to Eq. (2), if $I_0 = 0$, we have $E_t(t=0^+)=E_s$. Hence, immediately after switching off the probe, the detector measures the forward scattered intensity of the stationary regime [i.e., $I_t(t=0^+)=I_s$]. In the absence of a driving field, free induction decay occurs. If the probe is at resonance and the optical thickness is large, the stationary transmitted intensity is very small, i.e., $E_t(t=0^-) \simeq 0$, so that $E_s(t=0^-) \simeq -E_0$. Immediately after the probe is switched off, the atomic field E_s does not change, so that $E_t(t=0^+) \simeq -E_0$ and $I_t = I_0$. The free induction decay, thus, leads to the emission of a coherent flash of light with a peak intensity equal to I_0 (see for example Fig. 1(b) in Ref. [8]). For a detuned probe field, one illustrative example of the temporal evolution of I_t/I_0 is given in Fig. 1(c). In this case, we observe a flash of light with the peak intensity clearly above I_0 . We define it as a *coherent superflash*. In the inset of Fig. 1(c), we compare the experimental signal and the theoretical prediction. This theoretical prediction is obtained by numerically calculating the inverse Fourier

transform of Eq. (3) for an incident field that is a step function in the time domain. A good agreement is obtained, except at t = 0, where the finite response time of our detection scheme slightly smoothes the predicted discontinuity. The value of I_s is obtained by extrapolating the (super)flash down to t = 0.

We plot in Fig. 1(d) the normalized forward scattered intensity as a function of the laser detuning. At resonance, we find $I_s/I_0 \simeq 1$ and $I_t/I_0 \simeq 0$, as in Ref. [8], meaning that the interference between the incident field and the forward scattered field is almost perfectly destructive (i.e. $E_s \simeq -E_0$). Far from resonance, $I_{s|\overline{\delta}|\to\infty}0$ so that $I_{t|\overline{\delta}|\to\infty}I_0$. In between these two extreme cases, I_s/I_0 passes through a maximum of 3.1(4) at $|\delta| = 11.2(7)\Gamma$. At the same detuning, we get $I_t/I_0 = 0.66(8)$. Finding $I_s > I_0$ (i.e. a coherent superflash) is surprising for two reasons. First, as mentioned earlier, the forward scattered field is built upon the incident field. Second, it reaches its maximum value when the field is mostly transmitted (i.e. where we could expect that the incident field weakly interacts with the medium).




Figure 2: (Color online) Prediction for the I_s/I_0 ratio vs. parameters b_0 (optical thickness at resonance) and detuning $|\delta|/\Gamma$ for $T = 3.3(2) \,\mu\text{K}$. The black dashed line indicates the optical thickness of our experiment. The white solid line represents the linear dependence on b_0 of the detuning at which maximum value of I_s/I_0 is attained.

In the stationary regime, energy conservation imposes the transmitted intensity to be lower than the incident one, which, from Eq. (2), implies $|E_0 + E_s|^2 \le |E_0|^2$. Thus, E_s must lie inside a circle (represented by the white and light grey areas in Fig. 3) with center $-E_0$ and radius $|E_0|$. The maximum $|E_s|$ is, thus, reached when $E_s = -2E_0$, implying that the maximum superflash is $I_s = 4I_0$. We tend to this limit as we increase the optical thickness, as shown in Fig. 2. For $|\delta| \gg k\bar{v}$, the maximum superflash intensity at a given large b_0 occurs for $\theta_s \approx \pi$. This corresponds to $|\delta|/\Gamma \approx b_0/4\pi g(k\bar{v}/\Gamma)$ where g(x) = $\sqrt{\pi/8} \exp(1/8x^2) \operatorname{erfc}(1/\sqrt{8}x)/x$ [8]. At this detuning, the superflash intensity is $I_s/I_0 \approx 4[1 - 2\pi^2 g(k\bar{v}/\Gamma)/b_0]$. At $T = 3.3 \,\mu\text{K}$, the temperature of the experiment, $g(k\bar{v}/\Gamma) = 0.16$. The detuning at maximum superflash intensity is then given by $|\delta|/\Gamma \approx 0.48b_0$, a linear dependence on b_0 which can be seen in Fig. 2.

From our experimental measurements of I_t/I_0 (stationary transmitted probe intensity) and I_s/I_0 (immediately after switching off the probe), we extract the phase of the forward scattered field

$$\theta_s = \operatorname{acos}\left(\frac{I_t - I_0 - I_s}{2\sqrt{I_0 I_s}}\right).$$
(5)

However, an ambiguity exists in the phase calculated using Eq. (5), since we cannot distinguish between θ_s and $-\theta_s$. To disambiguate, the easiest way is to choose the sign giving the best agreement with Eqs. (3) and (4). The result of this procedure is represented by the dots in Fig. 3.





Figure 3: (Color online) Reconstruction of E_s in the complex plane. The false color scale gives the probe detuning. The white region corresponds to the superflash regime, the light gray area shows the region with the normal coherent flash, and the dark gray area gives the region forbidden by energy conservation. The dots and stars are the experimental values (see text for more details). The transparent ellipses around several experimental data depict the error estimates. The solid and dashed curves are theoretical predictions, respectively, at $b_0 = 19$ and $b_0 = 3$ for a temperature $T = 3.3 \ \mu\text{K}$.

We have also added theoretical predictions in Fig. 3. We note that the phase angle θ_s is within the range $[\pi/2, 3\pi/2]$ (see the allowed circle in Fig. 3), which means that the forward scattered field always destructively interferes with E_0 , a necessary condition for a passive scattering medium. We also note that for large detunings $\theta_{s\overline{\delta}\to\pm\infty} \mp \pi/2$. However, $|E_s|$ is close to zero, so E_s stays close to the origin. As the detuning decreases, E_s traces a curve as depicted in Fig. 3 until we reach a situation where $\theta_s \simeq \pi$. If this happens when the detuning is still relatively large, as it is in the experiment, a large superflash intensity is observed. 4



excursion of θ_s is limited and no superflash occurs as is

illustrated by the dashed curve in Fig. 3.

Figure 4: (Color online) Temporal evolution (blue curves) with an abrupt change of phase of -0.4π at t = 0 for a probe detuning of (a) $\delta = -19.3\Gamma$ and (b) $\delta = +20.7\Gamma$. The insets show a schematic representation of the electric fields in the complex plane at the time pointed by the arrows.

An additional measurement makes it possible to disambiguate the sign of phase θ_s . We insert, in the optical path of the probe, an electro-optic modulator (EOM) to adjust the phase delay of E_0 . By abruptly switching off the EOM bias voltage, we create an abrupt negative jump in the phase of E_0 . Depending on whether E_0 interferes constructively or destructively with E_s after the phase jump, we observed a positive (super)flash [see Fig. 4(b)] or a negative flash [see Fig. 4(a)], respectively. We further vary the phase jumps in the $[0, -\pi]$ range where the amplitude of the (super)flash necessarily passes through an extremum giving, without ambiguity, θ_s . We show as stars in Fig. 3 several values such a reconstructed field.

In conclusion, we have studied fast transient phenomena in the transmission of a probe beam through an optically thick cold atomic sample. When a detuned probe is abruptly switched off, a short coherent superflash is emitted with a peak intensity up to 4 times the incident intensity. By combining transient and stationary intensity measurements, we show that the coherent superflash comes from a phase rotation of the forward scattered field induced by the large optical thickness of the medium. The sensitivity of the transmitted intensity to the changes in the phase of the incident field suggests that an optically dense medium may be useful as a phase discriminator device and as a generator of pulse trains with repetition rates higher than Γ [36].

The authors are grateful to R. Carminati, C. Salomon and J. Ye for fruitful discussions and to a referee for hisher very valuable comments. C. C. K. thanks the CQT and ESPCI institutions for funding his trip to Paris. This work was supported by the CQT/MoE funding Grant No. R-710-002-016-271. R. P. acknowledges the support of LABEX WIFI (Laboratory of Excellence Grant No. ANR-10-LABX-24) within the French Program "Investments for the Future" under Reference No. ANR-10-IDEX-0001-02 PSL*.

- C. P. Slichter, Principles of Magnetic Resonance (Springer, 1990), vol. 1.
- [2] L. Allen and J. H. Eberly, Optical Resonance and Two-Level Atoms (Dover Publication, New York, 1974).
- [3] N. Bloembergen, E. M. Purcell, and R. V. Pound, Phys. Rev. 73, 679 (1948).
- [4] E. L. Hahn, Phys. Rev. 77, 297 (1950).
- [5] K. Toyoda, Y. Takahashi, K. Ishikawa, and T. Yabuzaki, Phys. Rev. A 56, 1564 (1997).
- [6] A. Pietiläinen, M. Kujala, and E. Ikonen, J. Opt. Soc. Am. B 15, 2823 (1998).
- [7] S. Zamith, J. Degert, S. Stock, B. de Beauvoir, V. Blanchet, M. A. Bouchene, and B. Girard, Phys. Rev. Lett. 87, 033001 (2001).
- [8] M. Chalony, R. Pierrat, D. Delande, and D. Wilkowski, Phys. Rev. A 84, 011401(R) (2011).
- [9] R. G. Brewer and R. L. Shoemaker, Phys. Rev. A 6, 2001 (1972).
- [10] K. Foster, S. Stenholm, and R. G. Brewer, Phys. Rev. A 10, 2318 (1974).
- [11] R. G. Brewer and A. Z. Genack, Phys. Rev. Lett. 36, 959 (1976).
- [12] R. S. Judson and H. Rabitz, Phys. Rev. Lett. 68, 1500 (1992).
- [13] P. Helistö, E. Ikonen, T. Katila, and K. Riski, Phys. Rev. Lett. 49, 1209 (1982).
- [14] E. Ikonen, P. Helistö, T. Katila, and K. Riski, Phys. Rev. A 32, 2298 (1985).
- [15] U. Shim, S. Cahn, A. Kumarakrishnan, T. Sleator, and J.-T. Kim, Jpn J. Appl. Phys. 41, 3688 (2002).
- [16] M. Ducloy, C. R. Acad. Sci. Paris B 285, 13 (1977).
- [17] D. Wei, J. F. Chen, M. M. T. Loy, G. K. L. Wong, and S. Du, Phys. Rev. Lett. **103**, 093602 (2009).
- [18] P. Helistö, I. Tittonen, M. Lippmaa, and T. Katila, Phys. Rev. Lett. 66, 2037 (1991).
- [19] A. Fioretti, A. F. Molisch, J. H. Müller, P. Verkerk, and

M. Allegrini, Opt. Commun. 149, 415 (1998).

- [20] G. Labeyrie, E. Vaujour, C. A. Müller, D. Delande, C. Miniatura, D. Wilkowski, and R. Kaiser, Phys. Rev. Lett. 91, 223904 (2003).
- [21] D. Meiser, J. Ye, D. R. Carlson, and M. J. Holland, Phys. Rev. Lett. **102**, 163601 (2009).
- [22] J. G. Bohnet, Z. Chen, J. M. Wiener, D. Meiser, M. J. Holland, and J. K. Thompson, Nature (London) 484, 78 (2012).
- [23] M. O. Scully and A. A. Svidzinsky, Science **325**, 1510 (2009).
- [24] T. Bienaimé, S. Bux, E. Lucioni, P. W. Courteille, N. Piovella, and R. Kaiser, Phys. Rev. Lett. **104**, 183602 (2010).
- [25] T. Yang, K. Pandey, M. S. Pramod, F. Leroux, C. C. Kwong, E. Hajiyev, Z. Y. Chia, B. Fang, and D. Wilkowski (unpublished).
- [26] R. H. Dicke, Phys. Rev. 93, 99 (1954).
- [27] N. E. Rehler and J. H. Eberly, Phys. Rev. A 3, 1735 (1971).
- [28] R. Bonifacio and L. Lugiato, Phys. Rev. A 11, 1507 (1975).
- [29] M. Gross and S. Haroche, Phys. Rep. 93, 301 (1982).
- [30] I. M. Sokolov, M. D. Kupriyanova, D. V. Kupriyanov, and M. D. Havey, Phys. Rev. A 79, 053405 (2009).
- [31] C. C. Kwong, D. Wilkowski, D. Delande, and R. Pierrat (unpublished).
- [32] J. Pellegrino, R. Bourgain, S. Jennewein, Y. R. P. Sortais, and A. Browaeys, Phys. Rev. Lett. **113**, 133602 (2014).
- [33] J. Keaveney, A. Sargsyan, U. Krohn, I. G. Hughes, D. Sarkisyan, and C. S. Adams, Phys. Rev. Lett. 108, 173601 (2012).
- [34] J. Javanainen, J. Ruostekoski, Y. Li, and S.-M. Yoo, Phys. Rev. Lett. **112**, 113603 (2014).
- [35] E. Hetch and A. Zajac, *Optics* (Addison-Wesley, Reading, MA, 1974).
- [36] C. C. Kwong, T. Yang, D. Delande, R. Pierrat, and D. Wilkowski (unpublished).
- [37] Y. Bidel, B. Klappauf, J. C. Bernard, D. Delande, G. Labeyrie, C. Miniatura, D. Wilkowski, and R. Kaiser, Phys. Rev. Lett. 88, 203902 (2002).
- [38] Partial coherence exists in the backward direction as well. See, for example, [37] and references therein.