



TITLE:

<Advanced Energy Generation Division> Advanced Atomic Energy Research Section

AUTHOR(S):

Konishi, S.; Yagi, J.; Mukai, K.; Bakr, M.

CITATION:

Konishi, S. ...[et al]. <Advanced Energy Generation Division> Advanced Atomic Energy Research Section. Institute of Advanced Energy, Kyoto University, Annual Report 2021, 2020: 23-28

ISSUE DATE:

2021-03

URL:

<http://hdl.handle.net/2433/264006>

RIGHT:

Advanced Atomic Energy Research Section

S. Konishi, Professor
 J. Yagi, Junior Associate Professor
 K. Mukai, Assistant Professor
 M. Bakr, Program-Specific Assistant Professor

1. Introduction

Main objective of our research section is to realize advanced energy systems for the sustainable development under global environmental constraints. We have shown a Zero-emission energy scenario based on fusion energy with biomass-based recycling system where biomass waste is converted into liquid fuel or hydrogen. And further we now propose an innovative Negative emission scenario to isolate CO₂ in the atmosphere by a carbonization process. Our research section focuses on development of hydrogen isotopes fuel cycle system, breeding blankets, fusion material R&D, feasibility study for fusion-biomass hybrid power system, conversion of biomass waste, and fusion neutron generation/measurement. Followings are main research achievements in the fiscal year of 2020.

- Experimental evaluation of tritium by DD neutron using a diamond detector
- Calculation of tritium generation and radioactivity of activation foils to be performed by DT neutron source
- Development of liquid lithium lead droplet system for efficient recovery of hydrogen isotope and electrochemical purification system
- Direct quantification of nitrogen in Fe-Ti alloy which trapped nitrogen in liquid lithium
- Development of DD neutron source using 3D printed electrode

2. Blanket mock-up neutronics study

Neutron distribution monitoring in fusion blanket mock up is a key to ensure the self-sufficiency of the tritium fuel. Developing a method of measuring tritium production rate and neutron flux distribution are

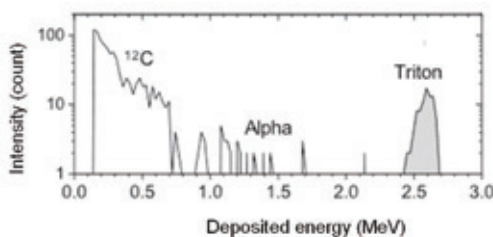


Fig. 1 Energy spectrum measured by single-crystal diamond detector with ⁶LiF converter.

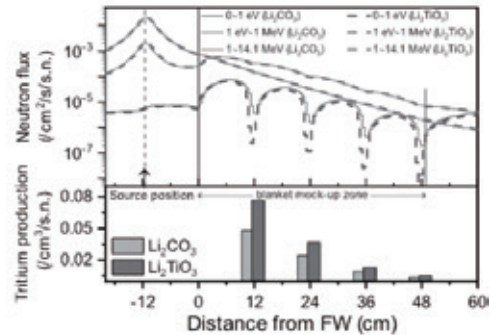


Fig. 2 Neutron fluxes and tritium production rate within a blanket mock-up irradiated with a DT neutron source

required. Tritium production rate was experimentally evaluated by using a single-crystal diamond detector and a compact DD fusion neutron source as shown in Fig. 1. By using Monte-Carlo simulation code, MCNP-6, transport of deuterium-tritium (DT) fusion reaction neutrons were simulated by MCNP6 and activation calculations were performed by DCHAIN as shown in Fig. 2. The results of activation calculations indicate each activity of activation foils inside the blanket, which proposes the exposure conditions for measurements using imaging plate.

3. Development of liquid lithium purification system

Lead lithium eutectic alloy (Pb-17at%Li, Pb-Li) is a candidate liquid breeding material with low chemical reactivity and good tritium breeding ratio. Effective tritium recovery method from the liquid must be developed for the

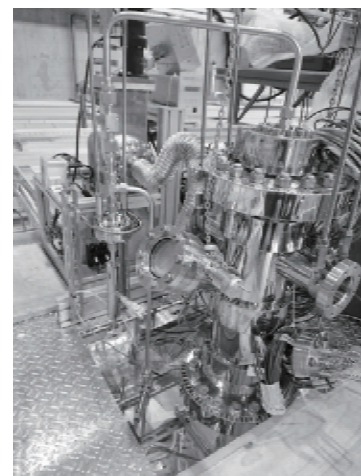


Fig.3: The VST system on Orosshi-2 Pb-Li loop at NIFS.

blanket system with minimal tritium loss. The vacuum sieve tray (VST) method, tritium recovery from the liquid droplet surface falling in vacuum, is a candidate developed in this section. This fiscal year, on a collaboration work with National Institute for Fusion Science (NIFS) the operation of VST test device shown in Fig. 3 integrated to Oroshhi-2 (Liquid metal test loop) at NIFS has been started.

Oxygen impurity in Pb-Li is also important from the view point of material compatibility. Oxygen removal by an electrochemical method using LiCl-KCl molten salt developed in this section has also been investigated in this fiscal year, and oxygen in Pb-Li is confirmed to be removed as CO₂ when oxygen impurity transferred into the molten salt reacted with the glass-like carbon electrochemically.

4. Nitrogen hot trapping for liquid lithium

Liquid lithium which is also a hopeful candidate as a liquid breeding material, is to be used as a flowing target in an intense neutron source such as A-FNS or IFMIF those are indispensable for fusion reactor development. Nitrogen impurity in liquid lithium is known to degrade the compatibility of structure material against lithium as well as the surface contamination of yttrium which is used for tritium trapping in lithium. For the removal of nitrogen, hot trapping using Fe-Ti alloy has been investigated though the detail transport behavior of nitrogen in the alloy has not been clarified. In this fiscal year, using SXES (soft X-ray energy spectroscopy), nitrogen distribution and diffusion in the alloy has been investigated. Most of the nitrogen in the alloy is concentrated in the grain boundary where titanium is also concentrated and the effective diffusivity of nitrogen in the alloy at 823 K is shown to be in the order of 10⁻¹⁶ m²/s. The nitrogen distribution in the alloy is shown in the figure 4. The X-axis of the figure is the depth from the surface of

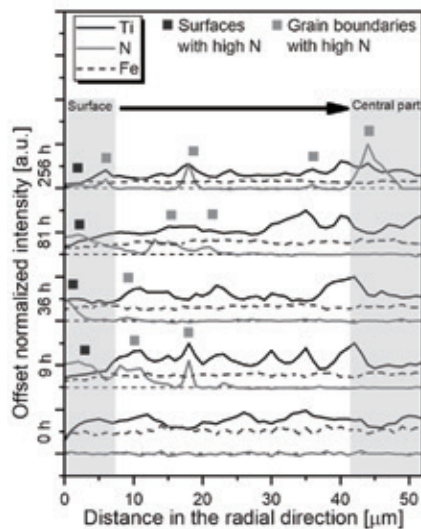


Fig.4: The nitrogen penetration into the Fe-Ti alloy quantified by SXES. Nitrogen is detected in deep region when the heating time is long (256h)

the alloy pebble, which was kept in N-containing Li (~1000wppm) at 823 K followed by the embedding into a resin and polish to show its equatorial plane.

From the practical view point, nitrogen trapping behavior in flowing lithium condition is also important. A small liquid lithium loop has been constructed in this fiscal year and the experiment using the device has also been started.

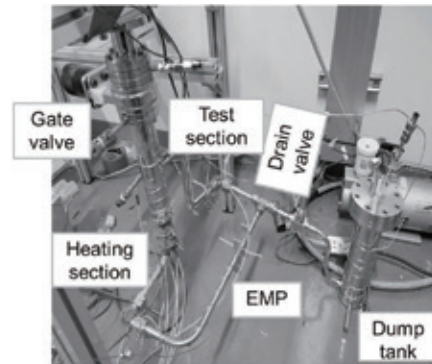


Fig.5: Major components of the lithium loop. The thermal insulator, a glove box connected to the gate valve, a casing with magnets of EMP etc. are not included.

5. Development of compact fusion neutron source with 3D-printed cathode

Development of a compact neutron source with a higher neutron production rate is of great importance for a wide range of its application, including radiography and boron neutron capture therapy (BNCT). Concentric spherical transparent cathodes made of stainless-steel and titanium were fabricated by a metal 3D printer (Figure 6). The measured neutron production rate using the Ti cathode is higher than that of the SS cathode by factors of 1.36–1.64 across the 20–70 kV range. Moreover, fusion on the Ti cathode surface enhances the total neutron yield significantly compared to the SS cathode under the same conditions. The Ti's considerable ability to accumulate D ions and molecules compared with that of SS explains the difference of measured NPR results.

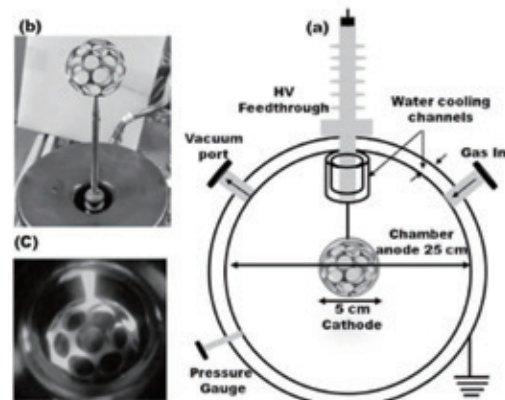


Fig.6 (a) a compact fusion neutron source. (b) buckyball-shaped grid cathode. (c) stainless-steel cathode during discharge

Collaboration Works

八木重郎, University of California San Diego (アメリカ), SiC 材料を用いたプラズマ対向機器の実用性に関する研究

八木重郎, 核融合科学研究所・LHD 計画共同研究, 液体溶融塩ブランケット第一壁開発のための高磁場下伝熱促進流路の特性評価

向井啓祐, 小西哲之, 八木重郎, 核融合科学研究所・一般共同研究, LHD 本体室における中性子線量の制御による核融合炉ブランケットの高性能化

八木重郎, 核融合科学研究所・一般共同研究, 溶融塩循環システム凝固バルブの試作と機能実証

八木重郎, 小西哲之, 向井啓祐, 核融合科学研究所・一般共同研究, 高融点鉛リチウム金属間化合物を用いた水素移行に関する基礎研究

八木重郎, 核融合科学研究所・一般共同研究, DT 中性子源を用いた液体ブランケット増殖材中における核変換トリチウム挙動の研究

八木重郎, 核融合科学研究所・一般共同研究, 液体ブランケット適用に向けた三面複層コーティング流路の製作性および流動特性評価

八木重郎, 核融合科学研究所・一般共同研究, トリチウム透過低減被覆の層構造の制御と液体ブランケット適用性

Financial Support

1. Grant-in-Aid for Scientific Research

八木重郎, 基盤研究(B), 核融合炉ブランケットにおける水素・腐食・照射相乗効果の解明と機能性材料設計 (分担金)

向井啓祐, 若手研究, 核融合ブランケットの中性子輸送と燃料生産性の実験評価

向井啓祐, 基盤研究(B), 特殊な電圧プロファイル下の電気透析による6リチウム同位体濃縮技術の研究 (分担金)

向井啓祐, 基盤研究(B), 核融合炉ブランケットにおける水素・腐食・照射相乗効果の解明と機能性材料設計 (分担金)

2. Others

小西哲之, 核融合科学研究所, 高速応答原型炉燃料サイクルとプロトンポンプフロントエンド

小西哲之, 京都フュージョンリアリング (株), 核融合炉内機器及び付属システムの開発研究

向井啓祐, (公財) 関西エネルギー・リサイクル科学研究振興財団, パルスレーザーを用いたリチウムセラミックス微小球製造手法の開発

Publications

H. Nam, H. Nam, S. Konishi, Techno-economic analysis of hydrogen production from the nuclear fusion-biomass hybrid system, *International Journal of Energy Research*, 124, 20, 10870-10877, 2020

K. Miyamae, H. Yamada, R. Kasada, S. Konishi, R. Sakamoto, Fuel flow and stock during deuterium-deuterium start-up of fusion reactor with advanced plasma model, *Fusion Engineering and Design*, 160, 111794, 2020

F. Okino, S. Konishi, Emissivity measurement of PbLi droplets in a vacuum for heat recovery by radiation Author links open overlay panel, *Fusion Engineering and Design*, 160, 111961, 2020

T. Higashi, T. Koyama, J. Yagi, T. Terai, Preparation of extremely low nitrogen concentration lithium by Fe-5at.%Ti alloy hot trap, *Fusion Engineering and Design*, 161, 112037, 2020

H. Nam, Impact of nuclear phase-out policy and energy balance in 2029 based on the 8th Basic Plan for long-term electricity supply and demand in South Korea, *Renewable and Sustainable Energy Reviews*, 122, 109723, 2020

H. Nam, K. Mukai, J. Yagi, S. Konishi, Economic Analysis of Carbon Removal Strategy by Fusion-Biomass Hybrid System in the Future Market Mechanism, *Journal of Fusion Energy*, 39, 1-2, 16-30, 2020

K. Mukai, R. Kasada, K. Sasaki, S. Konishi, Occupied Electronic States of Li in Li, Li₂O₂, and Li₂O Analyzed by Soft X-ray Emission Spectroscopy, *Journal of Physical Chemistry C*, 124, 17, 9256-9260, 2020

K. Mukai, M. Yasumoto, T. Terai, Lithium Vapor Chemistry of Hyper-Stoichiometric Lithium Metatitanate Li_{2.12(2)}TiO_{3+y}, *Journal of Physical Chemistry C*, 124,

20, 10870-10877, 2020

K. Mukai, Y. Ogino, J. Yagi, S. Konishi, 2-D evaluation of bred tritium using neutron imaging plate(Article) , IEEE Transactions on Plasma Science, 48, 6, 1831-1835, 2020

M.I. Kobayashi, K. Ogawa, M. Isobe, T. Nishitani, T. Nishimura, K. Mukai, S. Yoshihashi, M. Osakabe, Design of Neutron Spectrum-Shaping Assembly Around the Pneumatic Tube-End in the LHD Torus Hall for the Medical Research Application, Plasma and Fusion Research, 15, SI, 2405043, 2020

T. Okada, J. Yagi, H. Miyagaki, K. Mukai, S. Konishi, Fundamental analysis for electrochemical removal and monitoring of oxide impurities in lead lithium using LiCl-KCl melt, Fusion Engineering and Design, 156, 111597, 2020

H. Miyagaki, J. Yagi, T. Okada, K. Mukai, S. Konishi, Fundamental Analysis for Electrochemical Extraction and Monitoring of Impurities from Lead Lithium and Lithium with Chloride Molten Salt, Fusion Science and Technology, 76, 4, 458-463, 2020

H. Nam, K. Ibano, S. Konishi, Cost analysis and energy return on investment of fuel cell and gas turbine integrated fusion-biomass hybrid system; application of a small scale conceptual fusion reactor GNOME, Energy, 203, 117825, 2020

G. Yamazaki, T. Nagasaka, J. Yagi, T. Goto, T. Tanaka, T. Watanabe, A. Sagara, Electrochemical measurements of the corrosion of pure Fe and JLF-1 steel in HF-containing molten FLiNaK salt, Fusion Engineering and Design, 162, 112134, 2021

T. Chikada, M.H.H. Kolb, H. Fujita, K. Nakamura, K. Kimura, M. Rasinski, Y. Hishinuma, K. Mukai, R. Knitter, Compatibility of tritium permeation barrier coatings with ceramic breeder pebbles, Corrosion Science, 109288, 2021

M. Bakr, J-P. Wulfschlaeger, K. Mukai, K. Masuda, M. Tajmar, S. Konishi, Evaluation of 3D printed buckyball-shaped cathodes of titanium and stainless-steel for IEC fusion system, Physics of Plasmas, 28, 012706, 2021

K. Mukai, Y. Ogino, M. Kobayashi, M. Bakr, J. Yagi, K. Ogawa, M. Isobe, S. Konishi, Evaluation of tritium production rate in a blanket mock-up using a compact fusion neutron source, Nuclear Fusion, 61, 46034, 2021

M. Bakr, K. Mukai, K. Masuda, J. Yagi, S. Konishi,

Characterization of an ultra-compact neutron source based on an IEC fusion device and its prospective applications in radiography, Fusion Engineering and Design, 167, 112346, 2021

H. Matsuura, T. Suganuma, Y. Koga, M. Naoi, K. Katayama, T. Otsuka, M. Goto, S. Nakagawa, S. Hamamoto, E. Ishitsuka, K. Tobita, S. Konishi, R. Hiwatari, Y. Someya, Y. Sakamoto, The T-containment properties of a Zr-containing Li rod in a high-temperature gas-cooled reactor as a T production device for fusion reactors., Fusion Engineering and Design, 169, 112441, 2021

Y. Ogino, K. Mukai, J. Yagi, S. Konishi, Simulations for practical measurement methods of spatial neutron distribution inside blanket mock-up irradiated with DT neutrons, Fusion Engineering and Design, 168, 112417, 2021

W.J. Nuttall, S. Konishi, S. Takeda, D. Webbe-Wood, Commercialising Fusion Energy, 2020

笠田竜太, 向井啓祐, 軟 X 線発光分光装置を搭載した電子プローブマイクロアナライザによる原子力・核融合材料中の軽元素分析および状態分析, 日本電子 News, 52, 1, 19-22, 2020

小西哲之, 長尾昂, 京都大学発, 核融合炉向け装置の設計・開発～日本初の核融合テクノロジーで, 新しいエネルギー産業を創出し, 世界の環境問題を解決する～, 電気評論 2020 年夏期増刊号, 56-60, 2020

Presentations

小西哲之, 宮垣寛之, 向井啓祐, 日渡良爾, 磯部兼継, 増崎貴, 田中将裕, 原正憲, 片山一成, プロトンポンプによる原型炉一次燃料系水素同位体ダイレクトリサイクルの効果, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

向井啓祐, 安本勝, 寺井隆幸, 過定比メタチタン酸リチウム $\text{Li}_{2.12(2)}\text{TiO}_{3+y}$ の蒸発特性評価, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

荻野靖之, 向井啓祐, 八木重郎, 小西哲之, 中性子輸送計算によるブランケット模擬体系内部の中性子空間分布の計算および実験にむけた検討, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

林祐太, 向井啓祐, 八木重郎, 藤田隆明, 小西哲之, 燃料供給による核融合出力制御と不純物応答, 日本原子力学会 2020 年秋の大会, オンライン開催,

2020.9.16-18

岩松尚杜, 向井啓祐, 近田拓未, 八木重郎, 小西哲之, Li_2TiO_3 固体増殖ブランケット構造材 F82H 表面に生成する酸化被膜の水素透過特性, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

大村涼, 八木重郎, 向井啓祐, 小柳津 誠, 落合謙太郎, 春日井敦, 小西哲之, 軟 X 線分光分析法による鉄チタン合金中窒素の詳細分析, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

三浦颯太, 中村和貴, 赤星江莉果, 叶 翔, 八木重郎, 菱沼良光, 田中照也, 近田拓未, 液体ブランケット用機能性被覆の照射—腐食相乗効果, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

S. Konishi, H. Miyagaki, K. Mukai, J. Yagi, Proton Conductor Pump for Divertor evacuation for the Direct Recycling in the Primary Fusion Fuel Cycle, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

K. Mukai, M. Yasumoto, T. Terai, Thermochemical analysis of Li-containing vapor gas from hyper-stoichiometric lithium metatitanate ceramic breeder pebbles, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

M. Bakr, K. Mukai, J. Yagi, S. Konishi, K. Masuda, Development of ultra-compact neutron source based on inertial electrostatic confinement fusion device and its applications, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

Y. Ogino, K. Mukai, J. Yagi, S. Konishi, Simulations for practical measurement of spatial neutron distribution inside blanket mock-up irradiated with DT neutrons, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

Y. Hayashi, K. Mukai, J. Yagi, T. Fujita, S. Konishi, Fusion Power Control by Injecting Fuel and Response to Impurity Particles, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

R. Omura, J. Yagi, K. Mukai, M. Oyaidzu, K. Ochiai, A. Kasugai, S. Konishi, Analysis of nitrogen distribution in iron-titanium alloys using Soft X-ray Emission Spectroscopy, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

H. Matsuura, T. Sukanuma, Y. Koga, K. Katayama, T. Otsuka, M. Goto, S. Nakagawa, S. Hamamoto, E. Ishitsuka, K. Tobita, S. Konishi, R. Hiwatari, Y. Someya,

Y. Sakamoto, Tritium confinement property of Zr-contained Li rod in hightemperature gas-cooled reactor as a tritium production device for fusion reactors, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

S. Miura, K. Nakamura, E. Akahoshi, S. Kano, J. Yagi, Y. Hishinuma, T. Tanaka, T. Chikada, Lithium-lead corrosion behavior of zirconium oxide coating after heavy-ion irradiation, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

K. Kubo, K. Katayama, K. Tsukahara, M. Oya, S. Fukada, T. Tanaka, A. Sagara, J. Yagi, T. Watanabe, M. Kinoshita, Tritium release behavior from neutron-irradiated FLiNaBe mixed with Ti powder, 31st Symposium on Fusion Technology (SOFT2020), Online, 2020.9.20-25

小西哲之, 核融合プラント放出トリチウムの影響経路における濃度管理, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

八木重郎, 田宮裕之, 荻野 靖之, 向井啓祐, 能登裕之, 田中照也, 小西哲之, 鉛リチウム金属間化合物から溶融塩への水素移行挙動, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

向井啓祐, 荻野靖之, 小林真, Bakr Mahmoud, 八木重郎, 小川国大, 磯部光孝, 小西哲之, 放電型核融合中性子源による模擬ブランケットへの中性子照射とトリチウム生成率計測, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

荻野靖之, 小林真, 向井啓祐, 八木重郎, 小西哲之, 小川国大, 磯部光孝, LHD 真空容器内部における放射性核種の検出とその分布測定, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

見城俊介, 荻野靖之, 向井啓祐, Bakr Mahmoud, 八木重郎, 小西哲之, 水素吸蔵合金を用いた燃料ガス閉じ込め型核融合中性子源の開発, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

田宮裕之, 八木重郎, 岡田知大, 向井啓祐, 田中照也, 小西哲之, 塩化物溶融塩系-LiPb における酸素不純物の電気化学測定とガス分析, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

村田勇斗, 八木重郎, 向井啓祐, 小西哲之, 鉛リチウム合金へのマグネシウム添加と不純物制御への効果, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

山口修平, 小西哲之, 向井啓祐, 八木重郎, 原型炉ダイバータ排気システムに向けたプロトン導電体

セルの電気化学測定, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

赤星江莉加, 八木重郎, 向井啓祐, 小西哲之, 菱沼良光, 田中照也, 近田拓未, 液体リチウム鉛回転流動場における機能性セラミックス被覆の共存性試験, プラズマ・核融合学会第 37 回年会, オンライン開催, 2020.12.1-4

浦野雄介, 畑和実, 折戸玲子, 黒澤俊介, 伏見賢一, 小西哲之, Bakr Mahmoud, 向井啓祐, 宇宙暗黒物質探索のための単色中性子を用いた NaI(Tl) の消光因子測定, 第 35 回 KEK 研究会「放射線検出器とその応用」, オンライン開催, 2021.1.20-22

浦野雄介, 畑和実, 折戸玲子, 黒澤俊介, 伏見賢一, 小西哲之, Bakr Mahmoud, 向井啓祐, PICOLON 宇宙暗黒物質探索: 単色中性子を用いた NaI(Tl) の消光因子測定, 日本物理学会第 76 回年次大会, オンライン開催, 2021.3.12-15