Purdue University Purdue e-Pubs

LARS Symposia

Laboratory for Applications of Remote Sensing

1-1-1981

An Approach to Develop Interpretation Keys for the Analysis of Single Band Bhaskara Satellite TV-Data

K. L. Majumder

A. K. S. Gopalan

D. S. Kamat

A. N. Patel

P. Senchaudhuri

Follow this and additional works at: http://docs.lib.purdue.edu/lars_symp

Majumder, K. L.; Gopalan, A. K. S.; Kamat, D. S.; Patel, A. N.; and Senchaudhuri, P., "An Approach to Develop Interpretation Keys for the Analysis of Single Band Bhaskara Satellite TV-Data" (1981). *LARS Symposia*. Paper 482. http://docs.lib.purdue.edu/lars_symp/482

This document has been made available through Purdue e-Pubs, a service of the Purdue University Libraries. Please contact epubs@purdue.edu for additional information.

Reprinted from

Seventh International Symposium

Machine Processing of

Remotely Sensed Data

with special emphasis on

Range, Forest and Wetlands Assessment

June 23 - 26, 1981

Proceedings

Purdue University The Laboratory for Applications of Remote Sensing West Lafayette, Indiana 47907 USA

Copyright © 1981 by Purdue Research Foundation, West Lafayette, Indiana 47907. All Rights Reserved. This paper is provided for personal educational use only, under permission from Purdue Research Foundation. Purdue Research Foundation

AN APPROACH TO DEVELOP INTERPRETATION KEYS FOR THE ANALYSIS OF SINGLE BAND BHASKARA SATELLITE TV-DATA

K.L. MAJUMDER, A.K.S. GOPALAN, D.S. KAMAT, A.N. PATEL

ISRO-Space Applications Centre Ahmedabad, India

P. SENCHAUDHURI

Indian Institute of Management Ahmedabad, India

I INTRODUCTION

Bhaskara, the first Indian Earth Observations Satellite was launched on June 7, 1979. The two primary payloads onboard the Bhaskara satellite were two Television cameras (TV Camera) and two frequency Satellite Microwave Radiometers (SAMIR). The salient features of the TV camera and SAMIR payloads¹ are summarised and given in Table 1.

Since the Bhaskara TV data is having a low resolution and as the data was acquired in only one band, namely, 0.54-0.66 µm, the utility of the data from the point of view of information extraction on earth resources is limited. Moreover, because of its orbital characteristics the data is acquired at different times of the day and thus under various illumination conditions.

This note discusses an approach that is designed to increase the scope of utilisation of this data. This approach is developed using both digital and photographic techniques with a view to arrive at a standard set of keys for analysing and interpreting the TV data. The basis of the digital technique is the frequency distribution of gray tones (reflectance values) for identifying major cover types, classifying them and generation of three new data sets by assigning pseudo grey codes to the classified data. The pseudo gray coded data is then used to generate photographically colour codes for each of the cover type. Each pseudo data set is turned into a photographic film transparency and is assigned the colours red, green and blue respectively. The colour composite made using these transparencies is the new colour coded thematic ground cover picture from Bhaskara.

II METHODOLOGY

Let $Z = \{3i \mid i = 1, \dots, N\}$ be the data set corresponding to an image frame, where N is the total number of pixels and if

fi, $i = 1, \dots, n_g$ be the frequency for the frame corresponding to the gray value i, then

 $N = \sum_{i=0}^{n_g} f_i \qquad \dots (1)$

where n + 1 is the number of gray levels recorded by the slow scan TV vidicon camera. Also, let

 $I = \{ mi \mid 0 \leq mi \leq ng \}$ be the sequence of relative minima and $J = \{ Mj \mid 0 \leq mj \leq ng \}$ be the sequence of relative maxima for the frequency distribution given in equation (1). From these two sequences I and J form the two sequence I' and J' of stable minima and maxima respectively such that

$$\begin{aligned} & \texttt{I}' = \left\{ \begin{array}{l} \dot{\textit{i}} \mid \dot{\textit{i}} \in \texttt{I} \\ \text{and} \\ & \texttt{J}' = \left\{ \begin{array}{l} \dot{\textit{j}} \mid \dot{\textit{i}} \in \texttt{J} \\ \end{array} \right\} \begin{array}{l} \dot{\textit{f}} \mid \textbf{j} = 1 \\ \vec{\textit{f}} \mid \textbf{j} \in \texttt{J} \\ \end{array} \right\} \begin{array}{l} & \dots \\ \vec{\textit{f}} \mid \textbf{j} \in \texttt{J} \\ \end{array}$$

where, f_{k-1} , f_k and f_{k+1} are the frequencies at the three consecutive relative minima and maxima.

The sequences I' and J' are used to identify the clusters existing in the data set Z on the basis of the hypothesis that there exists at least one stable maximum between two stable minima. The limits of the clusters are obtained in the following way

Let
$$I' = \{x_1, \cdots, x_m\}$$

and $J' = \{a_1, \cdots, a_m\}$

are the sequences of stable minima and maxima respectively then

$$C_{i} = \bigcup_{\substack{i=k}}^{l} [x_{j}, x_{j+1}]$$

where, $j_i \in [x_i, x_{i+1}]$ and x_k-1 is the upper limit of C_{i-1} , C_i is the i-th cluster whose grey values lie between the range x_k and $x_{1+1}-1$.

Then a lookup table is generated with the clusters and their limits. This table is used to classify the data set Z.

The classified data set is assigned pseudo codes, one code for each cluster, where values are assigned by taking into consideration the light reflectance properties of the objects represented in the clusters. Three such data sets with three different grey coding for each cover type are generated and photographic transparencies are generated on a film recording system. Finally a colour coded imagery is generated photographically by exposing under controlled conditions with the three primary colours, namely, blue, green and red. The colour tones generated out of this product can be used as keys for classifying and interpreting the data for extracting resources information from Bhaskara TV Camera data.

III. ANALYSIS OF DATA, INTERPRETA-TION AND THEMATIC MAP KEY GENERATION

A typical Bhaskara TV imagery over Himalayan region in India was chosen for testing this approach.

The reseau marks in the imagery were blocked by counting the positions of the scan lines and pixels as there was no consistency in the location of reseau marks in the frame.

The methodology mentioned in the previous section was then applied to the imagery in order to check the consistency of the result and thereby to standardise the colour coding scheme for a single band TV data.

A, TEST SITE

The data for the test site whose coordinates are (29°50'N, 77°16'E), 31°45'N, 75°E), (31°30'N, 80°E) and (33°45'N, 77°45'E) covers an area of 329x329 sq kms on the ground and is shown in figure 1. The data was analysed by using the method discussed earlier in section II. The analysis gives eight distinct clusters. The distribution of population in each of the clusters and the range of gray values of each cluster is given in Table 2. From the clustered data set three separate photo-thematic transparencies/maps were generated by giving three sets of pseudo gray codes. One such photo-thematic-map is shown in figure 2. Using these three photo-thematic-maps, a colour coded picture is generated as discussed in section II. For the above test site, the broad landcover information is available from the Forest Atlas of India² and is shown in figure 3. By comparing figure 3 and the colour coded picture it is possible to establish a correspondence between colour tones generated in the picture and the existing landcovers. Table 3 gives the range of gray values for the different clusters, their tones (keys) in the colour coded picture and the names of the landcovers.

It is observed from figure 3 and Table 3 that arable land shown in the existing map shows two colour tones in the colour coded Bhaskara imagery, namely, greenish, blue and orange, which may correspond to fallow/barren land and vegetated lands respectively. Again dull green tone is observed for both tropical moist deciduous forest as well as for Himalayan dry temperate forest. Also, for dry alpine scrub two tones, namely, brown and pinkish violet are seen in the colour coded Bhaskara imagery which may be because of the different dryness conditions. The light pink tone appearing in the picture could not be related with any ground cover and this may be appearing due to some mixed signatures from forest and snow. It is also noticed that water in Bhakra Nangal dam gives similar signature as snow. This may be due to specular reflectance of sun illumination from the dam water. This is difficult to distinguish from snow, probably because such high reflectance value is close to the levels corresponding to snow cover and both may be falling in the saturation region of the TV sensor response curve.

The above mentioned procedure was extended to the imagery obtained over two more test sites with a view to verify the consistency of the approach³.

B, GENERATION OF KEYS

The test results from all the three sites mentioned above were combined to define keys that could be used consistently for the interpretation of all Bhaskara TV data. These keys in the form of colour tones, as explained before, were generated on the basis of clusters obtained from the spectral reflectance properties of various ground covers and by making use of available ground truth information. Table 4 gives broad ground covers and their interpretation keys.

IV, CONCLUSION

This approach of identifying clusters on the basis of a definition of relative maxima and minima in a data set and identification of a stable maximum between two minima seems to offer reasonably consistent interpretation keys for broad categories of land covers. The variations observed in the colour tones for similar ground covers may be attributed to, among other things, the omission of radiometric corrections required in the data due to the nonavailability of radiometric calibration information on TV data as well as acquisition of this data under different illumination conditions. These broad categories of land covers could be further sharpened, if one looks at the data alongwith the latest landcover maps and reference data. One major advantage of this approach is the exact delineation of a broad cover and its quantification as illustrated in Table 2.

It seems that the TV data when analysed using the above approach fulfils, to some extent, mission objectives of SEO, namely, the utilisation of Bhaskara TV data in the fields of forestry, hydrology (snow cover) and broad landuse.

V. REFERENCES

- Final Configuration of Satellite for Earth Observations. Doc. No. SEO-ISAC-CT-79-05-5-015, ISRO Satellite Centre, Bangalore, May 1979.
- 2. Dasgupta, S.P. (Ed)., Atlas of Forest Resources of India, National Atlas Organisation, 1976.
- Senchaudhuri, P. et. al.: An Approach to develop Interpretation Keys for the Analysis of Single band Bhaskara TV-Data, Tech. Rep. RSA-IP/TN-01/81, Space Applications Centre, Ahmedabad, January 1981.

VI. ACKNOWLEDGEMENT

The authors wish to thank their colleagues in Sensor Development Division and Image Processing and Analysis Division of Remote Sensing Area of Space Applications Centre, ISRO for their cooperation and useful discussions in this work. Thanks are also due to Chairman of the Remote Sensing Area and Director of Space Applications Centre for providing facilities and encouragement to carry out this work. The support provided by Shri Naresh Bhatnagar in typing this manuscript is thankfully acknowledged.

Table 1

Bhaskara Orbit and TV Sensor specifications

Bhaskara Orbit Specifications:

Altitude	:	525 kms (nominal)
Inclination	:	51 ⁰
Туре	:	Near circular (non sunsynchronous)

TV Payload specifications:

Type of camera	:	Slow Scan Vi bands (0.54- 0.75-0.85 ur	0.66 um and
Ground Resolu-			
tion	:	1 km (approx	c.)
Ground Coverage per frame	:	$340x340 \text{ km}^2$	
Quantisation level	:	7 bits	
SAMIR Payload specifications:			
Frequency (GHz)		19.1	22.235
RF Bandwidth (M	Hz)	250	250
Brightness Tempera-			
ture Resolution (°K)	1	1
Spatial Resolution	n (kn	ns) 150	230

Table 2. Statistics of clusters

Clus ter No.	- Clust Lowe limit	er interval r Upper limit	Populat	ion % of tot area	al
1.	9	52	9,645	6.18	
2.	52	60	8,896	5.70	
3.	60	64	7,534	4.83	
4.	64	72	16,864	12.08	
5.	72	87	27,638	17.72	
6.	87	111	17,864	11.45	
7.	111	123	4,784	3.05	
8.	123	127	58,478	37.49	
9.	0	9	2,315	1.50	

Table 3. Correspondence between clusters, colour tones and land cover. Class/Cover type/ in the test site.

Sr. No.	9	Colour-Code	Possible Class/ Covertype
1.	9 - 52	Red	Himalayan moist Temperate Forest
2.	52 - 60	Brown	Dry Alpine Scrub
3.	60 - 64	Pinkish Violet	Dry Alpine Scrub
4.	64 - 72	Dark Green	Tropical moist deciduous forest and Hi- malayan dry Temperate forest
5.	72 - 87	Orange	Arable Land (with vegeta - tion)
6.	87 - 111	Greenish Blue	Arable land (Barren/Fallow)
7. 3	111 - 123	Light Pink	Unclassified (mixed signa- ture)
8. 3	123 - 127	Light Blue	Snow

Table 4. Keys for interpretation of Bhaskara-TV data

	Cover Type	Colour Tone
Forest	i) Moist temperate forest	Red
	ii) Dry Alpine Scrub	Brown, Pinkish violet
i	ii) Tropical moist deciduous forest, Himalayan dry temperate forest	Dull Green
Water Body	i) Deep sea water	Blue
Dody	ii) Coastal sedimented water	White
i	iii) Sedimented water	Greenish Blue
Barren	/Fallow land	Greenish Blue
Vegetat	ive Arable Land	Orange
Snow or	r cloud	Light Blue

1981 Machine Processing of Remotely Sensed Data Symposium

636




Fig. 1: Original Bhaskara TV-data for the Test Site

Fig. 2: Pseudo coded photo-thematic-map from figure 1

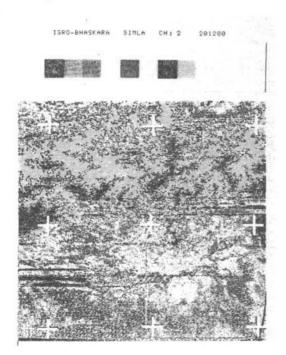


Fig. 3: Broad Landcover map for the Test Site

