University of South Alabama

JagWorks@USA

School of Marine and Environmental Sciences Faculty and Staff Publications and Presentations

School of Marine and Environmental Sciences

11-2014

Addition of Passive Acoustic Telemetry Mitigates Lost Data From Satellite-Tracked Manatees

Allen M. Aven

Ruth H. Carmichael

Matthew J. Ajemian

Sean P. Powers

Follow this and additional works at: https://jagworks.southalabama.edu/mar_env_sci_faculty_staff_pubs Part of the Behavior and Ethology Commons, Marine Biology Commons, Oceanography Commons, Other Animal Sciences Commons, Population Biology Commons, and the Terrestrial and Aquatic Ecology Commons Marine and Freshwater Research, 2015, **66**, 371–374 http://dx.doi.org/10.1071/MF14178

Addition of passive acoustic telemetry mitigates lost data from satellite-tracked manatees

Allen M. Aven^{A,B,D}, Ruth H. Carmichael^{A,B}, Matthew J. Ajemian^C and Sean P. Powers^{B,A}

^ADauphin Island Sea Lab, 101 Bienville Boulevard, Dauphin Island, AL 36528, USA.

^BDepartment of Marine Sciences, University of South Alabama, Mobile, AL 36688, USA.

^CHarte Research Institute for Gulf of Mexico Studies, Texas A&M University–Corpus Christi,

6300 Ocean Drive, Unit 5869, Corpus Christi, TX 78412-5869, USA.

^DCorresponding author. Email: allenaven@gmail.com

Abstract. Satellite-tracked manatees routinely lose satellite tags or tag functionality, resulting in the loss of valuable data on migration and habitat use patterns. Fortunately, some movement data from these animals remain salvageable because manatees typically retain a peduncle belt containing an acoustic transmitter that can be detected with a submersible hydrophone. We deployed an array of moored datalogging hydrophones at key locations in our study area to detect manatee belt-embedded acoustic transmitters, a technique not typically used to track manatees. Our array was successful in detecting five tagged manatees, and concurrently detected compatible acoustic tags of other estuarine fauna (e.g. Bull Sharks) tagged by local researchers. Moored datalogging hydrophones, therefore, provided a method to mitigate the loss of satellite tags from estuarine megafauna, and enhanced collaborative opportunities with researchers who tagged other species using compatible equipment.

Additional keywords: animal movement, hydrophone, sirenia.

Received 8 April 2014, accepted 15 September 2014, published online 26 November 2014

Introduction

Satellite-linked telemetry is a powerful method to track movements of mobile fauna (Tomkiewicz et al. 2010). For manatees and dugongs, satellite tracking systems have evolved during the past 30 years (Marsh and Rathbun 1990; Reid et al. 1995; Deutsch et al. 1998) and currently consist of three main components: (1) the buoyant 'tag' unit, housing the electronics, batteries and antenna; (2) a belt fitted around the animal's peduncle commonly containing an embedded acoustic transmitter; and (3) a flexible nylon tether connecting the floating unit to the peduncle belt that enables the unit to be towed behind the animal along the water's surface. This tracking system is somewhat unique among aquatic animals in that the tag floats and is linked to the animal with a tether rather than directly attached to the animal with a collar or an implant. Although a floating tag provides better data reception and transmission, tether breakage is commonplace in satellite telemetry studies of manatees and other aquatic species, substantially shortening the duration of tag deployments relative to potential (Reid et al. 1995; Deutsch et al. 1998; Ajemian and Powers 2014). Although disadvantageous from a data-collection perspective, tag release must occur to ensure animal safety should the tag become snagged on or tangled in an obstruction. Loss of telemetry functionality can also occur due to other causes such as equipment malfunction, obscured GPS reception, animal submersion, or water intrusion after a boat

strike or alligator interaction (Deutsch *et al.* 1998; Weigle *et al.* 2001). These unpredictable but fairly common events can limit tracking duration and result in data loss from telemetered animals at great expense to researchers.

Despite loss of satellite telemetry functionality, manatees with detached or non-functional satellite tags can be identified by acoustic transmitters embedded in peduncle belts. These acoustic transmitters typically are used for active tracking and relocating animals with detached or non-functional satellite tags. Researchers locate and follow a focal animal, typically by boat, using a portable directional hydrophone with the ultimate goal of replacing the non-functional satellite tag. These efforts are not always successful, especially if the animal has moved from its last known location. Hence, additional measures are often needed to locate animals or recover data.

In this study, we tested the use of moored omnidirectional datalogging hydrophones to detect belted manatees and potentially mitigate data loss from detached or non-functional satellite tags. The hydrophone array was designed to test: (1) the efficacy of this method to detect residence or passage of belted manatees within targeted travel corridors and known habitat areas; and (2) the potential for concurrently detecting other acoustically tagged estuarine fauna, thus supporting and enhancing collaborative research efforts with other area investigators.

A. M. Aven et al.

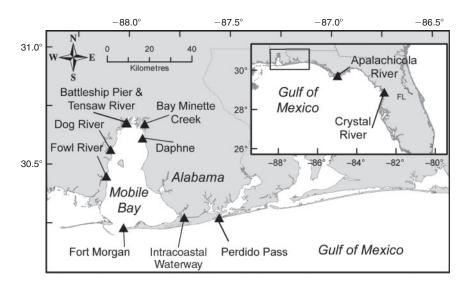


Fig. 1. Hydrophone deployment sites in Alabama and Florida, USA.

Materials and methods

We captured a total of eight manatees on the northern Gulf of Mexico coast in Mobile Bay, Alabama, USA, in 2009, 2010 and 2012 using standard manatee open-water boat capture methods and handling techniques (e.g. Weigle *et al.* 2001). Each manatee was fitted with a Telonics GPS satellite tag (Telonics Inc., Mesa, AZ, USA), tether and peduncle belt containing an embedded Sonotronics CHP-87-L acoustic transmitter (Sonotronics Inc., Tucson, AZ, USA) having a manufacturer-stated ideal range of 3000 m and expected battery life of 18 months. Satellite tags were set up to record GPS locations every 30 min to a horizontal accuracy of less than 10 m. Animal locations were monitored through ARGOS service and occasional visual observation while the satellite tag remained attached and functional.

Lotek WHS2000 datalogging submersible acoustic receivers (Lotek Wireless Inc., Newmarket, ON, Canada, hereafter referred to as 'hydrophones') were deployed to monitor belted manatees and other estuarine fauna with compatible acoustic transmitters at 11 sites in coastal Alabama and Florida, USA (Fig. 1). We chose sites based on: (1) known manatee use of the area; and (2) location at aquatic bottlenecks such as river mouths or passes (where possible), ensuring reasonably close passage of transient fauna to the hydrophone. Receivers were programmed to sequentially monitor frequencies 70-83 kHz for the constantly transmitting Sonotronics CHP transmitters used in manatee belts, and 69 kHz for Lotek Rcode transmitters used by collaborating researchers, which transmitted every 60 s. We tested the detection ranges at select sites by submerging a Sonotronics CHP-87-L transmitter 1 m below the surface for 3 min at a series of distances from 100 to 500 m away from the hydrophone. For each test, the time of transmitter submersion was noted and was later cross-referenced against hydrophone detection timestamps to determine if the test transmitter was detected.

Detection data downloaded from the hydrophones were postprocessed in two different stages. Raw data were initially processed with manufacturer-provided Sonotronics SURsoftDPC software and then analysed using a custom script to exclude tag detection records isolated in time by more than 60 min (modified

Table 1.	. Results of acoustic transmitter range tests at each hydroph				
	deployment site				

+, the transmitter was detected by the hydrophone; -, no detection

Location	Distance from hydrophone (m):				
	100	200	300	400	500
Fowl River, AL	+	+	+	+	+
Dog River, AL	+	+	+	_	_
Battleship Park Pier, AL	+	+	+	_	+
Bay Minette Creek, AL	+	+	+	+	+
Intracoastal Waterway, AL	+	+	+	+	+
Apalachicola River, FL	_	_	+	-	_

from Grothues *et al.* 2005). The 60-min exclusion approach removed detections of ambient environmental noises, boats, depth finders or other noises that may mimic an acoustic transmitter signal. Spurious detections, although common, are not likely to mimic any particular transmitter code more than once within a small time window (Grothues *et al.* 2005). Thus, we are confident that the filtered hydrophone detection data represented the presence of focal animals.

To assess hydrophone performance during periods when manatees were satellite-tracked, we found all GPS-derived animal locations within each hydrophone's expected detection radius (300 m) using GIS tools. We cross-referenced the timestamps of those locations to hydrophone detection data to determine if animals near each hydrophone were detected by the hydrophone.

Results and discussion

The detection range tests indicated that hydrophones reliably detected acoustic transmitters out to 300 m and in some cases as far as 500 m at all tested sites except Apalachicola River, FL (Table 1). These detection ranges are consistent with tests by other researchers using similar equipment in the region (Drymon *et al.* 2014). The Apalachicola River hydrophone was

Passive acoustic telemetry for tracked manatees

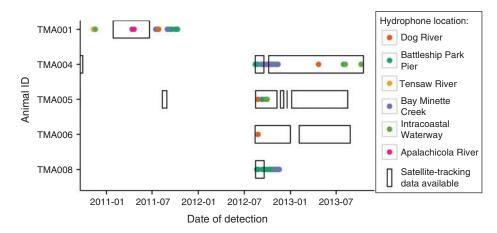


Fig. 2. Hydrophone detections of belted manatees by day of detection. Multiple detections in 1 day at the same site are symbolised only once. Periods when each animal was satellite tagged are indicated.

situated in an area with high boat traffic, significant water movement, variable bathymetry and submerged and floating aquatic vegetation. These factors along with other site-specific attributes such as salinity, tides, currents and sediment composition are known to mediate acoustic transmissions (Clements *et al.* 2005; Grothues *et al.* 2005; Heupel *et al.* 2006; Mathies *et al.* 2014) and likely accounted for the poorer detection range at Appalachicola River compared with other sites. The most effective hydrophone placement for detection of belted manatees, therefore, may be in deeper or dredged areas used for travel or rest rather than in shallow vegetated manatee foraging habitats, which may include more attributes that attenuate acoustic transmitter signals (Miksis-Olds and Miller 2006).

All eight tagged animals monitored in this study experienced tether breakage resulting in premature loss of satellite tags. Our hydrophone array detected the presence of five of those eight animals at six hydrophone sites, both while the animals retained satellite tags and after satellite tracking data became unavailable due to tag loss (TMA001, TMA004, TMA008: Fig. 2). These hydrophone detections (n = 1903) provided valuable information on movements of those focal animals that otherwise would have been unavailable due to satellite tag detachment. For example, hydrophone detections of TMA001 in 2011 enabled us to conclude that the animal had undertaken a significant, regional-scale movement from Apalachicola FL (where that animal's satellite tag stopped functioning) to Mobile Bay AL, where that animal resided for several months. These results suggest that strategically placed 'sentinel' acoustic receivers could be effective tools to detect presence of focal manatees at known aggregation sites or when traveling along predictable routes, potentially allowing researchers to infer timing of migrations. In addition to manatees, we also detected 35 acoustically tagged individuals of other estuarine species, including Bull Sharks (Carcharhinus leucas) and Gulf Sturgeon (Acipenser oxyrinchus desotoi), at eight hydrophone sites. These data were shared with the appropriate collaborating researchers.

In all, we found 96 instances when satellite-tracked manatees' GPS-derived locations fell within the expected detection radius (300 m) of a deployed hydrophone. Of those 96 locations, 50 were accompanied by one or more hydrophone detections of that animal's acoustic transmitter within 30 min before or after the time of the GPS reading. Of the remaining 46 GPS-derived manatee locations, 43 were completely undetected by the hydrophone and three were detected but subsequently rejected by the time filtering step in the data post-processing. These rejections likely indicate that the animal passed through the hydrophone's detection area too briefly to be detected more than once. Within 30 min of the GPS-derived location, successful manatee detections occurred regardless of manatee location within the 300-m radius (logistic regression, P = 0.58). Although this approach successfully detected manatee presence more than 50% of the time, these data indicate that non-detection is not necessarily evidence of absence of the animal from the study area.

This study demonstrates the potential application of moored datalogging hydrophones in a passive tracking role, an application that researchers have not traditionally used to monitor the West Indian manatee. Passive acoustic monitoring, implemented with carefully planned hydrophone arrays, can provide records of animal presence to supplement and corroborate high-resolution satellite tag data and may be particularly valuable when satellite tracking function is lost from these animals. This approach also has the potential to contribute to other researchers' compatible acoustic monitoring arrays with little additional effort, by concurrently detecting other acoustically tagged fauna. This type of multi-platform, coordinated and collaborative monitoring among fisheries and marine mammal researchers in acoustic monitoring networks has potential to be highly beneficial in minimising equipment and maintenance costs while maximising data collection and expanding the overall scale of tracking studies.

Acknowledgements

This work was performed under US Fish & Wildlife Service permit number MA37808A-0 (Sea to Shore Alliance, Sarasota, FL) and was funded by the Northern Gulf Institute (through the Gulf of Mexico Research Initiative) and the Alabama Division of Wildlife & Freshwater Fisheries under traditional Section Six of the US Fish & Wildlife Service. All procedures for working with live animals were approved by the University of South Alabama Institutional Animal Care and Use Committee (Protocol #581568). J. Powell and M. Ross (Sea to Shore Alliance), and R. Wagoner and personnel (Sea World of Orlando) enabled manatee capture and tagging efforts. The authors thank M. Valentine, N. Taylor, E. Hieb and C. Miller, who provided essential field help, and J. Reid, S. Butler and D. Slone (US Geological Survey Sirenia Project), who provided assistance with manatee satellite telemetry. Comments from Dr A. Rice and Dr M. Seaman greatly improved the quality of this manuscript.

References

- Ajemian, M. J., and Powers, S. P. (2014). Towed-float satellite telemetry tracks large-scale movement and habitat connectivity of myliobatid stingrays. *Environmental Biology of Fishes* 97, 1067–1081. doi:10.1007/S10641-014-0296-X
- Clements, S., Jepsen, D., Karnowski, M., and Schreck, C. B. (2005). Optimization of an acoustic telemetry array for detecting transmitterimplanted fish. North American Journal of Fisheries Management 25, 429–436. doi:10.1577/M03-224.1
- Deutsch, C. J., Bonde, R. K., and Reid, J. P. (1998). Radio-tracking manatees from land and space: tag design, implementation, and lessons learned from long-term study. *Marine Technology Society Journal* 32, 18–29.
- Drymon, J. M., Ajemian, M. J., and Powers, S. P. (2014). Distribution and dynamic habitat use of young bull sharks *Carcharhinus leucas* in a highly stratified northern Gulf of Mexico estuary. *PLoS ONE* 9, e97124. doi:10.1371/JOURNAL.PONE.0097124
- Grothues, T. M., Able, K. W., McDonnell, J., and Sisak, M. M. (2005). An estuarine observatory for real-time telemetry of migrant macrofauna: design, performance, and constraints. *Limnology and Oceanography*, *Methods* 3, 275–289. doi:10.4319/LOM.2005.3.275

- Heupel, M. R., Semmens, J. M., and Hobday, A. J. (2006). Automated acoustic tracking of aquatic animals: scales, design and deployment of listening station arrays. *Marine and Freshwater Research* 57, 1–13. doi:10.1071/MF05091
- Marsh, H., and Rathbun, G. (1990). Development and application of conventional and satellite radio tracking techniques for studying dugong movements and habitat use. *Australian Wildlife Research* 17, 83–100. doi:10.1071/WR9900083
- Mathies, N. H., Ogburn, M. B., McFall, G., and Fangman, S. (2014). Environmental interference factors affecting detection range in acoustic telemetry studies using fixed receiver arrays. *Marine Ecology Progress Series* 495, 27–38. doi:10.3354/MEPS10582
- Miksis-Olds, J. L., and Miller, J. H. (2006). Transmission loss in manatee habitats. *The Journal of the Acoustical Society of America* 120, 2320–2327. doi:10.1121/1.2258832
- Reid, J. P., Bonde, R. K., and O'Shea, T. J. (1995). Reproduction and mortality of radio-tagged and recognizable manatees on the Atlantic coast of Florida. In 'Population Biology of the Florida Manatee'. (Eds T. J. O'Shea, B. B. Ackerman, and H. F. Percival.) pp. 171–191. (US Department of the Interior, National Biological Service: Washington, DC.)
- Tomkiewicz, S. M., Fuller, M. R., Kie, J. G., and Bates, K. K. (2010). Global positioning system and associated technologies in animal behaviour and ecological research. *Philosophical Transactions of the Royal Society of London. Series B, Biological Sciences* 365, 2163–2176. doi:10.1098/ RSTB.2010.0090
- Weigle, B. L., Wright, I., Ross, M., and Flamm, R. (2001). Movements of radio-tagged manatees in Tampa Bay and along Florida's west coast, 1991–1996. Florida Marine Research Institute, Technical Report TR-7, St Petersburg, FL.