

Blind Video Watermarking Scheme For Mpeg-4 Videos With Parity Sequences In Transform Domain

S Janardhana Rao¹ and O Nagaraju²

¹ Acharya Nagarjuna University

Received: 13 December 2013 Accepted: 1 January 2014 Published: 15 January 2014

Abstract

High quality video broad casting is of high demand both with DVB-2 (Digital Video Broad casting) and Internet services. But these broadcasted data is distributed without protection. Invisible mode of video watermarking is one of the solutions, here in this paper a novel approach of data embedding scheme is proposed for MPEG-4 videos with different parity check codes and processed in transform domain. A subjective and objective analysis is performed to examine the proposed approach. Experimental results on various videos have shown that LDPC (Low density parity check) code with Gold spreading sequence in transform domain outperforms when compared against the other methods.

Index terms— video watermarking, parity check codes, spreading sequences, DCT.

1 Introduction

With the advent of digital video broadcasting over the internet and DTH (Direct to Home) /DVB (digital video Broadcasting) many issues of copy right protection is of great importance [3] [4]. Since the duplication of digital video signals does not result in the inherent decrease in quality of the suffered analog video signals. Invisible watermarking is one of the solutions for the protection of the digital data. A water mark is a digital code that is embedded in the video sequence which can be used to transmit that video to the copyright owner in others terms this can be used to send the copy of digital data only to the legal user. This allows illegally reproduced copies to be traced back to the receiver from which they are originated. A simple diagram used to depict the scenario.

2 Figure 1: Block diagram of Copyright protection

The digital video watermarking is regarded as a complete cryptogram communication system in which the watermark is regarded as the transmitted message and the video frame as the channel or carrier for the watermark and the pixels that are encountering attacks as the noise in the channel [1]. Based on this concept we can use parity check codes for error correction codes. In this paper we use LDPC codes for error correction.

Error correction codes are commonly used to protect memories from so-called soft errors, which change the logical value of memory cells without damaging the circuit. As technology scales, memory devices become larger and more powerful error correction codes are needed. To this end, the use of more advanced codes has been recently proposed. These codes can correct a larger number of errors, but generally require complex decoders. To avoid a high decoding complexity, the use of one step majority logic applications LDPC code was first presented by Gallager [2], these codes have many advantages like stronger ability to correct errors and have the lower error floor, it's a parallel algorithm which is very much suitable for hard ware implementation, lower delay in decoding process, lastly it uses the length of the watermark and the value of the transformed coefficients for adaptive embedding. In [5], XU Ba et al proposed a blind video watermarking algorithm based on LDPC, improving the robustness of video watermarking algorithm in the original domain. In [6], Hsu et al proposed a video watermarking scheme based on DCT, using the DCT coefficients to embed watermark. In [7], Hartung et al proposed a scheme that the watermark is added in the MPEG-4 facial motion parameters. The disadvantage of

5 CONCLUSION

the method is that extracting the watermarking requires the original host signal and the rate of extracting is unbalance. In [8], Chen Chao et al proposed a video watermarking algorithm in compressed domain, using the intermediate frequency coefficient of the luminance to embed watermark. Also, in [9], Li Jing et al proposed a robust blind video watermarking algorithm, using the lowfrequency coefficient of the luminance component to embed watermark

Where 'i' is the i th Dct coefficient and 'k' is the middle frequency component , is the original DCT coefficient and is the modified coefficient , {1,1} is the spreading sequence .the value of is set as If $|k| < 2$ then $k = 2$ If $2 < |k| < 10$ then $k = 2.5$ (2) If $10 < |k| < 20$ then $k = 3$ If $|k| > 20$ then $k = 5$

Spreading sequences: In this paper three different types of spreading codes were used PN sequence [13], Gold Codes [14] and Walsh/Hadamard codes [15].

3 b) Extraction Process

The watermarked video frame is converted into Ycbr from which the 'Y' component is selected for the process Apply the DCT transform and convolve the middle frequency coefficients with spreading sequence. $k = ?$ Consider the sign of the resultant coefficient value and perform LDPC decoding to extract the logo III.

4 Experimental Results

Experiments were conducted using the video sequences from [10]

5 Conclusion

A invisible mode of video watermarking with pre coding and spreading sequences is proposed in this paper , the present approach is compared against three spreading sequences and found that when encoded with LDPC gold sequences of spreading leads to the low bit error and also high visual quality of the video sequence. This work can implemented for all the DVB and internet services where the quality of video is of greater demand. This work can be further extended by implementing this methodology with advanced trans forms like contour let and curve lets.



Figure 1: WE

67

¹© 2014 Global Journals Inc. (US)

²© 2014 Global Journals Inc. (US) Year 2014

23

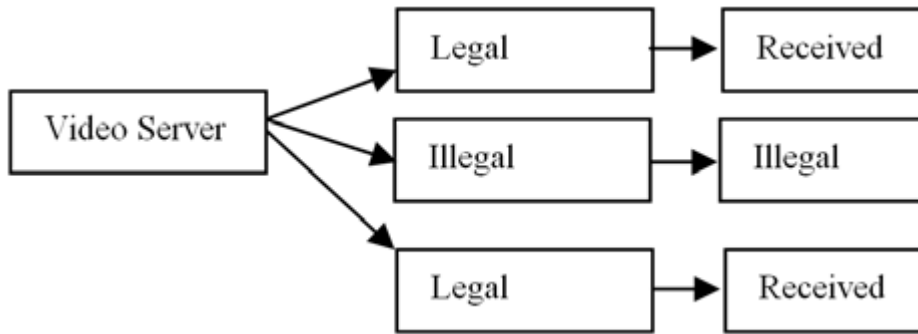


Figure 2: Figure 2 :Figure 3 :

4

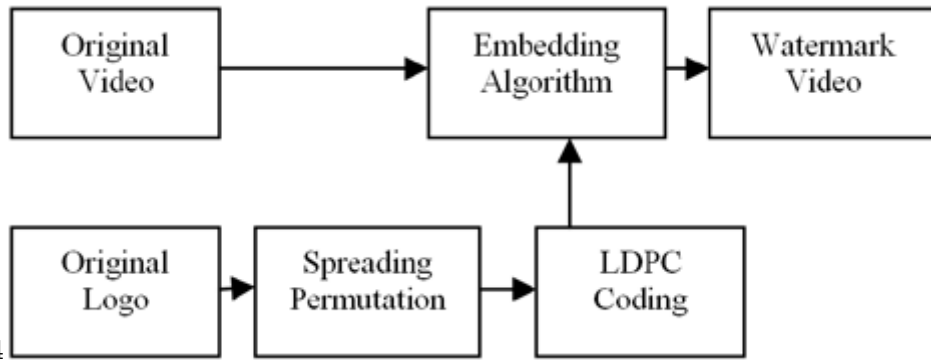


Figure 3: Figure 4 :

56

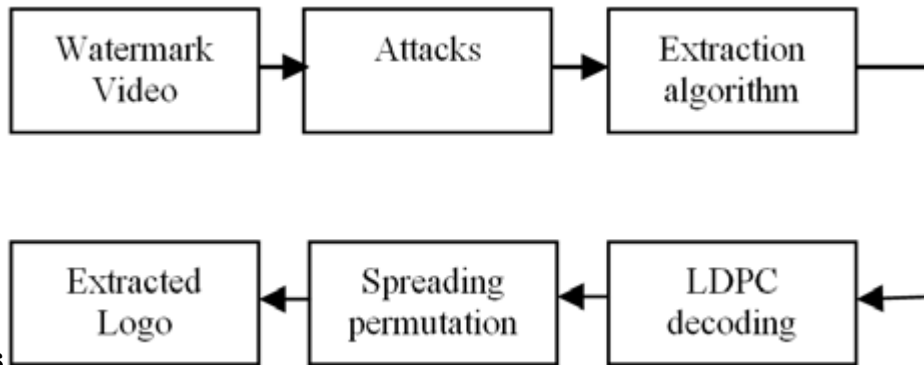


Figure 4: Figure 5 :Figure 6 :



(a)



(b)



(c)



(d)

78

Figure 5: Figure 7 :Figure 8 :



9

Figure 6: Figure 9 :

1

Parameter	NO PRE-CODING	LDPC
BER	0.04	0.01
NC	0.99	0.99
PSNR	49.28	49.31

Figure 7: Table 1 :

2

Figure 8: Table 2 :

-
- 68 [Chen Chao et al. ()] 'A compressed video watermarking scheme with temporal synchronization, Image and
69 Signal Processing'. Chen Chao , L I Gao Tie-Gang , Li-Zong . *CISP '08. Congress on 2008*. 2008. 5.
- 70 [Li Jing (2009)] 'A novel scheme of robust and blind video watermarking, Information Technology and Applica-
71 tions'. Li Jing . *International Forum on 2009*. 2009. May 2009. 1 p. .
- 72 [Huo Zhi ()] 'A study and application of digital image watermarking techniques based on LDPC'. Yong Huo Zhi
73 . *Journal of Nanjing University of posts and telecommunication*, 2006. p. 26.
- 74 [Xuba et al. (2009)] 'A study of blind video watermarking algorithm based on low-density parity check codes'.
75 Zhang Xuba , He Zhongming , Zhang Ying-Liang . *Journal of Chongqing University of Posts and
76 Telecommunications (Natural Science Edition)* Dec.2009. 21 (6) .
- 77 [Chiou Ting Hsu and Wu ()] 'DCT-based watermarking for'. Ja Ling Chiou Ting Hsu , Wu . *IEEE Transactions
78 on Consumer Electronic* 1988. (1) p. 44.
- 79 [Cheddad et al. ()] *Digital image Steganography: Survey and analysis of current methods*, A Cheddad , J Condell
80 , K Curran , P Mckeivitt . 2010. 90 p. . (Signal Process)
- 81 [Chung et al. (1998)] 'digital watermarking MPEG 1 & 2 Compressed video'. T Y Chung , M Hong , Y N Oh ,
82 D H Shin , S H Park . *IEEE transaction , Consumer electronics*, Vol44, no3 Aug 1998.
- 83 [Hartung et al. ()] 'Digital watermarking of MPEG-4 facial animation parameters'. Frank Hartung , Peter Eisert
84 , Bernd Girod . *Computer&Graphics* 1988. (3) p. 22.
- 85 [Falkowsky and Yan (2005)] 'Fixed Sign Walsh Transform and Its Iterative Hardware Architecture'. B Falkowsky
86 , Shixing Yan . *IEEE International Symposium on Circuits and Systems*, May 2005. 1 p. .
- 87 [Provos and Honeyman (2003)] 'Hide and seek: An introduction to Steganography'. N Provos , P Honeyman .
88 *IEEE Security Privacy* May/Jun. 2003. 3 (3) p. .
- 89 [Gallager ()] 'Low density parity check codes'. R Gallager . *IRE transactions on information theory*, 1962. p. 8.
- 90 [Braun (1997)] 'PN acquisition and tracking performance in DS/CDMA systems with symbollength spreading
91 sequences'. W R Braun . *IEEE Transactions on Communication* December 1997. 45 p. .
- 92 [Lee and Kim (2000)] 'Sequence acquisition of DS-CDMA systems employing gold sequences'. Yong-Hwan Lee ,
93 Seung-Jun Kim . *IEEE Transactions on Vehicular Technology* November 2000. 49 (6) p. .
- 94 [Rao and Hwang ()] *Techniques and standards of Image, video and audio coding*, K R Rao , J Hwang . 1996.
95 Prentice Hall.