

Environmental Science Advances

Accepted Manuscript

This article can be cited before page numbers have been issued, to do this please use: A. N. Kay Lup, V. Soni, B. Keenan, J. Son, M. Ramezanitaghartapeh, M. M. Morato, Y. Poya and R. M. Montañés, *Environ. Sci.: Adv.*, 2023, DOI: 10.1039/D2VA00247G.



This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

Sustainable energy technologies for the Global South: View Article Online DOI: 10.1039/D2VA00247G

Challenges and solutions toward achieving SDG 7

This work will provide important insights on the state-of-the-art concepts, problems and solutions on the application of sustainable technologies for clean and affordable energy generation. This paper is aligned to the following topics of interest within this issue: 1.) Present and future scope of renewable energy technologies in developing and under-developed countries, 2.) Prospects of renewable energy resources in terms of environmental sustainability and 3.) Energy engineering towards the progress of sustainable development goal.



Sustainable energy technologies for the Global South: View Article Online
DOI: 10.1039/D2VA00247G**Challenges and solutions toward achieving SDG 7**

Andrew Ng Kay Lup^{1,2,*†}, Vikram Soni^{3,†}, Benjamin Keenan⁴, Jaewon Son⁵, Mohammad Ramezani Taghartapeh⁶, Marcelo Menezes Morato⁷, Yalinu Poya⁸, Rubén M. Montañés^{9,10}

- 1 = School of Energy and Chemical Engineering, Xiamen University Malaysia, Jalan Sunsuria, Bandar Sunsuria, 43900 Sepang, Selangor Darul Ehsan, Malaysia
- 2 = College of Chemistry and Chemical Engineering, Xiamen University, Xiamen, 361005, Fujian, China
- 3 = Department of Mechanical and Industrial Engineering, University of Toronto, 5 King's College Road, Toronto, Ontario, M5S 3G8, Canada
- 4 = Department of Surface Waters, Swiss Federal Institute of Aquatic Science and Technology, CH-6047 Kastanienbaum, Switzerland
- 5 = Institute for Technology Assessment and Systems Analysis, Karlsruhe Institute of Technology, Karlstr. 11, D-76133 Karlsruhe, Germany
- 6 = Department of Chemistry and Biotechnology, Swinburne University of Technology, Hawthorn, VIC 3122, Australia
- 7 = Departamento de Automacao e Sistemas, Universidade Federal de Santa Catarina (UFSC), Florianopolis, Brazil
- 8 = School of Chemistry, University of Glasgow, Glasgow G12 8QQ, United Kingdom
- 9 = SINTEF Energy Research, NO-7465, Trondheim, Norway
- 10 = Energy Technology, Department of Space, Earth and Environment, Chalmers University of Technology, SE-412 96, Gothenburg, Sweden

* = Corresponding author,

andrew.ng@xmu.edu.my

†Both authors contributed equally



Abstract

The United Nations (UN) expectations for 2030 account for a renewable, affordable, and eco-friendly energy future. The 2030 agenda includes 17 different Sustainable Development Goals (SDGs) for countries worldwide. In this work, the 7th SDG: Affordable and Clean Energy, is brought into focus. For this goal, five main challenges are discussed: (i) limiting the use of fossil fuels; (ii) migrating towards diversified and renewable energy matrices; (iii) decentralizing energy generation and distribution; (iv) maximizing energy and energy storage efficiency; and (v) minimizing energy generation costs of chemical processes. These challenges are thoroughly scrutinized and surveyed in the context of recent developments and technologies including energy planning and supervision tools employed in the Global South. The discussion of these challenges in this work shows that the realization of SDG 7, whether partially or in full, within the Global South and global contexts, is possible only if existing technologies are fully implemented with the necessary international and national policies. Among the key solutions identified in addressing the five main challenges of SDG 7 are a global climate agreement; increased use of non-fossil fuel energy sources; Global North assistance and investment; reformed global energy policies; smart grid technologies and real time optimization and automation technologies.

Keywords: Global South; Sustainable Development Goal 7; Renewable Energy Technologies; Energy Management; Smart-grid



List of abbreviationsView Article Online
DOI: 10.1039/D2VA00247G

Abbreviation	Meaning
SDG	Sustainable Development Goal
PRISMA	Preferred Reporting Items for Systematic Reviews and Meta-Analyses
CCS	Carbon capture and sequestration
DOGGR	Division of Oil, Gas, and Geothermal Resources
CDM	Clean Development Mechanism
NAPCC	National Action Plan on Climate Change
GBI	Generation-Based Incentive
AD	Accelerated Depreciation
EMS	Energy Management Systems
MPC	Model Predictive Control
MILP	Mixed-Integer Linear Programming
QP	Quadratic Programming
IEA	International Energy Agency
IoT	Internet of Things
ITU	International Telecommunication Union
P2X	Power-to-X

1. Introduction

It is undisputed among the scientific community that anthropogenic activities have upset the equilibria of nature. Strategic actions must be taken to address the related adverse ecological and social effects by finding and employing sustainable solutions.^{1,2} Sustainable development is a concept that aims to couple environmental concerns with socio-economic issues.³ This topic has been extensively discussed over the last decade, leading to international treaties,



conventions, and so forth.⁴ The United Nations has formulated the “2030 Agenda” which proposes 17 different “Sustainable Development Goals” (SDGs) to radically reformulate the current development status-quo. The aim is to migrate towards a truly sustainable praxis by 2030, which would address the risks associated with anthropogenic climate change.⁵ These 17 SDGs encompass various aspects, including gender inequality, hunger, poverty reduction, responsible consumption, production, etc. Of these, three major challenges underpin the whole 2030 Agenda: (a) social inequality; (b) environmental pollution and damage; and (c) the fossil-fuel energy crisis.

Challenges (a) and (b) must be addressed with respect to criticisms regarding the means and methods of production in the current economic framework. Challenge (c) should be approached by transforming how energy is generated and distributed. The current energy crisis continues not only due to the fossil fuels polluting the atmosphere, but because the annual energy demands are aggressively growing around the globe annually.^{6,7} According to the 2030 Agenda, it is imperative to change the energy paradigm to renewable, non-polluting sources, and greatly enhance the efficiency of the generation units and the production capacity. With this in mind, the fossil fuel challenge which is the focus of SDG 7 (Affordable and Clean Energy) encompasses the concept of the energy transition paradigm, moving from the current fossil-based status of energy generation to a new one, anchored in the search for a healthier future for nature and ecology.

The Global South refers to low and middle-income countries located in Asia, Africa, Latin America, and the Caribbean, in contrast to the high-income nations of the Global North.³ The use of the term Global South is a reference to the large inequalities stemming from colonialism and neo-imperialism. The differences from the Global North, and indeed differences between countries within the Global South; such as energy distribution, population, dependency



burdens, agricultural production, and the means for energy transition require nuance and particular attention in the cultural, political, and economic contexts of each country. This is important to recognize the drivers of transition: income, energy prices, energy access, local fuel availability, and workability of proposed solutions for current infrastructure. From the unprecedented growth in transportation, infrastructure, and industry in some Global South countries, such as Brazil, Russia, India, and China, it seems evident that increasing population and associated rising energy demands require abrupt changes in the energy system, regarding generation and distribution strategies. The energy sector in the Global South has to be far more efficient, integrated, and cost-effective, which creates an opportunity to ensure a sustainable and clean system. Furthermore, the contribution of the Global South to global greenhouse gas emissions, is also set to increase, making achieving SDG 7 a major priority.⁸

The main aim of this research is to provide possible routes to the successful implementation of SDG 7 in the Global South by 2030. Often missing from discussion of the achievement of SDGs is the necessity for interaction between approaches, resulting in a silo approach rather than a holistic one. That is to say, with the example of achieving SDG 7, the focus of this review, that we can make contributions to achieving SDG 7 that also contribute to other SDGs. There has been some discussion around the interaction between achieving different SDGs including, for example, the ranking of synergies and trade-offs,⁹ or through learning lessons from case studies of sustainable development practices.¹⁰ Following attempts to analyze projections of SDG trends in the future,¹¹ we continue this discussion through focusing specifically on ways of achieving SDG 7 in the Global South. Through the prioritization of SDG 7, and by understanding the connections between different SDGs and sustainability generally, we hope to avoid some of the issues that might cause the 2030 Agenda to fail.¹²

View Article Online
DOI: 10.1039/D2VA00247G



The Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) method was used while systemically reviewing available technologies that can opportunely act to tackle and resolve the challenges of SDG 7. In the identification phase, a literature search with the data source from ISI Web of Science and Scopus through web search were collected with the keywords including “Global South”, “SDG 7”, “efficient energy”, “cost-effective energy”, “sustainable energy”, “clean energy”, “energy technology”, “greenhouse gas emissions technology”, and “integrated energy system”. After removing the duplication, search results were combined. During the screening phase, abstracts and titles were reviewed and removed based on the relevance to the subject of interests. Afterward, the full text of the literature was reviewed for eligibility check. In the inclusion phase, selected articles (n = 40) were included in quantitative synthesis, and analyses were conducted to distinguish five main challenges regarding how affordable and clean energy could be achieved by 2030.¹³ The novelty of our approach here is undertaking the search for a holistic approach to achieving SDG 7 through collaboration of researchers from wide-ranging disciplines. We identify synergetic relationships with other goals, and review the most appropriate technologies to achieve SDG 7, and related SDGs in the Global South. In doing so we highlight potential solutions to five key challenges and identify strategies with potential synergies with achieving other SDG goals. Each of these five challenges is individually scrutinized in terms of the available technological routes to tackle them.

2. Main Challenges

What should energy systems in the Global South look like in 2030, and what can be expected from them? It is evitable that the targets and strategies of the SDG 7 has potential synergies



and trade-offs across other SDGs.¹⁴ A synergetic strategy is achieved when the solution to one goal is related to progress towards achieving other goals. On the other hand, a trade-off is considered if solution to one goal becomes an obstruction for another goal. However, the large parametric space and the scarcity of methods to quantify the synergies and trade-offs between goals and their targets can lead to a complex framework.¹⁴ Of particular interest, considering the three key targets of the SDG 7, i.e., universal accessibility, share of renewable and rate of improvement in energy efficiency, there are five main challenges to be addressed in answering these questions. The first and obvious challenge is the necessity to limit the use of fossil fuels. Apart from being heavy pollutants, the price of fossil fuels rises each year, due to scarcity, shortage, and operational limitations.¹⁵ The current scale and trend of GHG emissions globally and the remaining carbon budgets mean that the abundance of fossil fuels, specifically for the countries with the large availability of domestic fossil fuels, is a threat to climate change mitigation.¹⁶ Therefore, this issue goes hand in hand with the second challenge which is migrating towards diversified and renewable energy matrices.¹⁷

The use of viable renewable sources is very important, being indeed a good alternative to avoid GHGs emissions and reduce environmental impacts.^{16,18,19} Today, there are many kinds of renewable energy technologies available such as wind energy, solar power, a huge variety of possible biomass and biogas routes (derived from sugarcane residuals,²⁰ micro and macro *algae*,^{21,22} animal waste,²³ *etc.*), geothermal heat and biofuels (bio-ethanol, bio-diesel, *etc.*).^{24,25} More possibilities are progressively becoming feasible as verified over the last few years.²⁶ Today, energy is generated in heavily centralized generation units; this practice is seen around the world.^{27,28} The literature indicates that the choice of which renewable energy source to use has to be made according to *in loci* availability and characteristics.²⁹⁻³¹ Therefore, the third challenge to be faced for SDG 7 is to decentralize energy generation and distribution. One can expect the energy generation of the future to be sustained by many sparse units that profit from

View Article Online
DOI: 10.1039/D2VA00247G



the local availability of renewable energy carriers, with each unit being responsible for power and meeting the demands of neighborhood areas.

The fourth and fifth challenges are, respectively, to maximize energy and energy storage efficiencies; to minimize energy generation costs of chemical processes, so that energy generation can be clean but also affordable. It seems that the decentralized generation paradigm presents benefits to both these issues:³² distribution costs are significantly reduced with respect to current centralized generation units. Moreover, technologies are available to manage these distributed renewable units so that minimal pricing and optimal energy efficiency can be made available, as discussed in the sequel. However, in the short to mid-term, it is challenging to transform some of the existing energy systems of the Global South into decentralized and renewable ones due to the current locked-in carbon-intensive infrastructure. Table 1 shows a summary of the key solutions for each respective challenge of Global South in achieving SDG 7. The discussions on the key solutions are presented in the subsequent sections.

Table 1. Key solutions for the five challenges of Global South in achieving SDG 7

Challenge	Solution
i) Limiting the use of fossil fuels	Global climate agreement; higher efficiency fossil fuel conversion technologies; intensification of non-fossil fuel energy sources; use of hydrogen-lean fuels; carbon capture and storage; and cooperation of energy industries
ii) Migrating towards diversified renewable energy matrices	Implementation of renewable energy technologies, Global North assistance and investment, global reformed energy policies
iii) Decentralizing energy generation and distribution	Decentralization; microgrids/smartgrids, automatic optimal EMS
iv) Maximizing energy and energy storage efficiencies	Real-time optimization permitted by the Internet of Things; smart grid technologies
v) Minimizing energy generation costs of chemical processes	Use of renewable energy; identification of important target chemicals

2.1 Challenge (i): Limiting the Use of Fossil Fuels



This challenge remains very difficult to be reconciled because most of the energy systems of the current society are driven by large quantities of fossil fuels where such quantity usage will lead to significant carbon dioxide emissions and hence global warming. For global warming to be reduced to 2 °C above the average global temperature during pre-industrial times, a cumulative carbon dioxide emission of not more than 870 to 1,240 Gt is required to be maintained within the year range of 2011 to 2050.³³ Carbon dioxide emissions can originate from natural or anthropogenic sources. Natural sources include ocean-atmospheric exchange, biological respiration, soil decomposition, and volcanic eruption whereas anthropogenic sources include transportation, electricity generation, agriculture, commercial, residential and industrial activities. While it is not possible to reduce carbon dioxide emissions from natural sources, the focus has been placed on anthropogenic sources instead. Against this backdrop, limiting fossil fuel usage thus becomes a viable solution to the aforementioned problem.


An estimation of the current global fossil fuel reserve reveals a total CO₂ emission of 11,000 Gt.³⁴ Two extreme scenarios can be drawn from this estimation: 1.) unabated fossil fuel production and usage will certainly exceed the 2 °C limit of global temperature rise, leading to uncontrolled global warming, 2.) Huge suppression of fossil fuel exploration will be required to meet the global temperature rise limit. The latter scenario reveals this challenge to be more than just a scientific problem, rather of political and economic natures. As many countries are involved in the fossil fuel industry due to their existing fossil fuel reserves, the latter scenario will cripple their economies. This scenario was modeled by McGlade and Ekins where the study revealed that an estimate of 82%, 49%, and 33% of the current global coal, gas and oil reserves must remain unexplored to meet the 2 °C limit of global temperature rise.³⁴ This is also made possible if carbon capture and sequestration (CCS) are done during fossil fuel exploration. Without CCS implementation, greater global coal, gas, and oil reserves (88%, 52%, 35%) must remain unexplored to meet the 2 °C limit. To put things in perspective, these



translate as 887 Gt of coal, 100 trillion m³ of gas, and 449 billion barrels of oil which are certainly huge amounts that are not possible to be phased out immediately without any effects on the global economy.

This fossil fuel challenge can be addressed based on its two parts: consumption and production. Over these recent years, the reduction of fossil fuel consumption is evidently instilled in various countries through their efforts in migrating toward diversified renewable energy matrices. The automobile-based transportation sector which is one of the major gasoline consumers and carbon dioxide emission sources had also undergone a gradual transition from gasoline-based internal combustion engines to battery-powered engines. Supply-side climate policies were also implemented to constrain fossil fuel production. A typical example would be the control of oil production in California by the Division of Oil, Gas, and Geothermal Resources (DOGGR) of the California Department of Conservation. DOGGR functions as the state permitting agency in controlling the amount of oil well projects based on the climate, industrial, and public policy bases. Among the oil production limiting policies implemented by DOGGR are: 1.) halting the issuance of new oil well permits to be consistent with Paris Agreement goals, 2.) reducing oil production in areas of high pollution vulnerability, 3.) charging carbon adder as a severance tax on oil extraction, 4.) removing oil production-related subsidies, 5.) phasing out oil production processes with more than 600 kgCO₂e per barrel or oil with break-even price greater than US\$60 per barrel.³⁵ These policies were reported to be effective where the Scoping Plan by California state reported the possibility to reduce oil production by 70% or 40 million barrels by 2030.^{36,37}

As of now, these policies were not implemented in coal and gas production globally. Thus, if the majority of the fossil fuel-based countries were to adopt such approaches, the fossil fuel industry can certainly be made more sustainable with lesser environmental impacts. However,



in the execution of such policies, global economic development and countries with fossil fuel industries will certainly be affected. Therefore, for a long-term solution, a global climate agreement that identifies and balances potential gainers and losers of climate change mitigation is necessary.³³ As for near term solutions, several action plans can be recommended such as 1.) development of fossil fuel conversion technologies of higher efficiencies, 2.) intensifying the usage of non-fossil fuel energy sources, 3.) substitution of hydrogen-rich with hydrogen-lean fuels, 4.) intensifying implementation of carbon capture and storage technologies and 5.) promoting bilateral cooperation of Western and Eastern energy industries.³⁸

2.2 Challenge (ii): Migrating towards Diversified Renewable Energy Matrices

Indeed, the implementation of renewable energy technologies over a few decades across the Global South saw an increase in capacity. However, the rate at which they are increasing is still not sufficient to match the rate of increase in fossil fuel usage. Energy matrices of Global South countries are still apparently shifting towards the non-renewable spectrum of energy matrix despite their efforts to accelerate the implementation of renewable energy technologies. The energy matrices of several Global South countries are highlighted and compared in Table 1 across the four regions of Global South: Asia-Pacific, Central, and South America, Africa, and the Middle East. Energy matrices of the years 1990 and 2017 are juxtaposed to analyze the migration initiative of countries towards a diversified and renewable energy matrix. Based on Figure 1 and Table S1, the achievement of SDG 7 by 2030 via reduction of fossil fuel usage and migration towards a diversified and renewable energy matrix is unlikely to be fully implemented. Even with the significant implementations of renewable energies in the energy sectors of Global North countries which tend to advocate strongly for renewable energy

View Article Online
DOI: 10.1039/D2VA00247G



sources, the global energy matrix did not show obvious migration towards a renewable energy matrix.

View Article Online

DOI: 10.1039/C3EA00247G

While energy matrices do offer important insights on this matter, one may require additional indicators to affirm such migration initiatives. For instance, the energy matrix of China showed a similar percentage range for coal despite its approximate fourfold capacity from 1990 to 2017. For such cases, the emission intensities of these energy matrices must also be considered as such trends are masked by the increasing trends of other energy sources, and are certainly not aligned with the spirit of global warming mitigation. Therefore, various Global South countries are increasingly more committed to addressing this issue. For instance, China has set several sustainable energy goals: 40-45% carbon intensity reduction by 2020 from 2005, 15% non-fossil based energy source by 2020, and also approved 2685 Clean Development Mechanism (CDM) projects under the auspices of the Kyoto Protocol to build aeolian, hydro and biogas power stations since 7 September 2010.³⁹⁻⁴¹ India, one of the main players in the energy sector of Asia has also identified eight “National Missions” under the National Action Plan on Climate Change (NAPCC) to accelerate the utilization of renewable energy technologies while reducing national carbon intensity per capita.⁴² Several government tax incentive schemes such as Generation-Based Incentive (GBI) and Accelerated Depreciation (AD) schemes are also implemented in India to attract private investors in the field of renewable energy generation.⁴³

It is instructive to further accelerate the implementation rate of renewable energy technologies and limit the use of fossil fuels to create a net increase in renewable energy usage. However, the energy issue at hand is more convoluted as it involves several deep-rooted technological, geographical, political, and socioeconomic complications. Global South is made up of developing countries in which their economic, population, and energy growths are very much inevitably intertwined. On a national scale, economic growth will lead to population growth



which increases energy demand. To cope with this trend, energy output must be increased, which in turn further increases the economic growth, leading to a cycle of accelerated increase in energy output for the economic growth of the Global South.⁴⁴ Even though fossil fuels are plagued with environmental issues, they are the only energy sources that could provide such energy security to cope with the aforementioned trends in the Global South. As the Global South economy becomes more heavily invested in these energy sources over these few decades, this issue has become a deep-seated problem and is worsening over time. If this conflict is to be addressed via a total and immediate renewable energy transition by themselves, the economy of the Global South will certainly be jeopardized. Therefore, Global North assistance and gradual reformation of energy policies must be considered to ensure a smooth renewable energy transition in Global South.

Another factor that strengthens this conflict is fossil fuel being the main commodity of the Global South. China, Malaysia, India, Brazil, Mexico, Venezuela, and the Middle East countries are some of the global main fossil fuel players where fossil fuel commodity remains their major national revenue source. A total phase-out of the fossil fuel industry would certainly accentuate the paradox of plenty in such countries.⁴⁵ Over these recent years, conventional oil exploration has seen increasing competition from non-conventional oil exploration and renewable energy generation. To curtail this competition, conventional oil exploration-based industries had increased the conventional oil production volume. It created an oversupply in the oil market, fueling a surge in fossil fuel demand and gradually losing the upper hand in the price war of energy sources.⁴⁶⁻⁴⁸ For renewable energy technologies to become feasible and to achieve SDG 7, large amounts of investment are needed as well as a long payback period which would slightly offset the economic growth of the Global South during the energy transition period.

View Article Online
DOI: 10.10597/D2VA00247G




The common struggles of such transition are often reported to be due to scarcity of rigid environmental and financial policy, low government incentives and long-term follow-up services, low interests of private investors, technology immaturity, and geographical constraints.^{43,45,46,49-51} Implementation of nuclear power generation has received mixed receptions within the Global South as not many countries have uranium reserves except Kazakhstan, Namibia, South Africa, Niger, Brazil, China, etc.^{52,53} In addition, the Fukushima nuclear accident in 2011 has also raised the global nuclear safety standards causing global nuclear development to proceed slower with higher precautionary measures.^{39,48,54} Hydropower is a mature renewable energy source where its challenges are often associated with precipitation fluctuation due to seasonal droughts and environmental impacts due to its massive land use.^{53,55} Efficiencies of solar and aeolian powers have been steadily increasing over the years due to the respective development of cheaper advanced photovoltaic materials such as silicon, perovskite, and semiconductor-based photovoltaics and stiffer lightweight wind turbines.^{53,56} As initial photovoltaic materials are common in the single *p-n* junction, their theoretical solar efficiencies are limited by the radiative recombination as the sole loss mechanism within the solar cell which is the Shockley-Queisser limit.⁵⁷ To overcome this limit, several photovoltaic technologies are implemented: multijunction photovoltaic cell,^{58,59} intermediate band photovoltaics,^{60,61} photon upconversion,^{62,63} concentrated photovoltaics,^{64,65} thermophotovoltaics,^{66,67} and fluorescent downconversion.⁶⁸ However, the uneven distributions of solar irradiation and wind have caused these power plants to be highly geographically constrained and centralized. This would increase the costs and complexities of transmission networks, making grid parity a challenge to be achieved.

Biomass is perhaps one of the oldest and most sustainable renewable energy sources which can be processed via numerous established conversion technologies and feedstock types. It gives



higher flexibility in optimizing its energy output and efficiency. Biomass is highly abundant in the Global South regions of South America, Asia, and Africa. Biogas is one of the major biomass types used for industrial and household energy generation in the Global South. However, different regions experienced different challenges in sustaining biogas technology. In Africa, poor access to water inhibits biogas development as anaerobic digestion requires an equal mixture of water and biomass to produce biogas.⁶⁹ In India and Andean communities, the high-altitude regions require digesters of higher complexity to maintain the optimum condition of anaerobic digestion.⁷⁰ The lack of technical supervision and inconsistent financial support for these technologies had also caused the biogas plants in these areas to be abandoned or not functional within the first two decades after their commissions.^{52,71} In the development of biomass technology, the focus of the Global South should perhaps be shifted towards bio-oil which can be produced at a higher rate and better consistency than bio-gas via pyrolysis.⁷²⁻⁷⁴ Bio-oil also offers a greater possibility to create highly functionalized and cleaner substituted fuels such as bio-crude oil⁷⁵⁻⁷⁹ and jet fuel^{80,81} which is in line with the cascading use of biomass.

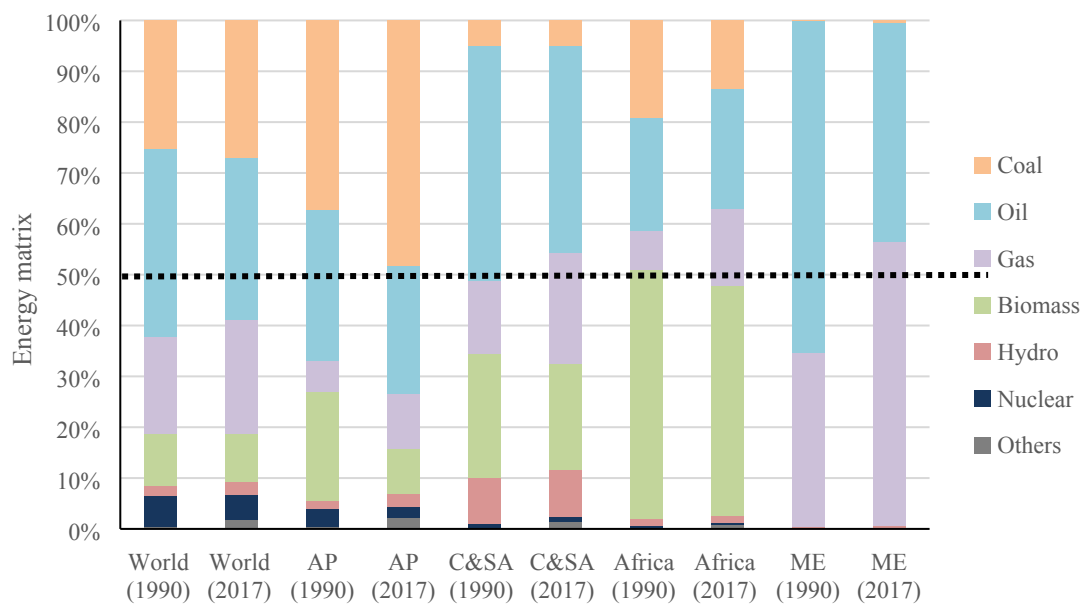

*AP = Asia-Pacific, C&AS = Central & South America, ME = Middle East


View Article Online
DOI: 10.1039/D2VA00247G

Figure 1. Energy matrices of Global South regions in 1990 and 2017^{39,42,44,52,82-84}

2.3 Challenge (iii): Decentralizing Energy Generation and Distribution

The third main challenge that should be put into practice regarding the Global South is decentralization. This challenge mainly refers to how electric energy is distributed and generated and how this should change to establish SDG 7 by 2030. Decentralization based on renewables plays a vital role in alleviating poverty and facilitating socio-economic growth; moreover, it is a prerequisite to achieving sustainable development of rural communities. The current paradigm is heavily anchored on the following baseline: central power plants produce power outlets that are carried by high-voltage transmission lines to neighborhood areas, then transformed down to regular household or industrial facilities. The central power stations are usually located far from the end-user. There is a huge cost associated with these transmission lines, from maintenance to power losses, not to mention the land use and space requirements to set up such coordinated generation-distribution operation; furthermore, there are many environmental impacts that appear to this centralized generation paradigm from large-scale region matters to localized concerns regarding the area that surrounds the large-scale power plant.

It seems very reasonable and thoroughly debated in the specific literature that the centralized energy generation paradigm must be transformed by a decentralized generation paradigm.^{27,32,85} This new paradigm would also tackle the distribution problem since each region or local network would be self-sustained. Such a decentralization paradigm is illustrated in Figure 2. Local neighborhoods and communities including households and industrial agents should collaborate and exchange energy within their boundaries ensuring that each demand is supplied. This is achievable when the local availability of renewable sources is considered. The



global south panorama plays a vital role in this matter, since, as previously discussed, there is a great variety and availability of possible renewable sources in these countries that could be integrated into such decentralized generation networks.

Regarding distributed energy generation schemes, as illustrated in Figure 2, we emphasize next the main divergences, advantages, and disadvantages with respect to the standard paradigm of centralized generation. Conventionally, since the establishment of larger power distribution chains, energy access reaches households and industries by the means of main network, which is physically connected to a large-scale generation facility in a central location. The major benefit is that, consistently, a broad number of end consumers can be reached within a considerable area, often physically far from the central energy dispatch plant. Nevertheless, centralized generation schemes exhibit major deficiencies in the sense that, since it relies in a single power supply, power shortages and bottlenecks often occur.²⁷ Accordingly, many works have debated on how centralized energy generation schemes cannot ensure reliable, nor sustainable and equitable energy access to people.^{86,87} As an example, we highlight that centralized energy systems usually “benefit the rich and bypass the poor and are underpowered, inefficient and unequal”.⁸⁷

In opposition to this standard paradigm, distribution energy schemes comprise more focused dispatch, especially encompassing small-scale conversion units that expedite power transmission to a smaller number of consumers. Moreover, decentralization also refers to “transferring authority, power resources, and responsibilities” from centralized operators to lower-level ones.⁸⁸ Accordingly, the major benefits of distributed generation is that it is able to provide enhanced energy and more democratized access, with improved reliability and efficiency. Furthermore, since security and resilience issues are easier to address due to the local and reduced-order size of these schemes, decentralized schemes can also encourage

View Article Online
DOI: 10.1039/D2VA00247G



“equity, inclusivity, information, accountability, and adaptability” of energy systems, which also work towards the mitigation of climate-related issues.⁸⁹

The key disadvantage of the decentralized energy system is its low economic scale. The microeconomic benefits to the society from the decentralization could be detrimental macroeconomically. Societies seeking for decentralized energy infrastructure could end up with higher consumption compared to their contribution to the cost of the infrastructure. If the energy generation cost is lower than the energy price in many countries, the decentralized infrastructure might be effective. If the participating players in the decentralized energy infrastructure have a small impact with high energy demand, the decentralization is most attractive option. It can be further analyzed by accessing the effect on the partial or fully decentralized beneficiaries. However, there is a need to analyze the optimum degree of decentralization to address the energy policy and associated integration costs challenges.

Recent technology developments can enable a renewable, affordable, and eco-friendly energy grid if established using proper energy planning, supervision tools, and enforcement policies. The intermittent nature of the current renewable energy carriers when operated using standalone generation units induce fluctuations and variability in the energy outlet quality. When multiple renewable energy carriers are plugged into a microgrid as the core generation sources, their intermittent behavior is overlapped. The smart grid can compensate for the power fluctuations by the use of storage units and demand-side management operations.⁹⁰ The concept of Microgrids or Smart-grids enables decentralized generation with multiple renewable carriers. Microgrids, as introduced by Lasseter⁹¹ and discussed in other works,⁹²⁻⁹⁴ are self-contained structures that comprise energy generation, storage, and distribution devices, subject to variable demand loads. They can operate in island mode (supplying local neighborhood needs), or connected to the grid (to exchange energy to nearby areas, for instance). Moreover,



the microgrid tool is essentially linked to the idea of available measurements of all power inlets, outlets, and flows, using a variety of sensors. The core idea of building energy units as microgrids are to use all possible renewable generation and store it when there are lower demand periods. The stored energy can then be further utilized when demand is higher than renewable production.

The use of a decentralized smart-grid paradigm ensures a drastic reduction of distribution costs. However, complementary technologies must be employed to reduce the production costs and maximize the energy production capacity efficiently, the two major challenges of SDG 7. Two important technologies tackle these challenges, the Energy Hubs modeling concept, and the use of automatic optimization-based controllers. They define the coordination policies within these microgrids (as when to store energy or when to dispatch it to meet demands), also known as “Energy Management Systems” (EMS). To define adequate coordination rules for microgrids leading to guaranteeing maximal generation and optimal efficiency, advanced mathematical models are required. The high-fidelity dynamic models are the preliminary requirement of any automation system, such as these optimal EMS. The Energy Hubs concept by Geidl et al.^{95,96} provides a framework that offers mathematical rigor and standards to characterize the dynamics of multi-carrier microgrids. The Energy Hub considers a unified energy generation unit, called a “hub”, which comprises the transformation, conversion, and storage of various forms of energy and combined transportation of different energy carriers in single transmission interconnectors.^{20,97-101}

The final major technology that is needed to face the mentioned challenges is the use of automatic optimal EMS. The engineering behind smart-grid technologies allows to naturally achieve more efficient use of locally available energy sources. The EMS-based units can “shift” electric load demands to the period when the intermittent renewables are unavailable,



employing intermediate storage units. Based on Energy Hubs models, optimization techniques, such as Model Predictive Control (MPC)^{98,101} have been shown the best possible energy efficiency and the maximized dispatch of renewable-based microgrids under regular operation conditions and stochastic demands and loads.¹⁰² MPC as the framework to formulate these EMS is an elegant solution with high-quality results and a computational burden. This technology is applied in many situations for the problem of efficient operation, satisfying a time-varying request, and operational constraints. The overall problem is formulated using either Mixed-Integer Linear Programming (MILP) or Quadratic Programming (QP). MILP and QP are solved efficiently by most commercial solvers without resorting to complex heuristics or decompositions techniques. Illustrative examples of the effectiveness of MPC in the management of renewable smart-grids can be referred to from the previous application-oriented MPC works.⁹⁷⁻¹⁰⁵ The adequate operation of EMS depends on the availability of prediction curves for renewable sources. For instance, when coordinating a solar-power based microgrid, local solar irradiance data is necessary within a span of a few hours ahead, so that the EMS knows when the microgrid should store energy (excessive sun power available) and when to use it from the storage (cloudy period, nighttime). For instance, a study by Neupane et al. has shown the potential and the necessary data on solar and wind energy outputs at Nepal.¹⁰⁶ It was reported that about 47,628 MW and 1,686 MW of solar and wind energies could be harvested in Nepal across a large share of provinces with minimal energy fluctuation. These enable an efficient decentralized solar and wind energy generation in Nepal at provincial level. Further, AI tools are available to make these predictions using time series for the vast majority of cases (sun forecast, wind forecast, etc.).¹⁰⁷




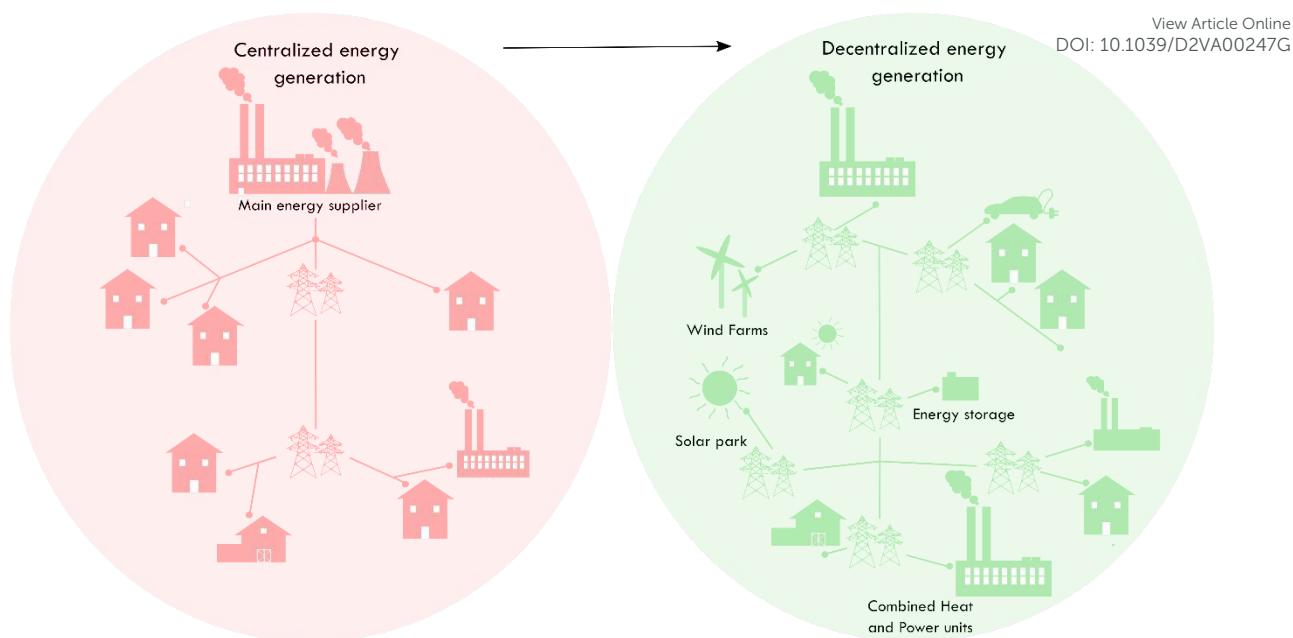


Figure 2. The transition from centralized to decentralized energy generation paradigm

In decentralized energy generation operations, many different agents play the role of the central power plant of the previous paradigm: local industries may produce energy from excédent bio-sources,¹⁰⁸ households may produce excédent energy with solar PVs,¹⁰⁹ buildings with large thermal storage¹¹⁰ can inject heat demands to compensate for electric energy usage. The issues that arise, thus, in this decentralized generation scenario are a) coordination, cooperation, and integration of the decentralized generation units, and b) privacy and security concerns. The available literature digresses on the topic of integration of the decentralized paradigm through different available technologies, but majorly residing in central coordination schemes. To truly establish a healthy decentralized energy generation system, local energy markets must be regulated.¹¹¹ The central management systems must coordinate the operation on when and how each agent can inject energy into the decentralized network.¹¹² There are many results regarding this matter; the possibilities include barter-like energy sharing between neighborhoods with efficient results.¹¹³ The microgrids of the same owner should cooperate which are interconnected by sharing electric energy and bio-sources through the decentralized solution.¹⁰⁸



They need to employ power exchange¹¹⁴ for efficient results. The planning of which structure and solution to implement regarding the decentralization should be planned by local governments. There should be fair competition between the energy production and consumption agents and an optimal plan sizing for the local networks.

Once the decentralized energy paradigm is planned, the issue that remains is to ensure the privacy and security of the energy distribution operation. The literature points out one major technology regarding this issue, which is the use of blockchains. Blockchains enable a decrease in the costs of interconnecting distributed energy resources in the decentralized, transactive network paradigm. Blockchain is a ledger technology that allows multiple parties or agents to share a common database infrastructure where the central management system would operate.¹¹⁵ The parties would exercise editorial control over the database where blockchain removes the intermediary necessity of transaction settlement systems and the decentralized generation network would be able to operate standalone. In addition, it blinds the network to malicious intentions for outside safety breaking.^{85,116}

2.4 Challenge (iv): Maximizing Energy and Energy Storage Efficiencies

Energy efficiency is the key to supporting economic and sustainable development while limiting or curbing the increase in energy consumption. Energy intensity indicates the energy usage by the global economy. According to data analysis from the International Energy Agency (IEA), there have been global improvements in primary energy intensity in the order of 1.4% to 2.9% from 2000 to 2015. However, the rate of improvement was significantly reduced in 2018 to 1.2%.¹¹⁷ The main challenge to overcome is that the emerging and growing economic activities in emerging countries lead to a boost in energy demand. It is mainly due to step increases in industrial activities that boost energy demand and the need for reliable, cost-effective, mature conventional low-efficiency technologies. Economic growth also leads to



changes in consumer behavior, which has been identified as a key driver for growth in energy demand: living in larger houses (more floor area per person), greater and wider use of appliances, higher appliance ownership, and other factors including population growth and access to new energy-intensive services. Higher standards of living might boost energy demand per person, which can overwhelm or significantly limit the benefits of using modern, energy-efficient technology.

The energy demand in India doubled from 2000 to 2017, yet energy efficiency prevented 6% of additional energy usage in 2017.¹¹⁸ Likewise, the population and economic growth of Southeast Asia have led to a continuous increase in energy demand. It seems that it is well on track to achieve SDG 7 by 2030 when it comes to electricity access, even if about 45 million people have remote access and many of them use solid biomass as cooking fuel.¹¹⁹ According to IEA, China has made significant improvements in energy efficiency from 2000 to 2017. Without such improvements, 12% more energy usage would have been required, being the main energy savings being obtained in the industry and service sectors.¹²⁰ In Africa, a key task toward SDG 7 achievement still clearly remains on providing access to affordable electricity. There are still around 600 million people who do not have access to electricity and around 900 million people lack access to clean cooking. With the estimated population growth from 1.29 billion people to 2.1 billion by 2040, rising demand will challenge the achievement of SDG 7 goals. Yet, Africa has been a minor contributor to global energy-related cumulative GHG emissions (with around 2%). The case of Africa offers a unique opportunity for a different energy pathway for pursuing a less energy-intensive, more efficient, and cleaner energy system, with energy efficiency playing a central role.¹²¹ A decentralized energy paradigm with smart grids seems to have potential benefits in Africa. However, it must be carefully assessed since systems thinking assessments have shown that implementation of mini-grids in regions of Africa might

View Article Online
DOI: 10.1039/C3EA00247G



be more challenging than anticipated if its assessment is based only on technical considerations.¹²²

View Article Online

DOI: 10.1039/D2VA00247G

Energy technologies are required across the entire energy conversion chain, and some of them might result in energy and cost savings. Yet, several barriers could prevent the widespread implementation of the technologies, such as economic viability, required payback, and realistic potential which requires taking into consideration of political, economic, and social dimensions during the implementation process. A technological solution that spurs from the digital revolution includes the optimization of energy systems using tools such as the Internet of Things (IoT) which enables real-time optimization, and smart grid technologies¹¹²⁻¹¹⁵ across sectors and infrastructures along the energy chain and across regions.¹¹⁶ International Telecommunication Union (ITU) defines IoT as “a global infrastructure for the information society, enabling advanced services by interconnecting things based on existing and evolving interoperable information and communication technologies”.¹²³ For example, with an IoT-based smart energy platform, energy efficiency can be maximized by energy information collection, demand-side management, and energy sharing and transaction. IoT makes interconnection and integration between energy supply-delivery-utilization energy systems possible in the entire life cycle. Figure 3 shows IoT connecting transmission, distribution, generation, power consumers, operations, markets, and service providers in a secure manner which shows the critical role in improving energy and energy storage efficiencies.




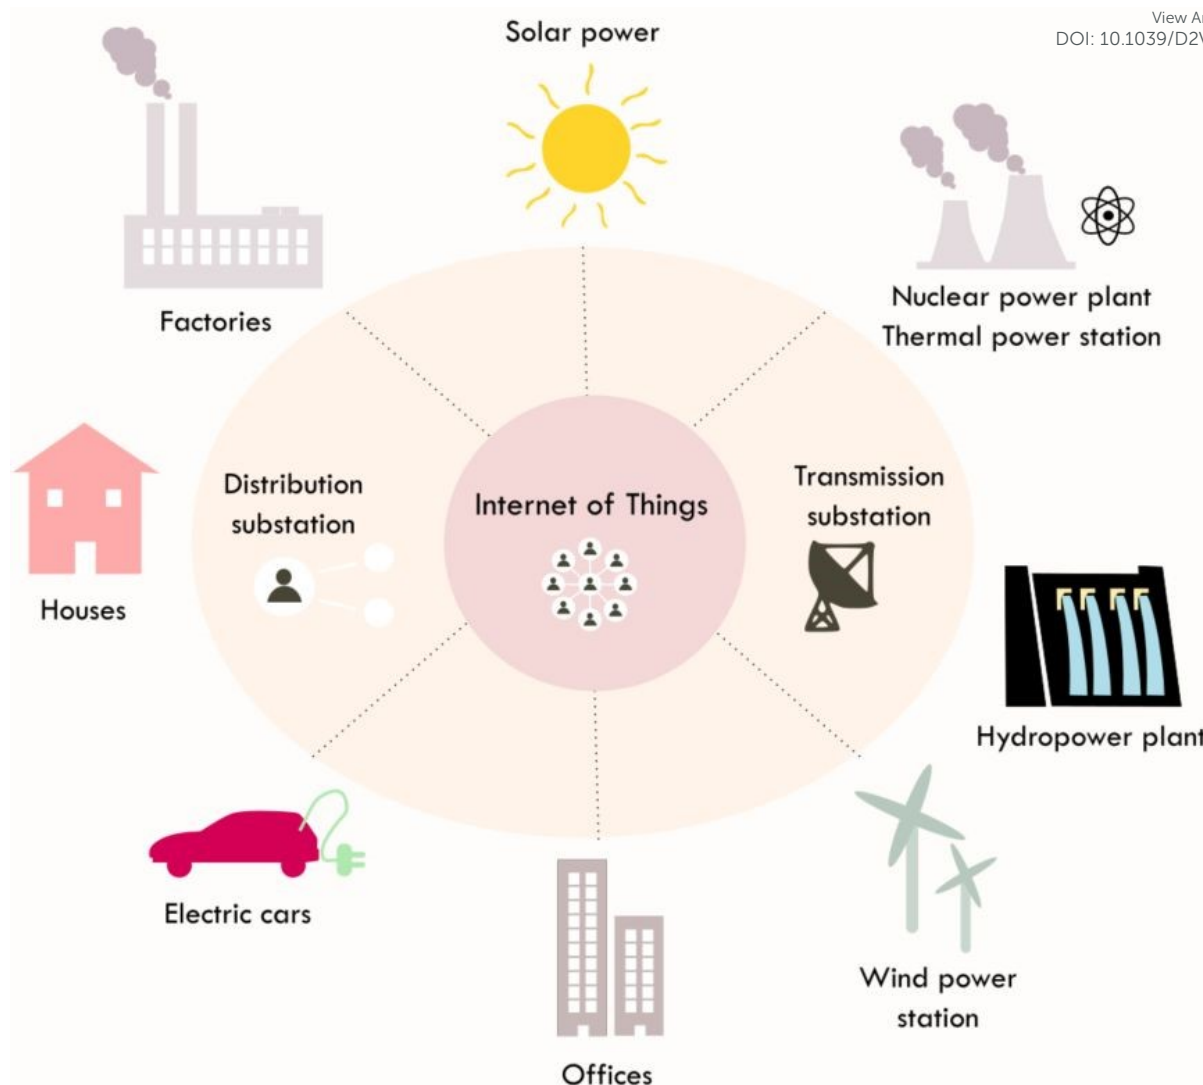


Figure 3. IoT for maximizing energy and energy storage efficiencies

2.5 Challenge (v): Minimizing Energy Generation Costs of Chemical Processes

The chemical industry is one of the major industries with the highest energy expenditure. Its energy intensive processes often require energy in various forms for material pre-treatment, conversion, storage and recovery. Thus, it is crucial to design simpler and greener processes or materials to minimize their energy expenditure without compromising the process performances.^{124,125} At present, the chemical industry is still heavily reliant on fossil fuels as energy and material sources. Thus, an increasingly available supply of low-cost renewable



energy derived from solar and wind holds the promise to decarbonize the chemical industry (Figure 4). This approach would revolutionize the chemical industry and play a crucial role to diminish the carbon footprint of chemical production. A complete overhaul of the time-tested and commercially relevant processes would not make much feasible economic sense. Thus, the first step in this direction should be the identification of the important target chemicals with significant contributions to the energy-carbon equation and that could be further transformed into economically viable final products.^{126,127} Preliminary *in silico* studies on the properties of fine chemicals should also be used as a supplementary tool to streamline the commercialization of desired chemical syntheses.¹²⁸⁻¹³⁹ The top five chemicals with the highest energy expenditures are methanol, ethylene, ammonia, propylene, and benzene/toluene/xylene mixture. These important feedstock chemicals *en route* to other fine chemicals and commodities.

View Article Online
DOI: 10.1039/D2TA00247G




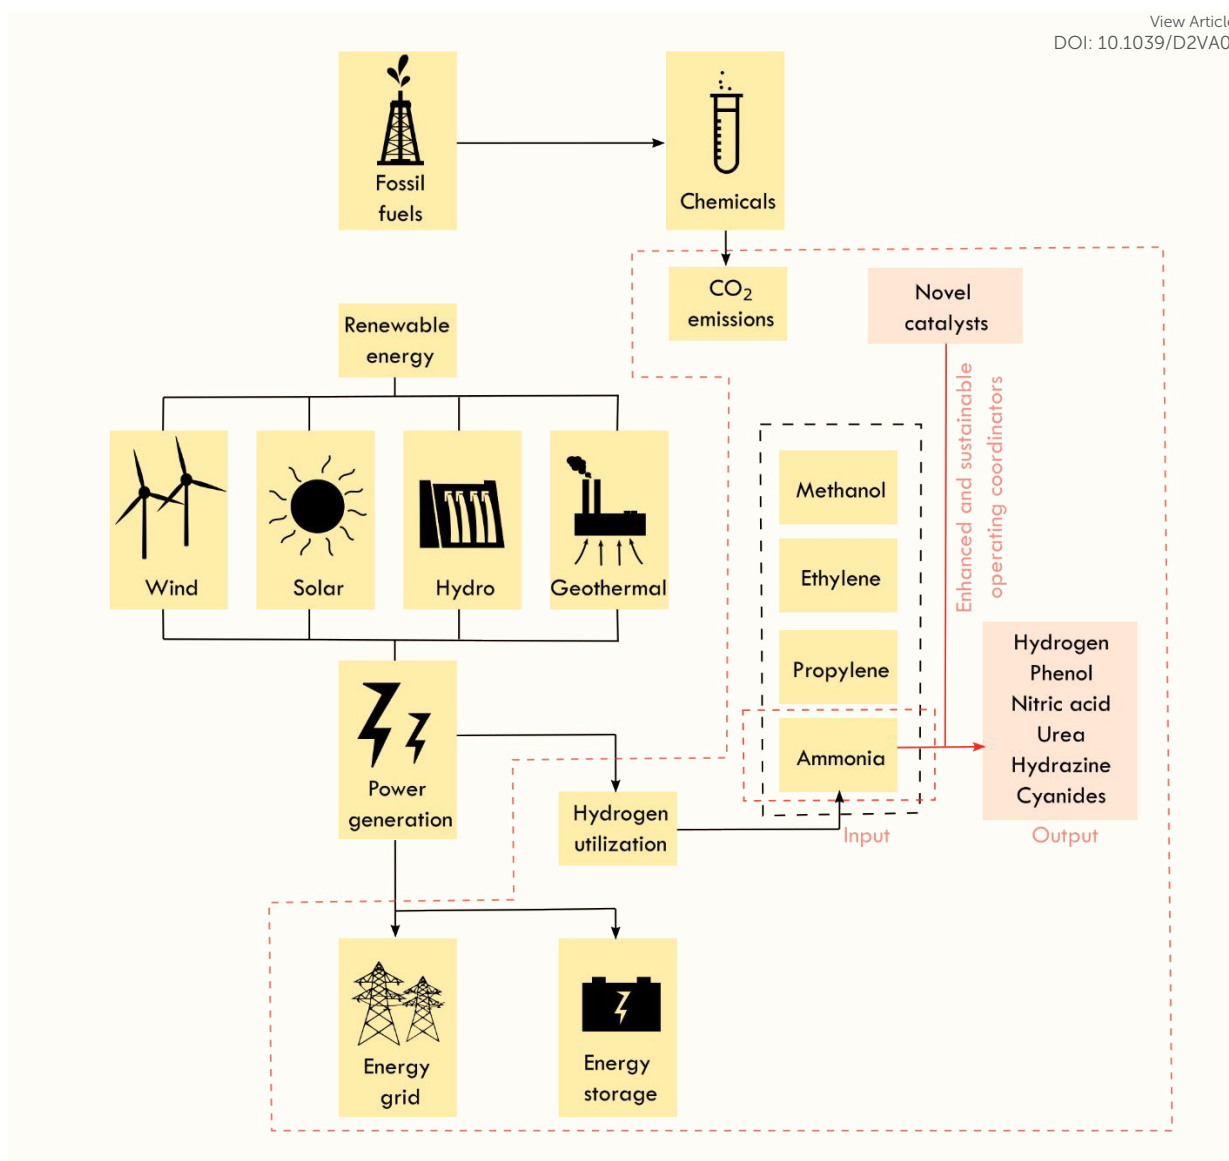


Figure 4. Roadmap to chemical industry decarbonization

An important example is an ammonia, which is essential for the production of hydrazine, phenol, nitric acid, and urea; which in turn, is employed for the synthesis of fertilizers, detergents, pharmaceuticals, and plastics. At present, there are more options to be considered to optimize the Haber–Bosch Process towards a greener route to minimize the use of fossil fuels and reduce carbon emissions. To reduce these harmful effects and yield massive rewards both in terms of economic and environmental benefits, there is great interest in the development of small-scale local ammonia production plants. The energy required is based on renewable



hydrogen generated from the water via electrolysis and powered by sustainable electricity sources such as wind energy.^{140,141} In such a context, it is necessary to develop novel ammonia synthesis or reductive catalysts.¹⁴² These catalyst technologies are to be active under less severe operating conditions, appropriate to smaller-scale reactors, and could be practiced in the global south. By addressing its catalyst component, many of the problems associated with the process can be solved or could contribute to a greater solution.

Power-to-X (P2X) concept could be broadly defined as an umbrella term incorporating various means to convert primary energy (especially derived from renewables) into an energy carrier (e.g., hydrogen), heating, cooling, or new products. This concept is considered to be a viable means for efficient utilization of excess renewables using existing infrastructure and has recently found considerable policy favor and investment support. For example, the Power-to-X alliance in Germany has committed over EUR 1.1 billion to invest in green energy carriers, hydrogen, and methane. The two major sources of GHGs during the synthesis of chemicals are the burning of fossil fuels to generate high reaction temperatures and the production of important feedstock like hydrogen, which is still mostly derived by steam reforming.

Herein, the most important P2X approaches which are fundamental to the decarbonization of the chemical industry are discussed. The bulk of the heating requirements in the modern chemical industries is still met with fossil fuels. As an alternative, the excess renewable energy may be used to generate heat via electric boilers or heat pumps. This heat will then be transferred using the surrounding vectors such as air/water to the buildings which is one of the P2X strategies: Power-to-heat. The heat pumps could also be used to manage the demand-supply paradigm of renewable electricity generation by load transfer and/or peak shaving. For example, in 2014 the Inner Mongolia Autonomous Region in China has an installed wind-power capacity of 22.3 GW which however suffered about 15% curtailment losses by 2015 due




to poor transmission.¹⁴³ To mitigate this issue, electric boilers with a capacity of 50 MW are planned to be installed by the end of 2020. Once completed, the heat derived from the excess electricity would provide for about 3% of the heating requirements of the district. Another example is the Swedish company of Vattenfall which installed three power-to-heat units in 2019 with a combined capacity of 120 MW in Berlin. They would harness excess energy from wind to heat water for 60,000 residences. This facility is poised to replace the existing 330 MWh coal-fired plant thereby reducing fossil fuel consumption.

Power-to-hydrogen is also another P2X strategy. Hydrogen is an important energy vector with a very high calorific value of 150 kJ/g. The vision of a “hydrogen economy” that is built on hydrogen as an energy vector has been around for a long time, but has never gained much traction due to how it was produced and the obvious cost disadvantage vis-à-vis fossil fuels. However, in the face of abundant renewable electricity, there has been a renewed interest in this direction. The most promising approach is that of electrocatalytic water splitting which uses renewable electricity to “break” water into its constituents, H₂ and O₂.¹⁴⁴ Three existing water electrolyzer technologies are differentiated by the electrolyte used, namely alkaline water electrolysis,^{145,146} polymer electrolyte membrane electrolysis,¹⁴⁷ and solid oxide electrolysis.^{148,149} The H₂ and O₂ produced from these technologies can be used as cleaner fuel sources to reduce the carbon footprint and improve the sustainability of energy generation industries. In addition, the high purity H₂ produced in this manner is also a potential precursor source for various value-added chemicals in chemical industries.

3. Conclusion

In an era with rapid technological advancements, energy sustainability presents itself as an important aspect in securing a renewable, affordable, and eco-friendly energy future. Against this backdrop, SDG 7 which is Affordable and Clean Energy is the present goal strived by



countries worldwide following the 2030 agenda set forth by United Nations. This work has discussed the five main challenges in SDG 7 attainment by the year 2030 in the Global South context. The challenge of phasing out the use of fossil fuels is possible with the advent of numerous renewable energy sources and policies. With the help of microgrids, fluctuations of renewable energy can be compensated through the harnessing of multiple energy sources and types at the same time. The challenge of migrating towards a diversified renewable energy matrix remains an insurmountable task in the Global South context. This challenge also reveals a deep-seated problem in Global South on their heavy reliance on non-renewable energy sources for energy and economic security. The challenge of decentralization of energy generation and distribution could be overcome through the use of multiple renewable energy sources in tandem with microgrid and blockchain technologies. As for the last two challenges of maximizing energy and energy storage efficiencies; reducing energy generation costs of chemical processes, much of the present efforts are placed on the development of decarbonization technologies. These in turn provide a cleaner energy source that is of higher efficiencies. All in all, the realization of SDG 7 whether partially or in full is not impossible within Global South and global contexts, only if existing technologies are fully implemented with the necessary international and national policies.

Conflicts of interest

The authors declare no conflict of interest.

Acknowledgement

This work is not financially supported.

View Article Online
DOI: 10.1059/ESVA00247G



CRedit authorship contribution statementView Article Online
DOI: 10.1039/D2VA00247G

Andrew Ng Kay Lup (Lead): Writing - original draft, Conceptualization, Data curation, Writing – review & editing, Supervision. **Vikram Soni (Equal):** Writing - original draft, Conceptualization, Data curation, Writing – review & editing, Supervision. **Benjamin Keenan:** Writing - original draft, Data curation. **Jaewon Son:** Writing - original draft, Data curation. **Mohammed Ramezani Taghartapeh:** Writing - original draft, Data curation. **Marcelo Menezes Morato:** Writing – review & editing. **Yalinu Poya:** Writing – review & editing. **Rubén M. Montañés:** Writing – review & editing.

4. References

- [1] Heard B. P., Brook B. W., Wigley T. M. L. and Bradshaw C. J. A., Burden of proof: A comprehensive review of the feasibility of 100% renewable-electricity systems, *Renewable and Sustainable Energy Reviews*, 2017; **76**, 1122-1133.
- [2] Griggs D., Stafford-Smith M., Gaffney O., Rockström J., Öhman M. C., Shyamsundar P., Steffen W., Glaser G., Kanie N. and Noble I., Sustainable development goals for people and planet, *Nature*, 2013; **495**, 305-307.
- [3] Hopwood B., Mellor M. and O'Brien G., Sustainable development: mapping different approaches, *Sustainable Development*, 2005; **13**, 38-52.
- [4] Prieur M., Luginbuehl Y., Zoido Naranjo F., De Montmollin B., Pedrolì B., Van Mansvelt J. D. and Durousseau S. *Landscape and sustainable development-Challenges of the European Landscape Convention.*; Council of Europe Publishing: 2006.
- [5] Gupta J. and Vegelin C., Sustainable development goals and inclusive development, *International Environmental Agreements: Politics, Law and Economics*, 2016; **16**, 433-448.




- [6] Suganthi L. and Samuel A. A., Energy models for demand forecasting—A review, *Renewable and Sustainable Energy Reviews*, 2012; **16**, 1223-1240.
- [7] Shafiee S. and Topal E., When will fossil fuel reserves be diminished?, *Energy Policy*, 2009; **37**, 181-189.
- [8] IPCC, Summary for Policymakers, An IPCC Special Report on the impacts of global warming of 1.5°C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change, sustainable development, and efforts to eradicate poverty, 2018.
- [9] Pradhan P., Costa L., Rybski D., Lucht W. and Kropp J. P., A systematic study of Sustainable Development Goal (SDG) interactions, *Earth's Future*, 2017; **5**, 1169-1179.
- [10] Baban S. M. J., Al-Oun S. and Shahbaz M., Let the desert bloom: an overview of an attempt to promote sustainable development and environmental protection in the Jordanian Badia region, *Sustainable Development*, 2003; **11**, 159-170.
- [11] Kroll C., Warchold A. and Pradhan P., Sustainable Development Goals (SDGs): Are we successful in turning trade-offs into synergies?, *Palgrave Communications*, 2019; **5**, 140.
- [12] Pradhan P., A threefold approach to rescue the 2030 Agenda from failing, *National Science Review*, 2023; 1-5.
- [13] Moher D., Liberati A., Tetzlaff J., Altman D. G. and Group T. P., Preferred reporting items for systematic reviews and meta-analyses: the PRISMA statement, *Annals of Internal Medicine*, 2009; **151**, 264-269.
- [14] Renaud F., Zhou X., Boshier L., Barrett B. and Huang S., Synergies and trade-offs between sustainable development goals and targets: innovative approaches and new perspectives, *Sustainability Science*, 2020; **15**, 1011-1011.




- [15] Shafiee S. and Topal E., A long-term view of worldwide fossil fuel prices, *Applied Energy*, 2010; **87**, 988-1000. View Article Online
DOI:10.1016/j.apenergy.2010.02.047
- [16] Owusu P. A. and Asumadu-Sarkodie S., A review of renewable energy sources, sustainability issues and climate change mitigation, *Cogent Engineering*, 2016; **3**, 1167990.
- [17] Johansson T. B., Kelly H., Reddy A. K. N. and Williams R. H. *Renewable energy: Sources for fuels and electricity*; Island Press: United States, 1993.
- [18] Hosseini S. E., Transition away from fossil fuels toward renewables: lessons from Russia-Ukraine crisis, *Future Energy*, 2022; **1**, 2-5.
- [19] Razeghi M., Hajinezhad A., Naseri A., Noorollahi Y. and Moosavian S. F., An overview of renewable energy technologies for the simultaneous production of high-performance power and heat, *Future Energy*, 2022; **2**, 1-11.
- [20] Morato M. M., da Costa Mendes P. R., Cani A. A., Normey-Rico J. E. and Bordons C., Future hybrid local energy generation paradigm for the Brazilian sugarcane industry scenario, *International Journal of Electrical Power & Energy Systems*, 2018; **101**, 139-150.
- [21] John R. P., Anisha G. S., Nampoothiri K. M. and Pandey A., Micro and macroalgal biomass: A renewable source for bioethanol, *Bioresource Technology*, 2011; **102**, 186-193.
- [22] Chia W. Y., Ying Tang D. Y., Khoo K. S., Kay Lup A. N. and Chew K. W., Nature's fight against plastic pollution: Algae for plastic biodegradation and bioplastics production, *Environmental Science and Ecotechnology*, 2020; **4**, 100065.
- [23] Perry S., Klemeš J. and Bulatov I., Integrating waste and renewable energy to reduce the carbon footprint of locally integrated energy sectors, *Energy*, 2008; **33**, 1489-1497.



- [24] Nogueira C. E. C., de Souza S. N. M., Micuanski V. C. and Azevedo R. L., View Article Online
DOI: 10.1039/C2EA00247G Exploring possibilities of energy insertion from vinasse biogas in the energy matrix of Paraná State, Brazil, *Renewable and Sustainable Energy Reviews*, 2015; **48**, 300-305.
- [25] Lam J. E., Mohamed A. R., Kay Lup A. N. and Koh M. K., Palm fatty acid distillate derived biofuels via deoxygenation: Properties, catalysts and processes, *Fuel Processing Technology*, 2022; **236**, 107394.
- [26] Zabed H., Sahu J. N., Suely A., Boyce A. N. and Faruq G., Bioethanol production from renewable sources: Current perspectives and technological progress, *Renewable and Sustainable Energy Reviews*, 2017; **71**, 475-501.
- [27] Hiremath R. B., Shikha S. and Ravindranath N. H., Decentralized energy planning; modeling and application—a review, *Renewable and Sustainable Energy Reviews*, 2007; **11**, 729-752.
- [28] Goldthau A., Rethinking the governance of energy infrastructure: Scale, decentralization and polycentrism, *Energy Research & Social Science*, 2014; **1**, 134-140.
- [29] Polatidis H. and Haralambopoulos D., Local renewable energy planning: A participatory multi-criteria approach, *Energy Sources*, 2004; **26**, 1253-1264.
- [30] Sperling K. and Möller B., End-use energy savings and district heating expansion in a local renewable energy system – A short-term perspective, *Applied Energy*, 2012; **92**, 831-842.
- [31] Akella A. K., Saini R. P. and Sharma M. P., Social, economical and environmental impacts of renewable energy systems, *Renewable Energy*, 2009; **34**, 390-396.
- [32] Orehounig K., Evins R. and Dorer V., Integration of decentralized energy systems in neighbourhoods using the energy hub approach, *Applied Energy*, 2015; **154**, 277-289.
- [33] Jakob M. and Hilaire J., Unburnable fossil fuel reserves, *Nature*, 2015; **517**, 150-151.



- [34] McGlade C. and Ekins P., The geographical distribution of fossil fuels View Article Online
DOI: 10.1039/D2VA00247G limiting global warming to 2 °C, *Nature*, 2015; **517**, 187-190.
- [35] Erickson P., Lazarus M. and Piggot G., Limiting fossil fuel production as the next big step in climate policy, *Nature Climate Change*, 2018; **8**, 1037-1043.
- [36] Administration U. E. I., Annual Energy Outlook 2018, 2018.
- [37] Board C. A. R., California's 2017 Climate Change Scoping Plan, 2017.
- [38] Judkins R. R., Fulkerson W. and Sanghvi M. K., The dilemma of fossil fuel use and global climate change, *Energy Fuels*, 1993; **7**, 14-22.
- [39] Zhou S., Tong Q., Yu S., Wang Y., Chai Q. and Zhang X., Role of non-fossil energy in meeting China's energy and climate target for 2020, *Energy Policy*, 2012; **51**, 14-19.
- [40] Jiang X., Sommer S. G. and Christensen K. V., A review of the biogas industry in China, *Energy Policy*, 2011; **39**, 6073-6081.
- [41] Jiankun H., Zhiwei Y. and Da Z., China's strategy for energy development and climate change mitigation, *Energy Policy*, 2012; **51**, 7-13.
- [42] Chandel S. S., Shrivastva R., Sharma V. and Ramasamy P., Overview of the initiatives in renewable energy sector under the national action plan on climate change in India, *Renewable and Sustainable Energy Reviews*, 2016; **54**, 866-873.
- [43] Kar S. K. and Sharma A., Wind power developments in India, *Renewable and Sustainable Energy Reviews*, 2015; **48**, 264-275.
- [44] Pachauri S. and Jiang L., The household energy transition in India and China, *Energy Policy*, 2008; **36**, 4022-4035.
- [45] Mengistu M. G., Simane B., Eshete G. and Workneh T. S., A review on biogas technology and its contributions to sustainable rural livelihood in Ethiopia, *Renewable and Sustainable Energy Reviews*, 2015; **48**, 306-316.



- [46] Fontaine G., The effects of governance modes on the energy matrix of Andean countries, *Energy Policy*, 2011; **39**, 2888-2898.
- [47] de Oliveira R. L., Policy Paper No.55 - Powering the future: Malaysia's energy policy challenges, 2018.
- [48] ICHIME, The Chemical Engineer, 2020, January.
- [49] ICHIME, The Chemical Engineer, 2019, November.
- [50] Chen L., Zhao L., Ren C. and Wang F., The progress and prospects of rural biogas production in China, *Energy Policy*, 2012; **51**, 58-63.
- [51] Shrimali G. and Rohra S., India's solar mission: A review, *Renewable and Sustainable Energy Reviews*, 2012; **16**, 6317-6332.
- [52] Singh S. P., Vatsa D. K. and Verma H. N., Problems with biogas plants in himachal pradesh, *Bioresource Technology*, 1997; **59**, 69-71.
- [53] Goldemberg J., Coelho S. T. and Rei F., Brazilian energy matrix and sustainable development, *Energy for Sustainable Development*, 2002; **6**, 55-59.
- [54] Pottmaier D., Melo C. R., Sartor M. N., Kuester S., Amadio T. M., Fernandes C. A. H., Marinha D. and Alarcon O. E., The Brazilian energy matrix: From a materials science and engineering perspective, *Renewable and Sustainable Energy Reviews*, 2013; **19**, 678-691.
- [55] Zhou S. and Zhang X., Nuclear energy development in China: A study of opportunities and challenges, *Energy*, 2010; **35**, 4282-4288.
- [56] Nasirov S. and Silva C., Diversification of Chilean energy matrix: Recent developments and challenges, *International Association for Energy Economics*, 2014; 27-31.
- [57] Schulman D. S., Arnold A. J. and Das S., Contact engineering for 2D materials and devices, *Chemical Society Reviews*, 2018; **47**, 3037-3058.

View Article Online
DOI: 10.1039/D2VA00247G




- [58] Colter P., Hagar B. and Bedair S., Tunnel junctions for III-V multijunction solar cells, *Crystals*, 2018; **8**, 445. View Article Online
DOI: 10.1039/D2VA00247G
- [59] Yamaguchi M., Takamoto T., Khan A., Imaizumi M., Matsuda S. and Ekins-Daukes N. J., Super-high-efficiency multi-junction solar cells, *Progress in Photovoltaics: Research and Applications*, 2005; **13**, 125-132.
- [60] Okada Y., Ekins-Daukes N. J., Kita T., Tamaki R., Yoshida M., Pusch A., Hess O., Phillips C. C., Farrell D. J., Yoshida K., Ahsan N., Shoji Y., Sogabe T. and Guillemoles J. F., Intermediate band solar cells: Recent progress and future directions, *Applied Physics Reviews*, 2015; **2**, 021302.
- [61] Luque A., Martí A. and Stanley C., Understanding intermediate-band solar cells, *Nature Photonics*, 2012; **6**, 146-152.
- [62] Liu X., Yan C.-H. and Capobianco J. A., Photon upconversion nanomaterials, *Chemical Society Reviews*, 2015; **44**, 1299-1301.
- [63] Shang Y., Hao S., Yang C. and Chen G., Enhancing solar cell efficiency using photon upconversion materials, *Nanomaterials*, 2015; **5**, 1782-1809.
- [64] Hasan A., Sarwar J. and Shah A. H., Concentrated photovoltaic: A review of thermal aspects, challenges and opportunities, *Renewable and Sustainable Energy Reviews*, 2018; **94**, 835-852.
- [65] Ejaz A., Babar H., Ali H. M., Jamil F., Janjua M. M., Fattah I. M. R., Said Z. and Li C., Concentrated photovoltaics as light harvesters: Outlook, recent progress, and challenges, *Sustainable Energy Technologies and Assessments*, 2021; **46**, 101199.
- [66] Ferrari C., Melino F., Pinelli M., Spina P. R. and Venturini M., Overview and status of thermophotovoltaic systems, *Energy Procedia*, 2014; **45**, 160-169.




- [67] Lenert A., Bierman D. M., Nam Y., Chan W. R., Celanović I., Soljačić M. and Wang E. N., A nanophotonic solar thermophotovoltaic device, *Nature Nanotechnology*, 2014; **9**, 126-130.
- [68] Ho W.-J., Chen J.-C., Liu J.-J. and Ho C.-H., Enhancing luminescent down-shifting of Eu-doped phosphors by incorporating plasmonic silver nanoparticles for silicon solar cells, *Applied Surface Science*, 2020; **532**, 147434.
- [69] Carrasco J. M., Franquelo L. G., Bialasiewicz J. T., Galvan E., PortilloGuisado R. C., Prats M. A. M., Leon J. I. and Moreno-Alfonso N., Power-electronic systems for the grid integration of renewable energy sources: A survey, *IEEE Transactions on Industrial Electronics*, 2006; **53**, 1002-1016.
- [70] Mwirigi J., Balana B. B., Mugisha J., Walekhwa P., Melamu R., Nakami S. and Makenzi P., Socio-economic hurdles to widespread adoption of small-scale biogas digesters in Sub-Saharan Africa: A review, *Biomass and Bioenergy*, 2014; **70**, 17-25.
- [71] Pérez I., Garfí M., Cadena E. and Ferrer I., Technical, economic and environmental assessment of household biogas digesters for rural communities, *Renewable Energy*, 2014; **62**, 313-318.
- [72] Bond T. and Templeton M. R., History and future of domestic biogas plants in the developing world, *Energy for Sustainable Development*, 2011; **15**, 347-354.
- [73] Qureshi K. M., Kay Lup A. N., Khan S., Abnisa F. and Wan Daud W. M. A., Optimization of palm shell pyrolysis parameters in helical screw fluidized bed reactor: Effect of particle size, pyrolysis time and vapor residence time, *Cleaner Engineering and Technology*, 2021; **4**, 100174.
- [74] Qureshi K. M., Kay Lup A. N., Khan S., Abnisa F. and Daud W. M. A. W., Effect of temperature and feed rate on pyrolysis oil produced via helical screw fluidized bed reactor, *Korean Journal of Chemical Engineering*, 2021; **38**, 1797-1809.



- [75] Qureshi K. M., Kay Lup A. N., Khan S., Abnisa F. and Wan Daud W. M. A., A technical review on semi-continuous and continuous pyrolysis process of biomass to bio-oil, *Journal of Analytical and Applied Pyrolysis*, 2018; **131**, 52-75.
- [76] Kay Lup A. N., Abnisa F., Daud W. M. A. W. and Aroua M. K., A review on reaction mechanisms of metal-catalyzed deoxygenation process in bio-oil model compounds, *Applied Catalysis A: General*, 2017; **541**, 87-106.
- [77] Kay Lup A. N., Abnisa F., Wan Daud W. M. A. and Aroua M. K., A review on reactivity and stability of heterogeneous metal catalysts for deoxygenation of bio-oil model compounds, *Journal of Industrial and Engineering Chemistry*, 2017; **56**, 1-34.
- [78] Kay Lup A. N., Abnisa F., Daud W. M. A. W. and Aroua M. K., Acidity, oxophilicity and hydrogen sticking probability of supported metal catalysts for hydrodeoxygenation process, *IOP Conference Series: Materials Science and Engineering*, 2018; **334**, 012074.
- [79] Kay Lup A. N., Abnisa F., Daud W. M. A. W. and Aroua M. K., Atmospheric hydrodeoxygenation of phenol as pyrolytic-oil model compound for hydrocarbon production using Ag/TiO₂ catalyst, *Asia-Pacific Journal of Chemical Engineering*, 2019; **14**, e2293.
- [80] Kay Lup A. N., Abnisa F., Daud W. M. A. W. and Aroua M. K., Synergistic interaction of metal–acid sites for phenol hydrodeoxygenation over bifunctional Ag/TiO₂ nanocatalyst, *Chinese Journal of Chemical Engineering*, 2019; **27**, 349-361.
- [81] Khan S., Qureshi K. M., Kay Lup A. N., Patah M. F. A. and Wan Daud W. M. A., Role of Ni–Fe/ZSM-5/SAPO-11 bifunctional catalyst on hydrodeoxygenation of palm oil and triolein for alternative jet fuel production, *Biomass and Bioenergy*, 2022; **164**, 106563.
- [82] IEA, World energy outlook 2019, Paris, 2019.



- [83] Kabir H., Yegbemey R. N. and Bauer S., Factors determinant of biogas adoption in Bangladesh, *Renewable and Sustainable Energy Reviews*, 2013; **28**, 881-889.
- [84] Udomsri S., Petrov M. P., Martin A. R. and Fransson T. H., Clean energy conversion from municipal solid waste and climate change mitigation in Thailand: Waste management and thermodynamic evaluation, *Energy for Sustainable Development*, 2011; **15**, 355-364.
- [85] Aitzhan N. Z. and Svetinovic D., Security and privacy in decentralized energy trading through multi-signatures, blockchain and anonymous messaging streams, *IEEE Transactions on Dependable and Secure Computing*, 2018; **15**, 840-852.
- [86] Alanne K. and Saari A., Distributed energy generation and sustainable development, *Renewable and Sustainable Energy Reviews*, 2006; **10**, 539-558.
- [87] Zalengera C., To L. S., Sieff R., Mohr A., Eales A., Cloke J., Buckland H., Brown E., Blanchard R. and Batchelor S., Decentralization: the key to accelerating access to distributed energy services in sub-Saharan Africa?, *Journal of Environmental Studies and Sciences*, 2020; **10**, 270-289.
- [88] Dickovick J. T. and Wunsch J. S. *Decentralization in Africa: The Paradox of State Strength*; Lynne Rienner Publishers: 2014.
- [89] Sovacool B. K., An international comparison of four polycentric approaches to climate and energy governance, *Energy Policy*, 2011; **39**, 3832-3844.
- [90] Dell R. M. and Rand D. A. J., Energy storage — a key technology for global energy sustainability, *Journal of Power Sources*, 2001; **100**, 2-17.
- [91] Lasseter R. H., 2002 *IEEE Power Engineering Society Winter Meeting. Conference Proceedings (Cat. No.02CH37309)*, 1, (2002).
- [92] Farhangi H., The path of the smart grid, *IEEE Power and Energy Magazine*, 2010; **8**, 18-28.



- [93] Siano P., Demand response and smart grids—A survey, *Renewable and Sustainable Energy Reviews*, 2014; **30**, 461-478. View Article Online
DOI: 10.1039/B2VA00247G
- [94] Yu X., Cecati C., Dillon T. and Simões M. G., The new frontier of smart grids, *IEEE Industrial Electronics Magazine*, 2011; **5**, 49-63.
- [95] Geidl M., Koeppel G., Favre-Perrod P., Klockl B., Andersson G. and Frohlich K., *Third Annual Carnegie Mellon Conference on the Electricity Industry*, (2007).
- [96] Geidl M., Koeppel G., Favre-Perrod P., Klockl B., Andersson G. and Frohlich K., Energy hubs for the future, *IEEE Power and Energy Magazine*, 2007; **5**, 24-30.
- [97] Parisio A. and Glielmo L., *2011 50th IEEE Conference on Decision and Control and European Control Conference*, (2011).
- [98] Parisio A., Rikos E. and Glielmo L., A model predictive control approach to microgrid operation optimization, *IEEE Transactions on Control Systems Technology*, 2014; **22**, 1813-1827.
- [99] Arnold M., Negenborn R. R., Andersson G. and Schutter B. D., *2009 IEEE Power & Energy Society General Meeting*, (2009).
- [100] Bozchalui M. C., Hashmi S. A., Hassen H., Canizares C. A. and Bhattacharya K., Optimal operation of residential energy hubs in smart grids, *IEEE Transactions on Smart Grid*, 2012; **3**, 1755-1766.
- [101] Nehrir M. H., Wang C., Strunz K., Aki H., Ramakumar R., Bing J., Miao Z. and Salameh Z., A review of hybrid renewable/alternative energy systems for electric power generation: Configurations, control, and applications, *IEEE Transactions on Sustainable Energy*, 2011; **2**, 392-403.
- [102] Bordons C., Garcia-Torres F. and Ridao M. A. *Model predictive control of microgrids*; Springer: 2020.



- [103] Valverde L., Rosa F., del Real A. J., Arce A. and Bordons C., Modeling simulation and experimental set-up of a renewable hydrogen-based domestic microgrid, *International Journal of Hydrogen Energy*, 2013; **38**, 11672-11684.
- [104] Garcia-Torres F. and Bordons C., Optimal economical schedule of hydrogen-based microgrids with hybrid storage using model predictive control, *IEEE Transactions on Industrial Electronics*, 2015; **62**, 5195-5207.
- [105] Jadidbonab M., Dolatabadi A., Mohammadi-Ivatloo B., Abapour M. and Asadi S., Risk-constrained energy management of PV integrated smart energy hub in the presence of demand response program and compressed air energy storage, *IET Renewable Power Generation*, Institution of Engineering and Technology, 2019, pp. 998-1008.
- [106] Neupane D., Kafle S., Karki K. R., Kim D. H. and Pradhan P., Solar and wind energy potential assessment at provincial level in Nepal: Geospatial and economic analysis, *Renewable Energy*, 2022; **181**, 278-291.
- [107] Vergara-Dietrich J. D., Morato M. M., Mendes P. R. C., Cani A. A., Normey-Rico J. E. and Bordons C., Advanced chance-constrained predictive control for the efficient energy management of renewable power systems, *Journal of Process Control*, 2019; **74**, 120-132.
- [108] Morato M. M., Vergara-Dietrich J. D., Mendes P. R. C., Normey-Rico J. E. and Bordons C., A two-layer EMS for cooperative sugarcane-based microgrids, *International Journal of Electrical Power & Energy Systems*, 2020; **118**, 105752.
- [109] Al-Waeli A. H. A., Sopian K., Kazem H. A. and Chaichan M. T., Photovoltaic/Thermal (PV/T) systems: Status and future prospects, *Renewable and Sustainable Energy Reviews*, 2017; **77**, 109-130.



- [110] Zhao Y., Lu Y., Yan C. and Wang S., MPC-based optimal scheduling of grid-connected low energy buildings with thermal energy storages, *Energy and Buildings*, 2015; **86**, 415-426.
- [111] Pereira M. G., Camacho C. F., Freitas M. A. V. and Silva N. F. d., The renewable energy market in Brazil: Current status and potential, *Renewable and Sustainable Energy Reviews*, 2012; **16**, 3786-3802.
- [112] Bazmohammadi N., Tahsiri A., Anvari-Moghaddam A. and Guerrero J. M., A hierarchical energy management strategy for interconnected microgrids considering uncertainty, *International Journal of Electrical Power & Energy Systems*, 2019; **109**, 597-608.
- [113] Ilic D., Silva P. G. D., Karnouskos S. and Griesemer M., *2012 6th IEEE International Conference on Digital Ecosystems and Technologies (DEST)*, (2012).
- [114] Zengin I., Vardakas J. S., Echave C., Morató M., Abadal J. and Verikoukis C. V., Cooperation in microgrids through power exchange: An optimal sizing and operation approach, *Applied Energy*, 2017; **203**, 972-981.
- [115] Andoni M., Robu V., Flynn D., Abram S., Geach D., Jenkins D., McCallum P. and Peacock A., Blockchain technology in the energy sector: A systematic review of challenges and opportunities, *Renewable and Sustainable Energy Reviews*, 2019; **100**, 143-174.
- [116] Park L. W., Lee S. and Chang H., A sustainable home energy prosumer-Chain methodology with energy tags over the blockchain, *Sustainability*, 2018; **10**,
- [117] IEA, Energy Efficiency 2019, Paris, 2019.
- [118] IEA, Energy efficiency in India, Paris, 2018.
- [119] IEA, Southeast Asia Energy Outlook 2019, 2019.
- [120] IEA, Energy efficiency in China, Paris, 2018.



- [121] IEA, Africa Energy Outlook 2019, Paris, 2019.
- [122] Riva F., Ahlborg H., Hartvigsson E., Pachauri S. and Colombo E., Electricity access and rural development: Review of complex socio-economic dynamics and causal diagrams for more appropriate energy modelling, *Energy for Sustainable Development*, 2018; **43**, 203-223.
- [123] ITU. ITU-T Recommendation database, <https://handle.itu.int/11.1002/1000/11559>; 2022
- [124] Dias V., Pochet M., Contino F. and Jeanmart H., Energy and economic costs of chemical storage, *Frontiers in Mechanical Engineering*, 2020; **6**, 1.
- [125] Lim J. J. Y. and Kay Lup A. N., Heterostructural TiO₂/Ti₃C₂ MXene aerogel composite for photocatalytic degradation of palm oil mill effluent, *Environmental Science: Advances*, 2022; **1**, 570-583.
- [126] Vooradi R., Anne S. B., Tula A. K., Eden M. R. and Gani R., Energy and CO₂ management for chemical and related industries: issues, opportunities and challenges, *BMC Chemical Engineering*, 2019; **1**, 7.
- [127] Kay Lup A. N., Abnisa F., Wan Daud W. M. A. and Aroua M. K., Delayed volatiles release phenomenon at higher temperature in TGA via sample encapsulation technique, *Fuel*, 2018; **234**, 422-429.
- [128] Cao Y., Khan A., Mirzaei H., Reza Khandoozi S., Javan M., Kay Lup A. N., Norouzi A., Tazikeh Lemeski E., Pishnamazi M., Soltani A. and Albadarin A. B., Investigations of adsorption behavior and anti-cancer activity of curcumin on pure and platinum-functionalized B₁₂N₁₂ nanocages, *Journal of Molecular Liquids*, 2021; **334**, 116516.
- [129] Aghaei M., Ramezanitaghartapeh M., Javan M., Hoseininezhad-Namin M. S., Mirzaei H., Rad A. S., Soltani A., Sedighi S., Kay Lup A. N., Khori V., Mahon P. J. and Heidari F., Investigations of adsorption behavior and anti-inflammatory activity of glycine




functionalized $\text{Al}_{12}\text{N}_{12}$ and $\text{Al}_{12}\text{ON}_{11}$ fullerene-like cages, *Spectrochimica Acta Part A: Molecular and Biomolecular Spectroscopy*, 2021; **246**, 119023. View Article Online
DOI: 10.1039/D2VA00247G

- [130] Gao S., Khan A., Nazari M., Mirzaei H., Kay Lup A. N., Taghi Baei M., Chandiramouli R., Soltani A., Salehi A., Javan M., Hassan Jokar M., Pishnamazi M. and Nouri A., Molecular modeling and simulation of glycine functionalized $\text{B}_{12}\text{N}_{12}$ and $\text{B}_{16}\text{N}_{16}$ nanoclusters as potential inhibitors of proinflammatory cytokines, *Journal of Molecular Liquids*, 2021; **343**, 117494.
- [131] Cao Y., Khan A., Balakheyli H., Kay Lup A. N., Ramezani Taghartapeh M., Mirzaei H., Reza Khandoozi S., Soltani A., Aghaei M., Heidari F., Sarkar S. M. and Albadarin A. B., Penicillamine functionalized $\text{B}_{12}\text{N}_{12}$ and $\text{B}_{12}\text{CaN}_{12}$ nanocages act as potential inhibitors of proinflammatory cytokines: A combined DFT analysis, ADMET and molecular docking study, *Arabian Journal of Chemistry*, 2021; **14**, 103200.
- [132] Hoseininezhad-Namin M. S., Pargolghasemi P., Saadi M., Taghartapeh M. R., Abdolahi N., Soltani A. and Kay Lup A. N., Ab initio study of TEPA Adsorption on pristine, Al and Si doped carbon and boron nitride nanotubes, *Journal of Inorganic and Organometallic Polymers and Materials*, 2020; **30**, 4297-4310.
- [133] Cao Y., Khan A., Soltani A., Erfani-Moghadam V., Kay Lup A. N., Aghaei M., Abdolahi N., Khalili M., Cordani M., Balakheyli H., Tavassoli S. and Albadarin A. B., Spectroscopic, density functional theory, cytotoxicity and antioxidant activities of sulfasalazine and naproxen drugs combination, *Arabian Journal of Chemistry*, 2021; **14**, 103190.
- [134] Soltani A., Ramezanitaghartapeh M., Javan M. B., Baei M. T., Kay Lup A. N., Mahon P. J. and Aghaei M., Influence of the adsorption of toxic agents on the optical and electronic properties of $\text{B}_{12}\text{N}_{12}$ fullerene in the presence and absence of an external electric field, *New Journal of Chemistry*, 2020; **44**, 14513-14528.



- [135] Wang Q., Zhang P., Javed Ansari M., Aldawsari M. F., Alalaiwe A. S., Kaur J., Kumar R., Kay Lup A. N., Enayati A., Mirzaei H., Soltani A., Su C.-H. and Nguyen H. C., Electrostatic interaction assisted Ca-decorated C20 fullerene loaded to anti-inflammatory drugs to manage cardiovascular disease risk in rheumatoid arthritis patients, *Journal of Molecular Liquids*, 2022; **350**, 118564. View Article Online
DOI: 10.1039/D2VA00247G
- [136] Sun N., Javed Ansari M., Kay Lup A. N., Javan M., Soltani A., Reza Khandoozi S., Arian Nia A., Tavassoli S., Lutfor Rahman M., Sani Sarjadi M., Sarkar S. M., Su C.-H. and Chinh Nguyen H., Improved anti-inflammatory and anticancer properties of celecoxib loaded zinc oxide and magnesium oxide nanoclusters: A molecular docking and density functional theory simulation, *Arabian Journal of Chemistry*, 2022; **15**, 103568.
- [137] Cao Y., Noori M., Nazari M., Kay Lup A. N., Soltani A., Erfani-Moghadam V., Salehi A., Aghaei M., Lutfor Rahman M., Sani Sarjadi M., Sarkar S. M. and Su C.-H., Molecular docking evaluation of celecoxib on the boron nitride nanostructures for alleviation of cardiovascular risk and inflammatory, *Arabian Journal of Chemistry*, 2022; **15**, 103521.
- [138] Hachem K., Jade Catalan Oplencia M., Kamal Abdelbasset W., Sevbitov A., Kuzichkin O. R., Mohamed A., Moazen Rad S., Salehi A., Kaur J., Kumar R., Kay Lup A. N. and Arian Nia A., Anti-inflammatory effect of functionalized sulfasalazine boron nitride nanocages on cardiovascular disease and breast cancer: An in-silico simulation, *Journal of Molecular Liquids*, 2022; **356**, 119030.
- [139] Alshahrani S. M., Alshehri S., Alsubaiyel A. M., Alzhrani R. M., Alatawi A. D., Algarni M. A., Abduljabbar M. H., Kay Lup A. N., Sarjad M. S., Rahman M. L. and Abourehab M. A. S., A robust computational investigation on C60 fullerene



nanostructure as a novel sensor to detect SCN^- , *Arabian Journal of Chemistry*, 2022, **15**, 104336. Article Online
DOI: 10.1039/D2VA00247G

- [140] Tanabe Y. and Nishibayashi Y., Developing more sustainable processes for ammonia synthesis, *Coordination Chemistry Reviews*, 2013; **257**, 2551-2564.
- [141] Hargreaves J. S. J., Nitrides as ammonia synthesis catalysts and as potential nitrogen transfer reagents, *Applied Petrochemical Research*, 2014; **4**, 3-10.
- [142] Kay Lup A. N., Abnisa F., Wan Daud W. M. A. and Aroua M. K., Temperature-programmed reduction of silver(I) oxide using a titania-supported silver catalyst under a H_2 atmosphere, *Journal of the Chinese Chemical Society*, 2019; **66**, 1443-1455.
- [143] Luo G., Dan E., Zhang X. and Guo Y., Why the Wind Curtailment of Northwest China Remains High, *Sustainability*, 2018, pp. 570.
- [144] You B. and Sun Y., Innovative strategies for electrocatalytic water splitting, *Accounts of Chemical Research*, 2018; **51**, 1571-1580.
- [145] Zeng K. and Zhang D., Recent progress in alkaline water electrolysis for hydrogen production and applications, *Progress in Energy and Combustion Science*, 2010; **36**, 307-326.
- [146] Brauns J. and Turek T., Alkaline water electrolysis powered by renewable energy: A review, *Processes*, 2020; **8**, 248.
- [147] Aricò A. S., Siracusano S., Briguglio N., Baglio V., Di Blasi A. and Antonucci V., Polymer electrolyte membrane water electrolysis: status of technologies and potential applications in combination with renewable power sources, *Journal of Applied Electrochemistry*, 2013; **43**, 107-118.
- [148] Arunkumar P., Aarthi U., Rengaraj S., Won C. S. and Babu K. M. S., Review of solid oxide electrolysis cells: a clean energy strategy for hydrogen generation, *Nanomaterials and Energy*, 2019; **8**, 2-22.



- [149] Laguna-Bercero M. A., Recent advances in high temperature electrolysis using solid oxide fuel cells: A review, *Journal of Power Sources*, 2012; **203**, 4-16. [View Article Online](#)
[DOI: 10.1039/D2VA00247G](#)

