

UNIVERSIDAD NACIONAL DE SAN AGUSTÍN DE AREQUIPA

FACULTAD DE INGENIERÍA DE PROCESOS

ESCUELA PROFESIONAL DE INGENIERÍA AMBIENTAL



STRATEGY TO SITUATE AIR QUALITY MONITORING STATIONS IN AREQUIPA  
INDUSTRIAL PARK

Tesis Formato Artículo presentado  
por la Bachiller:  
Chavez Caceres, Alicia Mirian

Para optar el Título Profesional de:  
Ingeniera Ambiental

Asesor:  
Dr. Pablo Raul Yanyachi Aco  
Cardenas

Arequipa – Perú

2021

A Yovana Chavez Caceres, la responsable de todos mis éxitos; a Evangelina Caceres y toda mi familia por brindarme siempre su apoyo continuo y confianza.

Al Dr. Raul Yanyachi por la confianza y apoyo continuo, además por el monitoreo y revisión continuo del trabajo de investigación. Al Prof. Juan Bravo por su colaboración durante el muestreo.

A la Universidad Nacional de San Agustín por el financiamiento a través del contrato N° TP-6-2018-UNSA. Al Instituto de Investigación Astronómico y Aeroespacial Pedro Paulet - UNSA por el soporte brindado en sus laboratorios para desarrollar este trabajo.

“STRATEGY TO LOCATE AIR QUALITY MONITORING STATIONS IN AREQUIPA  
INDUSTRIAL PARK”

**1. PROYECTO O CARACTERÍSTICAS DE LA INVESTIGACIÓN QUE GENERÓ EL ARTÍCULO**

*Planteamiento del Problema*

Se detecta como principal problema la ubicación de estaciones de monitoreo de calidad de aire inadecuados e ineficientes; esto debido a criterios técnicos obsoletos, incorrectos criterios legales según tipo de actividad, datos geográficos de referencia deficientes (atmosféricos y meteorológicos), deficientes control de las estaciones existente según tipo de actividad. Estas causas nos dan como efectos alta contaminación atmosférica (efecto invernadero), denuncias y quejas de contaminación y colección de datos no representativos. Que como efectos posteriores resultan en problemas sociales, irregularidad en el proceso de gestión ambiental y mitigación, continuos errores en datos de referencia, enfermedades cardiorrespiratorias, calentamiento global y mala estética visual. Al 2016 en Arequipa de registraron 100 casos, además que el 76% de municipios no supervisa la contaminación atmosférica, debido a la inexistente e ineficiente proceso de control de las estaciones, es decir no existe un marco legal de procedimiento para diseño de estaciones de monitoreo para que todos los municipios estén ligados y compartan información, además que en la actualidad todas las acciones están estrechamente ligados a la normativa nacional como guía principal. Por lo tanto, se plantea como pregunta general de esta tesis:

¿Para qué se necesita determinar estaciones de monitoreo de calidad de aire en el parque industrial – Arequipa?

Esta interrogante se podrá solucionar al responder las siguientes preguntas:

¿Por qué incremento el índice de denuncias sociales? ¿Es por la falta de control o ineficiente método de monitoreo?

La ineficiente e inadecuada gestión ambiental (aire) ¿Es motivo del incremento de gases del efecto invernadero en la zona del Parque Industrial?

La utilización de GIS, junto a puntos de control ¿permitirá modelar y diseñar las estaciones adecuadas?

El análisis multicriterio ¿Será adecuado para cuantificar criterios y alternativas? ¿Serán de ayuda estos datos cuantificados?

### *Justificación*

Se busca desarrollar una metodología para DETERMINAR ESTACIONES DE MONITOREO DE CALIDAD DE AIRE, considerando diversos criterios y alternativas cualitativas, con resultados cuantitativos, teniendo en cuenta áreas tanto ambientales, sociales (salud) y económicos, esto para lograr el éxito de las estaciones de monitoreo y toma de datos como antecedentes adecuados. En el Perú, existe deficiencia en criterios explícitos para determinar estaciones de monitoreo y estos nos sirvan como datos correctos para la gestión ambiental, social y económico. Este será un precedente para que a futuro sea considerado como un proceso de fácil manejo, con datos históricos adecuados y ser una referencia correcta. Este trabajo también considerará datos como: desarrollo humano, datos atmosféricos meteorológicos, imágenes satelitales (proceso de percepción remota) actividades productivas, y marco legal, buscando se obtenga una mayor efectividad.

Además, con este trabajo obtendremos resultados específicos como: desarrollar una red de monitoreo adecuada para la actividad industrial, aplicar GIS para obtener información completa (atmosférica, meteorológica), aplicar análisis multicriterio para cuantificar criterios y alternativas cualitativas de manera sostenible, modelar la evolución de datos de esta red de estaciones, generar una propuesta de metodología de diseño de redes de monitoreo. Se conoce de la existencia de protocolo de monitoreo de la calidad del aire que DIGESA ha elaborado para la estandarización y el

aseguramiento de la calidad del monitoreo de la calidad del aire y gestión de los datos que se realicen en el país. Actualmente, el país cuenta con el Reglamento de Estándares Nacionales de Calidad Ambiental del Aire, aprobado mediante Decreto Supremo N° 074-2001-PCM, en su artículo 12 señala que el monitoreo de la calidad del aire y la evaluación de los resultados en el ámbito nacional es una actividad de carácter permanente, a cargo del Ministerio de Salud a través de la Dirección General de Salud Ambiental (DIGESA), quien podrá encargar a instituciones públicas o privadas dichas labores (DIGESA, 2005).

### *Objetivo General*

Determinar las estaciones optimas de monitoreo de calidad de aire en el Parque Industrial de Arequipa.

## **2. TIPO DE PARTICIPACIÓN DEL ALUMNO O DE CADA ALUMNO, SEGÚN CORRESPONDA**

Autor: Chavez Caceres Alicia Mirian.

- Grado académico: Bachiler en Ingeniería Ambiental.
- Participación: Formulación, ejecución y redacción de la investigación.

Asesor: Yanyachi Aco Cardenas Pablo Raul.

- Grado académico: Doctorado en Ingeniería Eléctrica.
- Participación: Formulación, asesoramiento, monitoreo y publicación de artículo de investigación.
- Institución de afiliación: Universidad Nacional de San Agustín, Arequipa, Perú.

Reseña del autor: Doctor en Ingeniería Eléctrica de la Escuela Politécnica de la Universidad de Sao Paulo-Brasil, "Master of Science" en Control Automático en el Instituto Politécnico de Leningrado-Rusia y Ingeniero Eléctrico. Docente Principal del Departamento Académico de Ingeniería Electrónica de la Universidad Nacional de San Agustín (UNSA), "Station Manager" en la "Nasa Laser Tracking Station TLR3-3" y Director del Instituto de Investigación Astronómico y Aeroespacial Pedro Paulet. Además de ser especialista en Sistemas de Control, Rastreo de Satélites con Laser y Sistemas Satelitales.

## Environmental Engineering and Management Journal



"Gheorghe Asachi" Technical University of Iasi, Romania

73 Mangeron Blvd., 700050, Iasi, Romania  
Tel./Fax. +40-232-271759, PO 10, BOX 2111,  
URL: <http://omicron.ch.tuiasi.ro/EEMJ/>  
e-mail: [eemjournal@yahoo.com](mailto:eemjournal@yahoo.com), [eemj.office@gmail.com](mailto:eemj.office@gmail.com)



Iasi, March 17, 2020

Dear Dr. **PABLO RAUL YANYACHI**,

In your quality of *Corresponding Author*, I have the opportunity to inform you that your paper "**STRATEGY TO SITUATE AIR QUALITY MONITORING STATIONS IN AREQUIPA INDUSTRIAL PARK**" authors: **ALICIA MIRIAN CHAVEZ CACERES, PABLO RAUL YANYACHI** registered within the Editorial Office of *Environmental Engineering and Management Journal* as manuscript EEMJ\_356\_Caceres\_20, has been evaluated and **accepted** for publication.

As corresponding author, you will receive an electronic form as PDF of the manuscript.

Thank you for your interest in our journal.

Sincerely yours,

Professor Maria Gavrilescu,  
Editor-in-Chief,

### 3. PRUEBA DE DOCUMENTO INDEXADO EN WEB OF SCIENCE

Dirección web of science:

[http://www.eemj.icpm.tuiasi.ro/pdfs/vol20/no8/11\\_356\\_Caceres\\_20.pdf](http://www.eemj.icpm.tuiasi.ro/pdfs/vol20/no8/11_356_Caceres_20.pdf)

Search Sources Lists SciVal ? 🔔 🏠 Create account

1 of 1

Download Print E-mail Save to PDF Add to List More... >

Get full text

*Environmental Engineering and Management Journal* • Volume 20, Issue 8, Pages 1329 - 1339 • 2021

## Strategy to place air quality monitoring stations in arequipa industrial park

Chavez Caceres A.M.<sup>a</sup>, Yanyachi P.R.<sup>a, b</sup> ✉  
Save all to author list

**Document type**  
Article

**Source type**  
Journal

**ISSN**  
15829596

**Publisher**  
Gheorghe Asachi Technical University of Iasi, Romania

**Original language**  
English

View less ^

<sup>a</sup> Universidad Nacional San Agustín de Arequipa, 117 Santa Catalina Street, Cercado, Arequipa, Peru  
<sup>b</sup> Instituto Astronómico y Aeroespacial Pedro Paulet de Universidad Nacional San Agustín de Arequipa (IAAPP - UNSA), S/N Characato Avenue, Characato, Arequipa, Peru

Full text options Export

**Cited by 0 documents**

Inform me when this document is cited in Scopus:

Set citation alert >

**Related documents**

Evaluating air quality monitoring stations in Turkey by using multi criteria decision making  
Zeydan, Ö. , Pekkaya, M.  
(2021) *Atmospheric Pollution Research*

Optimal design of air quality monitoring networks: A systematic review  
Verghese, S. , Nema, A.K.  
(2022) *Stochastic Environmental Research and Risk Assessment*

Decision making framework for decreasing the redundancy of air quality



“Gheorghe Asachi” Technical University of Iasi, Romania



---

## STRATEGY TO LOCATE AIR QUALITY MONITORING STATIONS IN AREQUIPA INDUSTRIAL PARK

Alicia Mirian Chavez Caceres<sup>1</sup>, Pablo Raul Yanyachi<sup>1,2\*</sup>

<sup>1</sup>Universidad Nacional San Agustin de Arequipa, 117 Santa Catalina Street, Cercado – Arequipa, Peru

<sup>2</sup>Instituto Astronómico y Aeroespacial Pedro Paulet de Universidad Nacional San Agustin de Arequipa (IAAPP – UNSA), S/N Characato Avenue, Characato – Arequipa, Peru

---

### Abstract

Industrial development in urban areas is a continuing problem for citizens and industries because of the constant air pollution complaints and respiratory illness. There is a lack of data in Arequipa, Peru for the environmental guidance of air quality and public health protection. The strategy proposed in this report is to determine the optimal locations of monitoring stations in Arequipa Industrial Park. Using the Analytic Hierarchy Process (AHP), we evaluated their relative preferences for locating each monitoring station. The strategy includes three main activities: 1) identification of land use (i.e., industrial, bus station, urban), and data collection (meteorology, chemical pollutants), 2) development and a hierarchy of criteria by AHP, and 3) design of the monitoring network by weighted overlay and geographic information system methods. First, three sustainable criteria (environmental, social, and economic) are evaluated with nine sub-criteria. Afterward, with the assigned weights, we obtained a random index of 0.58, a consistency index of 0.04, and a consistency ratio of 0.07. With this confirmation, sustainability was prioritized as follows: environmental (61.9%), social (28.4%), and economic (9.6%). Finally, we propose a monitoring network sustainability; it includes three monitoring stations. Competent parties can use this proposal to develop a rapid diagnostic capacity for both pollution episodes and impact the health of the industrial park Arequipa population.

*Key words:* Analytic Hierarchy Process, geographic information system, multicriteria analysis, optimal locations, sustainable criteria

*Received:* June, 2020; *Revised final:* February, 2021; *Accepted:* March, 2021; *Published in final edited form:* August, 2021

---

### 1. Introduction

Anthropogenic activities are considered the leading issuers of pollution in the atmosphere. By the World Health Organization (WHO) in 2006 (WHO, 2006), there is enough scientific evidence linking air pollution and adverse health effects on both plants, animals, and populations. Therefore, air pollution is considered a vital threat to human health and life quality (Lu et al., 2018). For example, in the US since 1970, prolonged exposure to PM<sub>2.5</sub> and sulfate were associated with the annual mortality rate in urban areas. It was recommended to collect information and continuously monitor them (Pope and Wu, 2014). Mortality due to cardiovascular diseases is caused by

long and short exposure to PM. Due to respiratory diseases, mortality is caused by short exposure to ozone, nitrogen oxide, and sulfur dioxide (SWISS TPH, 2020). For these reasons, the WHO suggests that air pollutants should be measured at representative monitoring stations, which are high levels near neighborhoods, where there are emission sources such as roads, power plants, stores, supermarkets, and large stationary sources (vehicles) (Ceca et al., 2017). Especial measures are needed to be taken to reduce contamination levels to reference values for populations living in such areas. Therefore, estimates of public health benefits are considered part of the policy intervention to reduce air pollution.

The main problem in Arequipa Industrial Park

---

\* Author to whom all correspondence should be addressed: e-mail: [raulpab@unsa.edu.pe](mailto:raulpab@unsa.edu.pe); Phone: +51 959626624



is the accelerated and unplanned growth of industries (paper, textile, metallurgy), vehicle fleets (including the continuous automotive fleet and central bus stations), shopping centers, and food markets, which continually release harmful gases such as carbon monoxide (CO), nitrogen oxides (NO<sub>x</sub>), sulfur dioxide (SO<sub>2</sub>) and methane (CH<sub>4</sub>) (EPA, 2017). On the other hand, the acceleration of fossil fuels used in many industries, transportation, and electrical energy, are also considered primary atmospheric pollution sources because of harmful effects on the population's health and environment. These activities also decrease agricultural, urban areas, and green parks, leading to an exponential deterioration of air quality.

Currently, air pollutant emissions generated by the industries are a persistent problem for Arequipa's inhabitants and industries because they are the origin of health, environmental, and social complaints between the stakeholders. Until 2016 in Arequipa, environmental pollution covered chemical agents from several different sources: the automotive fleet (60%), industries (21%), companies and commerce (11%), and industrial boilers (7%) (Flores, 2017). As reported by OEFA (2019), there were 86 cases of air pollution complaints, and in 76% of these complaints, municipalities and competent authorities were unable to take the correct measures and follow up on each case because of the lack of a monitoring network and ineffective control processes. Besides, air quality concerns are related to geophysical, meteorological, and socioeconomic factors, the latter due to the pressure exerted by the growth of the economy and the population.

On the other hand, it needs to consider that air quality problems are also related to geophysical, meteorological, and socioeconomic factors, the last due to the pressure exerted by the economy's growth and the population. Besides, being conditioned to economic restrictions is unheard of since, in Mumbai in 2012, it was estimated that the population's dynamic exposure to NO<sub>2</sub> and PM<sub>10</sub> pollutants due to health problems resulted in a total cost of USD 800 million, which is 4.24% of the GDP (Gross Domestic Product) of India (Mesbah, 2016).

In Peru, the Environmental Protection Agency (EPA) guidelines are used, which indicate that an air quality monitoring network (AQMN) should be "operated by state, tribal or local agencies to regional or local scale" (EPA, 2012). These authorities define pollutants' levels considered potentially injurious to the environment, public health, and the economy (EPA, 2012). Furthermore, monitoring networks are a requirement and their maintenance as well; that why EPA recommends assessments of monitoring networks every five years (40 CFR § 58.10, 2007).

Thus, Arequipa must create an adequate air monitoring network to protect the public welfare and the environment because the monitoring stations are considered the primary source of data for adequate environmental management of air quality and public health. On the other hand, choosing and installing appropriate locations should lead to better air quality

studies and rapid diagnostic capacity. Therefore, an essential task for responsible authorities is to plan and configure a good air quality monitoring network (AQMN) effectively and systematically (Mofarraha and Husain, 2009). This task includes decisions that are sometimes complex and generally based on multidisciplinary knowledge that incorporates political, natural, social, and ethical sciences (Huang et al., 2011). As Trujillo-Ventura and Ellis (1992) mention, the complexity and size of environmental problems depend on the interconnection of their components; and the formulation of these large-scale environmental models has exceeded the ability to solve them. In addition, Modak and Lohani (1985) mention that complete models of the AQMN design are required to measure different types of synergistic pollutants simultaneously and to be able to estimate the missing values of each pollutant when it is necessary since then the economic issue has also been considered as a primary factor. Therefore, they used a multi-objective approach and multipollutant optimization, thus ensuring representative air quality patterns for each pollutant.

*The United Nations (UN)* in 1987 refers to sustainable development (SD), like the consumption of resources must be only the amount that is needed today; in this form, it will not compromise future needs. So the interconnection of the three pillars, such as environment, economy, and society, is considered essential (Giddings et al., 2002). An adequate Air Quality Monitoring Network (AQMN) has the primary goal of controlling the health and environment; therefore, establishing monitoring stations is primordial because these provide accurate and representative information (Si et al., 2016). For these reasons, we consider each of the three pillars essential pillars to develop our research.

According to Mohebbi et al. (2020), the Multi-criteria decision-making (MCDM) methods can be used in environmental impact assessment; during the process, the reciprocal value compares the least dominant element with the most dominant element (Goepel, 2018). The AHP method presents greater air quality sensitivity, human health risks, land use, and economic issues (Mohebbi et al., 2020). Furthermore, Huang et al. mention that the most efficient way to use AHP is taking into account environmental problems (water, air, energy, or waste), natural resources, and social sciences (Baby, 2013; Huang et al., 2011; Saaty, 2008). Consequently, the analytical hierarchy process (AHP) is chosen (Saaty, 2008); this hierarchical method connects decisions focused on measuring contributions to a goal structured in sub-objectives, attributes, and criteria, alternatives. Pisoni et al. (2008) recognize that the AHP method selects an efficient solution by considering an objective vector function of all the problem's objectives and emphasizing conflicts.

During this study, criteria are identified and developed from the AHP matrix, which are hierarchical alternatives for calculating the consistency index (CR), which must be less than or equal to 0.1. This CR confirms each sub-criterion's

weighting percentage, considering the pollutants, meteorological aspects (Seinfeld, 1972), population, and emitters identified, which are also evaluated and monitored by AHP (Table 1).

The dynamics of GIS allow for the processing of multitemporal data using multivariate statistical analyses so that numerical records can be stored, which creates and develops a geodatabase. Besides, ArcGIS is a robust tool to enhance land suitability evaluation accuracy, creating thematic maps by interpolation method. For these reasons, we execute a multi-criteria GIS-based approach, which integrates environmental, economic, and social indicators (Pope and Wu, 2014). After each sub-criteria interpolation, we obtained just one thematic map and classified, including three main criteria by the weight overlay tool (includes ArcGIS), considering our percentages after each AHP matrix. Finally, in this investigation, we performed three main tasks:

1. Identification of land use (i.e., industrial, bus station, urban), meteorology data, and population focus.
2. Development and a hierarchy of criteria by AHP.
3. Design of the monitoring network by weighted overlay and geographic information system methods.

An air quality monitoring network by the AHP method and weight overlay are proposed to determine suitable air quality monitoring stations considering three main pillars by the weight overlay method.

## 2. Case study

### 2.1. Study zone

The study was carried out in Arequipa Industrial Park (Fig. 1). Its geographical center is located at 16°25'S, 71°32'4"W, and its average altitude is 2328 meters above sea level. Arequipa is affected by the famous "soot", which has light-absorbing properties that turn the energy of light into heat, which warms the air around it (EPA, 2012). The climate is dry from May until September. Wet season is from October to April and is characterized by the presence of clouds in the afternoon and some rainfall. In 2019, the maximum temperature was 26.45°C, the minimum temperature was 2.80°C, and the average temperature was 13.22°C. The maximum pressure was 76500 Pa, the minimum pressure was 75700 Pa, and the average pressure was 76152 Pa (ILRS, 2018). Around Arequipa, the maximum wind speed was 2.1 m s<sup>-1</sup>, the minimum wind speed was 1.3 m s<sup>-1</sup> and the average wind speed was 1.8 m s<sup>-1</sup>. Global solar radiation was between 850 and 950 W m<sup>-2</sup>. Arequipa has one of the highest radiation rates in South America because of its proximity to the Atacama Desert.

### 2.2. Experimental procedure

#### 2.2.1. Criteria and sub-criteria identification and data collection

Based on the United Nations definition of sustainable development (SD) (Giddings, et al., 2002;

UN, 1987) and the AHP method (Bystrzanowska and Tobiszewski, 2018), three sustainable criteria are recognized.

Then, for each criterion, we select environmental sub-criteria (Mesbah, 2016) (pollutants, emission sources, meteorology) (Huang et al., 2011), social (population) (Pope and Wu, 2014), and economic (Fig. 1) (Baby, 2013; Chalabi et al., 2017; Hacıoglu et al., 2016; Kumar and Kumar, 2016; Lu et al., 2018; Mesbah 2016; Rotatori et al., 2011).

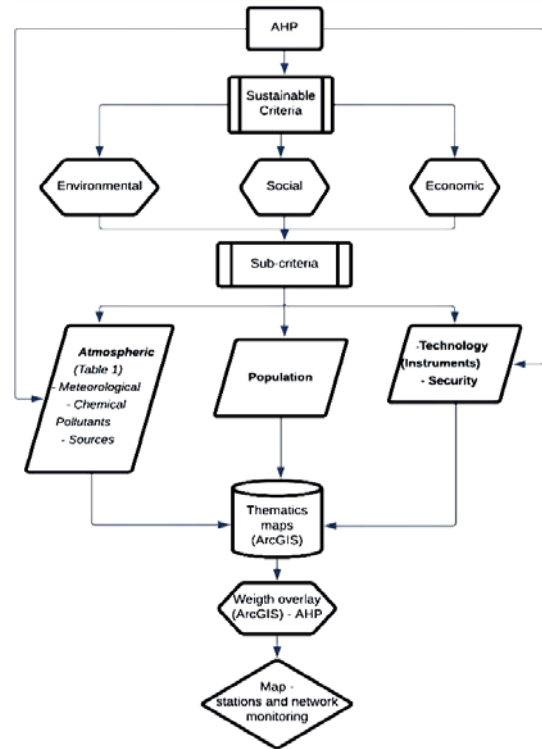


Fig. 1. Methodological setting

Within each sub-criterion, we see the need to collect and create data and design the thematic maps of land use (types of activities and emission sources), meteorological information (wind speed, temperature, relative humidity, precipitation, topography) (MINEM, 2016), pollutants chemicals (CO, PM10, NO2, H2S) (Fig. 3a, b, c, and d), population centers and costs (technology and security) (Pope and Wu, 2014). These are a guide that is necessary to keep these criteria independent at the beginning of the process. Moreover, in the end, all the collected variables must be combined by weight overlay. On the other hand, it is essential to consider possible obstructions in the study area and nearby buildings and trees, rivers that could affect airflow, and congested traffic areas (Chalabi et al., 2017; Hacıoglu et al., 2016).

#### 2.2.2. Development of criteria and modeling using the Analytic Hierarchy Process (AHP)

The AHP decomposes a complex decision problem into smaller sections, creating a hierarchical tree, and therefore AHP is considered a multi-objective analytical tool. According to the hierarchy levels, each element is evaluated by its preferences

relative to the next highest level (Hacioglu et al., 2016). The intensity of preference between two elements is based on the Saaty scale, ranging from 1 to 9 (Saaty, 1994). This scale allows evaluating the advantage of one element over another by using the characteristic or equated property. The minimum value is 1 (equal importance), and the maximum value is 9 (extreme dominance of an element). The AHP algorithm consists of 4 phases: (1) Setting the hierarchic structure of sustainability, (2) Calculations of the relative and absolute weights, for which information was collected from 3 professionals in an excel matrix, (3) the analysis coherence, and (4) the construction of the eventual classification (Baby, 2013; Hacioglu et al., 2016; Saaty, 2008). For the confirmation, AHP uses the consistency index (CI) and the consistency relation (CR), defined in Eqs. (1-2) (Saaty, 2008):

$$CI = \frac{\lambda_{max} - n}{(n - 1)} \quad (1)$$

$$CR = \left( \frac{CI}{RI} \right) \quad (2)$$

where:  $\lambda_{max}$  – maximum eigenvalue;  $n$  – number of parameters in the matrix;  $RI$  – random index (Mofarraha and Husain, 2009).

### 2.2.3. Design of monitoring network using satellite image information, ground level concentrations and GIS

The geographic information system (GIS) is a tool that helps you understand geography and make smart decisions. GIS also helps us organize and select necessary data for specific tasks and the entire project. Besides, GIS manages statistical and spatial data to provide us a tool that shows the relationship between air quality and population (health), environmental, and emission sources. ArcGIS is used to enhance, process, and interpret satellite imagery, combined with geographic tools that provide real images and geospatial research data (Pope and Wu, 2014).

On the other hand, remote sensing is a widespread technique in soil classification, air quality, temperature, and others. The most common and easily acquired are the Landsat MSS, Landsat TM, ETM+, SPOT HRV, and Sentinel (Alföldy et al., 2007; Verma et al., 2009). Besides, some special sensors monitor air quality, such as Aura and Sentinel 5. Because of it is needed to review each sensor's properties that must be considered before image processing. For our study, the use of Landsat 8 images is essential because it is necessary to generate information for the classification of land use as well as: urban zone, sources of emission, trade, roads, population (Fig. 1) and generate a digital elevation model (DEM). Based on the need for correctly georeferenced satellite images, we use high precision GSP with the DELTA-GT3 receiver and the Choke Ring antenna (JAVAD, 2012a; 2012b).

The data collected from the three measured sources (environmental, social, and economic) is

archived and linked in an ArcGIS database system. Where each collected data is georeferenced, that is, stored in geographic coordinates. The creation of the database in a GIS is designed for planning a temporary air quality network: that is, it works as a decision tool, and it is necessary due to the lack of data in our study area, and there is a reference monitoring station more than 8 km from the industrial zone.

We use GIS to examine industrial activities in the area, meteorological data, the existing emissions inventory, and the study area's baseline information (Fig. 2). In addition, we considered possible obstructions, such as nearby buildings, which could affect airflow, high traffic areas, and industrial zones (Hacioglu et al., 2016). With the data obtained in the temporary stations (Fig. 2), we create interpolated maps used as the primary reference for the atmospheric sub-criterion. Simultaneously, the rest of the data obtained are also interpolated as a baseline where the probabilistic (ordinary and universal kriging) is applied, which generate data for the classification according to each factor, so we establish five values that help us to reassign them in each classified map, which are: optimal (5), very adequate (4), adequate (3), acceptable (2) and unacceptable (1) (DIGESA, 2015; MINEM, 2016; Réquia, et al., 2015). Within each sub-criterion, each layer has the same numerical fixation and pixel size (5x5 m). Finally, the weight overlay function is applied with the weighting percentage obtained by the AHP method (Fig. 3). The final decision differs from multicriteria analysis, interpolation diagrams, and weight overlay (Rotatori et al., 2011).

## 3. Results and discussion

Based on the data obtained, we generated average, maximum, and minimum contamination values (every 1 hour, 8 hours, and 24 hours) by following the Peruvian regulations (MINAM, 2017). According to our methodological procedure, we design sub-criteria (Table 1) inside the three criteria sustainable, which are pollution (environmental), social (health), and economy.

We evaluate three criteria and nine sub-criteria, considering four sub-criteria within the atmospheric criteria and two sub-criteria within the economic criteria, and one is within the social criteria, with their respective weights (DIGESA, 2015; MINEM, 2016) (Table 1 and Fig. 1). Based on the recommended consistency index (CR), it must be less than or equal to 0.1 for these results to be valid. As a result,  $\lambda_{max} = 3.09$  and the number of criteria ( $n$ ) = 3, we obtain a random index = 0.58,  $CI = 0.04$  and  $CR = 0.07$ . With this CR, which is less than 0.1, we confirm that the assigned weights are correct to have consistency, thus obtaining the final weighted scores and classifications in terms of sustainable criteria. The environmental criterion has the highest percentage (61%), the social criterion has the second highest (28.4%), and the economic criterion is followed by the other two, thus being the lowest (9.6%) (Table 2).

The AHP method applied in each criterion and sub-criterion allows us to determine the percentage of influence or weight (Table 2) and obtain thematic maps of the weighted overlay concerning the assigned locations. On the map, we can see green colors for the optimal areas and red for the unacceptable areas; orange and yellow colors can also be a medium option (Fig. 3a, b, and c). As these maps show, the optimal zones are close to or within the focus of the emission sources' influence. Finally, we obtain a sustainable map that provides optimal areas to locate the monitoring stations and a network of air quality monitoring stations, shown in green; this map shows the process's result (Fig. 3d).

Of the weights obtained by the AHP method, for the atmospheric sub-criterion and its sub-criterion (Fig. 2 and Table 2), the emission sources sub-criterion has 40% importance, 37% of the chemical pollutants, and 23% of the meteorological data. On the other hand, the results and data obtained in the temporal stations serve to confirm that the maximum concentrations of PM<sub>10</sub>, CO<sub>2</sub>, NO<sub>2</sub>, and SO<sub>2</sub> collected in Arequipa were recorded in January, May, and October 2019, thus ruling out the influence of the altitude in the study area.

However, they were related to industrial activity, food markets, bus stations, and wind direction.

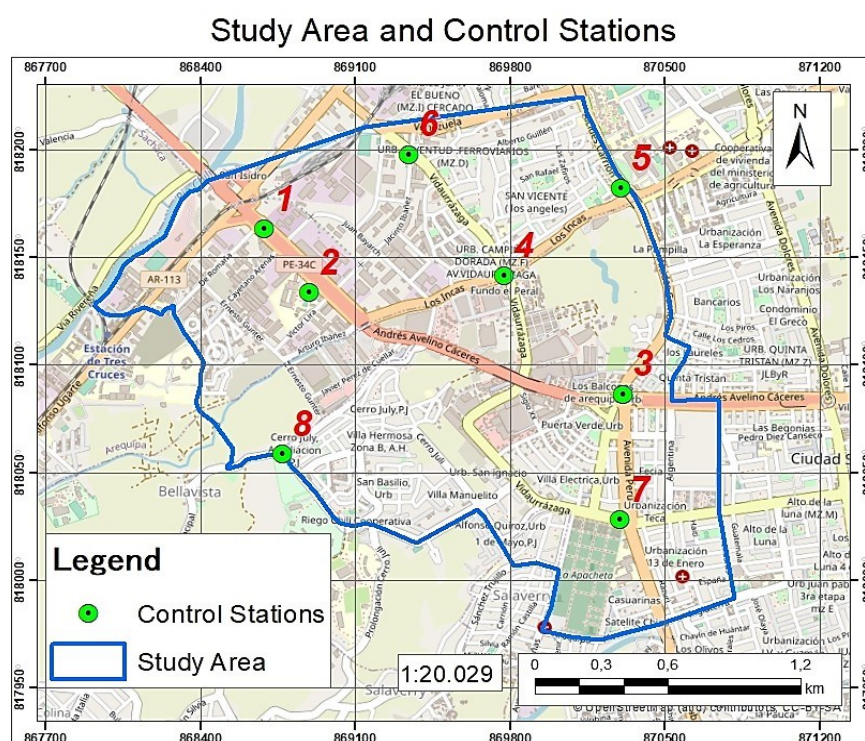


Fig. 2. Location of study area and temporary control stations

Table 1. Criteria for the evaluation and identification of potential monitoring sites (DIGESA, 2015; MINEM, 2016)

Social	Environmental				Economic
	Atmospheric				
	Meteorological	Chemical Pollutants	Sources		
Fixed			Mobile		
Population (Our data)	Wind direction (Meteoblue, 2019)	PM <sub>10</sub> (our data, Table 3 and 4)	Industrial (USGS, 2019; our processing)	Vehicles (USGS, 2019; our processing)	Technology - Instruments
	Wind speed (NASA, 2019)	PM <sub>2.5</sub>	Agricultural (USGS, 2019; our processing)		Access routes (USGS, 2019; our processing)
	Temperature (NASA, 2019)	Sulfur dioxide (our data, table 3 and 4)	Urbanization (USGS, 2019; our processing)		Electricity supply
	Relative humidity (NASA, 2019)	Carbon monoxide (CO)	Bus station (USGS, 2019; our processing)		Maintenance
	Precipitation (NASA, 2019)	Nitrogen dioxide (NO <sub>2</sub> ) (ESA & EarthData, 2019; our processing)	Food markets (USGS, 2019; our processing)		Security (our data)
	Solar radiation	Ozone			
	Altitude DEM (USGS, 2019)	Hydrogen sulfur (H <sub>2</sub> S)			
Vertical temperature profile (ILRS, 2018)	Benzene (from vehicles)				

Besides, a higher concentration of pollutants in the northeast (NE) part of our study area which coincides with the wind direction (more hours in this direction (NE)) (Fig. 4). All these records and observations served us as a decision reference to reassign each map's classification values. Finally, a suitable air quality monitoring network and three stations are designed (Fig. 3d).

**Particulate matter (PM<sub>10</sub>):** According to Peruvian legislation (MINAM, 2017), the 24-hour mean concentration of PM<sub>10</sub> in ambient air should not exceed 100 µg m<sup>-3</sup>, and the annual mean should remain below 50 µg m<sup>-3</sup>. The World Health Organization (WHO) suggests that the 24-hour mean should remain below 25 µg m<sup>-3</sup> (WHO, 2006). The highest concentration of PM<sub>10</sub> measured in this study was close to 180 µg m<sup>-3</sup> at station 2, inside the study area center. The lowest concentration measured was 80 µg m<sup>-3</sup> at station 8, outside the study area (Table 3). The concentrations at all stations exceeded both MINAM and WHO guidelines, indicating a low air quality in Arequipa Industrial Park (Table 3 and Table 4). This finding accords with a report by the Regional Health Directorate of Arequipa (DIGESA) from 2007

to 2012 (DIGESA, 2015). DIGESA had established five monitoring stations throughout Arequipa, but just one station in Industrial Park.

Although DIGESA mentioned that average daily PM<sub>10</sub> concentrations during these years did not exceed the Peruvian norm, the maximum daily values exceeded the 100 µg m<sup>-3</sup> ECA value in all years and reached up to 342 µg m<sup>-3</sup>. On the other hand, we cannot confirm the direct source of PM. Still, a correlation with traffic intensity can be considered due to internal combustion vehicles (diesel, gasoline, and gas). The recorded PM fractions are high near traffic zones and even more in routes for heavy vehicles (Roba et al., 2014).

**Nitrogen dioxide and sulfur dioxide:** The concentrations of NO<sub>2</sub> and SO<sub>2</sub> did not show significant variation (Table 3). For example, station 2 measured concentrations of NO<sub>2</sub> from 65 to 70 µg m<sup>-3</sup> and concentrations of SO<sub>2</sub> from 40 to 45 µg m<sup>-3</sup> during the three measurement periods (January 5, May 5 and October 5) (Table 4) (García et al., 2013). The Peruvian norms (ECA) suggest sampling NO<sub>2</sub> hourly, with a suggested maximum of 200 µg m<sup>-3</sup>, and annually, with a suggested maximum of 100 µg m<sup>-3</sup>.

**Table 2.** Weight criteria of three primary pillars and atmospheric sub-criterion by AHP method

Criteria		Weight criteria
Sustainable	Social	0.28
	Environmental	0.62
	Economic	0.10
Sub-criteria		
Environmental	Meteorological	0.23
	Chemical Pollutants	0.37
	Sources	0.40
Chemical Pollutants	PM <sub>10</sub>	0.31
	NO <sub>2</sub>	0.35
	SO <sub>2</sub>	0.16
	CO <sub>2</sub>	0.18
Meteorology	Precipitation	0.28
	Wind speed	0.39
	Temperature	0.16
	Relative Humidity	0.16
Sources	Industrial	0.24
	Agriculture	0.12
	Urbanization	0.19
	Buses stations	0.20
	Food markets	0.10
	Mobil	0.15

**Table 3.** Annual average pollutants measured at control stations around Arequipa Industrial Park

Stations	1	2	3	4	5	6	7	8
Latitude	16°25'6.63"S	16°25'16.08"S	16°25'30.65"S	16°25'13.06"S	16°24'59.57"S	16°24'54.97"S	16°25'49.60"S	16°25'40.53"S
Longitude	71°32'54.66"W	71°32'47.67"W	71°31'59.58"W	71°32'18.00"W	71°32'0.46"W	71°32'32.84"W	71°31'59.76"W	71°32'51.27"W
CO <sub>2</sub> ppm	1232.44	1446.00	1366.67	1046.19	807.64	700.25	1413.77	788.12
PM <sub>10</sub> µg m <sup>-3</sup>	105.37	177.16	159.51	132.52	84.57	87.33	140.39	79.66
NO <sub>2</sub> µg m <sup>-3</sup>	70.57	68.06	62.07	87.86	55.32	42.90	48.24	45.28
SO <sub>2</sub> µg m <sup>-3</sup>	41.11	42.32	38.13	42.89	18.44	11.38	21.46	20.53




They suggest daily sampling, with a suggested maximum of 250  $\mu\text{g m}^{-3}$ , for  $\text{SO}_2$ . In general, the concentrations of  $\text{SO}_2$  and  $\text{NO}_2$  were low in Arequipa (Table 4), which could indicate a decrease in pollution caused by coal combustion and vehicle emissions. WHO guidelines call for lower values than the ECA, but with a difference in mean measurement periods, or frequency. In other words, the WHO suggests using hourly and annual samples for  $\text{NO}_2$ , and daily and 10-minute samples for  $\text{SO}_2$ . Following ECA guidelines, we could say that Arequipa Industrial Park maintains adequate air quality. Nevertheless, according to WHO guidelines, Arequipa Industrial Park needs to improve urban air quality. Data from Arequipa could be compared with data from other cities (Hao and Wang, 2012). These high standard values would highlight that the Peruvian norms are more robust and tolerant. We think that this is due to a large number of industries in study zona (Fig. 5E) and perhaps due to Peru's industrial heyday.

**Carbon dioxide:** In Peru, there is no threshold for the control and assessment of  $\text{CO}_2$ . To give an

opinion on the values obtained, we used the WHO's suggestions (WHO, 2017), which indicate a  $\text{CO}_2$  concentration of 300 ppm as a threshold. Station 3 measured  $\text{CO}_2$  concentrations up to 1736 ppm in May (Table 4). Moreover, the annual average of  $\text{CO}_2$  is 1446 ppm in Arequipa Industrial Park. Fig. 3d shows that station 1 is within the study area center, where there are significant population activities. The concentrations at this station exceed the annual average by almost 400%. We suppose that these high concentrations result from metallurgical, textile and paper industries, the central bus station, markets, and a paint factory. Our research confirms that Arequipa Industrial Park is an active source of pollutants.

Moreover, to obtain a better database, we suggest creating a good network of continuous and complete air quality monitoring of all contaminants that consider the different production areas in Arequipa Industrial Park (Fig. 3). Just as our study developed and executed it as a test. Our model can be applied to different interests of measurement, control, evaluation, and detection.

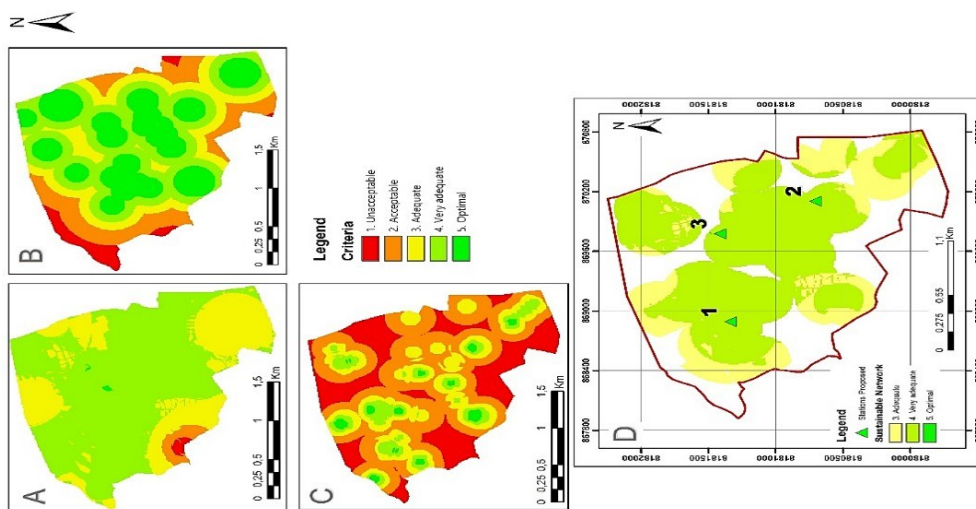

**Fig. 3.** Classification map prioritized by each sustainability criteria, (a) Environmental. (b) Social. (c) Economic. (d) Sustainable air monitoring station with proposed stations

**Table 4.** Pollutants measured at control stations around Arequipa Industrial Park

Stations		1	2	3	4	5	6	7	8
$\text{CO}_2$	2019.01.05	1234.13	1567.40	1345.20	984.50	824.80	753.40	1436.30	819.80
	2019.05.05	1452.76	1535.60	1736.50	969.58	795.82	780.06	1410.00	786.75
	2019.10.05	1010.42	1235.00	1018.30	1184.50	802.30	567.30	1395.00	757.80
$\text{PM}_{10}$	2019.01.05	102.65	173.98	153.45	154.47	80.32	78.01	141.02	78.67
	2019.05.05	114.68	182.83	164.66	126.74	93.41	100.34	138.72	81.23
	2019.10.05	98.79	174.68	160.42	116.36	79.98	83.65	141.42	79.07
$\text{NO}_2$	2019.01.05	70.97	68.45	62.46	88.23	55.70	43.29	48.63	45.67
	2019.05.05	70.00	67.49	61.50	87.32	54.78	42.33	47.67	44.71
	2019.10.05	70.76	68.24	62.25	88.02	55.49	43.08	48.42	45.46
$\text{SO}_2$	2019.01.05	40.48	40.87	37.79	41.46	17.80	10.74	20.02	19.07
	2019.05.05	41.38	41.76	37.72	42.35	18.73	11.67	20.95	20.00
	2019.10.05	41.47	44.34	38.87	44.85	18.79	11.72	23.42	22.50

\*Units:  $\text{CO}_2$  (ppm),  $\text{PM}_{10}$ ,  $\text{NO}_2$  and  $\text{SO}_2$  ( $\mu\text{g m}^{-3}$ )

*Meteorology:* in this case are used temperature, relative humidity, precipitation, wind speed, and wind direction (Meteoblue, 2019); These data helped us to understand the three-dimensional relationship that exists between them since they influence the period of the permanence of pollutants, chemical reactions between pollutants and compounds in the atmosphere (Langstaff, et al., 1987; MINEM, 2016). Besides, the weight by APH method (Table 2). Wind speed is of slight importance concerning precipitation (Table 2), Our study needs to obtain data on wind speed and precipitation for better interpolation; relative humidity and temperature have the same importance (16%). We consider the wind direction of vital importance, for which it was not interpolated, or its weight was found by the AHP, because these data help us in the immediate decision to assign the stations, but not the network (Fig. 4), (Hacioglu et al., 2016; MINAM, 2017; Weeberb et al., 2015).

The predominant wind direction is towards the Northeast of the city, with a speed of up to 28 km\*h<sup>-1</sup>, but most of the year, it is less than 19 km\*h<sup>-1</sup> and between 0 and 5 km\*h<sup>-1</sup> in our study area.

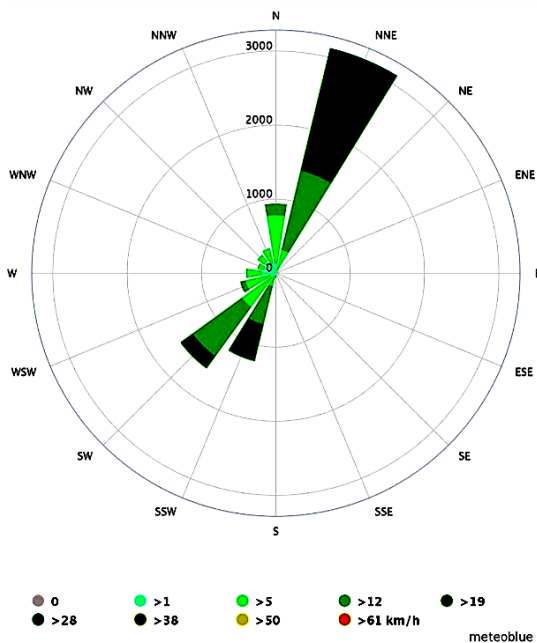


Fig. 4. Wind direction in Industrial Park Arequipa (Meteoblue, 2019)

*Health and environmental complaints:* The WHO stated that mortality has increased due to air pollution in cities with industrial development (SWISS TPH, 2020; WHO, 2006). This affirmation is also reported in Arequipa, where citizens today report asthma problems, irritation of the eyes, nose, throat, headaches, allergies, and lung cancer, which ten years ago were not common as they are now. Therefore, no controlled air contamination is one of the leading causes affecting public health; as Apaza (2018) mentioned that NO<sub>2</sub> caused more than 55% of IRAS in Arequipa. Based on the regional government's

reports of Arequipa (SINIA and OEFA, 2020) and public health damage. The general data of air quality do not focus on the real situation; sometimes, it is over understanding that there is no damage to public health either the environment. Hence, if one network's information could support corresponded decisions, there would not be struggles for functions (evaluation, control, planning, and sanctions). For this situation, our suggested map by the AHP method helps find a responsible issuer to evaluate and control the complaints' implications.

On the other hand, there are pieces of equipment in Arequipa specific locations that are only activated when there is a more significant complaint. Then, there is never any real data on an event that has caused the complaint. We believe that this dire situation does not help the authorities and other stakeholders to make decisions or improve environmental conditions. With the data obtained and generated for our research, we can assume an increase in respiratory diseases; since the sources of emission and pollutants (Fig. 5) are very close to the affected population and the range of the pollutants over height the thresholds establish by EPA; Therefore, the industrial zone should be relocated or control better emissions by a good air quality network (Giddings et al., 2002; Kumar and Kumar, 2016).

*A sustainable air monitoring network:* The green areas indicate the possible places to be used as optimal and suitable for a station; on the contrary, the blank spaces within the study area indicate unacceptable regions (Fig. 3d). As shown in Fig. 3a, b, and c, there is no direct interference from emission sources or activities until now. While Fig. 3a shows the environmental criterion, the optimal zones are broad; we have more selection options. Fig 3b, the social criterion, shows a change slightly; our optimal zones are reduced. In Fig. 3c, the economic criterion dramatically reduces our options, having fewer optimal zones. In general, when applying the AHP method and the weight overlay tool (ArcGIS, 2018), there are optimal, very adequate, and adequate options to define the monitoring stations and possible network (Fig. 3d). With these results, we can validate the consistency index of 0.07 by the methodology widely (Saaty, 2008). As Pope and Wu (2014) mentioned, a sustainable evaluation provides effectiveness to many other indicators. The spatial patterns are useful for evaluating and performing a network and its stations since it helps identify efficiencies and deficiencies in each sustainable criterion in time and space.

Meanwhile, Trujillo-Ventura and Ellis (1992) specified that an AQMN should maximize the obtaining of information. Decision-makers assign them levels of importance as required, for which they focused four objectives per pollutant, using kriging interpolation and minimizing the estimation error by multiobjective mathematical programming method. Therefore, we could briefly confirm, the need for an AQMN has had limitations since then. It has not been

solved until now, identifying only more limitations, so much so that today we suggest a sustainable AQMN.

For the design of adequate, sustainable air quality monitoring stations, we consider the three sustainable criteria (Table 2), for which with the AHP method, its importance weight was calculated, which can be used and applied quickly, efficiently, and effectively in different areas (urban, rural, specific areas) (Weeberb et al., 2015). The sub-criteria (table 1) expanded our variables, so we had to apply the AHP method (Fig. 1) repeatedly. In the case of the atmospheric sub-criterion, which is the broadest, it was necessary to take temporary samples of the chemical pollutants (Fig 5a, b, and c), meteorological (Meteoblue, 2019) and identify the emission sources (Fig. 5e) in the study area, because there are no reference data. As Trujillo-Ventura and Ellis (1992) stated, it is necessary to know the concentration of pollutants, which serve as a basis for estimating optimal interpolation. Furthermore, it is essential to identify the spatial variability since it is different from the concentration of the individual pollutants. Where multi-objective methods are flexible and work according to a decision-maker's preference (Modak and Lohani, 1985), in this paper, we implemented a sustainable point of view: society, environment, and economics (Table 1), thus obtaining an AQMN design. Since using the weighted superposition method, it is necessary to generate classified and compatible maps to create spheres of optimal areas for monitoring stations' locations (Pope and Wu, 2014).

The results improve when we create thematic maps using the ArcGIS weighted overlay method to improve visual analysis (Weeberb et al., 2015). With the collection and recollection of data to complete our study, we confirm the high levels of emission of chemical pollutants in the area, which concern public health and the environment (Chalabi et al., 2017;

Verma et al., 2009). As Figures 3d and 5e show, the monitoring stations have a high probability of being installed around the industrial zone and food markets (commerce). There is something unusual; it is how far it is from the bus stations.

On the other hand, it is also necessary to know if the amount of money invested in implementing and active management of a monitoring network is less or greater than the amount of money spent (Fig. 3c) on people with respiratory diseases; in both cases, political and sanitary intervention is necessary to reduce air pollution (Verma et al., 2009).

Therefore, with this methodology, the combination of the AHP method and ArcGIS tools can be widely used to establish monitoring stations and their subsequent design of an air quality network, confirming a station in leeward, a windward, and in the middle of the study area, which is established with our final maps (Fig. 3d). Finally, the variables weighted by AHP are not always applied with the sustainability criteria; they can also be used in specific cases, such as just industries, supply markets, schools, and buildings.

#### 4. Conclusions

In our proposal of an air quality monitoring network for Arequipa Industrial Park, we considered three criteria, which consisted of environmental (61.9%), social (28.4%), and economic (9.6%) factors, to find a solution to the persistent and complex air quality problem in this area where current regulations cannot be used to penalize those responsible for the emission of contaminants due to a lack of historical data.

At present, Arequipa Industrial Park does not have any monitoring network type, making a more highly recommended model difficult.

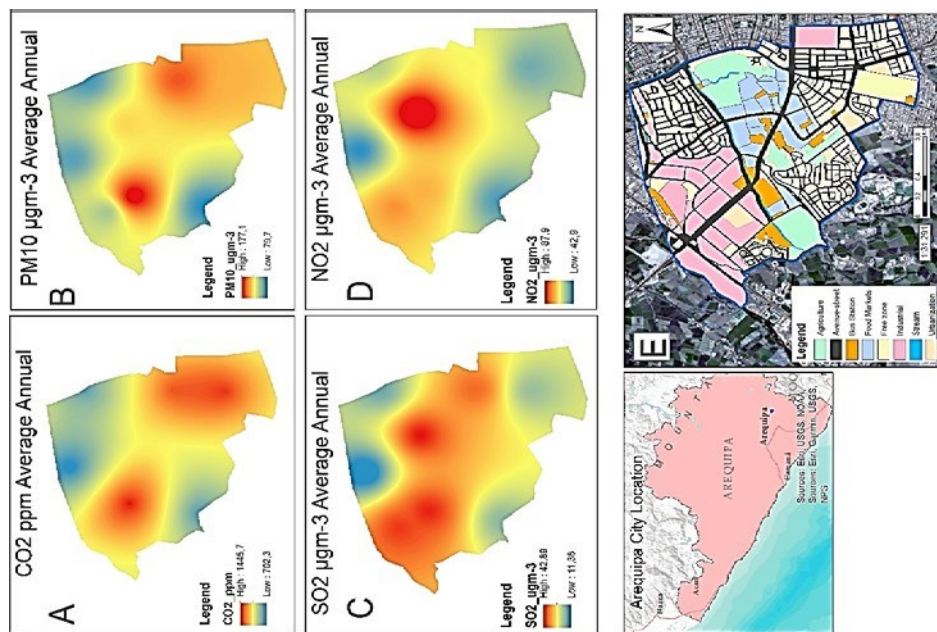


Fig. 5. Environmental Criterion - Atmospheric sub-criterion. Images a, b, c, d show pollutants concentration. The image (e) shows emission source identification map



Therefore, this network is proposed to initiate continuous data recording and provide an air quality baseline for administrative management.

AHP method with ArcGIS can prioritize and provide suitable sites for monitoring stations and facilitate their implementation and estimate their costs. We can continue the process of investigating and monitoring over a long period through the multitemporal integration of georeferenced satellite images and pollutant concentration data.

This methodology can improve the urban air quality environmental management plan in Arequipa, which must provide solutions to environmental problems and offer complete data in real-time. With the reference of available data, the responsible authorities will be ready to make the right decisions during the currently accelerated and disorganized urban and industrial growth that has caused a progressive deterioration of public health and the environment. In future studies, we suggest that the distribution of pollutants should be considered according to the type of source, related economic activities, and the population involved to establish a baseline to serve as a reference. For reference data, the origins of transport, transport flows, industrial plans, urban waste, morphology, or others can be included, which can be transferred in unmodified form to one database. The proposed method can be evaluated and applied to find the appropriate location of urban and rural monitoring stations in any part of Arequipa. The creation of new standards alone is not a solution. There must be compliance with these new policies by stakeholders, authorities, and companies.

With the AHP method and the sustainable application, we emphasize the weighting of weights, in addition to all the qualitative criteria, they become quantitative, with which subsequent evaluations are facilitated. Sustainable criteria and recommended sub-criteria can provide quality information, help develop a rapid diagnostic capacity for pollution episodes, determine the affected areas, estimate the concentration of pollutants and possible contamination sources.

Finally, it is necessary to consider using an integrated approach of biotechnology, bio-sustainability, or green chemicals to utilize sustainable, recyclable, and degradable raw materials fully. Besides, stakeholders need an adequate plan to control air quality, economical, urban, and rural development in real-time and space.

### Acknowledgements

We are grateful to Universidad Nacional San Agustín de Arequipa (UNSA) for its financing in the TP-6-2018-UNSA project and Instituto Astronómico y Aeroespacial Pedro Paulet de la Universidad Nacional San Agustín National de Arequipa (IAAPP -UNSA) for its support. In which the first author was supported by both institutions.

### References

40 CFR § 58.10, (2007), Annual monitoring network plan and periodic network assessment, GOVREGS — U.S.

- National Archive and Records Administration, Washington, On line at: <https://www.law.cornell.edu/cfr/text/40/58.10>.
- Alföldy B., Osán J., Tóth Z., Török S., Harbusch A., Jahn C., Emeis S., Schäfer K., (2007), Aerosol optical depth, aerosol composition and air pollution during summer and winter conditions in Budapest, *Science of The Total Environment*, **383**, 141-163.
- Apaza R., (2018), *Environmental pollution impact on the public health of metropolitan Arequipa in the period 2013 - 2017*, Bachelor Thesis, UNSA, Arequipa, Peru, On line at: <http://repositorio.unsa.edu.pe/handle/UNSA/6824>.
- ArcGIS, (2018), ArcGIS Desktop 10.5. New York: ESRI, On line at: <https://support.esri.com/de/products/desktop>.
- Baby S., (2013), AHP modeling for multicriteria decision-making and to optimise strategies for protecting coastal landscape resources, *International Journal of Innovation, Management and Technology*, **4**, 218-227.
- Bystrzanowska M., Tobiszewski M., (2018), How can analysts use multicriteria decision analysis?, *Trends in Analytical Chemistry*, **105**, 98-105.
- Ceca L.S., Micheletti M.I., Piacentini R.D., (2017), Atmospheric Particulate Matter Variability during 2014 at Buenos Aires City (Argentina) Comparing Ground-Based Measurements and Satellite Data, *Proceedings*, **1**, 180, <http://doi.org/10.3390/ecas2017-04152>.
- Chalabi Z., Milojevic A., Doherty R., Stevenson D., MacKenzie I., Milner J., Vieno M., Williams M., Wilkinson P., (2017), Applying air pollution modelling within a multi-criteria decision analysis framework to evaluate UK air quality policies, *Atmospheric Environment*, **167**, 466-475.
- DIGESA, (2015), 2013 - 2014 National Air Quality Report, Regional Health Directorate of Arequipa, MINAM, Arequipa, Peru.
- EPA, (2012), Regulatory Information by Topic: Air, U.S. Environmental Protection Agency, Washington D.C., On line at: <https://www.epa.gov/regulatory-information-topic/regulatory-information-topic-air#toxic>.
- EPA, (2017), Regulatory Information by Topic: Air, Washington: EPA, On line at: <https://www.epa.gov/regulatory-information-topic/regulatory-information-topic-air>.
- ESA, EarthData, (2019), Sentinel-5P Pre-Operations Data Hub, ESA, On line at: <https://s5phub.copernicus.eu/dhus/#/home>.
- Flores C.M.L., (2017), Environmental pollution: its impact on the health of the population of metropolitan Arequipa 2016-2017, Universidad Nacional San Agustín.Repositorio, On line at: <http://repositorio.unsa.edu.pe/handle/UNSA/5867>.
- García M., Ramírez H., Ulloa H., García O., Meulenert Á., Alcalá J., (2013), Concentration of SO<sub>2</sub>, NO<sub>2</sub> pollutants and correlation with H<sup>+</sup>, SO<sub>4</sub> rainy season in the Guadalajara Metropolitan Area, Jalisco, Mexico, *SciELO Analytics*, **29**, 81-88.
- Giddings B., Hopwood B., O'Brien G., (2002), Environment, economy and society: fitting them together into sustainable development, *Sustainable Development*, **10**, 187-196.
- Goepel K.D., (2018), *Judgment Scales of the Analytical Hierarchy Process - The Balanced Scale*, International Symposium of the Analytic Hierarchy Process, Hong Kong, **18**, 445-463.
- Hacioglu H., Ari A., Özkan A., Elbir T., Tuncel G., Yay O.,

- Gaga E., (2016), A new approach for site selection of air quality monitoring stations: Multi-criteria decision-making, *Aerosol and Air Quality Research*, **16**, 1390-1402.
- Hao J., Wang L., (2012), Improving urban air quality in China: Beijing case, *Journal of the Air and Waste Management Association*, **55**, 1298-1305.
- Huang I., Keisler J., Linkov I., (2011), Multi-criteria decision analysis in environmental sciences: Ten years of applications and trends, *Science of the Total Environment*, **409**, 3578-3594.
- JAVAD, (2012a), Choke Ring, On line at: <http://www.javad.com/jns/index.html?/jns/technology/Choke%20Ring%20Theory.html>.
- JAVAD, (2012b), Delta - G3T, On line at: [http://download.javad.com/sheets/Delta-G3T\\_Datasheet.pdf](http://download.javad.com/sheets/Delta-G3T_Datasheet.pdf).
- ILRS, (2018), Arequipa: Meteorological data, On line at: [https://ilrs.cddis.eosdis.nasa.gov/network/stations/charts/1yr\\_AREL\\_Temp.png](https://ilrs.cddis.eosdis.nasa.gov/network/stations/charts/1yr_AREL_Temp.png).
- Langstaff J., Seingeur C., M-Liu K., (1987), Design of an Optimal Air Monitoring Network of Exposure Assessment, *Atmospheric Environment*, **21**, 1393-1410.
- Lu Y., Wang Y., Zuo J., Jiang H., Huang D., Rameezdeen R., (2018), Characteristics of public concern on haze in China and its relationship with air quality in urban areas, *Science of the Total Environment*, 1597-1606.
- Kumar D., Kumar D., (2016), *Chapter 6 - Societal Responsibility and Economic Viability*, In: *Management of Coking Coal Resources*, Kumar D., Kumar D (Ed.), Elsevier, London, 193-259.
- Mesbah M., (2016), Measurement and analysis of quality of life related to environmental hazards: the methodology illustrated by recent epidemiological studies, *International Journal of Management Science and Engineering Management*, **11**, 89-104.
- Meteoblue, (2019), Arequipa weather, On line at: [https://www.meteoblue.com/es/tiempo/historyclimate/climatemodelled/arequipa\\_per%C3%BA\\_3947322](https://www.meteoblue.com/es/tiempo/historyclimate/climatemodelled/arequipa_per%C3%BA_3947322).
- MINAM, (2017), Supreme Decree No. 003-2017-MINAM.- To approve the Environmental Quality Standards (ECA) for air and establish complementary provisions, *El Peruano*, 6-9.
- MINEM, (2016), Air Quality and Emissions Monitoring Protocol, On line at: <http://www.minem.gob.pe/minem/archivos/file/DGAAM/guias/procaliaire.pdf>.
- Modak E.M., Lohani B.N., (1985), Optimization of ambient air quality monitoring networks, *Environmental Monitoring and Assessment*, **5**, 1-19.
- Mohebalı S., Maghsoudy S., Doulati A., Coupled F., (2020), Multi-criteria decision-making method: A new approach for environmental impact assessment of industrial companies, *Environmental Progress Sustainable Energy*, On line at: <https://doi.org/10.1002/ep.13523>.
- Mofarraha A., Husain T., (2009), A holistic approach for optimal design of air quality monitoring network expansion in an urban area, *Atmospheric Environment*, **44**, 432-440.
- NASA, (2019), Power Data Access Viewer, On line at: <https://power.larc.nasa.gov/data-access-viewer/>.
- OEFA, (2019), Environmental Assessment and Monitoring Agency, Environmental Complaints, Lima: OEFA, On line at: <https://sinia.minam.gob.pe/sinada>.
- Pisoni E., Camevale C., Marialuisa V., (2008), Multi-criteria analysis for PM10 planning, *Atmospheric Environment*, **43**, 4833-4842.
- Pope R., Wu J., (2014), A multi-objective assessment of an air quality monitoring network using environmental, economic, and social indicators and GIS-based models, *Journal of the Air and Waste Management Association*, **64**, 721-737.
- Roba C., Stefanie H., Török Z., Kovacs M., Roşu C., Ozunu A., (2014), Determination of volatile organic compounds and particulate matter levels in an urban area from Romania, *Environmental Engineering and Management Journal*, **9**, 2261-2268.
- Rotatori M., Salvatori R., Salzano R., (2011), *Chapter 1 - Planning Air Pollution Monitoring Networks in Industrial Areas by Means of Remote Sensed Images and GIS Techniques*, In: *Air Quality Monitoring, Assessment and Management*, Mazzeo N. (Ed.). Intech, Shanghai, 3-24.
- Saaty T.L., (1994), How to make a decision: The analytic hierarchy process, *INFORMS- Institute for Operations Research and The Management Sciences Journal on Applied Analytics*, **48**, 19-43.
- Saaty T.L., (2008), Decision making with the analytic hierarchy process, *International Journal of Services Sciences*, **1**, 83-98.
- Seinfeld J., (1972), Optimal Location of the Pollutant Monitoring Stations in an Airshed, *Atmospheric Environment*, **6**, 847-858.
- Si J., Marjanovic-Halburd L., Nasiri F., Bell S., (2016), Assessment of building-integrated green technologies: A review and case study on applications of multi-criteria decision making (MCDM) method, *Sustainable Cities and Society*, **29**, 106-115.
- SINIA, OEFA, (2020), Environmental Complaints - OEFA, National Environmental Information System, Lima, On line at: <https://sinia.minam.gob.pe/sinada>.
- SWISS TPH, (2020), Health Effects, On line at: <https://www.swisstph.ch/en/projects/ludok/healtheffects/>.
- Trujillo-Ventura A., Ellis J.H., (1992), Nonlinear optimization of air pollution monitoring networks: algorithmic considerations and computational results, *Engineering Optimization*, **19**, 287-308.
- UN, (1987), Report of the World Commission of Environmental Development: Our Common Future, The General Assembly of the United Nations, On line at: <https://sustainabledevelopment.un.org/content/documents/5987our-common-future.pdf>
- USGS, (2019), Earth Explorer, On line at: <https://earthexplorer.usgs.gov/>.
- Verma R.K., Kumari S., Tiwary K., (2009), Application of remote sensing and GIS technique for efficient urban planning in India, *Geomatrix*, 165-197, Berlin.
- Weeberb J., Henrique L., Petros, K., (2015), A spatial multicriteria model for determining air pollution at sample locations, *Journal of the Air and Waste Management Association*, **2**, 232-243.
- WHO, (2017), *Evolution of WHO air quality guidelines: past, present and future*, World Health Organization Regional Office for Europe, Copenhagen.
- WHO, (2006), *WHO Air quality guidelines for particulate matter, ozone, nitrogen dioxide and sulfur dioxide*, World Health Organization, Geneva WHO, On line at: [https://apps.who.int/iris/bitstream/handle/10665/69477/WHO\\_SDE\\_PHE\\_OEH\\_06.02\\_eng.pdf;jsessionid=583615C678E46C6CAB76FAEEB5DAEC48?sequence=](https://apps.who.int/iris/bitstream/handle/10665/69477/WHO_SDE_PHE_OEH_06.02_eng.pdf;jsessionid=583615C678E46C6CAB76FAEEB5DAEC48?sequence=)