

## ADVANCE OF THE ACCESS METHODS

Krassimir Markov, Krassimira Ivanova, Iliia Mitov, Stefan Karastanev

*Abstract:* The goal of this paper is to outline the advance of the access methods in the last ten years as well as to make review of all available in the accessible bibliography methods.

*Keywords:* Access Methods, Overview of the Access Methods

*ACM Classification Keywords:* D.4.3 File Systems Management, Access methods

### Introduction

The Access Methods (AM) had been available from the beginning of the developing the computer peripheral devices. As many devices there exists so many possibilities for developing different AM we have. Our attention is focused only to the access methods for devices for permanently storing the information with direct access such as magnetic discs, flash memories, etc.

In the beginning, the AM were functions of the Operational Systems Core or so called Supervisor, and were executed via corresponded macro-commands in the assembler languages [Stably, 1970] or via corresponding input/output operators in the high level programming languages like FORTRAN, COBOL, PL/I, etc.

Establishing of the first data bases in the 60-ties years of the last century caused gradually accepting the concepts "physical" as well as "logical" organization of the data [CODASYL, 1971], [Martin, 1975]. In 1975 the concepts "access method", "physical" and "logical" are clearly separated. In the same time Christopher Date [Date, 1977] specially remarked:

"The Data Base Management System (DBMS) does not know anything about:

- a) physical records (blocks);
- b) how the stored fields are integrated in the records (nevertheless that in many cases it is obviously because of their physical disposition);
- c) how the sorting is realized (for instance it may be realized on the base of physical sequence, using an index or by a chain of pointers);
- d) how is realized the direct access (i.e. by index, sequential scanning or hash addressing).

This information is a part of the structures for data storing but it is used by the access method but not by the DBMS. "

Every access method presumes an exact organization of the file which it is operating with and has no relation to the interconnections between the files, respectively – between the records of one file and that in the others files. These interconnections are controlled by the physical organization of the DBMS.

So, in the DBMS we may distinguish four levels:

- access methods of the core (supervisor) of the operation system;
- specialized access methods which upgrade these of the core of the operating system;
- physical organization of the DBMS;
- logical organization of the DBMS.

During the 80-ies years the "Multi-Dimensional Access Methods" had raised. In accordance with them the corresponded "spatial information structures" and the "spatio-temporal information structures" had risen, too. These AM developed the methods of the operating systems via specializing them to the give data models. From different point of view this period had been presented in [Ooi et al, 1993], [Gaede, Günther, 1998], [Arge, 2002], [Mokbel et al, 2003], [Moënné-Loccoz, 2005].

Usually the "one-dimensional" (linear) AM are used in the classical applications, based on the alpha-numerical information, whereas the "multi-dimensional" (spatial) methods are aimed to serve the work with graphical, visual, multimedia information. Now a special attention is given to the multi-dimensional AM.

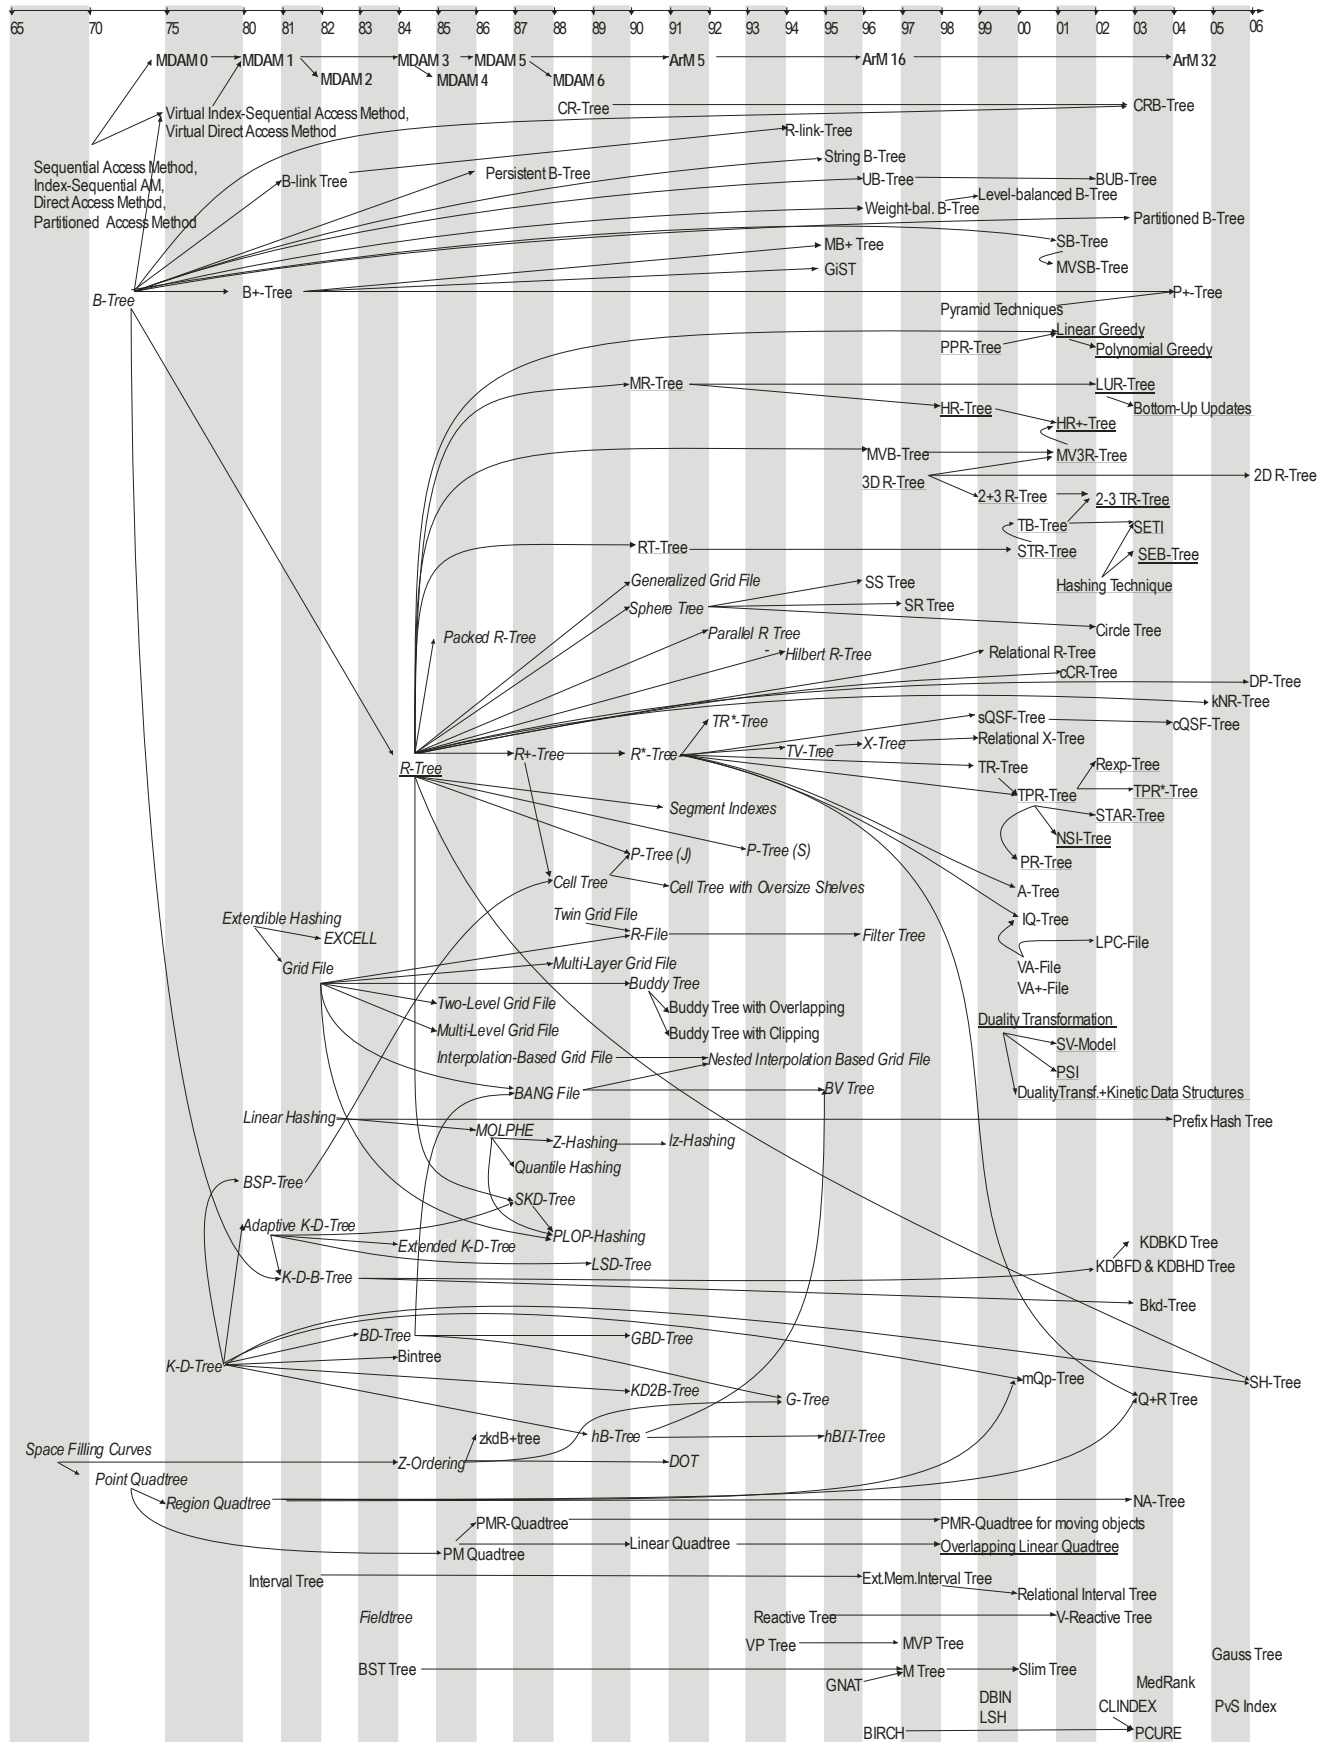


Fig. 1. Genesis of the Access Methods and their modifications extended variant of [Gaede, Günther, 1998] and [Mokbel et al, 2003]

Maybe one of the most popular analyses is given in [Gaede, Günther, 1998]. The authors presented a scheme of the genesis of the basic multi-dimensional AM and their modifications. This scheme firstly was proposed in [Ooi et al, 1993] and it was expanded in [Gaede, Günther, 1998]. An extension in direction to the multi-dimensional spatio-temporal access methods was given in [Mokbel et al, 2003].

This work continues the investigation provided in [Markov, 2006]. The main goal of this paper is to present a new variant of this scheme. It is presented on Fig.1. In it the new access methods created after 1998 are added. The methods presented in [Gaede, Günther, 1998] are marked in italics and methods presented in [Mokbel et al, 2003] are underlined. Access methods, which are given in the two surveys simultaneously, are marked in underlined italics. In the appendix of this paper the corresponded bibliography is given.

The access methods presented on Fig.1 we may classify as follow:

- One-dimensional AM;
- Multidimensional Spatial AM;
- Metric Access Methods;
- High Dimensional Access Methods;
- Spatio-Temporal Access Methods.

---

### One-dimensional Access Methods

---

One-dimensional AM are based on the concept "record". Let remember that the "record" is a logical sequence of fields which contain data eventually connected to unique identifier (a "key"). The identifier (key) is aimed to distinguish one sequence from another [Stably, 1970]. The records are united in the sets, called "files". There exist three basic formats of the records – with fixed, variable and undefined length.

In the *context-free methods* the storing of the records is not connected to their content and depends only on external factors – the sequence, disk address or position in the file. The necessity of stable file systems in the operating systems does not allow a great variety of the context-free AM. There are three main types well known from 60-ies and 70-ies years: *Sequential Access Method (SAM)*; *Direct Access Method (DAM)* and *Partitioned Access Method (PAM)* [IBM, 1965-68].

The main idea of the *context-depended AM* is that the part of the record is selected as a key which is used for making decision where to store the record and how to search it. This way the content of the record influences on the access to the record.

Historically, from the 60-ies years of the last century the attention is directed mainly to this type of AM. Modern DBMS are built using context-depended AM such as: unsorted sequential files with records with keys; sorted files with fixed record length; static or dynamic hash files; index file and files with data; clustered indexed tables [Connolly, Begg, 2002].

---

### Multidimensional Spatial Access Methods

---

Multidimensional Spatial Access Methods are developed to serve information about spatial objects, approximated with points, segments, polygons, polyhedrons, etc. The implementations are numerous and include traditional multi-attributive indexing, geographical information systems and spatial databases, content indexing in multimedia databases, etc.

From the point of view of the spatial databases can be split in two main classes of access methods – Point Access Methods and Spatial Access Methods [Gaede, Günther, 1998].

Point Access Methods are used for organizing multidimensional point objects. Typical instance are traditional records, where on every attribute of the relation corresponds one dimension. These methods can be separated in three basic groups:

- Multidimensional Hashing (for instance Grid File and its varieties, EXCELL, Twin Grid File, MOLPHE, Quantile Hashing, PLOP-Hashing, Z-Hashing, etc);
- Hierarchical Access Methods (includes such methods as KDB-Tree, LSD-Tree, Buddy Tree, BANG File, G-Tree, hB-Tree, BV-Tree, etc.);
- Space Filling Curves for Point Data (like Peano curve, N-trees, Z-Ordering, etc).

Spatial Access Methods are used for working with objects which have arbitrary form. The main idea of the spatial indexing of non-point objects is using of the approximation of the geometry of the examined objects to more

simple forms. The most used approximation is Minimum Bounding Rectangle (MBR), i.e. minimal rectangle, which sides are parallel of the coordinate axes and completely include the object. There exist approaches for approximation with Minimum Bounding Spheres (SS Tree) or other polytopes (Cell Tree), as well as their combinations (SR-Tree).

The usual problem when one operates with spatial objects is their overlapping. There are different techniques to avoid this problem. From the point of view of the techniques for organization of the spatial objects Spatial Access Methods can be split in four main groups:

- Transformation – this technique uses transformation of spatial objects to points in the space with more or less dimensions. Most of them spread out the space using space filling curves (Peano Curves, z-ordering, Hilbert curves, Gray ordering, etc.) and then use some of point access method upon the transformed data set. For instance UB-Tree [Bayer, 1996], is variant of B-Tree, where keys are region addresses, sorted via " $\leq$ " and z-ordering;
- Overlapping Regions – here the data set are separated in groups; different groups can occupy the same part of the space, but every space object associates with only one of the groups. The access methods of this category operate with data in their primary space (without any transformations) eventually in overlapping segments. Methods, which use this technique includes R-Tree, R-link-Tree, Hilbert R-Tree, R\*-Tree, Sphere Tree, SS-Tree, SR-Tree, TV-Tree, X-Tree, P-Tree of Schiewietz, SKD-Tree, GBD-Tree, Buddy Tree with overlapping, PLOP-Hashing, etc.;
- Clipping – this technique use eventually clipping of one object to several sub-objects, which will be stored. The main goal is to escape overlapping regions. But this advantage can lead tearing of the objects, extending of the resource expenses and decreasing of the productivity of the method. Representatives of this technique are R+-Tree, Cell-Tree, Extended KD-Tree, Quad-Tree, etc.;
- Multiple Layers – this technique can be examining as variant of the techniques of Overlapping Regions, because the regions from different layers can overlap. But there exist some important differences: first – the layers are organizing hierarchically; second – every layer split primary space in different way; third – the regions of one layer never overlaps; fourth – the data regions are separated from space extensions of the objects. Instances for these methods are Multi-Layer Grid File, R-File, etc.

---

### Metric Access Methods

---

Metric Access Methods deal with relative distances of data points to chosen points, named anchor points, vantage points or pivots [Moënné-Loccoz, 2005]. These methods are designed to limit the number of distance computation, calculating first distances to anchors, and then finding searched point in narrowed region. These methods are preferred when the distance is highly computational, as e.g. for the dynamic time warping distance between time series. Presentatives of these methods are: Vantage Point Tree (VP Tree), Bisector Tree (BST-Tree), Geometric Near-Neighbour Access Tree (GNNAT), as well as the most effective from this group – Metric Tree (M-Tree) [Chavez et al, 2001].

---

### High Dimensional Access Methods

---

Increasing of the dimensionality strongly aggravates the qualities of the multidimensional access methods. Usually these methods exhaust their possibilities till dimensions around 15. Only X-Tree reaches the boundary of 25 dimensions, after then this method gives worse results then sequential scanning [Chakrabarti, 2001].

The exit of this situation is based on the data approximation and query approximation in sequential scan. These methods form a new group of access methods – High Dimensional Access Methods.

Data approximation is used in VA-File, VA+-File, LPC-File, IQ-Tree, A-Tree, P+-Tree, etc.

Because in high dimensional access methods the selectivity of the methods makes worse, it is allowed some answers inaccuracy. For query approximation two strategies can be used:

- examine only a part of the database, which is more probably to contain resulting set – as a rule these methods are based on the clustering of the database. Some of these methods are: DBIN, CLINDEX, PCURE;
- splitting the database to several spaces with fewer dimensions and searching in each of them. Here two main methods are used:

- 1) Random Lines Projection (representatives of this approach are MedRank, which uses B+-Tree for indexing every arbitrary projection of the database, and PVS Index, which consist of combination of iterative projections and clustering);
- 2) Locality Sensitive Hashing, which is based on the set of local-sensitive hashing functions [Moëgne-Loccoz, 2005].

---

### Spatio-Temporal Access Methods

---

The Spatio-Temporal Access Methods have additional defined time dimensioning. [Mokbel et al, 2003]. They operate with objects, which change their form and/or position during the time. According to position of time interval in relation to present moment the Spatio-Temporal Access Methods are divided to:

- indexing the past, i.e. methods for operating with historical spatio-temporal data. The problem here is continuously increasing of the information over time. To overcome the overflow of the data space two approaches are used – sampling the stream data at certain time position or update the information only when data is changed. Spatio-temporal indexing schemes for historical data can be split in three categories: first category includes methods that manages spatial and temporal aspects into already existing spatial methods; second can be explained as snapshots of the spatial information in each time instance; the third category focus on trajectory-oriented queries, while spatial dimension lag on second priority. Representatives of this group are: RT-Tree, 3DR-Tree, STR-Tree, MR-Tree, HR-Tree, HR+-Tree, MV3R-Tree, PPR-Tree, TB-Tree, SETI, SEB-Tree;
- indexing the present. In contrast to previous methods, where all movements are known, here current positions are neither stored nor queried. Some of the methods, which answer of the questions of the current position of the objects are 2+3R-Tree, 2-3TR-Tree, LUR-Tree, Bottom-Up Updates, etc.;
- indexing the future. These methods have to answer on the questions about current and future position of moving object – here are embraced the methods like PMR-Quadtree for moving objects, Duality Transformation, SV-Model, PSI, PR-Tree, TPR-Tree, TPR\*-tree, NSI, VCIR-Tree, STAR-Tree, R<sup>EXP</sup>-Tree.

---

### Conclusion

---

In this paper we presented a short overview of the current state in the field of development of the access methods. During the last four decades the access methods have been developed toward plenty of modifications of small number basic ideas. It is important to remark that the research has been provided on software as well as on hardware levels. For instance, in [Schlosser et al, 2005] a technology for storing of multi-dimensional data with physically preserving the multi-dimensionality of the data is presented

The developed multi-dimensional index structures are effective for the small number of dimensions (from 2 – 5 up to 10 -15) and are uncomfortable for multi-dimensional spaces which are typical for the contemporary practical problems and the linear scanning may be preferable in many cases [Chakrabarti, 2001]. This is known as "Curse of dimensionality".

The concept of "curse of dimensionality" was first coined by Richard Bellman [Bellman 1961]. He employed it to describe the problem caused by the exponential increase of the volume with the augmentation of the space dimension when addressing the problem of optimizing functions with several variables. Later, the term was used to indicate, more generally, non-intuitive phenomena observed when the dimension of data increases [Bouteldja et al, 2006].

The survey of the access methods suggests that the context-free multi-dimensional access methods practically are not available. One step in developing such methods is the Multi-domain Access Method introduced in [Markov, 2004].

We have no place to present all access methods in details. The main goal was to collect the basic publications of the most popular access methods. The further survey needs to be provided to present current state of the art in this area.

---



---

## Appendix 1. Access Methods and Corresponded Publications

---

Access Method	Published in
2+3 R-Tree	[Nascimento, 1999] M. A. Nascimento, J.R.O. Silva, Y. Theodoridis. <i>Evaluation of Access Structures for Discretely Moving Points</i> . In Proc. of the Intl. Workshop on Spatio-Temporal Database Management, STDBM, pages 171–188, Sept. 1999.
2-3 TR-Tree	[Abdelguerfi et al, 2002] M. Abdelguerfi, J. Givaudan, K. Shaw, R. Ladner. <i>The 2-3 TR-tree, A Trajectory-Oriented Index Structure for Fully Evolving Valid-time Spatio-temporal Datasets</i> . In Proc. of the ACM workshop on Adv. in Geographic Info. Sys., ACM GIS, pages 29–34, Nov. 2002.
2D R-Tree	[Osborn, Barker, 2006] W. Osborn, K. Barker. <i>Searching through Spatial Relationships using the 2DR-tree</i> . The IASTED Conference on Internet and Multimedia Systems and Applications Honolulu, Hawaii, USA August 14-16, 2006
3D R-tree	[Theodoridis et al, 1996] Y. Theodoridis, M. Vazirgiannis, T. Sellis. <i>Spatio-Temporal Indexing for Large Multimedia Applications</i> . In Proc. of the IEEE Conference on Multimedia Computing and Systems, ICMCS, June 1996.
Adaptive K-D-Tree	[Bentley, Friedman, 1979] J. L. Bentley, J. H. Friedman. <i>Data structures for range searching</i> . ACM Comput. Surv. 11, 1979, 4, 397–409.
A-Tree (Approximation Tree)	[Sakurai et al, 2000] Y. Sakurai, M. Yoshikawa, S. Uemura, H. Kojima. <i>The a-tree: An index structure for high-dimensional spaces using relative approximation</i> . In VLDB, pages 516–526, 2000.
B+-tree	[Comer, 1979] D. Comer. <i>The ubiquitous B-tree</i> . ACM Comput. Surv. 11, 2, 1979, 121–138.
Balanced Multidimensional Extendible Hash Tree	[Otoo, 1985] E.J. Otoo. <i>Balanced multidimensional extendible hash tree</i> . In Proceedings of the fifth ACM SIGACT-SIGMOD symposium on Principles of database systems, Cambridge, Massachusetts, United States, 1985, Pages: 100 – 113
BANG File	[Freeston, 1987] M. Freeston. <i>The BANG file: A new kind of grid file</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1987, pp. 260–269.
BD-Tree	[Ohsawa, Sakauchi, 1983] Y. Ohsawa, M. Sakauchi. <i>BD-tree: A new n-dimensional data structure with efficient dynamic characteristics</i> . In Proceedings of the Ninth World Computer Congress, IFIP 1983, 1983, pp. 539–544.
Bintree	[Tamminen, 1984] M. Tamminen. <i>Comment on quad- and octrees</i> . Commun. ACM 30, 3, 204–212. 1984
BIRCH	[Zhang et al, 1996] T. Zhang, R. Ramakrishnan, M. Livny. <i>BIRCH: an efficient data clustering method for very large databases</i> . pages 103–114, 1996.
Bkd-Tree	[Procopiuc et al, 2003] O. Procopiuc, P. K. Agarwal, L. Arge, J.-S. Vitter. <i>Bkd-tree: A Dynamic Scalable kd-tree</i> . In Proceedings of International Symposium on Spatial and Temporal Databases, 2003
B-link Tree	[Lehman, Yao, 1981] P. Lehman, S. Yao. <i>Efficient locking for concurrent operations on B-trees</i> . ACM Trans. Database Syst. 6, 4, 1981, 650–670.
Bottom-up Updates	[Lee et al, 2003] M. Lee, W. Hsu, C. Jensen, B. Cui, K. Teo. <i>Supporting Frequent Updates in R-Trees: A Bottom-Up Approach</i> . In Proc. of the Intl. Conf. on Very Large Data Bases, VLDB, Sept. 2003.
BSP-Tree	[Fuchs et al, 1980] H. Fuchs, Z. Kedem, B. Naylor. <i>On visible surface generation by a priori tree structures</i> . Computer Graph. 14, 3, 1980.
BST-Tree (Bisector Tree)	[Kalantari, McDonald, 1983] I. Kalantari, G. McDonald. <i>A data structure and an algorithm for the nearest point problem</i> . IEEE Trans. Software Eng., 9(5):631–634, 1983.
B-Tree	[Bayer, McCreight, 1972] R. Bayer, E. M. McCreight. <i>Organization and maintenance of large ordered indices</i> . Acta Inf. 1, 3, 1972, pp. 173–189.
BUB-Tree (Bounding UB Tree)	[Fenk, 2002] R. Fenk. <i>The BUB-Tree</i> . In Proceedings of VLDB Conf. Hongkong, 2002
Buddy Tree	[Seeger, Kriegel, 1990] B. Seeger, H.-P. Kriegel. <i>The buddy-tree: An efficient and robust access method for spatial data base systems</i> . In Proceedings of the Sixteenth International Conference on Very Large Data Bases, 1990, pp. 590–601.
Buddy Tree with Clipping	[Seeger, 1991] B. Seeger. <i>Performance comparison of segment access methods implemented on top of the buddy-tree</i> . In Advances in Spatial Databases, O. Günther and H. Schek, Eds., LNCS 525, Springer-Verlag, Berlin/Heidelberg/New York, 1991, 277–296.
Buddy Tree with Overlapping	[Seeger, 1991] B. Seeger. <i>Performance comparison of segment access methods implemented on top of the buddy-tree</i> . In Advances in Spatial Databases, O. Günther and H. Schek, Eds., LNCS 525, Springer-Verlag, Berlin/Heidelberg/New York, 1991, 277–296.
Buffer Tree	[Arge, 1995] L. Arge. <i>The buffer tree: a new technique for optimal I/O-algorithms</i> . In Proc. Workshop on Algorithms and Data Structures, pages 334–345. LNCS 955. Springer-Verlag, Berlin, 1995.
	[Arge, 2003] Lars Arge. <i>The Buffer Tree: A Technique for Designing Batched External Data Structures</i> . Algorithmica, Springer-Verlag New York Inc. 2003

- BV Tree [Freeston, 1995] M. Freeston. *A general solution of the n-dimensional B-tree problem*. In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1995, pp. 80–91.
- cCR-tree (Cache-Conscious R-Tree) [Kim et al, 2001] K. Kim, S.K. Cha, K. Kwon. *Optimizing multidimensional index trees for main memory access*. International Conference on Management of Data Proceedings of the 2001 ACM SIGMOD international conference on Management of data, Santa Barbara, California, United States, 2001, Pp: 139 – 150
- Cell Tree [Günther, 1988] O. Günther. *Efficient Structures for Geometric Data Management*. LNCS 337, Springer-Verlag, Berlin/Heidelberg/New York. 1988.
- Cell Tree with Oversize Shelves [Günther, Noltemeier, 1991] O. Günther, H. Noltemeier. *Spatial database indices for large extended objects*. In Proceedings of the Seventh IEEE International Conference on Data Engineering, 1991, 520–526.
- Circle Tree [Moore, 2002] A. Moore. *The circle tree – a hierarchical structure for efficient storage, access and multi-scale representation of spatial data*. Presented at SIRC 2002 – The 14th Annual Colloquium of the Spatial Information Research Centre University of Otago, Dunedin, New Zealand, December 3-5th 2002
- CLINDEX [Li et al, 2002] C. Li, E. Chang, H. Garcia-Molina, G. Wiederhold. *Clustering for approximate similarity search in high-dimensional spaces*. IEEE Transactions on Knowledge and Data Engineering, 14(4):792–808, 2002.
- cQSF Tree (Scalable QSF Tree) [Orlandic, Yu, 2004] R. Orlandic, B. Yu. *Scalable QSF-Trees: Retrieving Regional Objects in High-Dimensional Spaces*. Journal of Database Management (JDM, IDEAS Group Publishing) Vol. 15 in press, 15-page, 2004
- CRB-Tree (Compressed Range B-Tree) [Govindarajan et al, 2003] S. Govindarajan, P. K. Agarwal, L. Arge. *CRB-Tree: An Efficient Indexing Scheme for Range-Aggregate Queries*. Proceedings of the 9th International Conference on Database Theory, 2003, Pp:143-157
- CR-Tree (Compressed Range Tree) [Chazelle, 1988] B. Chazelle. *A functional approach to data structures and its use in multidimensional searching*. SIAM J. Comput., 17(3):427–462, June 1988
- DBIN (Density Based Indexing) [Bennett et al, 1999] K. P. Bennett, U. Fayyad, D. Geiger. *Density-based indexing for approximate nearestneighbor queries*. In KDD '99: Proceedings of the fifth ACM SIGKDD international conference on Knowledge discovery and data mining, pages 233–243, New York, NY, USA, 1999. ACM Press.
- DOT [Faloutsos, Rong, 1991] C. Faloutsos, Y. Rong. *DOT: A spatial access method using fractals*. In Proceedings of the Seventh IEEE International Conference on Data Engineering, 1991, pp. 152–159.
- DP-Tree [Li et al, 2006] M. Li, W.-C. Lee, A. Sivasubramaniam. *DPTree: A balanced tree based indexing framework for peer-to-peer systems*. in Proceedings of the 14<sup>th</sup> International Conference on Network Protocols (ICNP 2006), pages 12-21, November, 2006
- Duality Transformation [Kollios et al, 1999] G. Kollios, D. Gunopulos, V. J. Tsotras. *On Indexing Mobile Objects*. In Proc. of the ACM Symp. on Principles of Database Systems, PODS, pages 261–272, June 1999.
- Duality Transformation with Kinetic Data Structure [Agarwal et al, 2000] P. K. Agarwal, L. Arge, and J. Erickson. *Indexing Moving Points*. In Proc. of the ACM Symp. on Principles of Database Systems, PODS, pages 175–186, May 2000.
- EXCELL (Extendible Cell) [Tamminen, 1982] M. Tamminen. *The extendible cell method for closest point problems*. BIT 22, 1982, pp. 27–41.
- Extended K-D-Tree [Matsuyama et al, 1984] T. Matsuyama, L.V. Hao, M. Nagao. *A file organization for geographic information systems based on spatial proximity*. Int. J. Comput. Vis. Graph. Image Process. 26, 3, 1984, pp. 303–318.
- Extendible Hashing [Fagin et al, 1979] R. Fagin, J. Nievergelt, N. Pippenger, R. Strong. *Extendible hashing: A fast access method for dynamic files*. ACM Trans. Database Syst. 4, 3, 1979, pp. 315–344.
- Fieldtree [Frank, 1983] A. Frank. *Problems of Realizing LIS: Storage Methods for Space Related Data: The Field Tree*. Technical Report 71, Institut for Geodesy and Photogrammetry, Swiss Federal Institut of Technology, Zurich, Switzerland, 1983.
- Filter Tree [Sevcik, Koudas, 1996] K. Sevcik, N. Koudas. *Filter trees for managing spatial data over a range of size granularities*. In Proceedings of the 22th International Conference on Very Large Data Bases (Bombay), 1996, pp. 16–27.
- Gauss-Tree [Bohm et al, 2006] C. Bohm, A. Pryakhin, M. Schubert. *The Gauss-Tree: Efficient Object Identification in Databases of Probabilistic Feature Vectors*. 22nd Int. Conf. on Data Engineering (ICDE'06), Atlanta, GA, 2006
- GBD-Tree [Ohsawa, Sakauchi, 1990] Y. Ohsawa, M. Sakauchi. *A new tree type data structure with homogeneous node suitable for a very large spatial database*. In Proceedings of the Sixth IEEE International Conference on Data Engineering, 1990, pp. 296–303.
- Generalized Grid File [Blanken et al, 1990] H. Blanken, A. Ijbema, P. Meek, B. Van den Akker. *The generalized grid file: Description and performance aspects*. In Proceedings of the Sixth IEEE International Conference on Data Engineering, 1990, pp. 380–388.
- GIST (Generalized Search Tree) [Hellerstein et al, 1995] J. M. Hellerstein, J. F. Naughton, A. Pfeffer. *Generalized Search Trees for Database Systems*. Proc. 21st Int. Conf. on Very Large Databases, September 1995, pp. 562-573.

GNAT (Geometric Near-Neighbor Access Tree)	[Brin, 1995] S. Brin. <i>Near neighbor search in large metric spaces</i> . In VLDB '95: Proceedings of the 21th International Conference on Very Large Data Bases, pages 574–584, San Francisco, CA, USA, 1995. Morgan Kaufmann Publishers Inc.
Grid File	[Nievergelt et al, 1981] J. Nievergelt, H. Hinterberger, K. Sevcik. <i>The grid file: An adaptable, symmetric multikey file structure</i> . In Proceedings of the Third ECI Conference, A. Duijvestijn and P. Lockemann, Eds., LNCS 123, Springer-Verlag, Berlin/Heidelberg/New York, 1981, pp. 236–251.
G-Tree	[Kumar, 1994] A. Kumar. <i>G-tree: A new data structure for organizing multidimensional data</i> . IEEE Trans. Knowl. Data Eng. 6, 2, 1994, pp. 341-347.
Hana Tree	[Kwon, Jeong, 2000] Y. Kwon, C. Jeong. <i>Hana Tree: A Dynamic and Robust Access Method for Spatial Data Handling</i> . Lecture Notes in Computer Science, Springer Berlin / Heidelberg, Volume 1846/2000. Proceedings of Web-Age Information Management: First International Conference, WAIM 2000, Shanghai, China, June 21-23, 2000.
Hashing Technique	[Song, Roussopoulos, 2001] Z. Song, N. Roussopoulos. <i>Hashing Moving Objects</i> . In Mobile Data Management, pages 161–172, Jan. 2001.
hBP-Tree	[Evangelidis et al, 1995] G. Evangelidis, D. Lomet, B. Salzberg. <i>The hBP-tree: A modified hB-tree supporting concurrency, recovery and node consolidation</i> . In Proceedings of the 21 <sup>st</sup> International Conference on Very Large Data Bases, 1995, pp. 551–561.
hB-Tree	[Lomet, Salzberg, 1989] D.B. Lomet, B. Salzberg. <i>The hBtree: A robust multiattribute search structure</i> . In Proceedings of the Fifth IEEE International Conference on Data Engineering, 1989, pp. 296–304.
Hilbert R-Tree	[Kamel, Faloutsos, 1994] I. Kamel, C. Faloutsos. <i>Hilbert R-tree: An improved R-tree using fractals</i> . In Proceedings of the Twentieth International Conference on Very Large Data Bases, 1994, pp. 500–509.
HR+-Tree	[Tao, Papadias, 2001a] Y. Tao, D. Papadias. <i>Efficient Historical R-trees</i> . In Proc. of the Intl. Conf. on Scientific and Statistical Database Management, SSDBM, pages 223–232, July 2001.
HR-Tree (Historical R-Tree)	[Nascimento, Silva, 1998] M. A. Nascimento, J.R.O. Silva. <i>Towards historical R-trees</i> . In Proc. of the ACM Symp. on Applied Computing, SAC, pages 235–240, Feb. 1998.
Interpolation-Based Grid File	[Ouksel, 1985] M. Ouksel. <i>The interpolation based grid file</i> . In Proceedings of the Fourth ACM SIGACT –SIGMOD Symposium on Principles of Database Systems, 1985, pp. 20–27.
Interval Tree	[Edelsbrunner 1980] H. Edelsbrunner. <i>Dynamic Rectangle Intersection Searching</i> . Institute for Information. Processing Report 47, Technical University of Graz, Austria, 1980.
IQ-Tree (Independent Quantization Tree)	[Berchtold et al, 2000] S. Berchtold, C. Bohm, H. V. Jagadish, H.-P. Kriegel, J. Sander. <i>Independent quantization: An index compression technique for high-dimensional data spaces</i> . In ICDE '00: Proceedings of the 16 <sup>th</sup> International Conference on Data Engineering, page 577, Washington, DC, USA, 2000. IEEE Computer Society.
KD2B-Tree	[Oosterom, 1990] P. Oosterom. <i>Reactive data structures for geographic information systems</i> . Ph.D. Thesis, University of Leiden, The Netherlands. 1990.
KDB <sub>FD</sub> -Tree KDB <sub>HD</sub> -Tree	[Orlandic, Yu, 2002] R. Orlandic, B. Yu. <i>A retrieval technique for high-dimensional data and partially specified queries</i> . Data & Knowledge Engineering 2002; 42(2):1-21.
KDB <sub>KD</sub> -Tree	[Yu et al, 2003] B. Yu, R. Orlandic, T. Bailey, J. Somavaram. <i>KDBKD-Tree: A Compact KDB-Tree Structure for Indexing Multidimensional Data</i> . International Conference on Information Technology: Computers and Communications, 2003.
K-D-B-Tree	[Robinson, 1981] J.T. Robinson. <i>The K-D-B-tree: A search structure for large multidimensional dynamic indexes</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1981, pp. 10-18.
K-D-Tree	[Bentley, 1975] J. L. Bentley. <i>Multidimensional binary search trees used for associative searching</i> . Commun. ACM 18, 9, 1975, pp. 509–517.
KNR-Tree	[Mondal et al, 2005] A. Mondal, A. K. H. Tung, M. Kitsuregawa. <i>kNR-tree: A novel R-tree-based index for facilitating Spatial Window Queries on any k relations among N spatial relations in Mobile environments</i> . MDM 2005 05 Ayia Napa Cyprus, 2005
Level Balaced B-Tree	[Agarwal et al, 1999] P.K. Agarwal, L. Arge, G.S. Brodal, J.S. Vitter. <i>I/O-efficient dynamic point location in monotone planar subdivisions</i> . In Proc. ACM-SIAM Symp. on Discrete Algorithms, 1999, pp.1116-1127
Linear Hashing	[Litwin, 1980] W. Litwin. <i>Linear hashing: A new tool for file and table addressing</i> . In Proceedings of the Sixth International Conference on Very Large Data Bases, 1980, pp. 212–223.
Linear Quadtree	[Larson, 1980] P. A. Larson. <i>Linear hashing with partial expansions</i> . In Proceedings of the Sixth International Conference on Very Large Data Bases, 1980, pp. 224–232.
LPC-File (Local Polar Coordinate File)	[Samet, 1990] H. Samet. <i>Applications of Spatial Data Structures</i> . Addison-Wesley, Reading, MA. 1990.
LSD-Tree	[Cha et al, 2002] G.-H. Cha, X. Zhu, D. Petkovic, C.-W. Chung. <i>An efficient indexing method for nearest neighbor searches in high-dimrnsional image databases</i> . IEEE Transactions on Multimedia, 4(1):76–87, 2002.
	[Henrich et al, 1989] A. Henrich, H.-W. Six, P. Widmayer. <i>The LSD tree: Spatial access to multidimensional point and non-point objects</i> . In Proceedings of the Fifteenth International Conference on Very Large Data Bases, 1989, pp. 45–53.



LSH (Locality Sensitive Hashing)	[Gionis et al, 1999] A. Gionis, P. Indyk, R. Motwani. <i>Similarity search in high dimensions via hashing</i> . In VLDB '99: Proceedings of the 25th International Conference on Very Large Data Bases, pages 518–529, San Francisco, CA, USA, 1999. Morgan Kaufmann Publishers Inc. [Indyk, Motwani, 1998] P. Indyk, R. Motwani. <i>Approximate nearest neighbors: towards removing the curse of dimensionality</i> . In STOC '98: Proceedings of the thirtieth annual ACM symposium on Theory of computing, pages 604–613, New York, NY, USA, 1998. ACM Press.
LUR-Tree (Lazy Update R-Tree)	[Kwon et al, 2002] D. Kwon, S. Lee, S. Lee. <i>Indexing the Current Positions of Moving Objects Using the Lazy Update R-tree</i> . In Mobile Data Management, MDM, pages 113–120, Jan. 2002.
Iz-Hashing	[Hutflesz et al, 1991] A. Hutflesz, P. Widmayer, C. Zimmermann. <i>Global order makes spatial access faster</i> . In Geographic Database Management Systems, G. Gambosi, M. Scholl, and H.-W. Six, Eds., Springer-Verlag, Berlin/Heidelberg/ New York, 1991, pp. 161–176.
MB+ Tree	[Yang et al, 1995] Q. Yang, A. Vellaikal, S. Dao. <i>MB+-Tree: A New Index Structure for Multimedia Databases</i> . Proceedings of the International Workshop on Multimedia Database Management Systems, August, 1995, pp. 151-158.
MDAM, ArM	[Markov, 1984] Kr. Markov. <i>A Multi-domain Access Method</i> . Proceedings of the International Conference on Computer Based Scientific Research. Plovdiv, 1984, pp.558-563. [Markov, 2004] Kr. Markov. <i>Multi-Domain Information Model</i> . International Journal "Information Theories and Applications", ISSN 1310-0513. Vol. 11, No: 4, 2004, pp. 303-308
MedRank (Median Rank)	[Fagin et al, 2003] R. Fagin, R. Kumar, D. Sivakumar. <i>Efficient similarity search and classification via rank aggregation</i> . In SIGMOD '03: Proceedings of the 2003 ACM SIGMOD international conference on Management of data, pages 301–312, New York, NY, USA, 2003. ACM Press.
MOLPHE	[Kriegel, Seeger, 1986] H.-P. Kriegel, B. Seeger. <i>Multidimensional order preserving linear hashing with partial expansions</i> . In Proceedings of the International Conference on Database Theory, LNCS 243, Springer-Verlag, Berlin/Heidelberg/New York. 1986.
mQp-Tree	[Salas, Polo, 2000] M. Salas, A. Polo. <i>The mQp-tree: a multidimensional access method based on a non-binary tree</i> . Proc of the VIth Conference on Extending Database Technology, March 2000, Konstanz - Germany
MR-tree	[Xu et al, 1990] X. Xu, J. Han, W. Lu. <i>RT-Tree: An Improved R-Tree Indexing Structure for Temporal Spatial Databases</i> . In Proc. of the Intl. Symp. on Spatial Data Handling, SDH, pages 1040–1049, July 1990.
M-Tree (Metric Tree)	[Ciaccia et al, 1997] P. Ciaccia, M. Patella, P. Zezula. <i>M-tree: An efficient access method for similarity search in metric spaces</i> . In VLDB '97: Proceedings of the 23rd International Conference on Very Large Data Bases, pages 426–435, San Francisco, CA, USA, 1997. Morgan Kaufmann Publishers Inc.
Multi-Layer Grid File	[Six, Widmayer, 1988] H. Six, P. Widmayer. <i>Spatial searching in geometric databases</i> . In Proceedings of the Fourth IEEE International Conference on Data Engineering, 1988, pp. 496–503.
Multi-Level Grid File	[Whang, Krishnamurthy, 1985] K.-Y. Whang, R. Krishnamurthy. <i>Multilevel grid files</i> . IBM Research Laboratory, Yorktown Heights, NY. 1985.
MV3R-Tree	[Tao, Papadias, 2001b] Y. Tao, D. Papadias. <i>MV3R-Tree: A Spatio-Temporal Access Method for Timestamp and Interval Queries</i> . In Proc. of the Intl. Conf. on Very Large Data Bases, VLDB, pages 431–440, Sept. 2001.
MVB-Tree (Multi Version B-Tree)	[Becker et al, 1996] B. Becker, S. Gschwind, T. Ohler, B. Seeger, P. Widmayer. <i>An Asymptotically Optimal Multiversion B-Tree</i> . VLDB Journal, 5(4):264–275, 1996.
MVP Tree	[Bozkaya, Ozsoyoglu, 1997] T. Bozkaya, M. Ozsoyoglu. <i>Distance-Based Indexing for High-Dimensional Metric Spaces</i> . Proceedings of the 1997 ACM SIGMOD International Conference on Management of Data, May 1997, pp. 357-368.
MVSB-Tree (Multiversion SB-tree)	[Markowetz et al, 2001] D. Zhang, A. Markowetz, V. Tsotras, D. Gunopulos, B. Seeger. <i>Efficient computation of temporal aggregates with range predicates</i> . In Proc. Principles Of Database Systems, pages 237–245, 2001.
NA-Tree (Nine Areas Tree)	[Chang et al, 2003] Y.-I. Chang, C.-H. Liao, H.-L. Chen. <i>NA-Trees: A Dynamic Index for Spatial Data</i> . Journal of Information Science and Engineering, 19, 103-139, 2003.
Nested Interpolation Based Grid File	[Ouksel, Mayer, 1992] M.A. Ouksel, O. Mayer. <i>A robust and efficient spatial data structure</i> . Acta Inf. 29, 1992, pp. 335–373.
NSI-Tree	[Porkaew et al, 2001] K. Porkaew, I. Lazaridis, S. Mehrotra. <i>Querying Mobile Objects in Spatio-Temporal Databases</i> . In Proc. of the Intl. Symp. on Advances in Spatial and Temporal Databases, SSTD, pages 59–78, Redondo Beach, CA, July 2001.
Overlapping Linear Quadtree	[Tzouramanis et al, 1998] T. Tzouramanis, M. Vassilakopoulos, Y. Manolopoulos. <i>Overlapping Linear Quadtrees: A Spatio-Temporal Access Method</i> . In Proc. of the ACM workshop on Adv. in Geographic Info. Sys., ACM GIS, pages 1–7, Nov. 1998.
P+-Tree	[Zhang et al, 2004] R. Zhang, B. C. Ooi, K.-L. Tan. <i>Making the pyramid technique robust to query types and workloads</i> . In ICDE'04 : Proceedings of the Twentieth International Conference on Data Engineering, pages 313–324, Washington, DC, USA, 2004. IEEE Computer Society.
Packed R-Tree	[Roussopoulos, Leifker, 1985] N. Roussopoulos, D. Leifker. <i>Direct spatial search on pictorial databases using packed R-trees</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1985, pp. 17–31.

Parallel R-Tree	[Kamel, Faloutsos, 1992] I. Kamel, C. Faloutsos. <i>Parallel R-trees</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1992, pp. 195–204.
Partitioned B-Tree	[Graefe, 2003] G. Graefe. <i>Sorting and Indexing with Partitioned B-Trees</i> . Conference on Innovative Data Systems Research, 2003.
PCURE (Parallel Implementation of Clustering Using Representatives)	[Berrani et al, 2003] S.-A. Berrani, L. Amsaleg, P. Gros. <i>Approximate searches: k-neighbors + precision</i> . In CIKM '03: Proceedings of the twelfth international conference on Information and knowledge management, pages 24–31, New York, NY, USA, 2003. ACM Press.
Persistent B-tree	[Sarnak, Tarjan, 1986] N. Sarnak, R.E. Tarjan. <i>Planar point location using persistent search trees</i> . Communication of the ACM, 1986, 29:669-679.
PLOP-Hashing	[Kriegel, Seeger, 1988] H.-P. Kriegel, B. Seeger. <i>PLOP-hashing: A grid file without directory</i> . In Proceedings of the Fourth IEEE International Conference on Data Engineering, 1988, pp. 369–376.
PM Quadtree	[Samet, Webber, 1985] H. Samet, R. E. Webber. <i>Storing a collection of polygons using quadtrees</i> . ACM Trans. Graph. 4, 3, 1985, 182–222.
PMR-Quadtree	[Nelson, Samet, 1986] R.C. Nelson, H. Samet. <i>A Consistent Hierarchical Representation for Vector Data</i> . In Proc. of the ACM SIGGRAPH, pages 197–206, Aug. 1986.
PMR-Quadtree for moving objects	[Tayeb et al, 1998] J. Tayeb, O. Ulusoy, O. Wolfson. <i>A Quadtree-Based Dynamic Attribute Indexing Method</i> . The Computer Journal, 41(3):185–200, 1998.
Point Quadtree	[Klinger, 1971] A. Klinger. <i>Pattern and search statistics</i> . In Optimizing Methods in Statistics, S.Rustagi, Ed., 1971, pp. 303–337.
PPR-Tree	[Kumar et al, 1998] A. Kumar, V. J. Tsotras, and C. Faloutsos. <i>Designing Access Methods for Bitemporal Databases</i> . IEEE Trans. on Knowledge and Data Engineering, TKDE, 10(1):1–20, 1998.
PPR-Tree with Linear Greedy	[Kollios et al, 2001] G. Kollios, V. J. Tsotras, D. Gunopulos, A. Delis, M. Hadjieleftheriou. <i>Indexing Animated Objects Using Spatiotemporal Access Methods</i> . IEEE Trans. on Knowledge and Data Engineering, TKDE, 13(5):758–777, 2001.
PPR-Tree with Polynomial Greedy	[Hadjieleftheriou et al, 2002] M. Hadjieleftheriou, G. Kollios, V. J. Tsotras, D. Gunopulos. <i>Efficient Indexing of Spatiotemporal Objects</i> . In Proc. of the Intl. Conf. on Extending Database Technology, EDBT, pages 251–268, Czech Republic, Mar. 2002.
Prefix Hash Tree	[Ramabhadran et al, 2004] S. Ramabhadran, S. Ratnasamy, J.M. Hellerstein, S. Shenker. <i>Prefix Hash Tree: An Indexing Data Structure over Distributed Hash Tables</i> . Submitted to PODC 2004
PR-Tree	[Cai, Revesz, 2000] M. Cai, P. Revesz. <i>Parametric R-Tree: An Index Structure for Moving Objects</i> . In Proc. of the Intl. Conf. on Management of Data, COMAD, Dec. 2000.
PSI (Parametric Space Indexing)	[Porkaew et al, 2001] K. Porkaew, I. Lazaridis, S. Mehrotra. <i>Querying Mobile Objects in Spatio-Temporal Databases</i> . In Proc. of the Intl. Symp. on Advances in Spatial and Temporal Databases, SSTD, pages 59–78, Redondo Beach, CA, July 2001.
P-Tree (J)	[Jagadish, 1990] H.V. Jagadish. <i>Spatial search with polyhedra</i> . In Proceedings of the Sixth IEEE International Conference on Data Engineering, 1990, pp. 311–319.
P-Tree (S)	[Schiewietz, 1993] M. Schiewietz. <i>Speicherung und anfragebearbeitung komplexer geo-objekte</i> . Ph.D. Thesis, Ludwig-Maximilians-Universitat Munchen, Germany (in German). 1993.
PvS Index	[Lejsek et al, 2005] H. Lejsek, F. H. Asmundsson, B. P. Jonsson, L. Amsaleg. <i>Efficient and effective image copyright enforcement</i> , Technical Report. Reykjavik University, 2005.
Pyramid Technique	[Berchtold et al, 1998] S. Berchtold, C. Bohm, H.-P. Kriegel. <i>The pyramid-technique: Towards breaking the curse of dimensionality</i> . In L. M. Haas and A. Tiwary, editors, SIGMOD 1998, Proceedings ACM SIGMOD International Conference on Management of Data, June 2-4, 1998, Seattle, Washington, USA, pages 142–153. ACM Press, 1998.
Q+R-Tree	[Yuni, Prabhakar, 2003] X. Yuni, S. Prabhakar. <i>Q+Rtree: efficient indexing for moving object databases</i> . Database Systems for Advanced Applications, 2003. (DASFAA 2003). Proceedings. Eighth International Conference on Publication Date: 26-28 March 2003. Pp: 175- 182
Quantile Hashing	[Kriegel, Seeger, 1987] H.-P. Kriegel, B. Seeger. <i>Multidimensional quantile hashing is very efficient for non-uniform record distributions</i> . In Proceedings of the Third IEEE International Conference on Data Engineering, 1987, pp. 10–17.
R*-Tree	[Beckmann et al, 1990] N. Beckmann, H.-P. Kriegel, R. Schneider, B. Seeger. <i>The R*-tree: An efficient and robust access method for points and rectangles</i> . In Proceedings of ACM SIGMOD International Conference on Management of Data, 1990, pp. 322–331.
R+-Tree	[Sellis et al, 1987] T. Sellis, N. Roussopoulos, C. Faloutsos. <i>The R+-tree: A dynamic index for multi-dimensional objects</i> . In Proceedings of the Thirteenth International Conference on Very Large Data Bases, 1987, pp. 507–518.
Reactive Tree	[Oosterom, 1993] P. van Oosterom. <i>Reactive Data Structures for Geographic Information Systems</i> . Oxford University Press, Oxford. 1993.
Region Quadtree	[Finkel, Bentley, 1974] R. Finkel, J. L. Bentley. <i>Quadtrees: A data structure for retrieval of composite keys</i> . Acta Inf. 4, 1, 1974, pp. 1–9.
Relational Interval Tree	[Kriegel et al, 2000] H.-P. Kriegel, M. Pötke, T. Seidl. <i>Managing Intervals Efficiently in Object-Relational Databases</i> . Proc. 26th Int. Conf. on Very Large Databases (VLDB): 407-418, 2000.
Relational R-Tree	[Ravi et al, 1999] K.V. Ravi Kanth, S. Ravada, J. Sharma, J. Banerjee. <i>Indexing Medium-dimensionality Data in Oracle</i> . Proc. ACM SIGMOD Int. Conf. on Management of Data: 521-522, 1999.

Relational X-Tree	[Berchtold et al, 1999] S. Berchtold, C. Böhm, H.-P. Kriegel, U. Michel. <i>Implementation of Multidimensional Index Structures for Knowledge Discovery in Relational Databases</i> . Proc. 1st Int. Conf. on Data Warehousing and Knowledge Discovery (DaWaK), LNCS 1676: 261-270, 1999.
R <sup>EXP</sup> -Tree	[Salteneis, Jensen, 2002] S. Salteneis, C. S. Jensen. <i>Indexing of Moving Objects for Location-Based Services</i> . In Proc. of the Intl. Conf. on Data Engineering, ICDE, Feb. 2002.
R-File	[Hutflesz et al, 1990] A. Hutflesz, H.-W. Six, P. Widmayer. <i>The R-file: An efficient access structure for proximity queries</i> . In Proceedings of the Sixth IEEE International Conference on Data Engineering, 1990, pp. 372–379.
R-link Tree	[Ng, Kameda, 1994] V. Ng, T. Kameda. <i>The R-link tree: A recoverable index structure for spatial data</i> . In Proceedings of the Fifth Conference on Database and Expert Systems Applications (DEXA'94), D. Karagiannis, Ed., LNCS 856, Springer-Verlag, Berlin/Heidelberg/New York, 1994, 163–172.
R-Tree	[Guttman, 1984] A. Guttman. <i>R-trees: A dynamic index structure for spatial searching</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1984, 47–54.
RT-Tree	[Xu et al, 1990] X. Xu, J. Han, W. Lu. <i>RT-Tree: An Improved R-Tree Indexing Structure for Temporal Spatial Databases</i> . In Proc. of the Intl. Symp. on Spatial Data Handling, SDH, pages 1040–1049, July 1990.
SB-Tree (Segment B-Tree)	[Yang, Widom, 2001] J. Yang, J. Widom. <i>Incremental Computation and Maintenance of Temporal Aggregates</i> . Proceedings of the 17th International Conference on Data Engineering, 2001, Pages: 51 - 60
SEB-Tree (Start/End Timestamp B-Tree)	[Song, Roussopoulos, 2003] Z. Song, N. Roussopoulos. <i>SEB-tree: An Approach to Index Continuously Moving Objects</i> . In Mobile Data Management, MDM, pages 340–344, Jan. 2003.
Segment Indexes	[Kolovson, Stonebraker, 1991] C. Kolovson, M. Stonebraker. <i>Segment indexes: Dynamic indexing techniques for multi-dimensional interval data</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1991, pp. 138–147.
SETI (Scalable and Efficient Trajectory Index)	[Chakka et al, 2003] V. P. Chakka, A. Everspaugh, J. M. Patel. <i>Indexing Large Trajectory Data Sets with SETI</i> . In Proc. of the Conf. on Innovative Data Systems Research, CIDR, Asilomar, CA, Jan. 2003.
SH-Tree (Super Hybrid Tree)	[Dang, 2006] T.K. Dang. <i>The SH-Tree: A Novel and Flexible Super Hybrid Index Structure for Similarity Search on Multidimensional Data</i> . International Journal of Computer Science & Applications, 2006 Technomathematics Research Foundation Vol. III, No. I, pp. 1 - 25
SKD-Tree	[Ooi et al, 1987] B.C. Ooi, K.J. McDonnell, R. Sacks-Davis. <i>Spatial kd-tree: An indexing mechanism for spatial databases</i> . In Proceedings of the IEEE Computer Software and Applications Conference, 1987, pp. 433–438.
Slim Tree	[Traina Jr. et al, 2000] C. Traina Jr., A. Traina, B. Seeger, C. Faloutsos. <i>Slim-trees: High Performance Metric Trees Minimizing Overlap Between Nodes</i> . International Conference on Extending Database Technology (EDBT) 2000, Konstanz, Germany, March 27-31, 2000.
Space Filling Curves	[Morton, 1966] G. Morton. <i>A computer oriented geodetic data base and a new technique in file sequencing</i> . IBM Ltd. 1966.
Sphere Tree	[Oosterom, 1990] P. Oosterom. <i>Reactive data structures for geographic information systems</i> . Ph.D. Thesis, University of Leiden, The Netherlands. 1990.
sQSF-Tree (Simple QSF-Tree)	[Yu et al, 1999] B. Yu, R. Orlandic, M. Evens. <i>Simple QSF-trees: an efficient and scalable spatial access method</i> . Proceedings of the Eighth International Conference on Information and Knowledge Management, p.5-14, November 02-06, 1999, Kansas City, Missouri, United States
SR Tree (Sphere-Rectangle Tree)	[Katayama, S. Satoh, 1997] N. Katayama, S. Satoh. <i>The sr-tree: an index structure for high-dimensional nearest neighbor queries</i> . In SIGMOD '97: Proceedings of the 1997 ACM SIGMOD international conference on Management of data, pages 369–380, New York, NY, USA, 1997. ACM Press.
SS Tree (Similarity Search Tree)	[White, Jain, 1996] D. A. White, R. Jain. <i>Similarity indexing with the ss-tree</i> . In ICDE '96: Proceedings of the Twelfth International Conference on Data Engineering, pages 516–523, Washington, DC, USA, 1996. IEEE Computer Society.
STAR-Tree (Spatio-temporal Self Adjusting R-Tree)	[Procopiuc et al, 2002] C. M. Procopiuc, P. K. Agarwal, S. Har-Peled. <i>STAR-Tree: An Efficient Self-Adjusting Index for Moving Objects</i> . In Proc. of the Workshop on Alg. Eng. and Experimentation, ALENEX, pages 178–193, Jan. 2002.
String B-tree	[Ferragina, Grossi, 1995] P. Ferragina, R. Grossi. <i>A fully-dynamic data structure for external substring search</i> . In Proc. ACM Symp. on Theory of Computation, 1995, pp.693-702.
STR-tree	[Pfoser et al, 2000] D. Pfoser, C. S. Jensen, and Y. Theodoridis. <i>Novel Approaches in Query Processing for Moving Object Trajectories</i> . In Proc. of the Intl. Conf. on Very Large Data Bases, VLDB, pages 395–406, Sept. 2000.
SV-Model	[Chon et al, 2001] H. D. Chon, D. Agrawal, A. E. Abbadi. <i>Storage and Retrieval of Moving Objects</i> . In Mobile Data Management, pages 173–184, Jan. 2001.
TB-Tree (Trajectory-Bundle Tree)	[Pfoser et al, 2000] D. Pfoser, C. S. Jensen, and Y. Theodoridis. <i>Novel Approaches in Query Processing for Moving Object Trajectories</i> . In Proc. of the Intl. Conf. on Very Large Data Bases, VLDB, pages 395–406, Sept. 2000.

---

TPR*-Tree	[Tao et al, 2003] Y. Tao, D. Papadias, J. Sun. <i>The TPR*-Tree: An Optimized Spatio-Temporal Access Method for Predictive Queries</i> . Proceedings of the 29th VLDB Conference, Berlin, Germany, 2003
TPR-tree (Time Parameterized R-Tree)	[Saltenis et al, 2000] S. Saltenis, C. S. Jensen, S. T. Leutenegger, M. A. Lopez. <i>Indexing the Positions of Continuously Moving Objects</i> . In Proc. of the ACM Intl. Conf. on Management of Data, SIGMOD, pages 331-342, May 2000. [Schneider, Kriegel, 1992] R. Schneider, H.-P. Kriegel. <i>The TR*-tree: A new representation of polygonal objects supporting spatial queries and operations</i> . In Proceedings of the Seventh Workshop on Computational Geometry, LNCS 553, Springer-Verlag, Berlin/Heidelberg/New York, 1992, pp. 249-264.
TR*-Tree	
TR-Tree (Temporal R-Tree)	[Almeida et al, 1999] V. T. Almeida, J. M. Souza, G. Zimbrão. <i>The Temporal R-Tree</i> . Technical Report No. ES-492/99, COPPE Sistemas/UFRJ, 1999.
TSB-Tree	[Lomet, Salzberg, 1989] D.B. Lomet, B. Salzberg. <i>Access Methods for Multiversion Data</i> . In Proc. of the ACM Intl. Conf. on Management of Data, SIGMOD, pages 315-324, May 1989.
TV-Tree (Telescoping Vector Tree)	[Lin et al, 1994] K. I. Lin, H. V. Jagadish, C. Faloutsos. <i>The tv-tree: an index structure for high-dimensional data</i> . The VLDB Journal, 3(4):517-542, 1994.
Twin Grid File	[Hutflesz et al, 1988b] A. Hutflesz, H.-W. Six, P. Widmayer. <i>Twin grid files: Space optimizing access schemes</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1988, pp. 183-190.
Two-Level Grid File	[Hinrichs, 1985] K. Hinrichs. <i>Implementation of the grid file: Design concepts and experience</i> . BIT 25, 1985, pp. 569-592.
UB-Tree	[Bayer, 1996] R. Bayer. <i>The universal B-tree for multidimensional indexing</i> . Tech. Rep. I9639, Technische Universität München, Munich, Germany. 1996. [Ferhatosmanoglu et al, 2000] H. Ferhatosmanoglu, E. Tuncel, D. Agrawal, A. E. Abbadi. <i>Vector approximation based indexing for non-uniform high dimensional data sets</i> . In CIKM '00: Proceedings of the ninth international conference on Information and knowledge management, pages 202-209, New York, NY, USA, 2000. ACM Press.
VA+-File	
VA-File (Vector Approximation File)	[Weber et al, 2000] R. Weber, K. Böhm, H.-J. Schek. <i>Interactive-time similarity search for large image collections using parallel va-files</i> . In ICDE, page 197, 2000.
VCI R-Tree (Velocity Constrained Indexing R-Tree)	[Prabhakar et al, 2002] S. Prabhakar, Y. Xia, D. V. Kalashnikov, W. G. Aref, S. E. Hambrusch. <i>Query Indexing and Velocity Constrained Indexing: Scalable Techniques for Continuous Queries on Moving Objects</i> . IEEE Transactions on Computers, 51(10):1124-1140, 2002. [Yianilos, 1993] P. N. Yianilos. <i>Data structures and algorithms for nearest neighbor search in general metric spaces</i> . In SODA '93: Proceedings of the fourth annual ACM-SIAM Symposium on Discrete algorithms, pages 311-321, Philadelphia, PA, USA, 1993. Society for Industrial and Applied Mathematics.
VP Tree (Vantage Point Tree)	
V-Reactive Tree	[Li et al, 2001] J. Li, N. Jing, M. Sun. <i>Spatial Database Techniques Oriented to Visualization in 3D GIS</i> . In Proceedings of the 2nd International Symposium on Digital Earth. 2001.
Weight-balanced B-tree	[Arge, Vitter, 1996] L. Arge, J. S.Vitter. <i>Optimal Dynamic Interval Management in External Memory</i> . Proc. 37th Annual Symp. on Foundations of Computer Science: 560-569, 1996.
X-Tree	[Berchtold et al, 1996] S. Berchtold, D. Keim, H.-P. Kriegel. <i>The X-tree: An index structure for high-dimensional data</i> . In Proceedings of the 22nd International Conference on Very Large Data Bases, (Bombay) 1996, pp. 28-39.
Z-Hashing	[Hutflesz et al, 1988a] A. Hutflesz, H.-W. Six, P. Widmayer. <i>Globally order preserving multidimensional linear hashing</i> . In Proceedings of the Fourth IEEE International Conference on Data Engineering, 1988, pp. 572-579.
zkdB+tree	[Orenstein, 1986] J. A. Orenstein. <i>Spatial query processing in an object-oriented database system</i> . In Proceedings of the ACM SIGMOD International Conference on Management of Data, 1986, 326-333.
Z-Ordering	[Orenstein, Merrett, 1984] J. Orenstein, T.H. Merrett. <i>A class of data structures for associative searching</i> . In Proceedings of the Third ACM SIGACT-SIGMOD Symposium on Principles of Database Systems, 1984, pp. 181-190.

---

### Additional bibliography

- [Arge, 2002] L. Arge. *External Memory Data Structures*. Part 4, chapter 9 in Handbook of Massive Datasets. J. Abello, P.M. Pardalos, M.G.C. Resende (eds), Kluwer Academic Publishers, 2002, pp. 313-357.
- [Bayer, 1996] R. Bayer. *The Universal B-tree for Multidimensional Indexing*. Technical Report I9639, Technische Universität München, Munich, Germany. 1996.
- [Bellman 1961] R. Bellman. *Adaptive Control Processes: A Guided Tour*. Princeton University Press., 1961
- [Bouteldja et al, 2006] N. Bouteldja, V. Gouet-Brunet, M. Scholl. *Back to the Curse of Dimensionality with Local Image Descriptors*. CEDRIC Research Report no 1049. July 20, 2006.

- [Chakrabarti, 2001] K. Chakrabarti. *Managing Large Multidimensional Datasets Inside a Database System*. Phd Thesis, University of Illinois at Urbana-Champaign. Urbana, Illinois, 2001
- [Chavez et al, 2001] E. Chavez, G. Navarro, R. Baeza-Yates, J. Marroquin. *Searching in Metric Spaces*. ACM Computing Surveys, 33(3):273–321, Sept. 2001.
- [CODASYL, 1971] Codasyl Systems Committee. *Feature Analysis of Generalized Data Base Management Systems*. Technical Report, May, 1971 / Информационные системы общего предназначения (Аналитический обзор систем управления базами данных). Москва, Статистика, 1975.
- [Connolly, Begg, 2002] T.M. Connolly, C.E.Begg. *Database Systems. A Practical Approach to Design, Implementation, and Management*. Third Edition. Addison-Wesley Longman, Inc. – Pearson Education Ltd., 1995, 2002 / Т.Коннолли, К.Бегг. *Базы данных. Проектирование, реализация и сопровождение*. Теория и практика. Москва-Санкт Петербург-Киев, Издательский дом "Вильямс", 2003. 1440 с.
- [Date, 1977] C.J. Date. *An Introduction to Database Systems*. Addison-Wesley Inc. 1975. / К.Дейт. *Введение в системы баз данных*. Москва, Наука, 1980.
- [Gaede, Günther, 1998] V. Gaede, O. Günther. *Multidimensional Access Methods*. ACM Computing Surveys, Vol. 30, No. 2, June 1998.
- [IBM, 1965-68] *IBM System/360, Disk Operating System, Data Management Concepts*. IBM System Reference Library, IBM Corp. 1965, Major Revision, February 1968.
- [Markov, 2004] Kr. Markov. *Multi-Domain Information Model*. International Journal "Information Theories and Applications", ISSN 1310-0513. Vol. 11, No: 4, 2004, pp. 303-308
- [Markov, 2006] Kr. Markov. *Multi-dimensional Context-free Access Method*. PhD Thesis. Institute of Mathematics and Informatics, Bulgarian Academy of Sciences. Sofia, 2006.
- [Martin, 1975] J.Martin. *Computer Data-Base Organization*. Prentice-Hall, Inc., Englewood Cliffs, New Jersey / Дж. Мартин. *Организация баз данных в вычислительных системах*. Москва, Мир, 1978.
- [Moëne-Loccoz, 2005] N. Moëne-Loccoz. *High-Dimensional Access Methods for Efficient Similarity Queries*. Technical Report N:0505, University of Geneva, Computer Vision and Multimedia Laboratory, May 2005.
- [Mokbel et al, 2003] M. F. Mokbel, T. M. Ghanem, W. G. Aref. *Spatio-temporal Access Methods*. IEEE Data Engineering Bulletin, 26(2), 40-49, June, 2003.
- [Ooi et al, 1993] B.C. Ooi, R. Sacks-Davis, J. Han. *Indexing in Spatial Databases*. Technical Report. 1993.
- [Schlosser et al, 2005] S.W. Schlosser, J. Schindler, S. Papadomanolakis, M. Shao, A. Ailamaki, C. Faloutsos, G.R. Ganger. *On Multidimensional Data and Modern Disks*. Proceedings of the 4th USENIX Conference on File and Storage Technology (FAST '05). San Francisco, CA. December 13-16, 2005.
- [Stably, 1970] D. Stably. *Logical Programming with System/360*. New York, 1970 / Д.Стэбли. *Логическое программирование в системе/360*. Москва, Мир, 1974.

---

## Authors' Information

---

*Krassimir Markov* - Institute of Mathematics and Informatics, BAS, Acad.G.Bonthev St., bl.8, Sofia-1113, Bulgaria; Institute of Information Theories and Applications FOI ITHEA, P.O.Box: 775, Sofia-1090, Bulgaria; e-mail: [markov@foibg.com](mailto:markov@foibg.com)

*Krassimira Ivanova* - Institute of Mathematics and Informatics, BAS, Acad.G.Bonthev St., bl.8, Sofia-1113, Bulgaria; e-mail: [kivanova@math.bas.bg](mailto:kivanova@math.bas.bg)

*Ilija Mitov* - Institute of Information Theories and Applications FOI ITHEA, P.O.Box: 775, Sofia-1090, Bulgaria; e-mail: [mitov@foibg.com](mailto:mitov@foibg.com)

*Stefan Karastanev* - Institute of Mechanics and Biomechanics, BAS, Acad.G.Bonthev St., bl.4, Sofia-1113, Bulgaria; e-mail: [stefan@info.imbm.bas.bg](mailto:stefan@info.imbm.bas.bg)