

NASA/TM-2012-217788



Use of Windbreaks for Hurricane Protection of Critical Facilities

*Simone Hyater-Adams
Hampton University, Hampton, Virginia*

*Russell J. DeYoung
Langley Research Center, Hampton, Virginia*

November 2012

NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA scientific and technical information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Report Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA Programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers, but having less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or co-sponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include organizing and publishing research results, distributing specialized research announcements and feeds, providing information desk and personal search support, and enabling data exchange services.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question to help@sti.nasa.gov
- Fax your question to the NASA STI Information Desk at 443-757-5803
- Phone the NASA STI Information Desk at 443-757-5802
- Write to:
STI Information Desk
NASA Center for AeroSpace Information
7115 Standard Drive
Hanover, MD 21076-1320

NASA/TM-2012-217788



Use of Windbreaks for Hurricane Protection of Critical Facilities

*Simone Hyater-Adams
Hampton University, Hampton, Virginia*

*Russell J. DeYoung
Langley Research Center, Hampton, Virginia*

National Aeronautics and
Space Administration

Langley Research Center
Hampton, Virginia 23681-2199

November 2012

Acknowledgements

The authors express their gratitude to NASA HQ funding under the Climate Adaptation Science Investigator program that supported this research.

Available from:

NASA Center for AeroSpace Information
7115 Standard Drive
Hanover, MD 21076-1320
443-757-5802

Abstract

The infrastructure of the Langley Research Center is under potential risk in the future because of more intense hurricanes with higher speed winds and flooding. A potential method of protecting the Center's facilities is the placement of a windbreak barrier composed of indigenous trees. The "New Town" program that is now in progress creates a more condensed area of focus for protection. A potential design for an efficient tree windbreak barrier for Langley Research Center is proposed.

Introduction

NASA Langley Research Center is a facility that impacts countless people throughout the country and across the world. Since its federal opening in 1917, the center has contributed to the advancement of aeronautics and science by working towards NASA's goals. On an economic scale, the center had a 2.1 billion dollar impact nationally in the past year [1]. The research programs taking place at the facility deal with aeronautics, space exploration, and global climate. These projects are handled and managed by the 1900 civil servants and 1800 contractors employed at the center proving that Langley is a value to the nation.

The center's location on the coast of the Chesapeake Bay creates risks to the infrastructure due to storms that the area encounters, the most dangerous being hurricanes. Damage to the infrastructure due to these conditions would affect not only thousands of jobs, but the progress of many NASA projects. Langley is in a process of new construction called the "New Town" Program which will consolidate the majority of Langley's buildings into a smaller infrastructure footprint while many outlying buildings will be demolished. This process of rebuilding which began in 2009 is focused on modernizing the center's facilities. Figure 1 shows a map of the New Town area and the year when each renovation will be complete. The bulk of Langley's campus will be located in this area by the time of the program's completion in 2018, making it the focus for disaster protection.

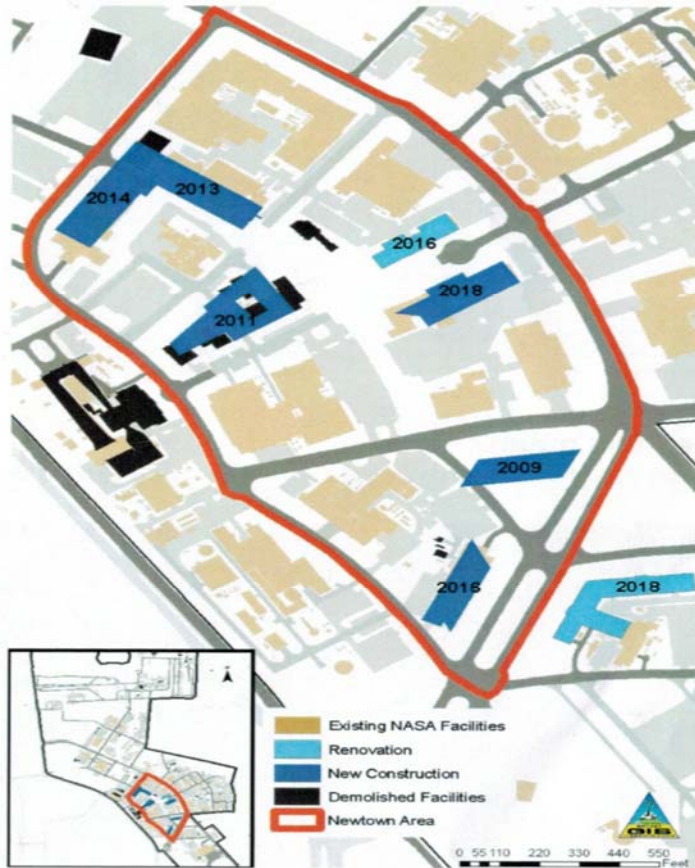


Figure 1. Layout of “New Town” Program Area.

2. Hurricane Risk

Hurricanes are common in the Chesapeake Bay area, with five major storms hitting the area within the century. Figure 2 shows a map of the hurricanes whose paths have gone through the Chesapeake Bay Area between 1851 and 2009[2]. It is evident from the figure that the most frequent passes were of tropical storms and hurricanes of category 1 and 2, and rarely a category 3. These types of storms have winds ranging from 30mph to 130mph with storm surges ranging from 4 to 12 feet. Although the most frequent storms that have passed through were category 3 and below, there are studies that show there will be a shift in this pattern due to global climate change [3]. Models of future hurricane projection show a decrease in lower category (1-3) hurricanes and an increase of higher category (4 and 5) expected to hit land in the future. Figure 3 shows a graph of the projected hurricane changes in the Atlantic over the 21st century. [4].

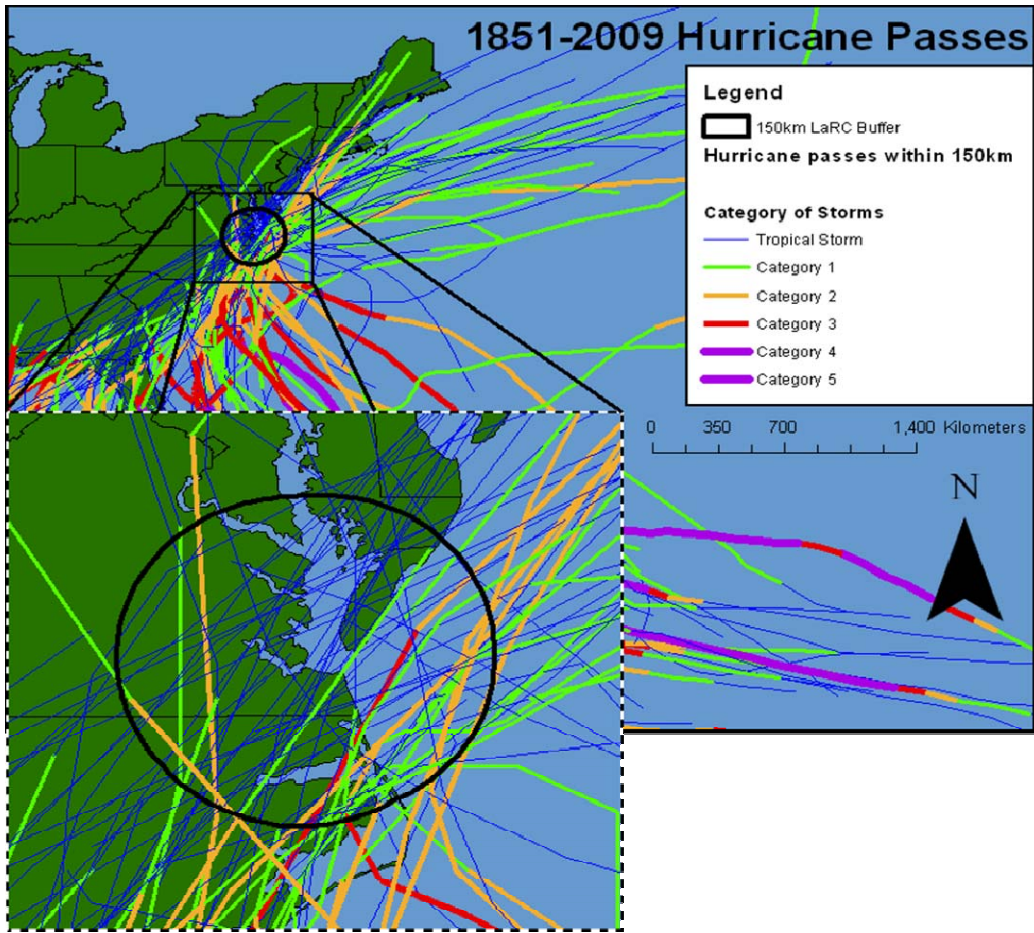


Figure 2. Map of storm and hurricane paths through the Chesapeake Bay area between 1851 and 2009.

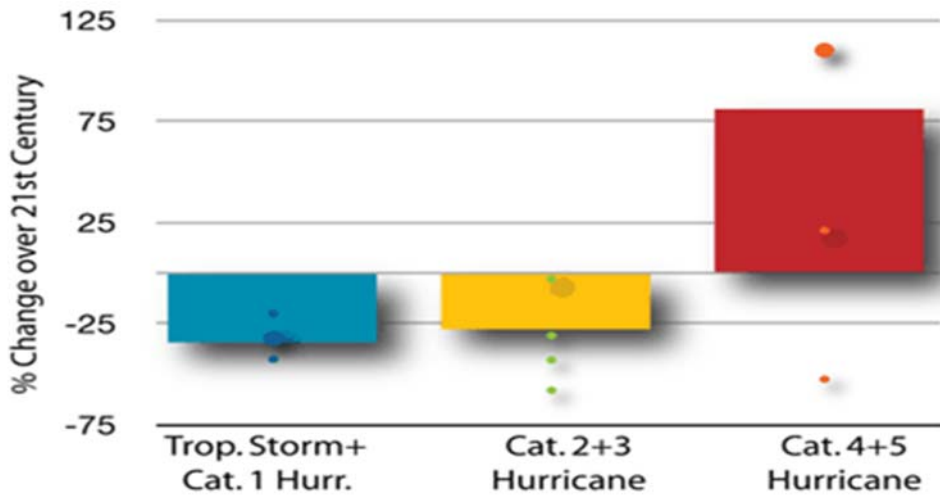


Figure 3. Graph of the projected hurricane changes over the 21st century.

These types of storms prove to be a great threat to Langley's facilities. The high winds and flooding can cause drastic damage to the infrastructure of the center. Therefore, the need for a method of protecting the center is essential in the coming years, especially if the trends of Figure 3 are realized.

3. Physics of Protective Windbreaks

Windbreaks can be defined as protective structures built to decrease wind flow to a specific area. There are different materials that are used to build these structures, but the most beneficial protection of Langley's facilities would be a tree windbreak. Tree windbreaks are composed of tree rows of different heights, densities, and properties that are arranged and positioned in a specific way to decrease winds. Figure 4 shows the schematic of how wind breaks work. The air hits the windbreak and some is slowed down by the barrier and passes through, and some is pushed over the top of the windbreak, leaving an area behind the windbreak of much lower wind speed.

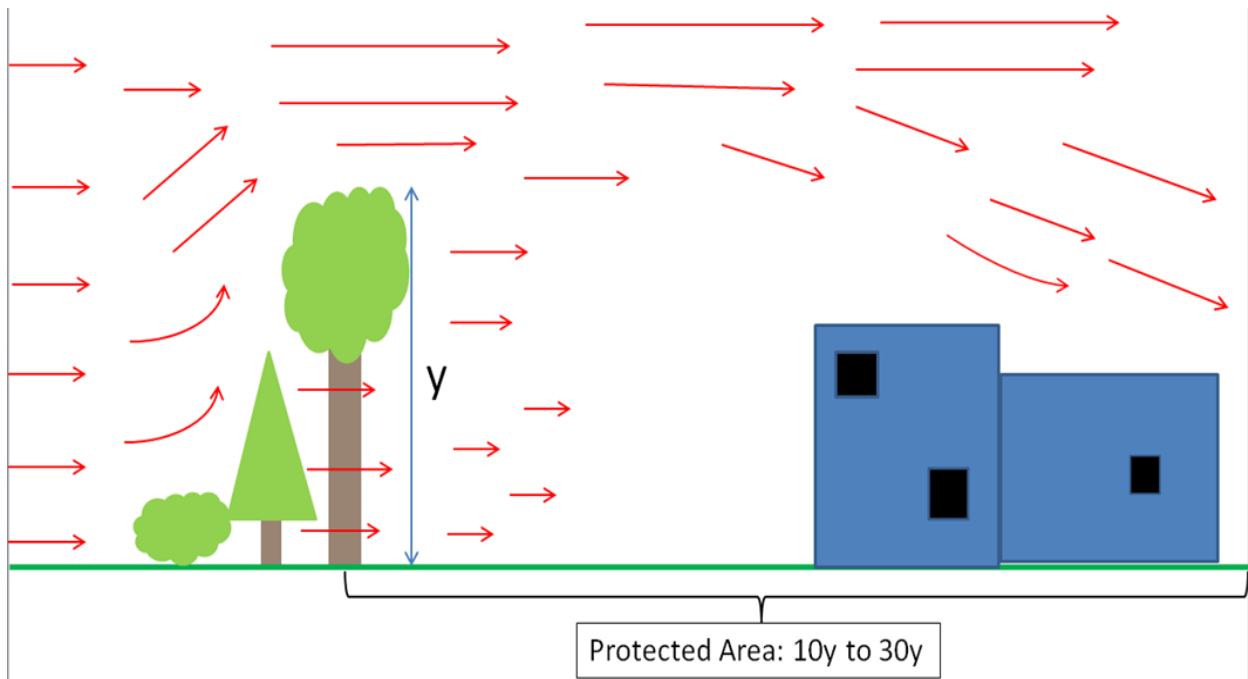


Figure 4. Windbreak Schematic

The keys to a successful tree windbreak are height and porosity. The length of protection that a wind break provides is a factor of the height of the tallest tree row ranging from 5 times the height on the windward side of the windbreak out to 30 times the height on the leeward side. The maximum wind reduction of a windbreak usually extends out to 10 times the height of the tallest

tree row, but some reduction can extend out to 30 times the height. Figure 5 shows the relationship between windbreak tree height, x , the length of protection, and the amount of wind speed reduction [5].

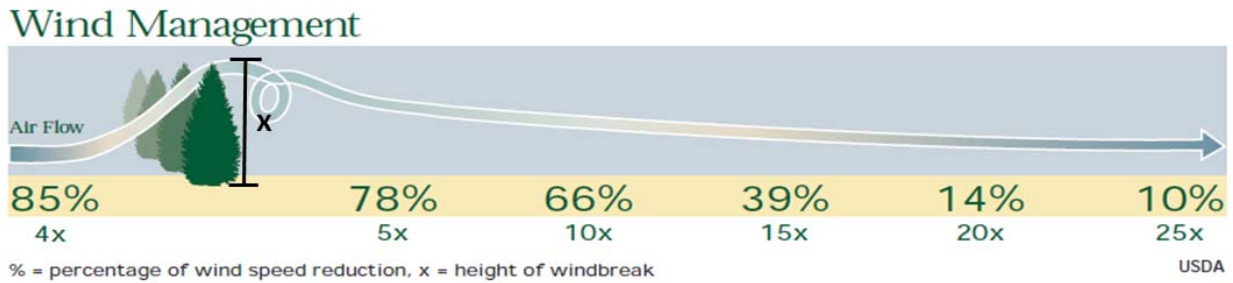


Figure 5. Wind management schematic that shows the relationship between wind speed reduction and height of windbreak. [5]

The density of the windbreak is important because of turbulence. If the structure is too dense, there is low porosity, forcing the wind over the trees and turbulently down the other side. The schematic in Figure 6 shows how the air flow changes with the density of the trees in a windbreak. When winds become turbulent they tend to create gusts of wind in different directions. When dealing with high speed winds, these gusts can become damaging to the infrastructure that the windbreak is meant to protect.

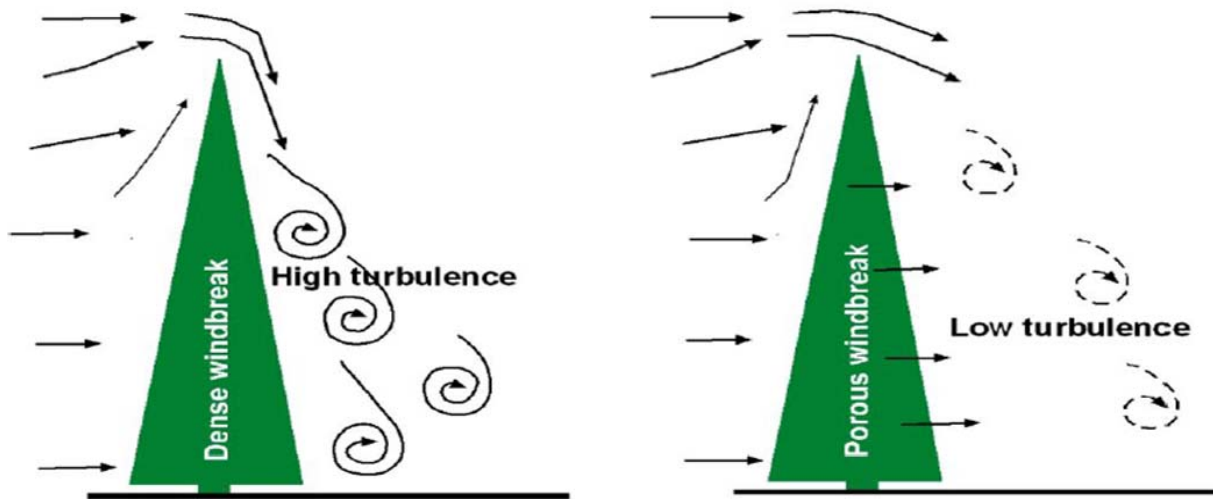


Figure 6. Diagram showing the turbulence caused by windbreaks that are too dense.

Wind breaks are most efficient when they have no openings, but if there are needs for breaks in the barrier for access points, they should be built in a specific way. In order to avoid wind tunnel

effects within the windbreak, gaps should be angled so that the windbreak can still have an effect. Figure 7 below shows an example of appropriate angled gaps in a windbreak and an inappropriate straight cut gap.

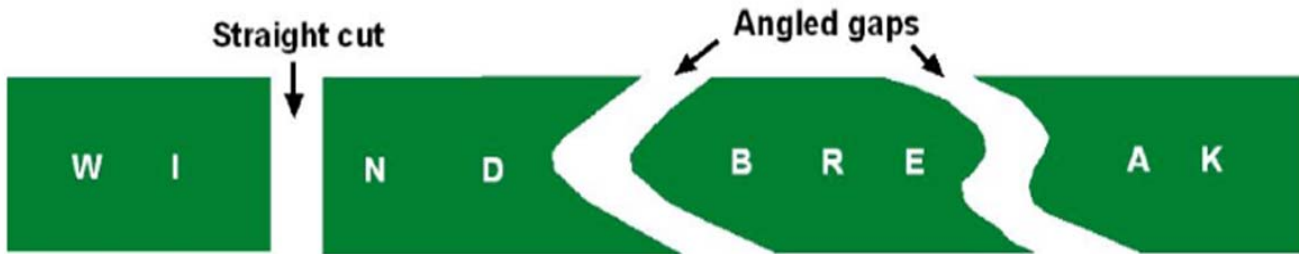


Figure 7. Diagram of the appropriate gaps for effective windbreaks.

The use of tree windbreaks to protect fields and infrastructure is not a new idea. There are many successful windbreaks being used to protect homes, farms, and crops across the country. Windbreaks can be used not only for a barrier against wind, but also for privacy and a shield from snow. Pictured in Figure 8, is a half mile long windbreak in Iowa that has been successfully protecting a crop field for 15 years. This windbreak design is composed of five rows [6].



Figure 8. Iowa Windbreak composed of red cedar, white pine, Norway and White spruce, along with 7 kinds of oaks [7].

Another successful wind break is pictured in Figure 9 protecting a farmstead. The angled trees create an area of protection for the infrastructures from wind and snow. This windbreak has been successfully used for 10 years [7].



Figure 9. Ten year old windbreak composed of white pine and honeysuckle. [7]

4. Preliminary Design of “New Town” Protective Windbreak

In order to efficiently protect Langley’s “New Town” area from high winds, a windbreak design must have the following characteristics: Tall trees for maximum protection distance, sufficient porosity, fast growing trees that can sustain the Hampton Roads climate and adapt to Langley’s soil. The placement of the windbreak should be determined by the wind direction of potential hurricane winds. Data from NOAA on past wind speeds and directions in the Chesapeake Bay area show that most high winds from storms over the last 20 years were from the northeast [8]. Figure 10 shows a wind rose of this data for the New Town area. The wind rose diagram pictured in Figure 10 shows the wind speed, direction, and frequency. The numbers along the x-axis of the diagram are assigned to a circle and represent the scale of how frequent each wind speed occurred in each direction over the past years.

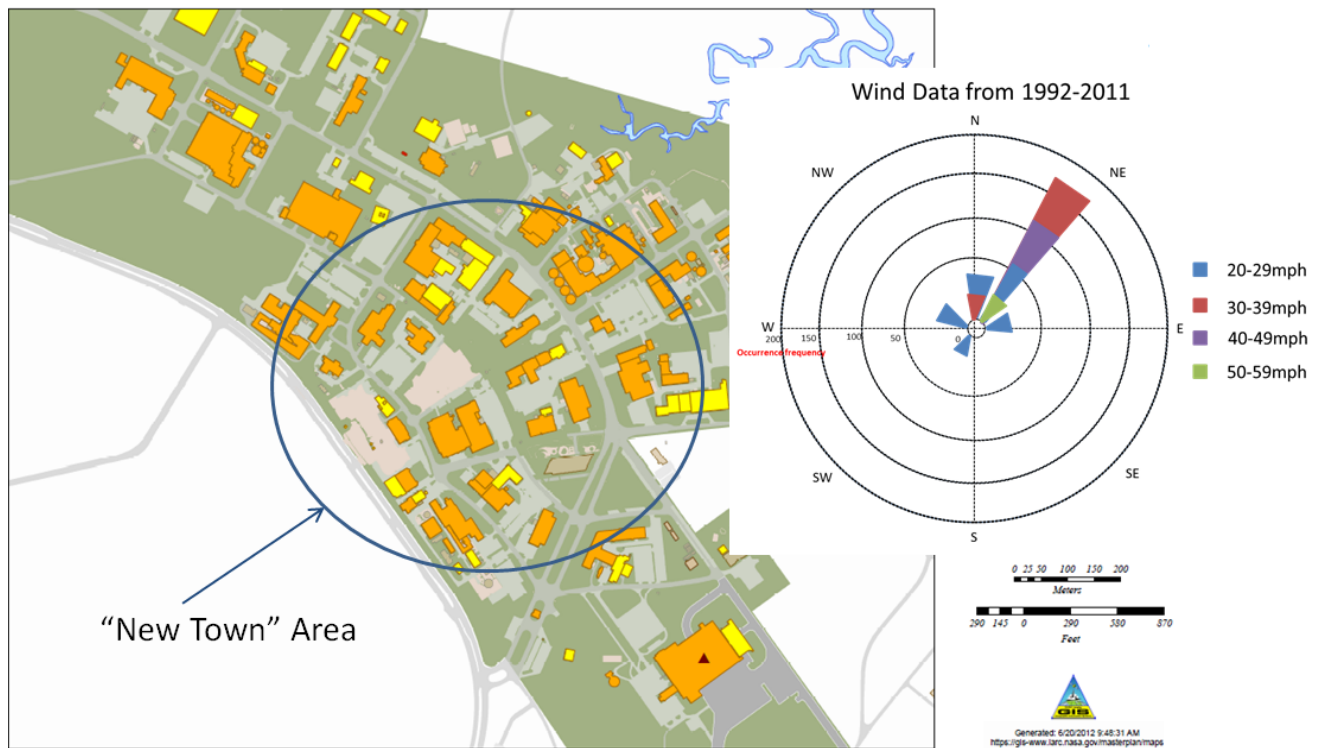


Figure 10. The Langley New Town area with respect to the directions of past high winds.

According to this wind data, the path for high winds is from the northeast. This means that the placement of the windbreak should be along the northeastern side of the facility. This works well with the “New Town” program because this is where the majority of the current infrastructure will be demolished for the renovation. A placement design for the wind break is shown on the map in Figure 11 along with the protection distances.

Falling trees must be considered when determining the placement of the windbreak. Winds from storms shown in figures 2 and 3 do not pose the threat of creating tree projectiles that could cause damage to infrastructure during a storm. A NOAA website describes the types of damage done to infrastructure and tree projectiles are only a threat with winds over 90 mph [9]. Therefore, Langley’s windbreak must be placed far enough away from infrastructure that it cannot cause damage because of falling trees.

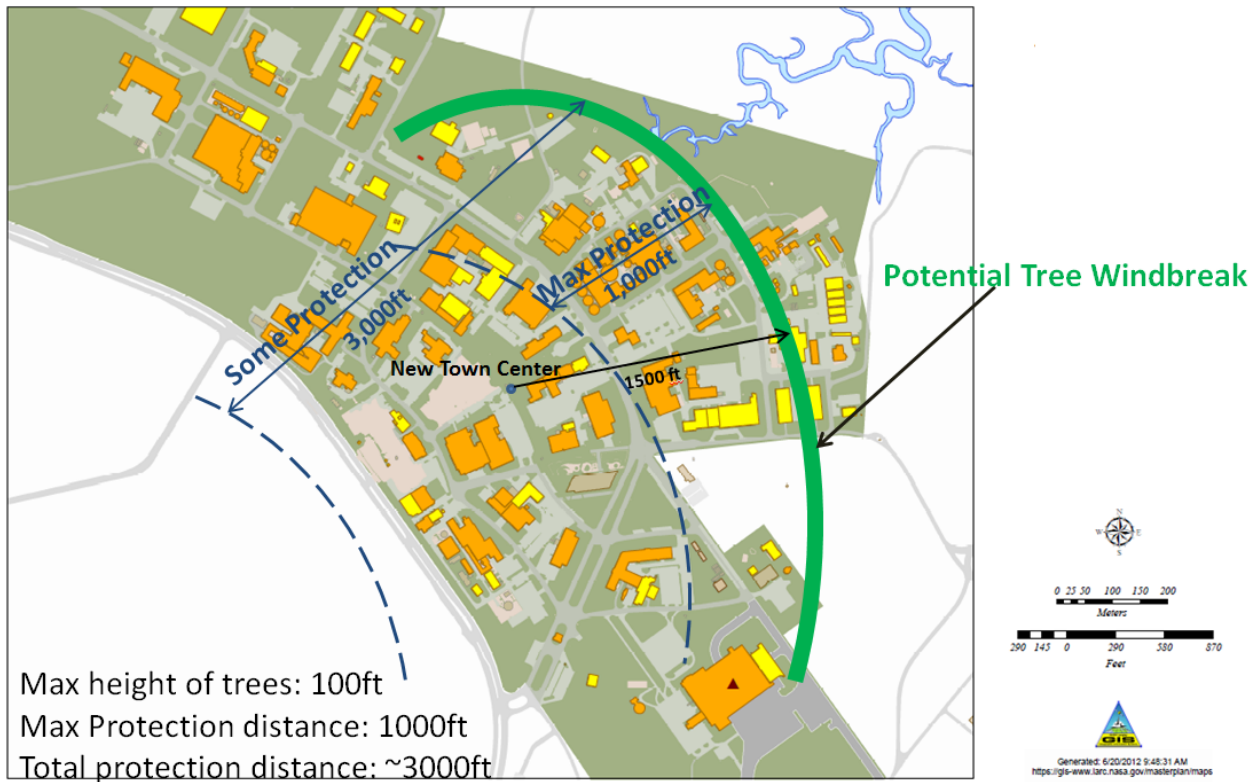


Figure 11. Possible placement of Langley windbreak providing protection of New Town area.

In order for this windbreak placement to be effective, the tallest tree row would be at least 100 feet, creating an overall protective length up to 3,000 feet. The other rows of trees will be used only to create the right density. The proposed design consists of four rows minimum of a mixture of dense conifers and tall broad leaf trees. Figure 12 shows the set-up of the rows within this windbreak design. The first two rows at the windward side (to the left) contain the shorter trees in the design, small to medium conifer rows that are spaced closer together. The next two rows are on the leeward side and consist of taller trees, and medium to tall broadleaf trees that are spaced a bit farther apart. This design is composed of dense and broad trees to create a good amount of porosity and the right height to protect the area needed. Adding double rows of the middle trees to thicken the windbreak can add to the effectiveness of the design.

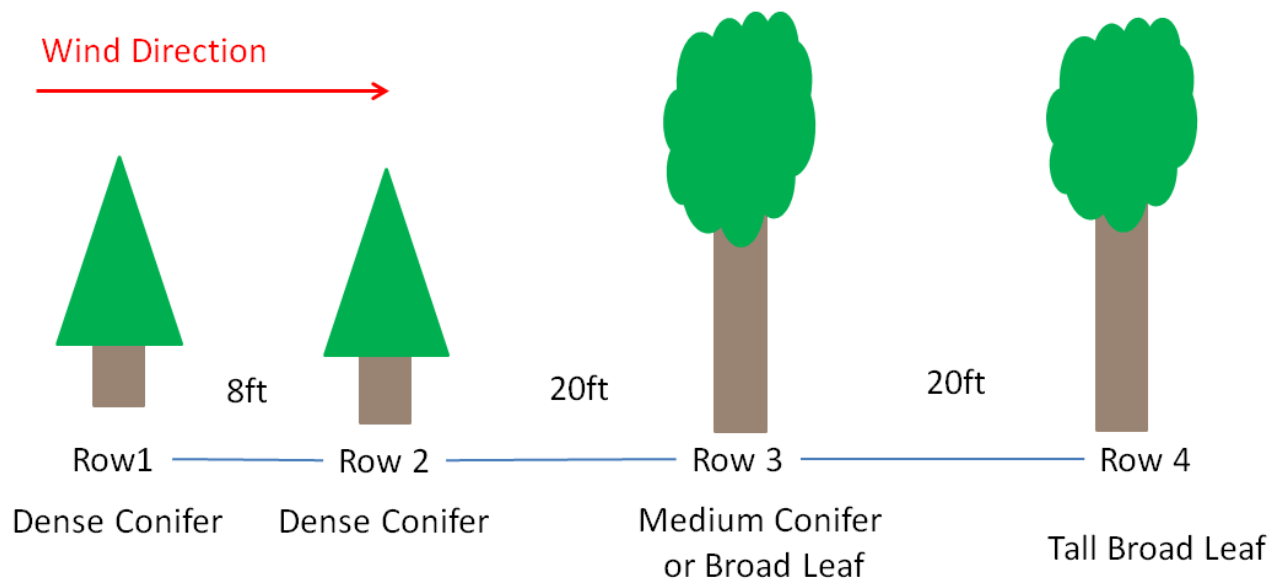


Figure 12. Langley Windbreak Potential 4-row Design.

The types of trees used for the windbreak must be carefully chosen in order to be effective. The trees must be indigenous or able to grow in the Virginia climate and medium to poorly drained soils because of the heavy flooding caused by hurricanes. They must be fast growing so that the windbreak can become effective as soon as possible. The trees must be durable enough to withstand the high winds that they will experience with the minimal amount of breaking. The trees proposed for this windbreak are as follows: Arborvitae, green ash, and black alder for the first two rows, and bald cypress, Norway spruce and American Sycamore for the last two rows. Table 1 below lists these selections along with the characteristics that make them qualify along with the cost ranges of the trees. Overall, the cost estimate of the trees in the windbreak can range from 13 to 19 thousand dollars according to arborday.org, fastgrowingtrees.com, windbreaktrees.com and tnnursery.net.

Row	1	2	3	4
	Dense Conifer	Dense Conifer	Medium Conifer or Broad Leaf	Tall Broad Leaf
Tree(s)	Arborvitae	Green Ash or Black Alder	Bald Cypress or Norway Spruce	American Sycamore
Characteristics	50ft or less Fast growing Dense Poor-medium drained soils	50ft or more Fast growing Dense Poor-medium drained soils	80ft or more Fast growing Not as dense Poor-medium drained soils	100ft or more Fast growing Not as dense Poor-medium drained soils
Cost Range per tree	\$3.00- \$72.00	\$0.55-\$30.00	\$4.00-\$9.00	\$50.00-\$65.00
Estimated # of trees	355	355	236	236
Total cost range estimate	\$887-\$1,768	\$196-\$267	\$944-\$2,006	\$11,672-\$14,858
TOTAL ESTIMATE	\$13,000 to \$19,000			

Table 1. Recommended trees for the Langley windbreak that are indigenous to Virginia and have the required characteristics.

5. Conclusion

Langley Research Center is a value to not only the science community but the nation as a whole. The intense hurricanes projected for the future of Hampton Roads pose a threat to the center’s infrastructure and research projects. The “New Town” Program plans to create an area of renovated and new buildings that are more condensed, creating an area of focus for protection in the center. The windbreak proposed is focused on protecting this new area, and should be able to be effective not long after the time of its completion. In addition to being a barrier for protecting Langley from wind, the tree windbreak can produce a few other benefits. It can help soak up water from flooding, beautify the campus and provide nature for walking trails, and create habitats for the wildlife on the center. The use of a well-designed tree windbreak barrier is a cost effective, environmentally friendly way to protect the center from inclement weather high winds of the future.

References

1. "2011 A Year of Visible Change." National Aeronautics and Space Administration. NP-2011-12-354-LaRC.
2. NOAA. National Hurricane Center. <<http://www.nhc.noaa.gov/>>.
3. Bender, Morris A. "Modeled Impact of Anthropogenic Warming on the Frequency of Intense Atlantic Hurricanes." *Science*, vol 327, p. 454. 22 January 2010.
4. Knutson, T.R. "Tropical Cyclones and Climate Change". *Nature Geoscience*, vol 3, p.157. March 2010.
5. "Why Plant A Windbreak?" Ohio Department of Natural Resources. Web. 30 July 2012. <http://ohiodnr.com/portals/18/landowner/pdf/windbreaks_guide.pdf>.
6. Tamang, Bijay, and Michael G. Andreu. "Windbreak Designs and Planting for Florida Agricultural." University of Florida IFAS Extension, Web.
7. "WindbreakTrees.com." WindbreakTrees.com. Web. 25 June 2012. <<http://www.windbreaktrees.com/index.html>>.
8. NOAA. National Climatic Data Center. < <http://www.ncdc.noaa.gov/oa/ncdc.html>>.
9. "Saffir-Simpson Hurricane Wind Scale." Saffir-Simpson Hurricane Wind Scale. NOAA National Hurricane Center, Web. 30 July 2012. <<http://www.nhc.noaa.gov/aboutsshws.php>>.
10. Brandle, James R., Xinhua Zhou, and Laurie Hodges. "How Windbreaks Work." University of Nebraska Lincoln Extension. Web. <<http://www.nfs.unl.edu/documents/howwindbreakswork.pdf>>.
11. Capatex Ltd. "Windbreaks for Horticulture: A Guide For The Professional." Web. <http://www.capatex.com/agro_web/techinfo/windbreakguide/fullguide_4web.pdf>.
12. Hanley, Donald P., and Gary Kuhn. "Trees Against The Wind." Pacific Northwest Extension, Web.
13. Jones, Chapin. "Common Forest Trees of Virginia." Common Forest Trees of Virginia. Web. 20 June 2012. <<http://www.newrivernotes.com/va/vatrees.htm>>.

14. "NASA Langley Research Center: Continuing a Legacy of Aerospace Success." NASA. Ed. Bob Allen. Web. 30 July 2012. <<http://www.nasa.gov/centers/langley/news/factsheets/fs-2010-01-178.html>>.
15. "Selecting Trees and Shrubs for Windbreaks." University of Minnesota Extension, Web. <<http://www.extension.umn.edu/agroforestry/components/selecting-trees-and-shrubs-in-windbreaks.pdf>>.
16. Slusher, John P., and Doug Wallace. "Planning Tree Windbreaks in Missouri." University of Missouri Extension. Web. <<http://extension.missouri.edu/p/G5900>>.
17. <<http://edis.ifas.ufl.edu/fr289>>.
18. Wilson, Jon S., and Scott J. Josiah. "Windbreak Design." NebGuide. University of Nebraska-Lincoln Extension, Web. <<http://www.nfs.unl.edu/documents/windbreakdesign.pdf>>.
19. "Windbreak 101 Pdf Free Ebook Download from Wwww.cccdwy.net." EbookBrowse.com. Web. 21 June 2012. <<http://ebookbrowse.com/windbreak-101-pdf-d277649474>>.

REPORT DOCUMENTATION PAGE

*Form Approved
OMB No. 0704-0188*

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY) 01-11-2012		2. REPORT TYPE Technical Memorandum		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Use of Windbreaks for Hurricane Protection of Critical Facilities				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Hyater-Adams, Simone; DeYoung, Russell J.				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER 509496.02.08.03.69	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Langley Research Center Hampton, VA 23681-2199				8. PERFORMING ORGANIZATION REPORT NUMBER L-20191	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001				10. SPONSOR/MONITOR'S ACRONYM(S) NASA	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) NASA/TM-2012-217788	
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category 31 Availability: NASA CASI (443) 757-5802					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The protection of NASA Langley Research Center from future hurricanes is important in order to allow the center to fulfill its mission. The impact of the center is not only great within NASA but the economy as well. The infrastructure of the Center is under potential risk in the future because of more intense hurricanes with higher speed winds and flooding. A potential method of protecting the Center's facilities is the placement of a windbreak barrier composed of indigenous trees. The "New Town" program that is now in progress creates a more condensed area of focus for protection. A potential design for an efficient tree windbreak barrier for Langley Research center is proposed.					
15. SUBJECT TERMS Hurricane barrier; Protection; Trees					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			STI Help Desk (email: help@sti.nasa.gov)
U	U	U	UU	18	19b. TELEPHONE NUMBER (Include area code) (443) 757-5802