

User Guide to the Magellan Synthetic Aperture Radar Images

Stephen D. Wall Shannon L. McConnell Craig E. Leff Richard S. Austin Kathi K. Beratan Mark J. Rokey



National Aeronautics and Space Administration

Scientific and Technical Information Branch Jet Propulsion Laboratory California Institute of Technology Pasadena, California

NASA Reference Publication 1356 March 1995

This publication was prepared at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

Contents

1	Introduction	1
2	The Spacecraft	2
	Mission Design	
	Experiment Description	
5	Mission Operations	.17
	Notable Events and Problems	
7	Data Product Description	.37
	Ordering Products	

Appendixes

1	Acronyms and Abbreviations	65
	References	
	Magellan Resources Document	
4	SIS Reverse Reference List	101
	MIDR Browse Images	

Figures

2.1. The Magellan Spacecraft	2
2.2. Spacecraft Coordinate System	3
3.1. Magellan Coverage (All Cycles)	5
3.2. Planning Chart for Cycles 1 and 2	7
3.3. Planning Chart for Cycles 2 and 3	J

3.4. Cursor for Use with Planning Charts	
4.1. SAR Imaging Geometry	
5.1. Uplink and Downlink Processes	
7.1. Magellan Image Products	

Tables

5.1. Upload Identifiers	19
5.2. Upload Number versus Orbit Number	19
6.1.A. Comments on Individual Swaths (Cycle 1)	24
6.1.B. Comments on Individual Swaths (Cycle 2)	
6.1.C. Comments on Individual Swaths (Cycle 3)	
6.2. DMS Gaps	35
6.3. Special Tests	36
7.1. Magellan SIS Documents	43
7.2. Begin and End Latitudes for BIDRs	46
7.3. BIDR File Structure	47
7.4. Engineering F-MIDR Label Identifications	47
7.5. CD-ROM File Structure	
7.6. Cycle-1 Cn-MIDRs by Compact Disk	51
7.7. Cycle-1 F-MIDRs by Compact Disk	52
7.8. Cycle-2 Cn-MIDRs by Compact Disk	56
7.9. Cycle-2 F-MIDRs by Compact Disk	57
7.10. Cycle-3 Cn-MIDRs by Compact Disk	
7.11. Cycle-3 F-MIDRs by Compact Disk	
7.12. Magelian Data Product List	

1 Introduction

The Magellan mission acquired a data set impressive not only because it contains new data to be used by the scientific community for analysis of Venus, but also for its sheer size. As such, the newcomer is faced with the formidable task of understanding how the data set is structured before beginning any investigation of the information contained in the data set. As with most planetary missions, along with this acquisition of data have come a myriad of acronyms, procedures, programs, and documents, which contain some information useful to the researcher and much that, while it was necessary to the operation of Magellan, may be of little interest to the postmission researcher.

It has been the desire of the Magellan operations personnel to make the task of getting acquainted with this data set as painless as possible. The first and most time-consuming part of that task is being completed at this writing, as the archiving of the data themselves is accomplished. Yet we wish also to place in the hands of future analysts a summary of information which is not archived elsewhere (or difficult to obtain or interpret) to help him or her access the Magellan data archive.

This document is designed as a guide to the synthetic aperture radar (SAR), or imaging, data acquired by the Magellan Project during its mapping of Venus. Although the other experiments — altimetry, radiometry, and gravity — are mentioned, and their basic data records are described, the details of their data products are left for another volume. Within that limitation, the emphasis here is on subjects likely to be of interest to those who do not have firsthand experience with the Magellan mission. It is hoped that this document will provide them with enough information about the data set and its acquisition to allow best use of the data collected by the mission, without extensive reference to the Project's primary documentation. References are provided to more detailed information about how the Project was organized and run, but only minimal description is included.

This guide begins with brief descriptions of the Magellan spacecraft (Section 2) and the overall design of its mission (Section 3), including an overview of each mapping cycle's goals. Section 4 provides a summary of the experiments which were performed by the mission and their scientific objectives. Section 5 contains relevant information about how the mission was run. Section 6 describes events occur-

ring during the mission that may enhance or affect interpretation of the data. In Section 6, special tests of different acquisition modes, performed as precursors to subsequent cycle operations, are described with pointers to the data acquired, regardless of whether or not the modes were used in subsequent cycles. Spacecraft anomalies — including the well-publicized "walkabouts" — which had an effect on the data are also described in this section. Section 6 also includes a table of lower-level comments on each orbit's data. Section 7 provides information on the actual planetary coverage obtained and describes each product type. Some of the more highly processed products, such as the Stanfordproduced Surface Characteristics Data Records and the U.S. Geological Survey's F-Maps, have not yet been completed and are only generally described here, but the basic SAR, altimetry, and radiometry products are treated in detail. Finally, Section 8 gives information on where data products may be ordered. For ease of use, acronyms and abbreviations are listed in Appendix 1; referenced documents are listed in Appendix 2.

For the most part, this guide is not an original work, but a compilation of summaries and excerpts from the various Project reports, both internal and in the public press, that in our opinion the analyst will need. As the ex-members of the Magellan Mission Operations Science Support Team and as the authors of this guide, we accept final responsibility for any errors or omissions, but we would like to express sincere appreciation to the many hundreds of individuals who made up the entire Magellan Team --- they designed, coded, built, tested, programmed, and operated Magellan. In particular, it was the inspiration provided by Project Scientist Dr. R. Stephen Saunders that led to Magellan becoming a reality, and the leadership of Project Managers John Gerpheide, Anthony Spear, James Scott, and Douglas Griffith that made the mission a success. Joseph Boyce, David Okersen, Elizabeth Byers, Wesley Huntress, Lennard Fisk, and others at the National Aeronautics and Space Administration (NASA). which sponsored the Magellan mission, were ultimately responsible for providing resources and, often, much of the hard work as well. But the real utility of all this effort will not be measured by us but by future analysts, who will ultimately determine the value of the data. It is to those future analysts that this book is dedicated.

2 The Spacecraft

The Magellan spacecraft is shown in Figure 2.1. The highgain antenna (HGA) was used both for communications with Earth and for transmitting radar signals to and receiving reflected radar signals from the surface of Venus. The low-gain omnidirectional command receipt antenna was used for emergency commanding. The altimeter antenna (ALTA), a long narrow structure fixed at a permanent angle to the HGA boresight, was used to determine the distance between the spacecraft and Venus' surface. The coordinate system used to refer to the spacecraft body is shown in Figure 2.2.

The forward equipment module (FEM) was approximately half occupied by the electronics for the radar and altimeter. The star scanner, an optical telescope with an electronic detector at the focal plane, looked out of the side of the FEM visible in the drawing. On the opposite side of the FEM from the star scanner was the medium-gain antenna (MGA), which was used for communications during cruise and was available for emergency downlink. The remainder of the components that resided in the FEM were the radio electronics, two batteries, the star scanner electronics, the gyroscopes and their associated attitude reference unit electronics, and three momentum wheels for turning the spacecraft. At the base of the FEM, on either side, were the arms for the solar panels, with the articulation devices at each end. The two solar panels were deployed shortly after launch and remained deployed for the remainder of the mission.

Next to the FEM was the 10-sided structural bus, a spare from the Voyager program. The various bays of the bus contained the controls for the solar array drive motors, the two attitude control computers, the two command and data system computers, two tape recorders (generally referred to as Data Management Subsystems–A and –B [DMS-A and DMS-B]), four bulk utility memories, the power switching unit, and the power distribution unit. In the middle of the hollow bus ring was the hydrazine propellant tank. The engines and thrusters of the propulsion module were at the ends of the struts below the bus. Each of the four rocket engine modules contained two 440-N engines, a 22-N thruster, and three 0.9-N thrusters, which were used for midcourse trajectory corrections and orbit trim maneuvers (OTMs), and to desaturate the momentum wheels.

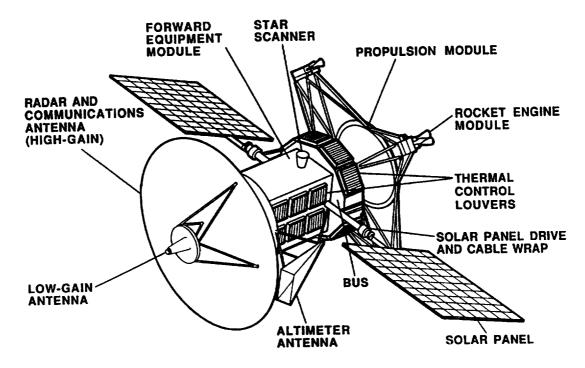
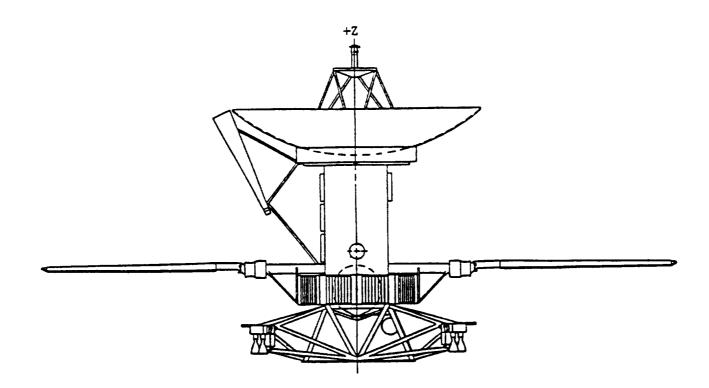


Figure 2.1. The Magellan Spacecraft.



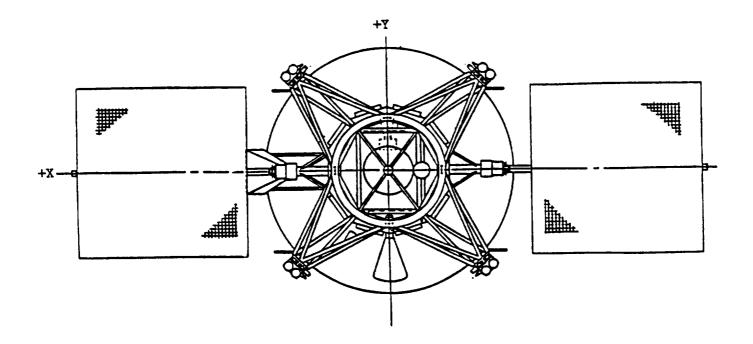


Figure 2.2. Spacecraft Coordinate System.

3 Mission Design

Much of the design effort for Magellan was dedicated to safely and accurately placing the spacecraft into its mapping orbit. Since this is now an accomplished fact, we will not discuss it here. The interested reader is referred to Wall, 1989, for an overview, and to Saunders et al., 1992, and other listed references for more detailed information.

After its cruise from Earth to Venus, the spacecraft was injected into an elliptical orbit around the planet using a burn of the main engine called Venus Orbit Insertion (VOI). The elliptical orbit was a design necessity largely for cost reasons (Wall, 1989); the less expensive solid-fuel main engine could only be ignited once, and a single-burn VOI can only produce an elliptical orbit.

ORBIT STRATEGY

Magellan's orbit was intentionally offset from polar so that the side-looking SAR could image Venus' north pole. Since the orbit plane was fixed in inertial space, the planet rotated under it once approximately every 243 Earth days. This period defined one Magellan mapping "cycle." As a result of the elliptical orbit, mapping of the surface was only possible on the side of the orbit containing periapsis, and during mapping swaths the distance from spacecraft to surface varied greatly. The portion of the orbit containing apoapsis was used to replay the recorded radar data to Earth, to perform star calibrations, and for other engineering purposes.

As the spacecraft approached the north pole, at about a 2200-km range, it turned its HGA toward the pole, pointing at a look angle of about 15° with respect to nadir and perpendicular to the direction of motion; then it began to take radar data, storing them on flight tape recorders at 806 kbits/s. As the spacecraft approached periapsis (about 290 km) it gradually rolled the HGA away from nadir to increase the imaging incidence angle, then pulled the HGA back toward nadir as the spacecraft neared the south pole. This slow change in angle with latitude is referred to as the "desired look-angle profile," or DLAP. For a more complete discussion of look angle, incidence angle, and other radarimaging parameters, see Section 4.

Each mapping pass, or "swath," generated about 1.8 billion bits. At the conclusion of a mapping pass, the spacecraft turned the HGA to point to Earth. After a short period to allow the NASA Deep Space Network (DSN) antenna on the ground to acquire telemetry lock, the onboard tape recorders began to play back the recorded science data at 269 kbits/s. Near apoapsis, the playback was temporarily halted as the spacecraft updated its attitude knowledge by scanning a preselected pair of reference stars, and despun its momentum wheels if necessary; playback was then resumed. The spacecraft concluded playback in time to reorient itself over the Venusian north pole for the next mapping pass. Note that during the mapping pass the spacecraft was completely out of contact with Earth.

To maximize Venus data coverage in Cycle 1, Magellan alternated between imaging the north pole and imaging the southern latitudes. Orbits imaging the north pole begin at +90° and image Venus to about -55°. These orbits are called "immediate orbits" and are even-numbered. "Delayed orbits" image Venus from +55° to -89° and are odd-numbered. This rule applies throughout all mapping cycles. Coverage ranges for all orbits are listed in Section 7.

MISSION PHASES

Following VOI the mission proceeded in its nominal mapping phase for one cycle, obtaining images from about 78% of the planet. As described in Section 4, the SAR imaging principle requires images to be taken looking to one side of the spacecraft nadir track. Early in the planning phase it was decided to begin the mission "left looking" (i.e., with the radar antenna pointed to the spacecraft's left) and to cover the north pole first. The first cycle coverage, then, extended from +90° to about -78° latitude (with some variation in the southern limit required during thermally difficult periods). Cycle 1 succeeded in mapping most of the planet, interrupted only by the time periods listed in Section 6.

In Cycle 2 the SAR was used to look to either left or right side, so that the larger gaps in the Cycle-1 coverage could be filled while a view of the south polar area was obtained. Since right-looking coverage north of the Cycle-1 southern limit was redundant, mission planners decided to change that portion of the look-angle profile which involved the repeat coverage to be different than that of Cycle 1, to give a different perspective in the redundant data. Note also that during Cycle 2 several special tests were performed using other DLAPs and other look directions. These tests are described in Section 6.

Cycle-2 right-looking SAR data are not, however, an exact match for the Cycle-1 left-looking data, and Cycle 3 was used to cover some portions of the planet once again with

left-looking geometry, to search for changes in the surface. Additional data for stereo were also obtained. At the conclusion of Cycle 3 the spacecraft periapsis was lowered and radar-mapping operations terminated so that higher resolution gravity information could be collected by careful tracking of the spacecraft orbit for Cycle 4.

Total Magellan coverage, irrespective of cycle or look angle, exceeded 98% of the surface area of Venus. Combined coverage is shown in Figure 3.1.

ORBIT NUMBERING SCHEME

During the cruise period, several tests were organized to prepare both the spacecraft and ground teams for the mapping phase. These tests produced telemetry data (with no meaningful science data) which were labeled with orbit numbers beginning with 1. To avoid confusion with these test data, the first Magellan orbit around Venus is numbered 100. However, no archivable science data were produced until the completion of an in-orbit checkout period of 275 orbits. Mapping Cycle 1, therefore, begins with orbit number 376. Orbit numbers corresponding to other cycles are shown in Section 6.

PLANNING CHARTS

To the analyst, image data are usually associated with their location on the planet surface, in terms of latitude and longitude. However, to the mission planner, these data are more often associated with acquisition time (either absolute or relative to periapsis passage), spacecraft position, or other variables. In order to easily visualize the relationship between these two viewpoints, planning charts were devised by the Magellan operations teams. As an aid to the analyst these planning charts are reproduced in Figures 3.2 and 3.3. The SAR and altimeter ground tracks, which moved along these charts as a function of time, can be overlain by reproducing Figure 3.4 onto a transparency and using the appropriate section as a cursor on the planning charts, aligning the index mark with the acquisition date on the lower scale. In this way individual locations on the planet can be easily related to date of uplink, date of acquisition, upload number, and time since periapsis (TSP). Analysts can use Figure 3.4 as a guide to determine which orbits contain the desired data and to get a feel for the different DLAPs which were used to maximize the radar mapping.

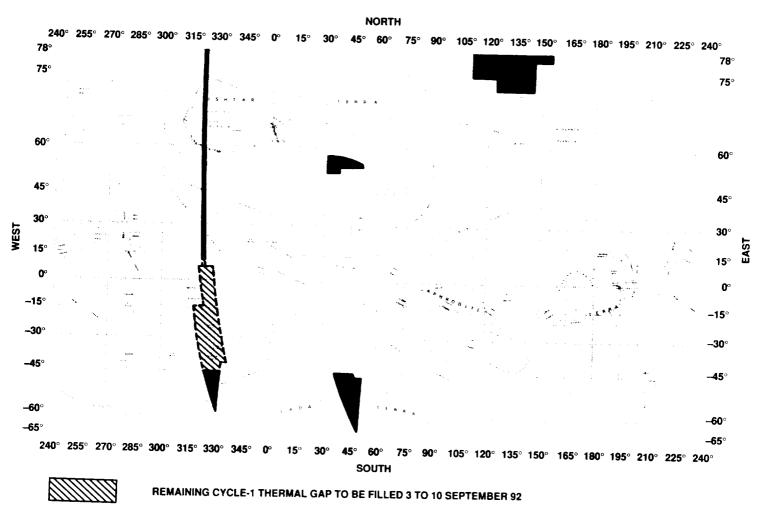


Figure 3.1. Magellan Coverage (All Cycles).

HOW TO USE THIS CHART

This planning chart was prepared for the purpose of tracking the mapping coverage of the Magellan Mission. Current or expected mapping coverage may be found by keying the overlay to the desired map scale, e.g., longitude or days past VOI. The current version of this map was updated from Revision A (dated May, 1990) with most of the changes being direct results of the delay in the start of mapping. This version assumes that mapping begins on September 15, 1990.

The overlay depicts both altimeter (nadir-looking) and SAR (left-looking) boresight tracks. The long vertical marks at the top and bottom of the overlay should be aligned with the desired date or other scale. The altimeter and SAR boresight tracks should then be in the correct position for that time in the mission.

Two important details should be noted:

 The tick marks on the boresight tracks are placed at the equator and NOT at periapsis, 10°N. This was done to take advantage of the more detailed longitudinal information along the equator in the base map.

Periapsis information may be obtained by using the true anomaly scales running vertically on both sides of the chart. True anomaly is the angle formed by a line running from the center of the planet to the spacecraft with respect to periapsis.

Thus, for Magellan, when the spacecraft is at periapsis, its true anomaly is 0°, at the north pole, the true anomaly is -80° and at the south pole the true anomaly is $+100^{\circ}$.

2) The boresight tracks are wider than an actual F-BIDR would be at this scale. The width of an F-BIDR at the equator is only 20-25 km, or about 0.2°. It is not possible to represent this width accurately on a map of 1:50M scale, and the user should not be misled into believing that the boresight track widths are accurate on the overlay.

This map is accurate to the extent possible given the resolution of the base map. Figures presented are correct as of the printing date. Errors or omissions should be brought to the attention of the preparer.

SEQUENCE INFORMATION

RADAR PARAMETER UPDATES


- 1) Uploads are on indicated dates.
- 2) Tweaks are on upload +3 days.
- 3) Last chance to change sequences is an upload -8 days.


LEGEND

AO	Apoapsis Occultation
C1, C2, C3	C1-, C2-, C3-MIDRs
DOY	Day of Year
F-BIDR	Full-Resolution Basic
	Image Data Record
SC	Superior Conjunction
VOI	Venus Orbit Insertion
VU1	

Note: All dates refer to the nominal mapping mission (Cycle 1) unless otherwise noted.

Prepared by: Shannon McConnell & Craig Leff Rev. B November 1990



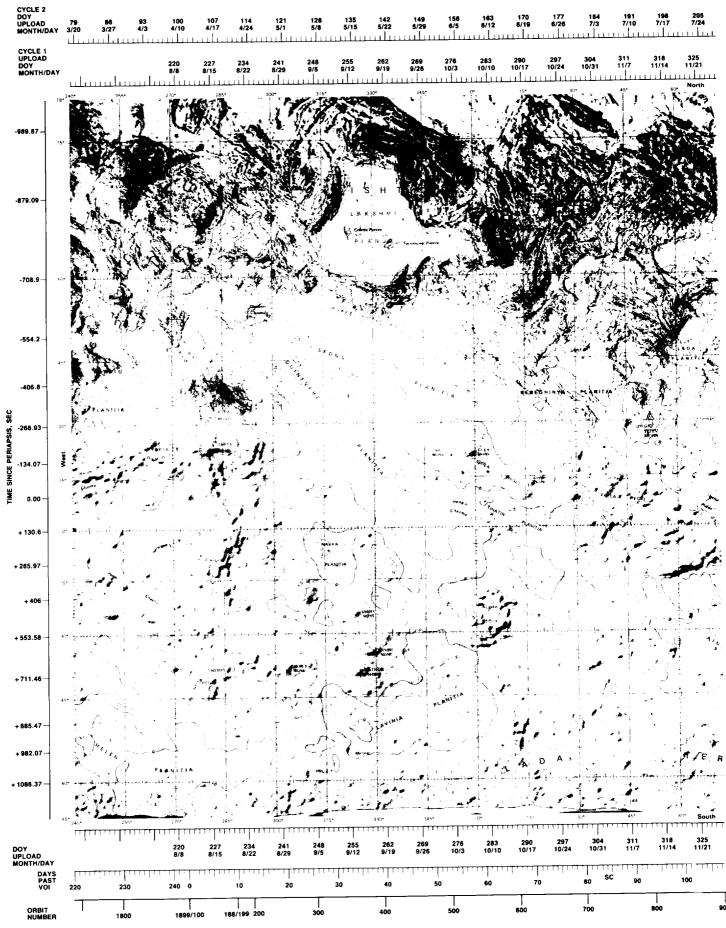



HOW TO USE THIS CHART

This planning chart was prepared for the purpose of tracking the mapping coverage of the Magellan Mission. Current or expected mapping coverage may be found by keying the overlay to the desired map scale, e.g., longitude, days past VOI, or orbit number. The current version of this map was updated from Revision B (November, 1990) and is designed specifically to pertain to Cycle 3 of the Magellan Mission.

The overlay depicts both Altimeter and SAR boresight tracks for left-looking and right-looking mapping profiles. The long vertical marks at the top and bottom of the overlay should be aligned with the desired date or other scale. The corresponding altimeter and SAR boresight tracks should be in the correct position for that time in the mission.

The Cycle 3 DOY scale begins at VOI + one year, wraps around to the top scale, and then returns to the bottom scale, finishing up in the same place as it began. In addition, on the Orbit Number scale, orbit numbers are included for Cycle 3. Keep in mind that orbit numbers are linear and ascending beginning at VOI (orbit number 100).

Two important details should be noted:

 The tick marks on the boresight tracks are placed at the equator and NOT at periapsis, 10°N. This was done to take advantage of the more detailed longitudinal information along the equator in the base map.

Periapsis information may be obtained by using the true anomaly scales running vertically on both sides of the chart. True anomaly is the angle formed by a line running from the center of the planet to the spacecraft with respect to periapsis.

Thus, for Magellan, when the spacecraft is at periapsis, its true anomaly is 0° , at the north pole, the true anomaly is -80° and at the south pole the true anomaly is $+100^{\circ}$.

2) The boresight tracks are wider than an actual F-BIDR would be at this scale. The width of an F-BIDR at the equator is only 20-25 km, or about 0.2°. It is not possible to represent this width accurately on a map of 1:50M scale, and the user should not be misled into believing that the boresight track widths are accurate on the overlay.


This map is accurate to the extent possible given the resolution of the base map. Figures presented are correct as of the printing date. Errors or omissions should be brought to the attention of the preparer.

LEGEND

AO	Apoapsis Occultation
CY3	Cycle 3
DOY	Day of Year
F-BIDR	Full Resolution Basic
	Image Data Record
SC	Superior Conjunction
VOI	Venus Orbit Insertion
	10 August, 1990

Prepared by: Shannon McConnell Rev. C December 1991

COLDOUT FRAME 2 .

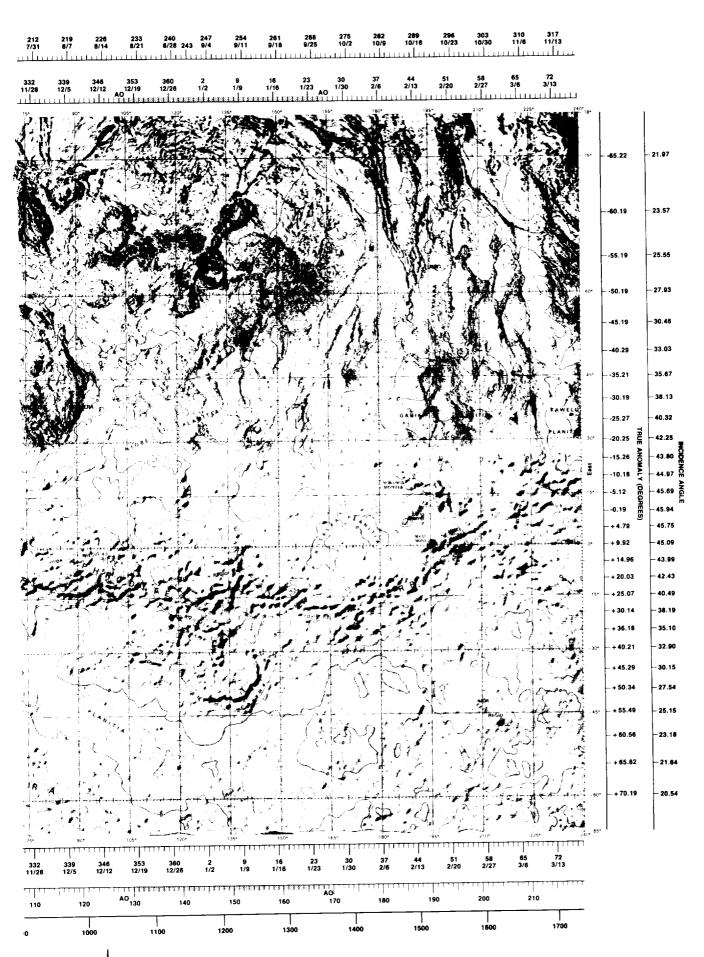

-






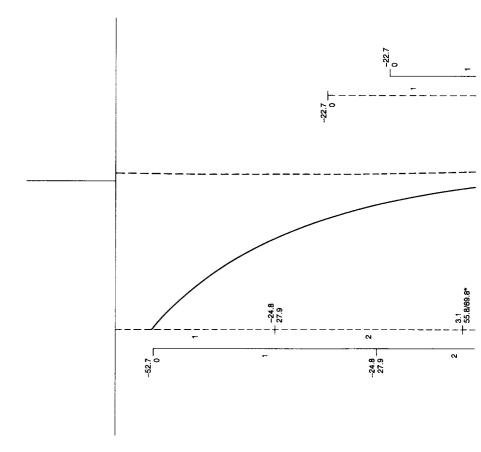


Figure 3.4. Cursor for Use with Planning Charts.



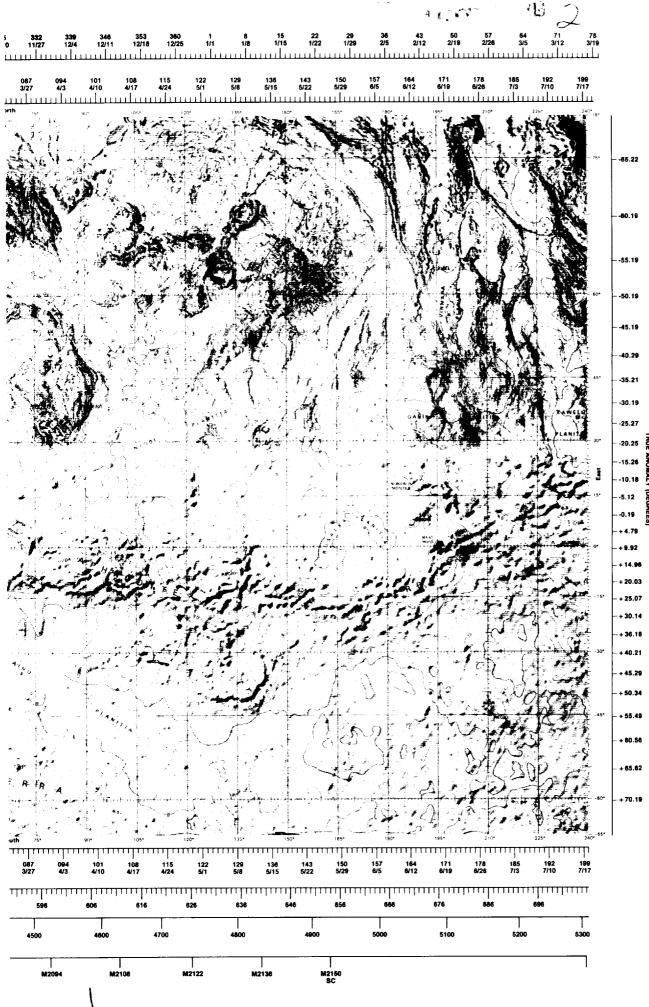

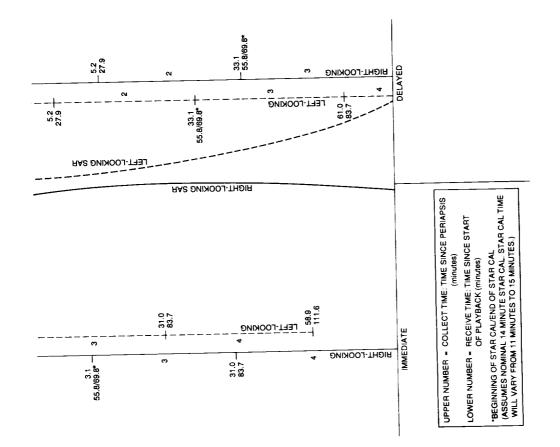

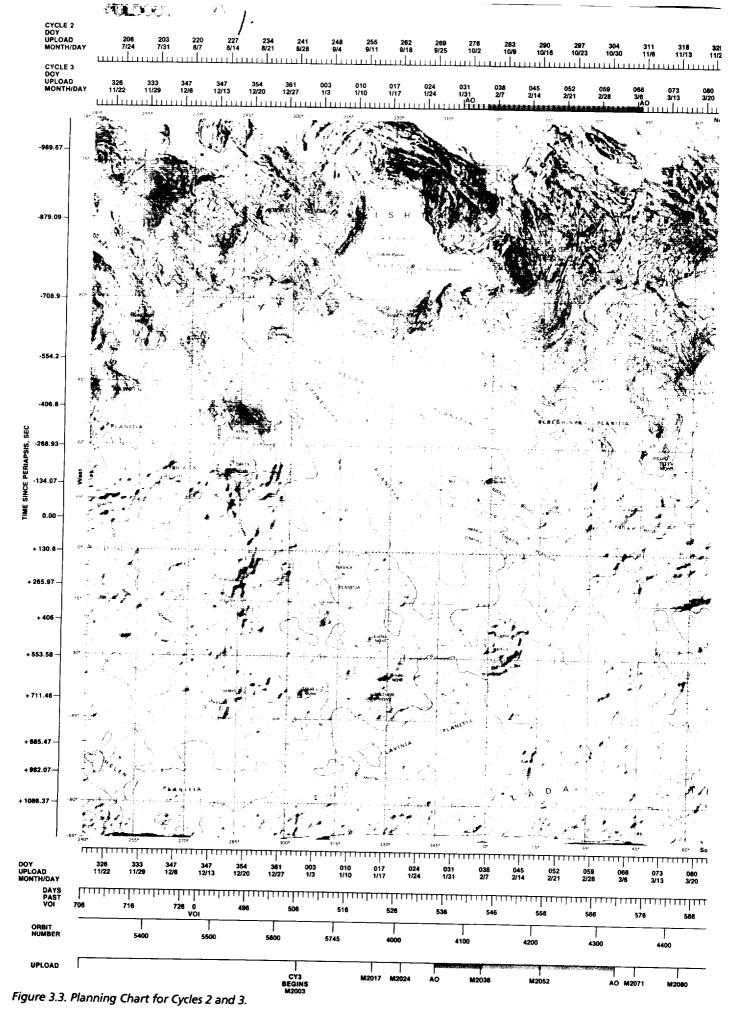



Experiment Description

m I he Magellan spacecraft payload consisted of a single radar instrument which served three of its four experiments (Johnson, 1991). The instrument used a single microwave S-band (12-cm-wavelength) receiver and transmitter,1 and the HGA. These elements acted in different ways to perform the different investigations. The SAR experiment mapped the HH (horizontally polarized transmit, horizontally polarized receive, where "horizontal" is with reference to the planet surface) S-band backscatter of the surface of Venus (e.g., Ulaby et al., 1982). An additional investigation, the gravitymapping study, used the entire spacecraft and its radio telemetry system to measure small perturbations in the spacecraft orbit and thus infer details about the planetary gravity field. Analyses of Magellan data by the Magellan science teams are reported by Saunders et al., 1991, and Saunders et al., 1992; see also other articles in the same volumes. Pre-Magellan knowledge of Venus is summarized by Hunten et al., 1983.

During mapping, the radar sent out a series of "bursts," each consisting of a series of pulses, at a rate called the pulse repetition frequency (PRF). The first pulses were sent out through the HGA, directed to one side of nadir by an amount referred to as the look angle² (see Figure 4.1). The value of the look angle and the spacecraft location also determined the SAR incidence angle — the angle between local vertical (assuming a spherical surface) and the spacecraft as seen from the surface. Between pulses, the radar receiver, also attached to the HGA, listened for previously emitted pulses, or "echoes," returned from the Venusian surface. By a technique called SAR correlation, these echoes were then transformed into images (Curlander et al., 1991). A natural trade-off exists between low look-angle imaging geometry, which returns stronger echoes and thus less-noisy images, and higher look angles, in which the perspective generally allows better image interpretation. Magellan's choice was to always use the greatest possible look angle consistent with a

minimum signal-to-noise ratio in the returned signal. Given the spacecraft's elliptical orbit, this choice had the look angle varying from about 17° at the north pole to about 45° near periapsis (+10° latitude) and back to lower angles in the southern latitudes. In Magellan documentation this variation in look angle with latitude is frequently referred to as the DLAP (see Section 3).

Because of this variation in range, the number of "looks" (defined as independent observations of the surface element) and resolution of the Magellan SAR images also varied as a function of latitude on the surface of Venus and of the DLAP used while imaging. The predicted resolution cell size for specific orbits can be found in the Experimenters' Notebook, an archive of Magellan orbital data (for general contact information, see Appendix 3). For a discussion of "looks" in SAR images, see Elachi, 1988, page 80.

At the end of the SAR burst another antenna was selected which emitted a fan-shaped beam directed to nadir. This antenna is often referred to as the altimeter antenna (ALTA). More pulses were then sent and returned, but this time the objective was to record the time of flight of the pulses so that the distance to the planet could be determined. The amplitude of the returned echoes was also recorded to infer the low-angle scattering properties of the surface. Finally, a brief time period was reserved for the receiver alone to record the natural Venusian microwave emissions, allowing determination of the surface brightness temperature.

Magellan's original goal was to systematically map Venus. It was hoped that in the first cycle of mapping it would be possible to cover over 70% of the surface. This goal defined Magellan's primary mission. The strategy devised to accomplish this goal had Magellan begin radar bursts over the north pole on even-numbered orbits and continue until the spacecraft's tape recorders were filled with data; on odd orbits the start of this imaging "swath" was delayed and thus extended further south. In this way the swaths neatly covered the surface at both northern and southern extremes. The even swaths were labeled "immediate" swaths, and the odd swaths "delayed."

¹ The radar's receiver, transmitter, and other essential elements were actually redundant, but only one of each was employed at a time.

² The orientation of the plane in which the look angle was measured is referred to as either the look azimuth angle or the look direction angle. This angle also was varied with latitude.

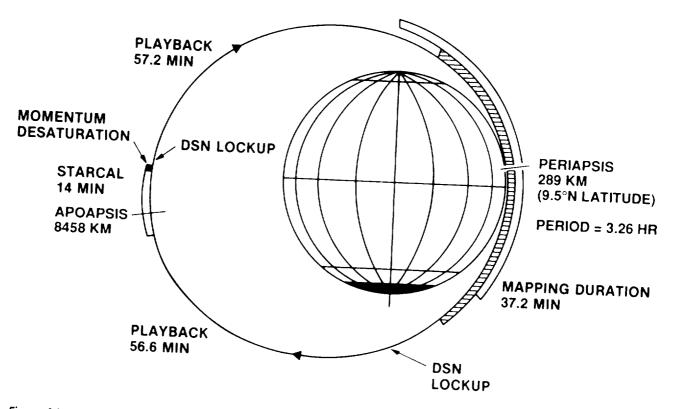


Figure 4.1. SAR Imaging Geometry.



Mission Operations

 $T_{\rm he}$ Magellan mission was operated in two functional divisions or processes, called uplink and downlink. Although these were by no means independent, it is convenient to describe them separately. More complete description of Magellan operations can be found in Chapter 7 of Wall et al., 1992.

THE UPLINK PROCESS

Magellan's uplink process satisfied mission objectives by developing and uploading sequences of platform and payload activities that responded to requests for user or engineering data, interspersed with supporting ground events. The process was divided into a number of tasks which defined the sequence design steps. These were advanced sequence planning, sequence planning, sequence generation, and command processing. In advance sequence planning, a timeordered list of activities was developed based on a mission plan, which was composed of requirements and constraints at a high level. A sequence was then formed which flowed from task to task where the sequence was repetitively refined. In the command-processing task, a command file of intended activities was radiated to the spacecraft.

Figure 5.1 shows how the uplink and downlink processes worked together. The Mission Plan was periodically updated, generally once per mission phase. Thus, a Mission Plan was written for cruise, updated for the first cycle, updated again for the second cycle, and so on. Each version of the Mission Plan was used to generate advanced sequence planning. An advanced sequence plan was combined with ground events such as ground antenna coverage requirements and sent to the first phase of sequence planning. In sequence planning, the preliminary sequence of commands was produced. Some iteration was commonly required between the sequence designers and the sequence builders as a thorough review of the preliminary sequence was conducted and the details in the sequence were filled in. After such iteration a final sequence design was produced, along with two levels of printed schedules. The final sequence was transformed into a command file and, together with the schedules, was transferred to the DSN. Each upload file was assigned a number, constructed as shown in Table 5.1. This number identifies the date of the upload event, the upload type, and the cycle number. A list of which orbits were executed in which seguence is contained in Table 5.2. This table was compiled chronologically and is divided into Cycle 1, Cycle 2, and Cycle 3.

Even though Magellan was not, by nature, adaptive to science discoveries, science data analysis results were considered on a long-term basis. Engineering data analysis results were also considered at all levels of sequence design, since non-nominal conditions on the spacecraft affected subsequent commanding. Anomalies resulting in data gaps were logged so that in the following cycles, the sequences could be modified to recover the lost data. All of these factors affected sequence planning during the mission.

As the upload was completed, a brief description of the goals, problems, and other items of interest was compiled and entered into the Experimenters' Notebook. These comments can be accessed either by use of the Magellan Hypermap, described in Section 7, or by referring to Section 6.

THE DOWNLINK PROCESS

Magellan's downlink process began with production of the radar data and spacecraft engineering data on board. During mapping, radar data were recorded onto the DMS-A and -B tape recorders at 806 kbits/s. Each DMS had four tracks. Odd- and even-numbered tracks were generally played in opposite directions to minimize motion of the tape. Since time was required to switch from, for example, track-1 forward motion to track-2 reverse motion, the nominal datarecording strategy involved alternating tracks from DMS-A to DMS-B to avoid loss of data during the track-switching time. For example, data might be recorded on DMS-A track 1 in the forward direction, followed by DMS-B track 1 forward, followed by DMS-A track 2 reverse, etc. Playback of the data was accomplished in the same sequence, but at 269 kbits/s. Note, however, that due to a failure in DMS-A during Cycle 1 this strategy was modified for much of the mission as described in Section 6.

The playback rate from the DMS units was higher than the capability of the DSN to transmit data from its station complexes to the network control center at the Jet Propulsion Laboratory (JPL). Therefore, most of Magellan's science data were transferred to JPL on computer tapes called original data records (ODRs) which were shipped from the individual DSN complexes. In order to verify that the sensor was healthy and properly commanded, a small percentage was

selected at the individual stations and transferred by electronic means at a lower rate. This created two situations which complicated the mission operation. First, a significant percentage of the radar data was handled twice — once for health analysis and again to process the science data. Second, much of the mapping data arrival was delayed by up to several weeks. As tapes arrived from the DSN complexes (in California, Spain, and Australia), the data were received in an unpredictable order and had to be staged until mosaics could be assembled in the order in which the individual mapping strips were taken.

Independent of the science high-rate operation was a lower rate telemetry channel, at 1.2 kbits/s, of engineering telemetry and ground-processing monitor data which were transferred to the operations center in real time to monitor the health of all spacecraft subsystems, especially those critical to current operations. These data were decommutated, decalibrated, and alarm limit checked as they were displayed on screens in front of spacecraft controllers who monitored the health of the spacecraft and its instrumentation 24 hours per day.

ODRs received at the operations center at JPL were processed by the ground data system into images and other data products. The ODRs were first read into the Magellan High-Rate Processor (MHR), which synchronized the data stream into frames and removed periods during which two DSN stations were simultaneously receiving data. Engineering data were removed from the data stream for use by spacecraft teams, and ancillary data (such as spacecraft ephemerides produced from tracking data) were added, producing three different types of tapes called the experiment data records (EDRs). Image data, contained on the SAR-EDRs, were read into the SAR Data-Processing Subsystem (SDPS), which produced individual image strips called full-resolution basic image data records (F-BIDRs). Section 7 describes the data products created from these tapes.

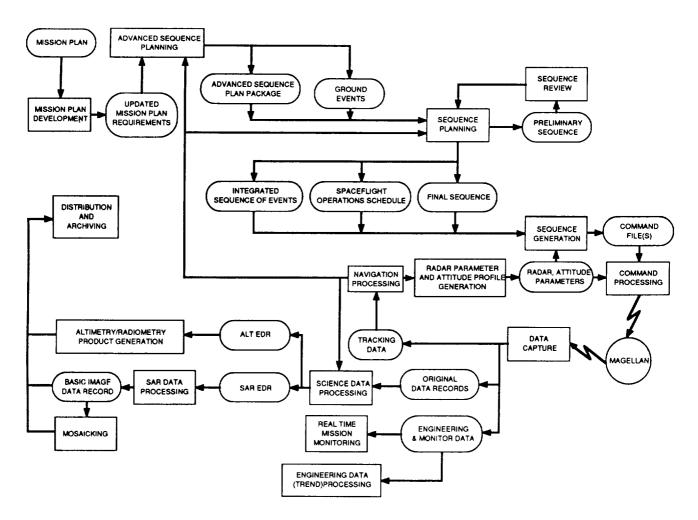


Figure 5.1. Uplink and Downlink Processes.

Table 5.1. Upload Identifiers.

General format: Tnnnn

where

T = one of the following:

M, which identifies a normal mapping upload

P, D, or Q, which identifies a sequence modifying an onboard mapping sequence

nnnn = 4-digit number in which the first character indicates the cycle number as follows:

0 = Cycle 1 1 = Cycle 2

2 = Cycle 3

The last three characters represent the calendar day of the year on which the sequence was uploaded. For example: M0268 was a mapping upload for Cycle 1 which was uploaded on day 268 (September 25) of the year.

Table 5.2. Upload Number versus Orbit Number.

CYCLE 1		CYCLE 2		CY	CYCLE 3	
UPLOAD	ORBITS	UPLOAD	ORBITS	UPLOAD	ORBITS	
M0258	376-403	M1138	2176-2218	M2024	4031-4057	
M0262	404-424	M1143	2219-2234	D2028	4058-4079	
M0265	425-446	M1145	2235-2269	D2031	4080-4108	
M0268	447-455	M1150	2270-2293	D2035	4109-4131	
M0269	456-476	M1154	2294-2313	M2038	4132-4160	
M0272	477-506	M 1156	2314-2337	D2042	4161-4182	
M0276	507-527	M1160	2338-2365	D2045	4183-4211	
M0279	528-558	M1163	2366-2389	D2049	4212-4234	
M0283	559-579	M1167	2390-2416	M2052	4235-4263	
M0286	580609	M1170	2417-2440	D2056	4264-4285	
M0290	610-630	M1174	2441-2464	D2059	4286-4314	
M0293	631-661	M1177	2465-2488	D2063	4315-4336	
M0297	662–682	M1180	2489-2519	D2066	4337-4367	
M0300	683698	M1184	2520-2543	M2070	4368-4388	
M 0311	765-785	M1188	2544-2581	D2073	4389-4417	
M0314	787-816	M1193B	2582-2586	D2077	4418-4440	
M0318	817-837	M1193E	2587-2612	M2080	4441-4455	
M0321	838-867	M 1197	2613-2642	D2082	4456-4458	
M0325	868888	M1201	2643-2673	D2083	4459-4491	
M0328	889-919	M1205	2674-2681	D2087	4492-4520	
M0332	920-940	M1206	2682-2688	D2091	4521-4543	
M0335	941-970	M1207	2689-2716	M2094	4544-4566	
40339	971-991	M1211	2717-2740	D2097	4567-4574	
M0342	992-1022	M1214	2741-2768	D2098	4575-4594	

CYC	LE 1	CYCLE 2		CYCLE 3	
UPLOAD	ORBITS	UPLOAD ORBITS		UPLOAD	ORBITS
				D2101	4595-4623
M0346	1023-1045	M1218	2769-2791	D2101	4624-4646
M0349	1046-1073	M1221	2792-2819	D2105	4647-4675
M0353	1074-1097	M1225	2820-2843	M2108	4676-4684
M0356	1098-1117	M1228	2844-2871	D2112	4685-469
M0359	1118-1147	M1232	28722894	Q2113	
M0363	1148-1168	M1235	2895-2922	D2115	4698-4726
M1001	1169-1199	M1239	2923-2936	D2119	4727-4749
M1005	1200-1227	M1241	2937–2974	M2122	4750-4778
M1009	1228-1250	M1246	2975-2998	D2126	4779-4800
M1012	1250-1278	M1249	29993025	D2129	4801-482
M1016	1279-1301	M1253	3026-3049	D2133	4830-485
M1019	1302-1330	M1256	30503077	M2136	4853–488
M1023	1331-1354	M1260	3078-3101	D2140	4882-490
M1026	1355-1382	M1263	3102-3128	D2143	4904 -491
M1030	1383-1403	M1267	31293152	D2145	4919–492
M1033	1404-1434	M1270	3153-3180	D2146	4922-495
M1037	1435-1455	M1274	3181-3204	D2150	4956-498
M1040	1456-1477	M1277	3205-3231	M2178	5164-519
M1043	1478-1485	M1281	3232-3255	D2182	5191-520
M1044	1486-1507	M1284	3256-3283	D2184	5206-524
M1047	1508-1537	M1288	3284-3307	D2189	5243-526
M1051	1538-1558	M1289C	3291-3298	M2192	5266-529
M1054	15591588	M1291	3308-3335	D2196	5294-53
M1058	1589-1610	R1295	3336-3358	M2234	5574-56
M1061	1611-1640	M1298	3359-3386	M2247	5670-56
M1065	1641-1661	R1302	3387-3409	M2250	5692-57
M1068	1662-1692	D1305	3410-3438	M2253	5714-57
M1072	1693-1713	D1309	3439-3461	M2255	5729–57
M1075	1714-1743	M1312	3462-3490		
M1079	1744-1764	R1316	3491-3513		
M1082	17651795	D1319	3514-3541		
M1086	1796-1816	D1323	3542-3564		
M1089	1817-1846	M1326	3565-3593		
M1093	1847-1868	M1330	3594-3616		
M1096		M1333	3617-3644		
M1100		D1337	3644-3667		
M1103		M1340	3668-3696		
M1103		M1344	3697-3715		
M1110		M1347E			
		M1347I			
M1114		M1351	3748-3770		
M1117		M1354	3771-3807		
M1121		M1354 M1359	3808-3828		
M1124			3829–3858		
M1128		M1362	3859-3881		
M113		M2001	3882-3902		
M113:	5 2159–2175	M2004	3882-3902 3903-3924		
		M2007			
		M2014	3763-3710		

Table 5.2. Upload Number versus Orbit Number (Cont.).



Notable Events and Problems

In the early planning stages Magellan was seen as a highly repetitive mission that would not require performance of unique sequences. In retrospect, much of the mission proceeded that way. There were, however, a number of special occurrences that required special attention and deviation from the nominal plan described in Section 3. These occurrences fell into three categories: spacecraft- or commandrelated problems which had to be accommodated, planetary geometries which created thermal or other environmental conditions from which the spacecraft required protection, and special tests done by the Project to evaluate new data collection techniques for possible use later in the mission. In this section we describe all such events that had a significant effect on the science data and provide specific references to times of collection and effect on collection.

Tables 6.1.A through 6.1.C contain a summary of orbits which had problems, unexpected data outages, special tests, or milestones achieved. The notes in these tables are selected from more complete observations contained in the Experimenters' Notebook. The orbits are segregated by cycle and are listed chronologically.

SPACECRAFT-RELATED EVENTS

Fault Protection Events

Magellan experienced loss of computer control (termed "walkabouts") three times during its mapping mission, which resulted in a preprogrammed "safing" maneuver. Briefly, this maneuver was executed whenever the central computer (the Command and Data Subsystem, or CDS) failed to exchange a periodic signal from another computer charged with maintaining attitude control. The spacecraft then assumed that a fault had occurred and began sweeping the HGA in a cone centered in the direction of the Sun with a central angle equal to the current angular distance from Sun to Earth. After several hours in this maneuver, a second level of safing pointed the HGA directly at the Sun and held it there. These events were eventually traced to a timing problem in the attitude control system, which was fixed.

Tape Recorder DMS-A Failure and Subsequent Mapping Strategies

Two months into Magellan's mapping mission (Cycle 1), beginning with the image swath taken in orbit 650, a small patch of noisy data (in which features are difficult or impossible to see) appeared. This patch extended over approximately 0.3° in latitude at -16° latitude for immediate swaths and at -58° latitude for delayed swaths. As mapping continued, the length of this patch grew. By orbit 800, a small data gap (in which there is no image present in the swath) began to appear within these bad data. The length and frequency of these data gaps grew until, by orbit 1003, approximately one-third of each mapping orbit was lost.

The cause of the problem was traced to DMS-A, one of the two onboard tape recorders used for collecting mapping data during each orbit. The playback bit stream from DMS-A was sometimes a corrupted form of the stream recorded. The corruption took the form of an inverted bit followed by a missing bit. Thus, the bit pattern 1001 was sometimes played back as 111. Records containing corrupted data were not properly synchronized by the Magellan ground data system, and the result on the EDR tapes (see Section 5) was either corrupted records or, in some cases, missing records. The effect on image data after subsequent processing by the SDPS can be seen as some combination of loss of resolution, increase in noise, and data gaps. Later in the mission an improvement was made in the ground data system software (specifically, to the MHR) which enabled mildly corrupted data to be reconstructed (Scott et al., 1993). The affected EDRs were later recreated from the ODR data and reprocessed into new F-BIDRs. Some mosaicked image data records (MIDRs) were remade from the new F-BIDR data.

After the DMS-A problem was discovered, mission planners developed a substitute scheme called the single-DMS strategy whereby a full orbit could be mapped and recorded on DMS-B. The new scheme allowed the data to be recorded

on one track of DMS-B until it reached the end. Then the tape recorder stopped momentarily in order to align the next track on the tape before data were recorded on this next track. A full orbit could then fit onto one tape by using all of the available tracks. However, a small data gap (up to 0.5° in latitude) occurred each time a track switch was performed. Although switching to one tape recorder did not affect the length of the SAR swaths, it did cause a series of small gaps to appear in each swath since, after filling a track, the tape recorder stopped and realigned itself to record in the opposite direction. The resulting gaps extend approximately 0.3° in latitude. Table 6.2 lists the latitudinal extent of the DMS gaps.

Beginning with orbit 1098, this alternate mapping scheme was implemented with success. Zero to three of these small data gaps (called "DMS gaps" throughout this guide) are present in each orbit following 1098. In order to minimize the effect of these DMS gaps on science data, the gaps were at first shifted in latitude between uploads. Beginning with upload M1026 (orbit 1355), however, DMS gaps were not switched between uploads. Immediate and delayed orbits, of course, may still have different latitude ranges.

It should be noted that not all gaps listed actually appear in the image data. Due to record time, the number of looks varied with latitude. The Magellan science requirement was a minimum of four looks. Any area imaged in less than four looks was considered a gap. Therefore, if the number of looks failed to drop below four during any of these track switches, no visible gap occurred in the data.

The Extra DMS Gap

In uploads M1012 and M1019 (orbits 1252 through 1354) a different strategy was employed whereby the tape recorder was "slewed" prior to the playback of data. To slew the tape recorder meant to position the tape to the location desired. This strategy made it difficult for the DSN stations to acquire the high-rate data signal. As a result, these orbits contain an extra gap approximately 1° in length. The problem was rectified beginning with orbit 1355 (upload M1026) and did not recur.

Early Turn from Mapping

An onboard thermal emergency was the cause of a southern hemisphere data loss for uploads M1044 and M1058. Prior to these uploads, thermal sensors on the instrument panels were recording excessive temperatures. A quick change in the upload sequence caused the spacecraft to turn away from mapping prior to the time of maximum heating. The tape recorder and SAR were left running. As a result, for swaths associated with these orbits the data became blurred and then faded to black as the spacecraft rotated for cooling below –52° latitude.

Thermal Hide Strategies

A thermal problem arose at the end of Cycle 1 in which the instruments were exceeding their safe heat limits. In an attempt to cool the instruments as much as possible and still collect mapping data, a thermal strategy was employed whereby the HGA was used to shield, or "hide," the rest of the spacecraft from the Sun to allow cooling. Beginning with orbit 1950 (upload M1107), each mapping pass was shortened so that the spacecraft could be rotated and the instrument panels shaded. For each successive upload after M1107, the mapping passes became shorter. This allowed the instruments to be shaded from the Sun by the HGA. A variation of this technique, which was referred to as "two hides," provided two such cooling periods.

Transmitter-A Failure

On January 4, 1992, transmitter A on board the spacecraft failed during the playback of orbit 3880. The redundant transmitter B had previously been shut down in March 1991 when a narrow-band spurious oscillation began appearing in the telemetry signal. This so-called "spike" was probably the result of a thermal problem which had allowed the transmitter to become too hot. As a result of the failure of transmitter A, mapping data from orbit 3881 through the end of Cycle 2 (orbit 3962) were lost. Transmitter B was used for the remainder of the SAR data collection, and the quality of received data continued to degrade throughout, despite efforts by DSN personnel to maximize collection.

After the behavior of transmitter B was studied, the transmitter was turned off with the hope that its operative capability would be preserved until the only significant remaining gap could be filled in September 1992. Thus, mapping for uploads M2192, M2206, and M2220 was sacrificed.

ASTRONOMICAL EVENTS

Superior Conjunction during Cycle 1

Superior Conjunction occurs once every 583.92 days for Venus. Superior Conjunction affected telemetry quality when the Sun–Earth–spacecraft (more generically, the Sun–Earth– probe, or SEP, angle) was less than about 5°. During this period, transmissions could not be received from or sent to Magellan. Superior Conjunction occurred during the end of October and the beginning of November 1990. The result was a loss of 110 orbits (orbits 677 through 786). Another Superior Conjunction occurred at the end of Cycle 3, affecting orbits 4986 through 5163.

Apoapsis Occultation

Apoapsis Occultation occurred approximately once every one and one-half cycles (2700 orbits). During this period, the spacecraft's signal on Earth was blocked by Venus during data playback, making communication with the spacecraft impossible. During Cycle 1, Apoapsis Occultation affected data during orbits 1046 through 1354, resulting in a shortening of the playback of mapping data. Apoapsis Occultation occurred again around orbit 3700, but at this time, mapping was heavily constrained from the transmitter failure and was not, therefore, affected by Apoapsis Occultation.

SPECIAL TESTS

Throughout Cycles 1 and 2, Magellan performed several special tests aimed at collecting different types of scientific and engineering information. The goal of these tests was to examine candidates for different data collection modes that might be used later in the mission.

Interferometry Test

The interferometry test bridged the end of Cycle 1 and the beginning of Cycle 2, orbits 2159 through 2171, in upload M1135. This upload contained radar commands designed to lengthen the burst period in a portion of each orbit to enhance the possibility of producing data that would coherently interfere with those acquired at the beginning of Cycle 1. If burst echoes could be made to interfere, the phase history of each pixel involved could be preserved, and pixel elevation information could be derived. Thus, the interferometric mode could potentially produce limited but highresolution surface topographic information (Li et al., 1990). The basic image data records (BIDRs) associated with these orbits were processed with the standard SDPS software, which was not designed to properly use the longer bursts, and therefore the image data in the affected area (extending approximately from +50° to +45° latitude) are substandard.

High-Resolution Radar Test

The second test performed during Cycle 2 used a SAR mode with PRFs and burst lengths modified to improve azimuth resolution from the nominal 120 m to 60 m at the expense of reduced swath width, which would produce higher resolution image data. This test was executed during special upload M1193B covering orbits 2582 through 2586, from the start of mapping to -30° latitude. The BIDR products generated from these orbits have the exact same format as the normal BIDR except in the following areas on image files 13 and 15:

• The pixel spacing for the "Hi-Res" image data is 25 m in each dimension instead of the usual 75 m. Therefore, the image line length is much greater. The line length in the "Hi-Res" F-BIDR varies from one image block to another, but the maximum line length is capped at 3200 pixels.

• The number of image lines per image block in the "Hi-Res" F-BIDR also varies from image block to image block. However, the maximum number of pixels per image block is capped at 640,000.

Stereo Test

The third test performed during Cycle 2 was executed during upload M1205 and covered orbits 2674 through 2681. This was an evaluation of Magellan's stereo abilities. A special left-looking DLAP was designed for this test to yield stereo pairs when used with the nominal left-looking DLAP (see Section 4).

Polarimetry Test

For a series of four consecutive orbits (3716 through 3719), the spacecraft was rotated 90° about the HGA boresight as a test of the utility of polarimetric data. The resulting data are VV (vertically polarized transmit, vertically polarized receive) with the electric field vector oriented 90° to the nominal left-looking data acquired over the same terrain during Cycle 1 (Giuli, 1986). The coverage extended over Theia Mons and Rhea Mons in Beta Regio. Due to the 90° rotation, no altimetry data were taken over these orbits. A second polarimetry test was conducted during Cycle 3, covering orbits 4567 through 4574 (upload M2097).

Table 6.3 summarizes the orbit range and upload number for each of the special tests discussed.

ORBIT(S)	LONGITUDE(S), * DEGREES	UPLOAD NUMBER(S)	NOTES
376	332.2	M0258	First mapping orbit in Cycle 1.
416	340.4	M0262	ALT-EDRs for this orbit are mislabeled.
452–455	247.3–347.9	M0268	Radar Test 5: no mapping data exist for these orbits.
467	350.0	M0269	ALT-EDRs for this orbit are mislabeled.
475	351.8	M0269	ALT-EDRs for this orbit are mislabeled.
489	354.8	M0272	ALT-EDRs for this orbit are mislabeled.
490–491	355.0–355.2	M0272	The majority of data in these orbits were lost due to a DSN power outage at the Madrid DSN station.
577	12.6	M0283	ALT-EDRs for this orbit are mislabeled.
589	15.2	M0286	ALT-EDRs for this orbit are mislabeled.
650–1097	26.9–117.0	M0293- M0353	Gradual degradation of the DMS-A tape recorde resulted in an increase in corrupted data and gaps.
677–786	32.6-64.5	M0297– M0311	Superior Conjunction; there are no data for these orbits.
787	54.7	M0311	First mapping orbit after Superior Conjunction.
787–816	54.7-60.5	M0314	A bad threshold caused a white patch in these orbits at approximately 14°. The patches were approximately 0.5° in length.
788	54.9	M0314	This orbit was severely off-pointed due to Superior Conjunction. As a result, the orbit was disapproved by MOSST for inclusion in mosaicked products.
788	54.9	M0314	Significant degradation of the DMS-A tape recorder.
789	55.1	M0314	This orbit contains much bad data due to low SNR at the DSN station.
813	59.9	M0314	This orbit ended 25° early due to a DSN outage.
814	60.1	M0314	This orbit was lost due to a DSN outage.
815	60.3	M0314	The first 20° of this orbit is missing due to the DSN outage associated with orbits 813–814.
825-826	62.3–62.5	M0318	These orbits were lost in a spacecraft emergency on November 15, 1990.

Table 6.1.A. Comments on	Individual Swaths (Cycle 1) (Cont.).
--------------------------	--------------------------------------

ORBIT(S)	ments on Individual Swa LONGITUDE(S),* DEGREES	UPLOAD NUMBER(S)	NOTES
827-828	62.7–62.9	M0318	These orbits were processed but they contain severe problems as a result of the November 15, 1990, spacecraft emergency. These orbits were disapproved by MOSST for inclusion in mosaicked products.
849	67.1	M0321	Although this was a successful mapping orbit, version 1 of the F-BIDR was only processed to -60°. Version 2 was processed to -79° (the complete orbit).
850	67.3	M0321	Although this was a successful mapping orbit, version 1 of the F-BIDR was only processed to -20° . Version 2 was processed to -52° (the complete orbit).
888-891	75.0–75.6	M0325– M0328	These orbits were lost during a spacecraft commanding error on November 23, 1990.
929	83.2	M0332	Approximately 9° of data is missing due to the DMS-A tape recorder problem.
941–970	85.6–91.5	M0335	A misplaced burst caused image discontinuity at +89.5°. This was the effect of a commanding error associated with upload M0335.
942	85.8	M0335	Approximately one-half of this orbit was lost in bad star calibration on December 1, 1990.
943–945	86.0-86.4	M0335	These three orbits were lost during a bad star calibration on December 1, 1990.
946	86.6	M0335	This orbit contains cross-track shading throughout the entire swath due to an approximate 0.7° antenna off-point. In addition, the first 10° of this orbit was lost in the bad star calibration on December 1, 1990.
1020	101.3	M0342	Beginning of irrecoverable DMSA data.
1046–1354	106.7–168.6	M0349- M1023	Apoapsis Occultation. Subsequently, these orbits begin at $+71^{\circ}$ instead of $+89^{\circ}$. These orbits also have a broader swath beginning at -42.5° and continuing to the bottom of the orbits.
1098	116.5	M0356	This was the first orbit that used the one-tape- recorder (DMS-B) strategy instead of the two- tape-recorder strategy used previously.
1245	146.7	M1009	Three-minute gap at the beginning of this orbit was due to an onboard switch of the TWTA.

ORBIT(S)	LONGITUDE(S), * DEGREES	UPLOAD NUMBER(S)	NOTES	
1250	147.7	M1009	This orbit was only processed through the EDR stage. Subsequent processing was not done because of an approximate three-minute change in radar commanding relative to spacecraft location.	
1251–1301	147.9–157.9	M1012 M1016	These orbits contain an extra tape recorder gap that is approximately 1° in length due to the DMS block strategy used in the command procedure.	
1302	158.1	M1019	To avoid a miscalculation discovered late in the sequence generation process, this orbit was recorded as a delayed orbit, thus making $1301-1303$ all delayed mapping swaths. Orbit 1302 has begin and end latitudes of $+54.5^{\circ}$ and -61° instead of the $+77.4^{\circ}$ and -39.9° typical of immediate orbits in this upload.	
302–1354	158.1–168.6	M1019– M1023	These orbits contain an extra tape recorder gap that is approximately 1° in length due to the DMS block strategy used in the command procedure.	
341	165.9	M1023	21° of data was lost due to a late lockup at the DSN.	
355-1403	168.8–178.4	M1026 M1030	Swaths within this range are 35 km wide from +90° to +80° in order to support pole location studies.	
390	175.8	M1030	This orbit contains seven minutes of missing data.	
415	180.8	M1033	Approximately one-quarter of this orbit was lost due to a power outage at the DSN station.	
486-1607 195.3-219.5		M1044– M1058	These orbits are missing the final 10 minutes of mapping playback. This is due to the early turn from mapping to fix the thermal problem. However, the radar was left on after the early turn.	
08	199.5	M1047	Forty-five minutes of playback were lost due to weather conditions at the DSN station.	
64–1588	210.8-215.6	M1054	Orbits in this range are approximately 0.2° off- pointed.	
30	224.1	M1061	The second half of this orbit was lost due to a bad star calibration on March 4, 1991.	

ORBIT(S)	LONGITUDE(S), * DEGREES	UPLOAD NUMBER(S)	NOTES	
1631–1633	224.3-224.7	M1061	These orbits were lost during a bad star calibration on March 4, 1991.	
1634	224.9	M1061	Approximately one-half of this orbit was lost during a bad star calibration on March 4, 1991.	
1674-1698	232.9–237.7	M1068– M1072	A transmitter problem (transmitter B) caused significant portions of these orbits to contain corrupted data and gaps.	
1739	245.9	M1075	2.7 minutes of data were lost due to wind and snow at the DSN station.	
1740	246.1	M1075	2.5 minutes of data were lost due to wind and snow at the DSN station.	
1746	247.4	M1079	18.2 minutes of data were lost due to wind and snow at the DSN station.	
1761	250.4	M1079	This orbit was off-pointed by approximately 0.3° due to missed star calibrations in previous orbits.	
1798	257.8	M1086	22.9 minutes of data were lost due to snow at the DSN station.	
1799	258.0	M1086	1.8 minutes of data were lost due to snow at DSN station.	
1950–2165	288.2-331.6	M1107- M1135	Thermal hiding period; swath shortened and all swaths begin at north pole.	
1971	292.6	M1110	This orbit contains 12 minutes of missing playback due to a missing ODR.	
2119–2127	322.4–324.0	M1128	These orbits were lost during a spacecraft walkabout on May 10, 1991.	
2128	324.2	M1128	This orbit was off-pointed by 1.7° due to the May 10, 1991, spacecraft walkabout.	
2159–2171	330.4–332.8	M1131- M1135	A radar/interferometry test was performed during these orbits. Consequently, these orbits contain bad radar data between +50° and +45°.	
2165	331.6	M1135	Final orbit in Cycle 1.	

ORBIT(S)*	UPLOAD NUMBER(S)	NOTES
2149–2175	M1135	Interferometry test: bad SAR data 50° N to 45° N latitude.
2159–2175	M1135	Interferometry test: bad SAR data 50° N to 45° N latitude.
2166	M1135	First orbit which intersects 376.
2166–2218	M1135-M1138	Left-looking mapping, nominal mapping.
2172–2175	M1135	Orbit trim maneuver (see description in Section 6).
2219	M1143	First right-looking orbit.
2219–2464	M1143-M1174	Right-looking mapping.
2270	M1150	This orbit was lost due to wind at the DSN.
2338-2365	M1160	Possible pointing error could result in bad SAR data.
2465–2581	M1177-M1188	Filling the Cycle-1 Superior Conjunction gap. Left-looking mapping with nominal Cycle-1 parameters.
582–2586	M1193B	High-resolution test.
587	M1193E	Switched back to right-looking parameters.
587–2673	M1193E-M1201	Right-looking mapping.
649	M1201	Lost in spacecraft anomaly.
674-2681	M1205	Stereo test.
682	M1206	Right-looking mapping resumes.
582-3211	M1206–M1277	Right-looking mapping.
5823300	M1206-M1288	Used topographic model 5.2 which caused a processing problem.
775–2850	M1218-M1228	Correlation problem caused small gaps surrounding equator (recoverable); also shading problem due to topographical error.
)13-2936	M1235	Shortened swath due to DMS heating.
926–2936	Q1239	180° roll around radar boresight prior to mapping start — loss of altimetry data.
37–2998	M1241	20-minute "two-hides."
39-2974	Q1241	180° roll around boresight prior to mapping start — loss of altimetry dat

^{*} Right-looking orbits during Cycle 2 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

Table 6.1.B. Comments	on Individual	Swaths (Cy	cle 2)	(Cont.).
-----------------------	---------------	------------	--------	----------

ORBIT(S)*	UPLOAD NUMBER(S)	NOTES
2975–2976	R1246	180° roll around boresight prior to mapping start — loss of altimetry data.
3212-3213	M1277	Radio-science experiment —no effect on normal mapping.
3214-3668	M1277-M1340	Right-looking mapping.
3256	M1284	Orbit was off-pointed.
3256-3283	M1284	Modified to start mapping five minutes early to cover Maat Mons; later adjusted to optimize radar over steepest part of Maat Mons.
3291-3298	M1289C	Modified radar parameters in order to image the steepest portion of Maat Mons.
3669-3715	M1340-M1344	Left-looking nominal mapping.
3716-3719	M1347B	Polarimetry test.
3720–3954	M1347D-M2014	Left-looking nominal mapping resumes following polarimetry test.
3801	M1354	Lost in DSN Christmas shutdown.
38563858	M1362	Lost in DSN New Year's shutdown.
3880	M2001	Final orbit prior to the failure of transmitter A. The remainder of the BIDRs in Cycle 2 were disapproved.
3954	M2014	1546 SAR bursts on the XEDR.
3955	M2014	1379 SAR bursts on the XEDR.
3958	M2014	808 SAR bursts on the XEDR.
3962	M2014	Final orbit in Cycle 2 — two SAR bursts on the XEDR.

* Right-looking orbits during Cycle 2 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

ORBIT(S)*	UPLOAD NUMBER(S)	NOTES	
4037	M2024	0.66 minute of data missing from start.	
4043	M2024	First 3.8 minutes missing — late lock.	
4080	M2024	Some trouble locking up after occultation.	
4089	M2024	Last 37 seconds missing from the XEDR.	
4091	M2024	About 65 seconds of gap at the 43/63 transition. (Latitude range +64.6° to +60.4°.) First 2.3 minutes of 63 data are corrupted (1/3 bursts are missing), but improves after occultation.	
4094	M2024	Only partly covered by DSS 12; last 7.3 minutes gone.	
4108	D2031	First 1.8 minutes not covered by DSS 15. Data corrupted before occultation gap.	
4109-4131	D2035B	Special left-looking, high incidence angle DLAP to cover the territory over Maxwell Montes.	
4132-4160	M2038	Left-looking, stereo incidence angle mapping.	
4145	M2038	Unexpected 43-second gap at latitude +8.7°.	
4156	M2038	Rain at DSS 42 caused negative SNRs at the beginning of the orbit.	
4172	D2042	First 2.8 minutes not covered by DSS 63. Following this, there are 1.2 minutes of corrupted data.	
4178	D2042	0.65 minute of the missing data is from a single gap as the DSN tried to get lock following occultation.	
4209	D2045	Low SNRs (SNR < $0 dB$) at the start of the pass.	
4210	D2045	Somewhat low SNRs (SNR < 2 dB).	
4223	D2049	A 0.61-minute gap at the B2–B3 track transition.	
4317	D2063	Only the last 80 seconds were covered by DSS 43.	
4318	D2063	Only the first 7.8 minutes (record time) were covered by DSS 43.	
4330	D2063	First 14.3 minutes missing (includes occultation).	
4331	D2063	First 14.4 minutes missing (includes occultation).	
4353	D2066	Data very bad at the end as the SNRs dropped below -1.0 dB. Trouble locking up after occultation.	
4355	D2066	Poor data overall; end of orbit very bad with $SNRs < -1.0 dB$.	
4356	D2066	Only six bursts in the orbit.	
4360	D2066	Only partially played back; 3.9 minutes missing at the start; 2.4 minutes missing at the end.	

* Orbits during Cycle 3 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

ORBIT(S)*	UPLOAD NUMBER(S)	NOTES
4361	D2066	First .77 minute missing; last 7.93 minutes missing.
4367	D2066	First 5.92 minutes missing.
4368	M2070	First 3.51 minutes missing.
4379	M2070	Track 4 bad.
4384	M2070	Track 4 poor (Standard Station).
4385	M2070	Track 4 completely gone; track 3 poor.
4417	D2073	Track 4 poor, others good.
4421	D2077	Track 4 poor.
4455	M2080	Poor data (Standard Station). 1.8-minute gap at start; late lock.
4456	D2082	Poor data; track 4 completely gone (Standard Station).
4462	D2083	Trouble locking up on first half of the orbit; first two tracks completely gone.
4482	D2083	Gap in Track 1 due to low elevation plus TPA trouble.
4483	D2083	DSS 65 reported snow.
4487	D2083	Poor data (Standard Station) on first two DMS tracks.
4488	D2083	Poor data (Standard Station).
4 508	D2087	Good data except for DMS track 4.
4523	D2091	Poor data except for DMS track 4.
4581	D2098	Last track missing.
4592	D2098	Standard Station — no data.
4593	D2098	Standard Station — no data.
4610	D2101	Very poor data (90% missing).
4611	D2101	Very poor data (90% missing).
619	D2101	Very poor data (95% missing).
162 0	D2101	Very poor data (95% missing).
16 30	D2105	34-m HEF station — no data.
4631	D2105	34-m HEF station — no data.
1632	D2105	Array test, DSS 12 and 15 — First 0.7 minute missing. SNR down in track 4.

^{*} Orbits during Cycle 3 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

ORBIT(S)*	UPLOAD NUMBER(S)	NOTES	
4639	D2105	Swapped to TWTA-B. Data quality improved. SNR approximately -0.5 dB for first two tracks, lower after star calibration. Track 4 — SNRs very low.	
4640	D2105	Continued with TWTA-B.	
4647-4675	M2108	No good high rate; 180° rolled left stereo.	
4676-4684	D2112	No good high rate; 180° rolled left stereo.	
4685-4697	D2113	No good high rate; -90° rolled left stereo.	
4698–4726	D2115	Some good high rate; -90° rolled left stereo.	
4728	D2119	Very poor data. SNRs -1.0 to -1.6 dB.	
4729	D2119	Very poor data. SNRs -1.2 to -2.0 dB.	
4737	D2119	Poor data. SNRs -0.5 to -1.0 dB. About half of the data is present for the last two tracks.	
4738	D2119	First two tracks have about 60% of the data present. SNRs start at around -0.3 dB, sink to -1.8 dB by the end of the orbit.	
4742	D2119	This orbit used for DSN test. The test raised SNR to $+1.5$ dB on track 3, which is why this track is only missing 1.38 minutes.	
4743	D2119	Good data. Phase adjustment at DSS 15 kept SNR around +1.5 dB for most of the orbit.	
4750-4778	M2122	-90° rolled left stereo.	
4766	M2122	Poor data; SNRs -0.3 to -1.3 dB. Tracks 2 and 3 might be okay. (No phase tweak this orbit.)	
4767	M2122	Poor data. SNRs -0.2 to -0.8 dB. Track 3 may have some decent image data, however. (No phase tweak this orbit.)	
4772	M2122	Good data. SNRs +0.2 to +1.2 dB.	
4773	M2122	Very good data. SNRs +0.6 to +1.6 dB.	
4779–4800	D2126	-90° rolled left stereo.	
4781	D2126	Very good data. SNRs +0.9 to +1.8 dB.	
4782	D2126	Very good data. SNRs +0.6 to +1.6 dB.	
4801–4829	D2129	-90° rolled left stereo.	
4813	D2129	First DMS track and part of the second were not covered by DSS 61/65.	
4830-4852	D2133	-90° rolled left stereo.	

^{*} Orbits during Cycle 3 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

able 6.1.C. Comments on Individual Swaths (Cycle 3) (Cont.).

nble 6.1.C. Comments on Individual Swaths RBIT(S)* UPLOAD NUMBER(S)		NOTES		
4833-4834	D2133	Good data. Most SNRs +2.0 to +2.5 dB; short SNR drop before star calibration.		
4840	D2133	Very good data. SNRs +1.2 to +2.1 dB. (First 16 seconds during lockup.)		
4853-4881	M2136	-90° rolled left stereo.		
48824903	D2140	-90° rolled left stereo.		
4904-4918	D2143	-90° rolled left stereo.		
4913	D2143	0.58-minute gap at the very start.		
49194920	D2145	SNRs around +5 dB, but still missing > 1 minute.		
49194921	D2145	High-resolution altimetry.		
4922-4955	D2146	-90° rolled left stereo.		
4936	D2146	3.24-minute gap at start.		
49564985	D2150	-90° rolled left stereo.		
4986-5163	M2154	Superior Conjunction.		
5179	M2178	Very poor data. SNRs -2.0 to -0.5 dB.		
5180	M2178	Poor data; okay for track 4.		
5189	M2178	Late lock due to TPA (DSN) trouble.		
5190	M2178	Missing more bursts and RCDs than expected given the high SN		
5194	D2182	Poor data. SNRs –1 to 0 dB.		
5195	D2182	Poor data. SNRs –1.5 to 0 dB.		
5200	D2182	Poor data. SNRs -1.8 to -0.8 dB.		
5201	D2182	Very poor data. SNRs -1.8 to -1.2 dB		
5245	D2189	Almost completely gone. Except small portion of track 4, $SNR < -2 dB$.		
5253	D2189	Almost completely gone. Except small portion of track 4, $SNR < -2 dB$.		
55XX	M2234	End of mapping until thermal gap fill.		
5670–5747	M2247-M2255	Filling of thermal gap.		
5671	M2247	Missing last 30 seconds.		
5672	M2247	Missing first 35 seconds.		

;

* Orbits during Cycle 3 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

ORBIT(S)*	UPLOAD NUMBER(S)	NOTES
5687	M2247	Missing last 30 seconds.
695	M2250	Missing first 22 seconds and last 30 seconds.
705	M2250	Missing first 75 seconds and last 30 seconds.
706	M2250	Missing first 17 seconds.
743	M2255	Missing last 30 seconds.
747	M2255	Last SAR orbit.
525		Last gravity orbit prior to aerobraking.
526	_	Beginning of aerobraking.

* Orbits during Cycle 3 did not cover the equatorial region of Venus. Therefore, no equatorial longitude is included for these orbits.

UPLOAD NUMBER(S)	ORBIT RANGE	IMMEDIATE SWATH GAPS, DEGREES	DELAYED SWATH GAPS, DEGREES	
M0356	1098-1147	18.4 to 18.0, 40.7 to 40.4, -4.5 to -4.9	12.4 to 12.1, -10.3 to -10.8, -31.4 to -31.6	
M0363, M1005	1148-1250	17.3 to 17.0, 38.7 to 38.0, -4.4 to -4.0	-9.3 to -9.7, 12.4 to 12.1, -29.4 to -29.7	
M1012	1251-1301	-10.6 to -10.9, 21.6 to 21.2, 52.0 to 51.8	24.5 to 24.2, -37.0 to -37.2, -7.7 to -8.0	
M1019	1302–1354	-9.1 to -9.5, 25.0 to 24.0, 56.6 to 56.0	-41.8 to -42.0, -11.4 to -11.8, 22.7 to 22.3	
M1026–M1103	1355-1949	25.1 to 24.8, 63.2 to 63.0, -16.6 to -17.0	15.6 to 15.2, -58.2 to -58.6, -25.5 to -25.8	
M1107-M1110	1950–2001	31.3 to 31.0, -7.1 to -7.0	8.0 to 30.5, -7.6 to -7.9	
M1114-M1117	2002–2054	-0.3 to -0.6, 35.6 to 35.0	-0.7 to -1.0, 35.2 to 35.0	
M1121–M1124 2055–2106		16.6 to 16.3, 46.1 to 45.0	16.2 to 15.9, 45.7 to 45.5	
M1128-M1135	2107–2175	55.8 to 55.6, 33.2 to 32.0	55.5 to 55.3, 32.8 to 32.4	
M1143	2219–2234	-51.65 to -51.75, -58.95 to -59.05	-84.75 to -85.4	
M1145-M1150 2235 to 2293		-51.65 to -51.75	-73.85 to -74.35, -58.95 to -59.0	
M1154 2294-2313 -51.		-51.75 to -51.85	-75.0 to -75.24	
M1156-M1160	2314-2365	-51.8 to -52.05, -59.15 to -59.2	-74.1 to -74.5	
M1163-M1174	M1163–M1174 2366–2464 –		-72.3 to -72.7	
1		27.7 to 28.0, 1.8 to 2.2, -22.65 to -23.0	27.7 to 28.0, 1.8 to 2.2, -22.65 to -23.0	
M1184-M1193B	2520–2586	28.5 to 29.0, 1.85 to 2.3, -23.3 to -23.6	28.5 to 29.0, 1.85 to 2.3, -23.3 to -23.6	
M1193E-M1197	2587–2642	-37.5 to -37.6	-55.8 to -55.9	
M1201-M1206	2643–2688	-19.5 to -20.15	-20.0 to -20.2, -49.75 to -50.5	
M1207–M1239 2689–2936		44.6 to 44.75, 3.4 to 3.8, -36.1 to -36.25	0.75 to 1.10, -38.4 to -38.6	

UPLOAD NUMBER(S)	ORBIT RANGE	IMMEDIATE SWATH GAPS, DEGREES	DELAYED SWATH GAPS, DEGREES	
M1241-M1246	2937–2998	-77.4 to -77.9, -61.1 to -61.3, -41.3 to -41.35	-77.4 to -77.9, -61.1 to -61.3, -41.3 to -41.35	
M1249-M1260	2999-3101	-25.75 to -26.0	-25.75 to -26.0	
M1263-M1267	3102-3152	-31.0 to -31.2, -55.7 to -55.9	-31.0 to -31.2, -55.7 to -55.9	
M1270–M1274	3153-3204	-30.9 to -31.2	30.9 to31.2, 75.6 to75.8, 55.6 to56.0	
M1277-M1281	3205-3255	-33.6 to -33.75, -57.2 to -57.5	-33.6 to -33.75, -57.2 to -57.5	
M1284–M1295	3256-3358	-20.3 to -20.6, -64.0 to -64.5, -44.4 to -45.0	-20.3 to -20.6, -64.0 to -46.5, -44.4 to -45.0	
M1298-M1309	3359-3461	-32.5 to -32.7, -56.6 to -57.0, -75.8 to -76.0	-32.5 to -32.7, -56.6 to -57.2, -75.8 to -76.5	
M1312-D1337	3462–3667	-36.2 to -36.3, -50.7 to -51.0, -63.2 to -63.0	-61.5 to -62.3, -72.7 to -73.3, -82.9 to -83.4	
M1340-M1344	3668–3715	-28.8 to -28.9, -50.4 to -50.0, -67.1 to -67.0	-28.8 to -28.9, -50.4 to -50.7, -67.1 to -67.4	
M1347B	3716-3719	No gaps — polarimetry	test.	
M1347D-M1351	3720–3770	-28.9 to -29.0, -50.5 to -50.0, -67.5 to -67.0	28.9 to29.0, 50.5 to50.8, 67.5 to67.8	
M1354-M2001	3771-3880	-21.6 to -21.8, -46.7 to -46.0	-21.6 to -21.8, -46.7 to -46.9	

Table 6.2. DMS Gaps (Cont.).

Table 6.3. Special Tests.

TEST	ORBIT RANGE	UPLOAD NUMBER	
Interferometry Test	2166–2175	M1135	
High-Resolution Radar Test	2582-2586	M1193B	
Stereo Test	2674-2681	M1205	
Radio-Science Test	3212-3213	M1277	
Polarimetry Test	3716–3719 4567–4574	M1347B M2097C	



Data Product Description

A large number of data products come from the data acquired by the Magellan spacecraft. For the purposes of this guide, the SAR-related products fall into three general categories: interim products used in the production of uploads or other Project needs; products directly useful for science or engineering analysis; and products that, while not useful for analysis, may be required indirectly by data analysts. An example of the latter category is the archive engineering data record (AEDR), which contains the spacecraft's engineering telemetry. This product might be required if it were necessary to determine whether a peculiarity in the science data is related to some spacecraft activity or is related to the Venusian surface. Those products deemed useful for science analysis and most of those that might be required indirectly are cataloged and archived, and are available to the public through NASA archive facilities.

The NASA archiving system has three components: the Regional Planetary Image Facilities (RPIFs), the Planetary Data System (PDS), and the National Space Science Data Center (NSSDC). Briefly, RPIFs are centers located around the world where planetary data may be browsed but generally may not be removed. PDS is a catalog center that can help the investigator locate specific pieces of information. Finally, NSSDC is the location of planetary data archives. For more information about using these three facilities, see Appendix 3.

Each of the separate data product types is described in detail by a document called a Software Interface Specification (SIS). A list of Magellan-specific SISs is shown in Table 7.1. The SISs are written with two objectives. First, the SIS and its references contain all information required to write software to read the data product. The file and record structures are described at the bit level. Second, the SIS provides low-level information about the meaning of the data. Units, derivation methods, processing algorithms, and references to such information are contained in the product SIS. Product SISs may be ordered from the PDS Geosciences Node or from NSSDC, as explained in Appendix 3.

As the Magellan data processing proceeded from one step to the next, many data segments were transferred intact from one data product to the next, either unchanged or slightly modified. In order to reduce duplication, SISs for data products containing inherited files or data simply make reference to other SISs. As a result it may be necessary for the analyst to obtain several SISs to fully understand one product, and the full list of required SISs might not be clear from the outset. To make this process simpler, a cross-index of SISs which refer to each other is provided in Appendix 4.

Magellan imaging data were acquired by the DSN as they were played back from the spacecraft. Each one-hour playback period was simultaneously recorded on ODRs, which were shipped to JPL. ODR tapes and other ancillary files were used to generate EDRs, which contain no multiple copies of data (as might have existed, for example, when multiple DSN stations received Magellan's telemetry). Three distinct types of EDRs were made. They are as follows:

• The SAR-EDR, which contains not only SAR data from the radar sensor but also all ancillary data necessary to turn SAR data into images, including navigation data, sensor engineering data, and information from the radar control parameter generation task.

• The altimeter experiment data record (ALT-EDR), which similarly contains all data necessary to process the altimetry and radiometry data.

• The AEDR, which contains all spacecraft and radar engineering data for placement into the Project archive.

The SAR echoes contained on each SAR-EDR were transformed into a single strip of image data representing a Venusian surface area about 20 km wide and about 15 by 1000 km long, which is the F-BIDR. The F-BIDR, which is discussed in detail in the following section, is the most basic Magellan image data product. On the F-BIDR, each 8-bit byte contains one pixel, which represents a 75-m patch of surface area. Pixels on the F-BIDR are located on the planet in latitude and longitude, calculated from navigation data contained on the SAR-EDR.

The Magellan data types thought to be most useful for science analysis are described in the following sections, beginning with the most common image data products. For all products, the respective SIS should be consulted when attempting to make quantitative use of the data.

BASIC IMAGES (BIDRS)

The BIDR is the most basic form of the Magellan SAR image data. As well as forming the foundation for all other image products, the BIDR is also the only product which contains a full set of ancillary data. In the files surrounding the image data on the BIDR are contained such supporting data as ephemerides, data quality, spacecraft pointing, SAR-processing inputs and output parameters, telemetry stream (including DSN) monitor data, and the like (see Table 7.2). The BIDR also preserves the Project's best efforts at radiometric and geometric calibration, and it provides tables translating from the natural coordinates of the SAR (for range and Doppler, see, e.g., Elachi, 1988) into the latitude/longitude coordinates. Location information on the BIDR was used to lay each pixel into image mosaics at various resolutions, as described in the following sections. The BIDR also contains radiometer measurements and data necessary for the calibration of those data.

There are actually many different forms of BIDRs (see Table 7.1), only two of which will be of common interest to the data analyst. The F-BIDR is the first product typically produced. It represents the full-resolution capability of the processed data. Arrays of 3-by-3 F-BIDR pixels were converted to power and averaged into single pixels on the compressed basic image data record (C-BIDR), whose pixel widths represent 225 m on the surface of the planet. The C-BIDR was produced as an interim product for production of mosaics, but the compression may be useful if full resolution is not desired.

The BIDRs, however, are extremely narrow swaths of image data. A typical F-BIDR may contain about 300 pixels eastwest and 200,000 pixels north-south. Since they do not exactly represent a swath of constant longitude, the data within individual records on the BIDR are offset to avoid the use of excessive filler pixels, which prevents most conventional image-processing software from producing reasonable displays from them. An additional complication is that the offset for the first line in each image block is copied from the second line in the block. Refer to the BIDR SIS documents (listed in Table 7.1) for further details on reading BIDR data.

From a computer standpoint, an F-BIDR is a recording on 2400-foot reels of 6250-characters-per-inch (cpi) computer-compatible nine-track magnetic tape using the 6250-cpi Group Coding Recording Method (known as the GCR format) as specified by American National Standard (ANSI) X3.54-1976. A typical F-BIDR contains approximately 106 million bytes of image data and approximately 39 million bytes of ancillary data, and each product represents a single orbit. The SAR experiment was active for about 5630 orbits, most of which produced archivable F-BIDRs. At this writing an effort is being made to put the F-BIDR data set onto more dense media at the PDS Geosciences Node at Washington University, but the status of that effort is unclear.

As represented on the BIDR, pixels are a measure of the reflectance of the represented surface element, of diameter 75 m,¹ expressed in decibels, relative to a model of the average Venusian reflectance. Thus the byte representation of each pixel (often referred to as the "data number," or DN) in the BIDR represents a number linear with the ratio of measured backscatter to modeled backscatter at the measurement's incidence angle (where incidence angle is relative to a spherical planet). The model, which varies with incidence angle, is used to compress the required dynamic range, which is largely due to the incidence angle variation with latitude (see Section 4). It was the Project's intention to use the model proposed by Muhleman, 1964, with parameters generated by Pettengill et al., 1988. The actual model in the SAR processor was different because of an error (Saunders et al., 1992, page 13,079), but the difference is slight, and as long as the correct function is used to decompress the data there is no additional loss of accuracy. Because the decibel scale is nonlinear, however, it is necessary to convert the pixel values into a value linear with measured power (or backscatter) before performing arithmetic operations such as averaging. Radiometric and geometric calibration accuracy of the BIDR data set is also discussed by Saunders et al., 1992.

To convert DNs from the BIDR into normalized radar backscatter cross-sections (Ulaby et al., 1982), use the following code fragment. This code correctly accommodates the model error and another lookup table error that was discovered in the SAR processor. Note also that a DN = 0 can represent either a valid measurement, processor underflow, or filler pixel, and that DNs from 252 through 255 are not used.

REAL THETA, DN, SIGNORM, MUHL, SIGMA, SIGDB

C C ACCOMMODATE FOR SAR PROCESSOR ERROR IN INCIDENCE ANGLE LOOKUP C TABLE (ASSUMES THETA IS IN DEGREES). NOTE ** DENOTES

С EXPONENTIATION. С THETA = THETA + 0.5SIGNORM = 10 ** (((DN-1)/5 - 20) * .1) С USE OF 0.0118 TERM MATCHES ERROR IN SAR С PROCESSOR ALGORITHM. 0.0188 IS CORRECT С MUHLEMAN LAW VALUE FOR AVERAGE VENUS. NOTE THAT THE FUNCTIONS SIND С AND COSD ARE TRIGONOMETRIC SINE AND COSINE OF THE С ARGUMENT IN DEGREES. С С MUHL = (0.0118 * COSD(THETA))/((SIND(THETA) + 0.111*COSD(THETA))**3) С

C UNDO MUHLEMAN FUNCTION NORMALIZATION

С

SIGMA = SIGNORM * MUHL SIGDB = 10 * ALOG10(SIGMA)

¹ The surface area represented by a pixel differs from the radar resolution, which varies with latitude (see Section 4).

where

THETA = incidence angle in degrees (see preceding discussion)

DN =the data number (0–251)

SIGMA = the normalized radar backscatter coefficient, in power-linear units

SIGDB = the normalized radar backscatter coefficient, expressed in decibels (Ulaby et al., 1982)

Geometrically, the BIDR contains two different projections. From +89° to -89° latitude, pixels are presented in equalarea sinusoidal projection, offset as already noted. From +80° to +90° latitude and from -80° to -90° latitude, the data are presented in oblique sinusoidal projection. The projection origin latitude for sinusoidal data is always the equator (0°). The projection longitude is given in the Data Annotation Label of the image files.

Begin and end latitudes vary for the BIDRs, both because of the immediate and delayed swath mission design (see Section 3) and because of various problems encountered during the mission (see Section 6). Table 7.2 shows the begin and end latitudes for BIDRs, and the associated longitudes can be determined from Table 6.1.A. Table 7.3 shows the BIDR file structure.

MOSAICKED IMAGES (MIDRS)

In order to maximize the scientific value of Magellan data, individual orbits were assembled to produce mosaicked products. Mosaicked products were created on several scales to illustrate areas of the surface ranging from a single feature to large volcanic flows. The smallest-scale mosaic corresponds to the scale of an F-BIDR. Mosaicked images produced from F-BIDRs are called full-resolution mosaicked image data records (F-MIDRs). To provide coverage for larger areas, the BIDR data were averaged in successive operations in which a single mosaic pixel was replaced by the average of nine pixels, creating compressed-once MIDRs (C1-MIDRs) with 225-m pixels, compressed-twice MIDRs (C2-MIDRs) with 675-m pixels, and compressed-thrice MIDRs (C3-MIDRs) with 2-km pixels. These mosaics allow scientists to have both high-resolution and more synoptic views (see Figure 7.1). Each MIDR frame is approximately 8000 pixels on each side, covering varying amounts of the surface according to the resolution of each pixel. Each C3-MIDR, for example, covers about one-sixth of the planet's surface. The C1-MIDRs, C2-MIDRs, and C3-MIDRs are often collectively called the Cn-MIDRs.

MIDRs are labeled according to the convention

aMIDR.bRc;v

where

a = "F," "C1," "C2," or "C3," according to the type of MIDR

b = the (nearest integer) center latitude of the frame (always positive)

R = "N" or "S," indicating whether b is north or south of the equator

c = the (nearest integer) center longitude of the frame, 0 < c < 360, positive east

v = the version number

During each mapping cycle, MIDRs were produced using the same grid centerpoints. To distinguish MIDRs from different cycles, the following procedure was implemented: Any MIDR whose version number is "1" or "10x" (where x is any digit from 1 to 9) was produced with Cycle-1 data. Beginning with data collected in Cycle 2, a three-digit cycle/version number was always employed. The resulting label identifications are in the form "aMIDR.bRc;dvv" where d is the cycle in which the data used in that MIDR were collected and w is the version of that product. Versions range from "01" (the first version produced using data from that cycle) to "99."

For example, FMIDR.27S339;201 is an F-MIDR centered at 27° S latitude, 339° E longitude. Data in the MIDR were collected during Cycle 2, and this MIDR is the first version produced. In other examples, FMIDR.20N200;201 is the first version produced using Cycle-2 data, and FMIDR.20N200;202 is the second version produced using Cycle-2 data.

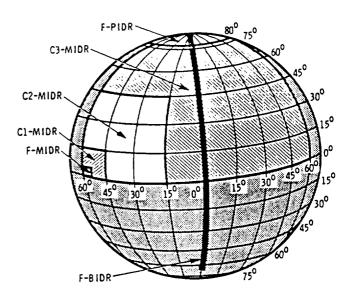


Figure 7.1. Magellan Image Products.

Largely for financial reasons, F-MIDRs were only produced over areas chosen by the science team; a total of about 25% of the planet was covered by these mosaics. However, the surface is fully represented in the C*n*-MIDR set excluding only the polar areas where the polar mosaicked image data records (P-MIDRs) are used instead to allow the more convenient polar projection. A standard grid for mosaicked images of all scales was produced prior to the start of mapping, providing a basis by which products were created.

Engineering MIDRs

Prior to the start of standard MIDR production, a set of eight F-MIDRs was produced as a test of processing capabilities. These eight F-MIDRs were called "Engineering F-MIDRS" and are accessible digitally on MIDRCD.001. The label identifications of these Engineering F-MIDRs are as follows:

FMIDR.275339;1	FMIDR.20N334;1
FMIDR.75N332;1	FMIDR.55N337;1
FMIDR.05S335;1	FMIDR.30N334;1
FMIDR.40S342;1	FMIDR.50S345;1

There are four distinguishing features of Engineering F-MIDRs: Engineering F-MIDRs consist of 20 orbits whereas standard F-MIDRs contain 24 orbits. Second, Engineering F-MIDRs are not necessarily complete on the trailing (right) edge and may contain missing orbits within the body of the mosaic that were processed later. The gap at the trailing edge of some of the F-MIDRs is a start of a mapping gap and is present because processing began with orbit 376. Gaps in the bodies of the F-MIDRs may be present because of the desire to process these mosaics early. Therefore, orbits that were more difficult to process appear as gaps in the Engineering F-MIDRs even though the orbit may have been processed later. Third, Engineering F-MIDRs were processed with earlier software versions and thus may not meet radiometric or other standards. Finally, the Engineering F-MIDRs which are included in MIDRCD.001 contain special processing label identifications (they were produced as "special products" as opposed to "standard products"). While standard F-MIDRs are identified through the MIDR label identifications (the MIDR type, centerpoint, and version of the product — such as FMIDR. 10N200; 1), the Engineering F-MIDRs are identified through the special product label identifications, as shown in Table 7.4.

MIDR Compact Disks

Magellan MIDRs are archived on compact optical disks, more commonly referred to as compact disks (CDs) or compact disk read-only memories (CD-ROMs). Other Magellan products — such as the altimeter/radiometer composite data record (ARCDR), the gridded global emissivity data record (GEDR), the global altimeter data record (GADR), the global radiometer data record (GRDR), the global reflectivity data record (GREDR), the global slope data record (GSDR), and the global topography data record (GTDR) (which are often referred to collectively as the GxDRs) — are also archived on CDs. More than 100 such CDs contain the SAR images, and an additional set of more than 20 CDs contains the other data sets. Any of the CDs can be ordered from NSSDC, and specific ordering information is contained in Section 8 and Appendix 3. The CD-ROMs are largely self-documenting, with many included text files. The following excerpts, taken from the CD-ROM files, will give the prospective user an idea as to their structure.

The CD-ROMs are formatted so that a variety of currently popular computer systems (e.g., IBM personal computer [PC], Macintosh, Sun, and VAX) may access the data, and the format is general enough that future systems should be able to read them with little problem as long as the medium remains viable. Specifically, the CDs are formatted according to the International Standards Organization (ISO) 9660 level-1 Interchange Standard, and file attributes are specified by extended attribute records (XARs). For computer software that fully supports XARs, access to the CD-ROM volume will be straightforward; the disk will appear to the user to be identical to a file system of directories, subdirectories, and data files. Some computer systems that do not support XARs will ignore them; others will append the XAR to the beginning of the file. In the latter case the user must ignore the first 512 bytes of the file. For further information, refer to the ISO 9660 Standard Document (RF# ISO 9660-1988, April 15, 1988). All data formats are based on the Planetary Data System Data Preparation Workbook (Jet Propulsion Laboratory, 1991). For information specific to Magellan, refer to SISs IDPS-145, IDPS-107, and IDPS-109.

Each F-MIDR and C*n*-MIDR is divided into an array of 56 framelets, arranged in seven rows and eight columns. The framelets are numbered in increasing order from left to right, top to bottom. Each framelet is 1024 lines by 1024 samples, with one byte per sample, and is stored in a separate file. The framelet files contain embedded VICAR2 labels and have detached PDS labels in accompanying files. The framelet files and supplementary data files for each MIDR are stored in a separate subdirectory. The MIDRs are all in sinusoidal equal-area map projection except P-MIDRs, which are in polar stereographic map projection.

Additional general information about each product is found in a *LABEL* directory. The *.*LBL* files in that directory contain the PDS catalog information for the Magellan mission, the spacecraft, the radar instrument, and the data sets. Subsampled "browse" versions of the MIDRs are provided for quick inspection of the images, both in digital form on each CD and in photographic form in Appendix 5 of this guide. On the CDs, the browse version of each MIDR is found in the subdirectory for that MIDR. The file name for the browse image is *BROWSE.IMG*. Each browse image is 896 lines by 1024 samples and was created by averaging groups of 8-by-8 pixels in the original 7168-by-8192 MIDR. Browse images contain embedded VICAR2 labels and have detached PDS labels. The VICAR2 label is from the original 7168-by-8192 MIDR; therefore, corner points, map projection, and pixel size for label items may be inappropriate for the *BROWSE.IMG*.

All document files and detached label files contain 80-byte fixed-length records, with a carriage return character (ASCII 13) in the 79th byte and a line-feed character (ASCII 10) in the 80th byte. This allows the files to be read by the MacOS, DOS, UNIX, and VMS operating systems. All tabular files are also described by PDS labels, either embedded at the beginning of the file or detached. If detached, the PDS label file has the same name as the data file it describes, with the extension .LBL; for example, the file CONTENTS.TAB is accompanied by the detached label file CONTENTS.LBL in the same directory. The detached labels for MIDRs and GxDRs also contain PDS-defined map projection keywords that provide information needed to extract latitude and longitude values from given line and sample locations. Tabular files are formatted so that they may be read directly into many database management systems on various computers. All fields are separated by commas, and character fields are enclosed in double quotation marks (" "). Character fields are left justified, and numeric fields are right justified. The "start byte" and "bytes" values listed in the labels do not include the commas between fields or the quotation marks surrounding character fields. The records are of fixed length, and the last two bytes of each record contain the ASCII carriage return and line-feed characters. This allows a table to be treated as a fixed-length record file on computers that support this file type and as a normal text file on other computers.

PDS labels are object-oriented. The object to which the label refers (IMAGE, TABLE, etc.) is denoted by a statement of the form

^object = location"

in which the carat character ("^," also called a pointer in this context) indicates that the object starts at the given location. In an embedded label, the location is an integer repre-

senting the starting record number of the object (the first record in the file is record 1). In a detached label, the location denotes the name of the file containing the object, along with the starting record or byte number if there is more than one object. For example:

^IMAGE_HEADER = ("C1F02.IMG",1)
^IMAGE = ("C1F02.IMG",3)

indicates that the IMAGE object begins at record 3 of the file *C102.IMG*, in the same directory as the detached label file. The following is a list of the possible formats for the ^object definition:

- ^object = n
 ^object = n<BYTES>
 ^object = ("filename.ext")
 ^object = ("filename.ext",n)
 ^object = ("[dirlist]filename.ext",n)
 ^object = ("filename.ext",n<BYTES>)
- ^object = ("[dirlist]filename.ext",n<BYTES>)

where

n = the starting record or byte number of the object, counting from the beginning of the file (record 1, byte 1)

<BYTES> indicates that the number is given in bytes

filename = the upper-case file name

ext = the upper-case file extension

dirlist = a period-delimited path-list of parent directories, in upper case, that specifies the object file directory (used only when the object is not in the same directory as the label file)

The list begins on the directory level below the root directory of the CD-ROM. *[dirlist]* may be omitted when the object being described is located either in the same directory as the detached label or in a subdirectory named *LABEL*, located one level below the CD-ROM root directory.

Files are organized in one top-level directory with several subdirectories. Table 7.5 shows the structure and content of these directories. In the table, directory names are enclosed in square brackets ([]), upper-case letters indicate an actual directory or file name, and lower-case letters indicate the general form of a set of directory or file names.

C*n*-MIDRs and F-MIDRs are listed in Tables 7.6–7.11. Each table is segregated by MIDR type (C*n*-MIDR or F-MIDR) and by mapping cycle. Within each table, the MIDRs are ordered first by degrees of latitude beginning at the equator and moving toward the poles — then by longitude from 0° to 360° .

For computers in common use in 1992, the following CD-ROM drives and driver software were tested and found to properly read the Magellan CD-ROMs. Information regarding appropriate driver software was current as of 1992, but subsequent drivers may be compatible as well.

VAX/VMS

Drive: Digital Equipment Corporation (DEC) RRD40, RRD42, or RRD50.

Driver: DEC VFS CD-ROM driver V4.7 or V5.2 and up.

VAX/Ultrix

Drive: DEC RRD40, RRD42, or RRD50.

Driver: Supplied with ULTRIX 3.1. Note: Use the cdio software package (in ~*ftp/src/cdio.shar* from the *space.mit.edu* server).

• IBM PC

Drive: Toshiba, Hitachi, Sony, or compatible brand. Driver: Microsoft MSCDEX 2.2. Note: The newest version of MSCDEX (released in February 1990) is generally available.

Apple Macintosh

Drive: Apple CD SC (Sony) or Toshiba. Driver: Apple CD-ROM driver. Note: The Toshiba drive requires a separate driver, which may be obtained from Toshiba.

Sun Micro

Drive: Delta Microsystems SS-660 (Sony). Driver: Delta Microsystems driver or SUN CD-ROM Driver.

Locating Data on the MIDRs

Because the MIDR data set is so large, and because the individual frames are placed on the disks by order of production, it can be difficult to locate specific features or locations without aid. Two computer-based aids have been created. The Magellan Hypermap, written at the Massachusetts Institute of Technology (MIT), locates features by name or by center latitude and longitude. The program lists MIDRs containing the requested site and identifies the proper CD for a selected MIDR. After the proper CD is mounted the program will launch another program which displays the image and allows basic image processing to be done or a separate file to be written in raw pixel, TIFF, PICT, PICS, or other file formats.

The Magellan Hypermap and the associated notepad stacks are available from the PDS Geosciences Node, whose address is listed in Appendix 3. The stacks are also available via Internet in electronic form from the *delcano.mit.edu* File Transfer Protocol (FTP) server; log on as an "anonymous" user in the *mgn/software* directory. You may also contact

Dr. Peter G. Ford MIT Microwave Subnode Tel: (617) 253-6485 Fax: (617) 253-0861 E-mail: pgf@space.mit.edu or JPLPDS::PFORD These stacks require HyperCard version 2.1 or later. The image display functions require at least 5 Mbytes of random access memory (RAM), an 8-bit (or deeper) frame buffer, and a floating-point unit (FPU).

Those wishing to implement the capability to access MIDRs by latitude and longitude in their own analysis programs may follow the following code fragments. (The quantities in bold type are available in the *.LBL* file accompanying each of the MIDR files on the CD.)

For a given F- or C*n*-MIDR, the line and sample (i.e., the y and x coordinates in the image file, respectively) can be calculated from the desired latitude (LAT) and longitude (LON) using the following code:

SCALE = 6051000/MAP_SCALE LINE = X_AXIS_PROJECTION_OFFSET-LAT*SCALE+0.5 SAMPLE = Y_AXIS_PROJECTION_OFFSET +(LON-CENTER_LONGITUDE)*SCALE*COS(LAT)+0.5

For the P-MIDRs, the corresponding codes depend on whether the frame is for the north or south pole. For the north pole,

PI = 3.1415926

SCALE = 6051000/MAP_SCALE SAMPLE = Y_AXIS_PROJECTION_OFFSET+2*SCALE*SIN(LON-CENTER_LONGITUDE)*TAN(PI/4-LAT/2)+0.5 LINE = X_AXIS_PROJECTION_OFFSET+2*SCALE*COS(LON-CENTER_LONGITUDE)*TAN(PI/4-LAT/2)+0.5

For the south pole,

PI = 3.1415926

SCALE = 6051000/MAP_SCALE

SAMPLE = Y_AXIS_PROJECTION_OFFSET+2*SCALE*SIN(LON-PROJ_LON)*TAN(PI/4+LAT/2)+0.5

LINE = X_AXIS_PROJECTION_OFFSET-2*SCALE*COS(LON-CENTER_LONGITUDE)*TAN(PI/4+LAT/2)+0.5

ALPHABETICAL PRODUCT LISTING

Table 7.12 provides a complete list of products generated by the Magellan Project. For more information, refer to Yewell, 1993. Note that in the following descriptions, "tape" refers to 2400-foot reels of 6250-cpi computer-compatible nine-track magnetic tape using the 6250-cpi GCR format as specified by ANSI X3.54-1976. The CD-ROMs listed in the table are written in ISO 9660 format.

able 7.1. Magellan	PRODUCT NAME		RELEASE DATE(S)
	Archive engineering data record	TPS-140	
AEDR	Altimeter experiment data record	TPS-101	
ALT-EDR	Temporary altimeter experiment data record	TPS-101	
ALT-TEDR	Altimeter expedited experiment data record	TPS-101	_
ALT-XEDR		NAV-136	
AOEDR	Averaged orbital elements data record	MIT-002	
ARCDR	Altimeter/radiometer composite data record CD-ROM	IDPS-146	8/27/91
ARCDRCD	Altimeter/radiometer composite data record CD-ROM	MIT-002	
ARCDRW	Altimeter/radiometer composite data record WORM	TRK-105	
ATDFDR	Archival tracking data record	IDPS-119	2/14/90,
BADR	Basic altimeter data record		8/7/90
_	Basic altimeter data record WORM	IDPS-119	—
BADRW	Bouguer map data record	SCI-GRAV-104	
BOUGDR	-	N/A	
BOUGMAP	Bouguer map	IDPS-123	9/14/88,
BRDR	Basic radiometer data record		8/31/90, 1/17/91
		IDPS-123	
BRDRW	Basic radiometer data record WORM	IDPS-102	8/10/90,
C-BIDR	Compressed basic image data record		1/17/91, 5/31/91
C-BIDRW	Compressed basic image data record WORM	IDPS-102	
	Compressed-once mosaicked image data record	IDPS-109	
C1-MIDR	Compressed-once mosaicked image data record WORM	IDPS-109	
C1-MIDRW	Compressed twice mosaicked image data record	IDPS-109	
C2-MIDR	Compressed-twice mosaicked image data record WORM	IDPS-109	
C2-MIDRW	Compressed-thrice mosaicked image data record	IDPS-109	
C3-MIDR	Compressed-thrice mosaicked image data record WORM	IDPS-109	2/17/88, 1/16/91,
C3-MIDRW	Compressed-unice mostlenee and		10/2/91
	Ephemeris data record		
EPHEMDR	Full-resolution basic image data record	SDPS-101	5/10/90
F-BIDR	Full-resolution basic image data record		2/14/91 6/30/91 10/18/9
F-BIDRW	Full-resolution basic image data record WORM	SDPS-101	-

ACRONYM	PRODUCT NAME	DOCUMENT	DELEASE
		NUMBER(S)	RELEASE DATE(S)
F-MAPDRCD	Full-resolution map data record CD-ROM		
F-MIDR	Full-resolution mosaicked image data record	IDPS-109	— 2/17/88, 1/16/91 10/2/91
F-MIDRW	Full-resolution mosaicked image data record WORM	IDPS-109	10/2/91
F-SBIDR	Full-resolution special basic image data record	SDPS-101	
F-TBIDR	Full-resolution temporary basic image data record	SDPS-101	
F-UBIDR	Full-resolution engineering test basic image data record	SDPS-101	
F-XBIDR	Full-resolution expedited basic image data record	SDPS-101	
GADR	Global altimeter data record	IDPS-135	 2/14/90, 1/17/91
GADRW	Global altimeter data record WORM	IDPS-135	1/1//91
GEDR	Global emissivity data record	MIT-001	
GEOIDR	Geoid map data record	SCI-GRAV-102 CNES-002	,
J-MAPDR	Global map data record		
J-MAPDRCD	Global map data record CD-ROM		
GRAVDR	Gravity data record		
RDR	Global radiometer data record	IDPS-124	2/14/90, 1/16/91
REDR	Global reflectivity data record	MIT-001	
SDR	Global slope data record	MIT-001	
TDR	Global topography data record	MIT-001	
xDRCD	global x data record CD-ROM (x = altimeter, emissivity, radiometer, reflectivity, slope, or topography)	IDPS-147	2/7/92, 4/24/92
)R	Intermediate data record	TPS-130	
DSAPDR	Line-of-sight acceleration profiles data record	SCI-GRAV-103	
MAGCDR	Limb track maneuver and S-band AGC data record		
CFDR	Media calibration file data record	TRK-103	
IDRCD	Mosaicked image data record: CD composite	IDPS-145	7/3/91, 4/24/92
SAWORM	MSA WORM disk	_	··· — ·· > 4u
CFDR	Navigation constants file data record	NAV-103	
DR Experimenters' notepad data record			-

ACRONYM	PRODUCT NAME	DOCUMENT NUMBER(S)	RELEASE
			DATE(S)
ODFDR	Orbit data file data record	TRK-101	
ODR	DSN original data record	TPS-102	
ODRVALDR	ODR validation data record	TLM-317	
PIDR	Polar image data record	IDPS-107	9/14/88, 1/28/91
PIDRW	Polar image data record WORM	IDPS-107	_
P-MIDR	Polar mosaicked image data record	IDPS-142	
P-MIDRW	North polar mosaicked data record WORM	IDPS-142	
RADARCALDR	Radar calibration data record		_
RADR	Radio-science data record	_	
RSODR	Radio-science original data record		
USDR	Radar upload summary data record		
AFDR	SEGS archival file data record	_	_
AR-EDR	SAR experiment data record	TPS-101	
AR-TEDR	SAR temporary experiment data record	TPS-101	
AR-XEDR	SAR expedited experiment data record	TPS-101	
CEDR	Spacecraft ephemeris data record	NAV-124	
CVDR	Surface characteristics vector data record	_	
FFDR	Small forces file data record	SES-121	
HDR			
OPDR	Skeleton orbit profile data record	MSDS-106	
PCFDR	Station polynomial coefficients file data record	NAV-110	
PEDR-N	Spacecraft planetary ephemeris data record-NAIF	NAV-135	
PEDR-S	Spacecraft planetary ephemeris data record-special	_	
PSDR	SAR Data-Processing Team-produced special data record		
AEDR	Temporary archive engineering data record	_	
OPODR	Topographic model data record		
CFDR	Tie-point coefficient file data record	IDPS-143	
MFDR	Timing and polar motion file data record	TRK-104	_
PDR			

ORBIT RANGE	UPLOAD(S)	BEGIN/END LATITUDE (IMMEDIATE ORBITS), DEGREES	BEGIN/END LATITUDE (DELAYED ORBITS), DEGREES	
77/ 102	M0258	89.0/-51.0	69.0/71.0	
376-403	M0262-M0279	89.0/-51.0	54.9/-79.0	
404-558	M0283-M0293	90.0/-52.0	69.0/-71.5	
559-661	M0205 M0270	89.0/-51.5	54.7/-79.2	
662-676	M0314-M0346	89.0/-52.0	54.5/-79.0	
787-1045	M0349-M0353	81.4/-19.0	52.0/-51.0	
1046-1097	M0356-M0359	75.0/-42.4	52.0/-62.5	
1098-1147	M0363-M1009	73.0/-42.0	52.0/-61.0	
1148-1250	M1012-M1016	77.5/-40.0	54.5/-61.0	
1251-1301	M1012-M1023	82.3/-40.5	54.5/-65.5	
1302-1354	M1026-M1043	89.0/-51.5	55.4/-79.0	
1355-1485	M1044-M1058	89.0/-52.0	54.8/60.0	
1486-1607	M1058-M1103	89.0/-52.0	55.0/-79.0	
1608-1949	M1107-M1110	89.0/-42.0	89.0/-42.0	
1950-2001	M1114-M1117	89.0/-34.0	89.0/-34.0	
2002-2054	M1121-M1124	89.0/-14.0	89.0/-14.0	
2055-2106 2107-2165	M1128-M1135	89.0/8.0	89.0/8.0	
2166-2175	M1135	89.0/8.0	89.0/8.0	
2176-2218	M1138	89.0/14.0	89.0/14.0	
2219-2337	M1143-M1156	-44.0/-72.0	-68.0/-89.0	
2366-2464	M1163-M1174	-37.0/-70.0	-65.0/-89.0	
2366-2464	M1177-M1193B	52.0/-45.0	52.0/-45.0	
2463-2586	M1193E-M1197	-20.0/-79.0	-41.0/-89.0	
2643-2673	M1201	14.0/-89.0	14.0/-89.0	
2674-2681	M1205	14.0/-80.0	14.0/-80.0	
2682–2688 M1206		14.0/-89.0	14.0/-89.0	
2682-2088	M1207-M1239	75.0/67.0	42.0/-89.0	
2089-2930 2937-2998	M1241-M1246	-18.0/-89.0	-18.0/-89.0	
2937-2998 2999-3101	M1249-M1260	5.0/-90.0	5.0/-90.0	
3102-3204	M1263-M1274	-2.0/-89.0	-2.0/-89.0	
	M1202 M1281	-5.5/-89.0	-5.5/-89.0	
3205-3255	M1284–R1295	6.0/-80.0	6.0/-80.0	
3256-3358	M1298-D1309	-4.0/-89.0	-4.0/-89.0	
3359-3461	M1312-D1337	-20.0/73.0	-49.0/-89.0	
3462-3667	M1340-M1344	-4.0/-80.0	-4.0/-80.0	
3668-3715	M1347B	57.0/-65.0	57.0/-65.0	
3716-3719	M1347D-M1351	-4.0/-80.0	-4.0/-80.0	
37203770 37713880	M1354-M2001	7.0/-79.0	7.0/-79.0	

Table 7.2. Begin and End Latitudes for BIDRs.

.....

. ____

Table 7.3. BIDR File Structure.				
FILE NAME	FILE IDENTIFICATION	NUMBER OF TRAILING BLANKS	FILE SEQUENCE NUMBER	DESCRIPTION
BIDR Header	'FILE_01'	10	'0001'	Summary BIDR volume information
File 2	'FILE_02'	10	'0002'	Orbit header
File 3	'FILE_03'	10	'0003'	EDR data quality summary
File 4	'FILE_04'	10	'0004'	Spacecraft ephemeris file (orbit description)
File 5	'FILE_05'	10	'0005'	SCLK/SCET conversion coefficients
File 6	'FILE_06'	10	'0006'	DSN monitor records
File 7	'FILE_07'	10	'0007'	Quaternion pointing coefficients
File 8	'FILE_08'	10	'0008'	Processing bandwidths
File 9	'FILE_09'	10	'0009'	Decommutation and decalibration data
File 10	'FILE_10'	10	'0010'	Engineering data
File 11	'FILE_11'	10	'0011'	Radar header records
File 12	'FILE_12'	10	'0012'	Per-orbit parameters
File 13	'FILE_13'	10	'0013'	Image data in oblique sinusoidal projection
File 14	'FILE_14'	10	'0014'	Processing parameters for oblique sinusoidal dat
File 15	'FILE_15'	10	'0015'	Image data in sinusoidal projection
File 16	'FILE_16'	10	'0016'	Processing parameters for sinusoidal data
File 17	'FILE_17'	10	'0017'	Processed radiometer data
File 18	'FILE_18'	10	'0018'	Cold-sky calibration results
File 19	'FILE_19'	10	'0019'	Processing monitor results
BIDR Trailer	'FILE_20'	10	'0020'	Additional BIDR volume information

Table 7.4. Engineering F-MIDR Label Identifications.

F-MIDR	PRODUCT LABEL
FMIDR.27S339;1	IPSP.34528-214;1
FMIDR.05S335;1	IPSP.34535-214;1
FMIDR.40S342;1	IPSP.34536-214;1
FMIDR.30N334;1	IPSP.33698-98;1
FMIDR.50S345;1	IPSP.34537-214;1
FMIDR.55N337;1	IPSP.34531-214;1
FMIDR.20N334;1	IPSP.34534-214;1
FMIDR.75N332;1	IPSP.34518-214;1

Table 7.5.	CD-ROM F	ile Structure.
------------	----------	----------------

FILE	CONTENTS
Top-level directory	
- AAREADME.TXT -	General text (from which this selection is taken).
 - MCUMCOMM.TXT 	A cumulative listing of comments concerning all MIDR CD-ROMs published so far.
l I- GEO.TAB	A table of Venus geologic features.
 - GEO.LBL	A PDS detached label that describes GEO.TAB.
 - voldesc.sfd 	A description of the contents of this CD-ROM volume in a format readable by both humans and computers.
 - [INDEX] 	A directory containing index files for searching specific MIDR or GxDR products.
 - MCUMDIR.TAB 	A table listing all MIDR and GxDR products published so far, including the MIDRs on this CD-ROM.
 - MCUMDIR.LBL 	A PDS detached label that describes MCUMDIR.TAB.
 - CONTENTS.TAB 	A tabular listing of each MIDR frame on this disk, the directory in which it is located, and its extent in latitude and longitude. Also includes whether MIDR has had seam removal procedures applied.
 - CONTENTS.LBL 	A PDS detached label that describes CONTENTS.TAB.
 - [LABEL] 	A directory containing catalog information describing the major Magellan data products that will be submitted to PDS. This information can be used to gain a top-level understanding of the Magellan mission, radar experiment, processing, and data products.
 - CATALOG.LBL 	PDS high-level experiment-description catalog information.
 - C1MIDRDS.LBL 	PDS high-level data-set catalog information for C1-MIDR.
 - C2MIDRDS.LBL 	PDS high-level data-set catalog information for C2-MIDR.

Table 7.5. CD-ROM File Structure (Cont.).

ile	CONTENTS
 - C3MIDRDS.LBL 	PDS high-level data-set catalog information for C3-MIDR.
FBIDRDS.LBL	PDS high-level data-set catalog information for F-BIDR. The F-BIDR is the basic image data product. This file provides the information on how to extract radar backscatter cross-sections from MIDRs, given the incidence angle information from GEOM.TAB and the image data.
 - FMIDRDS.LBL 	PDS high-level data-set catalog information for F-MIDR.
 - xPMIDRDS.LBL 	PDS high-level data-set catalog information for P-MIDR, where x is N (north) or S (south)
- DSMAPC1.LBL 	PDS high-level data-set catalog information describing C1-MIDR cartographic projections and references. This and following map projection files allow computation of latitude and longitude from image line and sample, using either the VICAR2 or PDS label information.
- DSMAPC2.LBL	PDS high-level data-set catalog information describing C2-MIDR cartographic projections and references.
- DSMAPC3.LBL	PDS high-level data-set catalog information describing C3-MIDR cartographic projections and references.
 - DSMAPP.LBL 	PDS high-level data-set catalog information describing P-MIDR cartographic projections and references.
I- DSMAPF.LBL	PDS high-level data-set catalog information describing F-MIDR cartographic projections and references.
[x(y)nnzmmm]	Directories containing framelets that make up a single 7168 line by 8192 sample mosaic, where x is either C (compressed mosaic) or F (full mosaic); y is either 1, 2, or 3 (C1-MIDR, C2-MIDR, or C3-MIDR, i.e., once, twice, or thrice compressed using 3-by-3 moving averages), or not present; nn is the middle latitude of the mosaic; z is N or S (north or south latitude); and mmm is the middle longitude of the mosaic. Both middle latitude and longitude have been rounded off to the nearest integer number.
BROWSE.IMG	The browse version of the MIDR, 896 lines by 1024 samples, created by averaging groups of 8-by-8 pixels in the original MIDR.

LE	CONTENTS
- BROWSE.LBL	A PDS detached label that describes BROWSE.IMG.
I- FRAME.TAB	A table describing the range of latitude and longitude within each image framelet.
 - FRAME.LBL 	A PDS detached label that describes FRAME.TAB.
 - GEOM.TAB 	Selected entries from the Magellan Experimenters' Notebook. The Notebook is generated from the Magellan Radar Mapping Sequencing Software and is based on predicted information. Included in GEOM.TAI is information on orbit numbers for which data were acquired and used in the MIDR, together with information on radar viewing geometry and image quality.
 - GEOM.LBL	A PDS detached label that describes GEOM.TAB.
 - HIST.TAB 	A binary histogram of pixel values in each 7168-by-8192 MIDR.
 - HIST.LBL 	A PDS detached label that describes HIST.TAB.
 - x(y)Fnn.LBL 	PDS detached labels describing the framelet files, where x is C (compressed mosaic) or F (full mosaic); y is 1, 2, or 3 (C1-MIDR, C2- MIDR, or C3-MIDR), or not present; and nn the framelet number (01 through 56).
 - x(y)Fnn.IMG	A 1024-by-1024 image framelet, where x, y, and nn are the same as in the preceding entry.

Table 7.5. CD-ROM File Structure (Cont.).

Cn-MIDR	1 Cn-MIDRs by Compac COMPACT DISK IDENTIFICATION	Cn-MIDR	COMPACT DISK	Cn-MIDR	COMPACT DISK
				30N189;1	MIDRCD.031
00N009;1	MIDRCD.014	15N197;1	MIDRCD.033	30N207;1	MIDRCD.033
0N026;1	MIDRCD.012	15N215;1	MIDRCD.034	30N225;1	MIDRCD.034
0N026;2	MIDRCD.112	15N232;1	MIDRCD.037		MIDRCD.043
0N028;1	MIDRCD.037	15N249;1	MIDRCD.041	30N232;1	MIDRCD.040
01028,1 001060;1	MIDRCD.014	15N266;1	MIDRCD.041	30N243;1	MIDRCD.040
	MIDRCD.016	15N283;1	MIDRCD.043	30N261;1	MIDRCD.043
00N077;1	MIDRCD.030	15N300;1	MIDRCD.047	30N279;1	MIDRCD.045
00N080;1	MIDRCD.019	15N317;1	MIDRCD.048	30N284;1	MIDRCD.061
00N095;1	MIDRCD.112	15N335;1	MIDRCD.002	30N284;2	
00N095;2	MIDRCD.019	15N335;2	MIDRCD.057	30N297;1	MIDRCD.047
00N112;1		15N352;1	MIDRCD.002	30N315;1	MIDRCD.048
00N112;2	MIDRCD.096	15\$009;1	MIDRCD.014	30N333;1	MIDRCD.002
00N129;1	MIDRCD.019	15\$026;1	MIDRCD.012	30N333;2	MIDRCD.057
00N131;1	MIDRCD.034	15\$026;2	MIDRCD.097	30N335;2	MIDRCD.051
00N146;1	MIDRCD.022	158060;1	MIDRCD.016	30N351;1	MIDRCD.012
00N163;1	MIDRCD.031		MIDRCD.019	30\$009;1	MIDRCD.014
00N180;1	MIDRCD.030	158077;1	MIDRCD.019	30\$026;1	MIDRCD.037
00N183;1	MIDRCD.034	158095;1	MIDRCD.097	30\$027;1	MIDRCD.014
00N197;1	MIDRCD.033	158095;2	MIDRCD.020	308027;2	MIDRCD.100
00N215;1	MIDRCD.033	15\$112;1	MIDRCD.096	30\$045;1	MIDRCD.037
00N232;1	MIDRCD.034	155112;2	MIDRCD.019	30\$063;1	MIDRCD.016
00N234;1	MIDRCD.043	15\$129;1	MIDRCD.022	30\$078;1	MIDRCD.037
00N249;1	MIDRCD.040	15\$146;1	MIDRCD.022 MIDRCD.030	30\$081;1	MIDRCD.020
00N266;1	MIDRCD.041	15\$163;1	MIDRCD.030	30\$099;1	MIDRCD.020
00N283;1	MIDRCD.043	15\$180;1		30\$099;2	MIDRCD.090
00N286;1	MIDRCD.051	15\$197;1	MIDRCD.033	30\$117;1	MIDRCD.02
00N300;1	MIDRCD.047	15\$215;1	MIDRCD.033	30\$117;2	MIDRCD.09
00N317;1	MIDRCD.048	15\$232;1	MIDRCD.034	30\$129;1	MIDRCD.03
00N335;1	MIDRCD.002	15\$249;1	MIDRCD.040		MIDRCD.02
00N337;2	MIDRCD.051	15\$266;1	MIDRCD.041	30\$135;1	MIDRCD.02
00N352;1	MIDRCD.002	15\$283;1	MIDRCD.041	30\$153;1	MIDRCD.03
14N060;1	MIDRCD.078	15\$300;1	MIDRCD.047	30\$171;1	MIDRCD.03
14N180;1	MIDRCD.069	15\$317;1	MIDRCD.048	30\$181;1	MIDRCD.03
14N300;1	MIDRCD.078	15\$335;1	MIDRCD.002	30\$189;1	MIDRCD.03
14(1)00,1	MIDRCD.078	15\$352;1	MIDRCD.002	30\$207;1	MIDRCD.03
	MIDRCD.078	30N009;1	MIDRCD.012	30\$225;1	MIDRCD.04
14\$180;1	MIDRCD.078	30N026;1	MIDRCD.034	30\$232;1	MIDRCD.04
14\$300;1	MIDRCD.014	30N027;1	MIDRCD.012	30\$243;1	
15N009;1	MIDRCD.012	30N027;2	MIDRCD.112	30\$261;1	MIDRCD.0
15N026;1	MIDRCD.112	30N063;1	MIDRCD.016	30\$279;1	MIDRCD.0
15N026;2	MIDRCD.016	30N078;1	MIDRCD.033	30\$284;1	MIDRCD.0
15N060;1		30N081;1	MIDRCD.020	30\$297;1	MIDRCD.0
15N077;1	MIDRCD.019	30N099;1	MIDRCD.020	30\$315;1	MIDRCD.0
15N095;1	MIDRCD.019	30N099;2	MIDRCD.097	30\$333;1	MIDRCD.0
15N095;2	MIDRCD.112	30N117;1	MIDRCD.021	30\$335;2	MIDRCD.
15N112;1	MIDRCD.020	30N129;1	MIDRCD.034	30\$351;1	MIDRCD.
15N112;2	MIDRCD.097		MIDRCD.030	45N011;1	MIDRCD.
15N129;1	MIDRCD.020	30N135;1	MIDRCD.022	45N032;1	MIDRCD.
15N146;1	MIDRCD.022	30N153;1	MIDRCD.021	45N053;1	MIDRCD.
15N163;1	MIDRCD.031	30N171;1		45N074;1	MIDRCD.
15N180;1	MIDRCD.030	30N181;1	MIDRCD.043		

Cn-MIDR	COMPACT DISK	Cn-MIDR		Cn-MIDR	COMPACT DISK
<u> </u>			IDENTIFICATION		IDENTIFICATION
45N096;1	MIDRCD.020	45\$286;1			
45N096;2	MIDRCD.097	45\$350;1	MIDRCD.043	60\$093;1	MIDRCD.054
45N117;1	MIDRCD.021	455550,1 60N014;1	MIDRCD.002	60S097;1	MIDRCD.022
45N117;2	MIDRCD.097	60N033;1	MIDRCD.012	60\$125;1	MIDRCD.022
45N138;1	MIDRCD.021	60N033;2	MIDRCD.043	60S153;1	MIDRCD.022
45N159;1	MIDRCD.030	60N042;1	MIDRCD.061	60\$153;1	MIDRCD.054
45N180;1	MIDRCD.030	60N070;1	MIDRCD.016	60S180;1	MIDRCD.033
45N202;1	MIDRCD.031	60N093;1	MIDRCD.019	60S208;1	MIDRCD.034
45N223;1	MIDRCD.037	60N093;1	MIDRCD.051	60S213;1	MIDRCD.054
45N244;1	MIDRCD.040	60N097;2	MIDRCD.021	60S236;1	MIDRCD.037
45N265;1	MIDRCD.040	60N125;1	MIDRCD.097	60S263;1	MIDRCD.041
45N286;1	MIDRCD.047	60N153;1	MIDRCD.021	60S273;1	MIDRCD.054
45N307:1	MIDRCD.047	60N153;1	MIDRCD.031	60\$291;1	MIDRCD.047
45N329:1	MIDRCD.047 MIDRCD.047	60N153;2	MIDRCD.051	60\$333;1	MIDRCD.069
I5N329;2	MIDRCD.060	60N180;1	MIDRCD.061	60\$347;1	MIDRCD.031
I5N350;1	MIDRCD.012	60N208;1	MIDRCD.030	75N029;1	MIDRCD.016
55011;1		60N213;1	MIDRCD.037	75N029;2	MIDRCD.069
5\$032:1	MIDRCD.012	60N236;1	MIDRCD.054	75N074;1	MIDRCD.022
5\$032;2	MIDRCD.014	60N263;1	MIDRCD.040	75N119;1	MIDRCD.030
5S074;1	MIDRCD.112	60N273;2	MIDRCD.041	75N164;1	MIDRCD.037
55074,1 55096;1	MIDRCD.016	60N291;1	MIDRCD.061	75N209;1	MIDRCD.041
5S096;2	MIDRCD.019	60N319;1	MIDRCD.047	75N254;1	MIDRCD.048
55090,2 55117;1	MIDRCD.097	60N333;1	MIDRCD.048	75N299;1	MIDRCD.048
55117,1 5S117;2	MIDRCD.021	·	MIDRCD.051	75N338;1	MIDRCD.014
55117;2 55138;1	MIDRCD.096	60N347;1	MIDRCD.014	75N338;2	MIDRCD.069
55158;1 55159;1	MIDRCD.021	60N347;2	MIDRCD.054	75\$023;1	MIDRCD.054
	MIDRCD.022	60S014;1	MIDRCD.016	75\$068;1	MIDRCD.051
5S180;1	MIDRCD.069	60S033;1	MIDRCD.054	75\$113;1	MIDRCD.051
58202;1	MIDRCD.031	60S042;1	MIDRCD.020	75S203;1	MIDRCD.048
S223;1	MIDRCD.033	60S042;2	MIDRCD.054	75\$248;1	MIDRCD.048
S244;1	MIDRCD.040	608042;3	MIDRCD.097	758293;1	MIDRCD.048
\$265;1	MIDRCD.040	60S070;1	MIDRCD.021	75\$338;2	MIDRCD.078

Table 7.6. Cycle-1	Cn-MIDRs by Compact Disk (Cont.).

Table 7.7. Cycle-1 F-MIDRs by Compact Disk.

F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK
00N059;1 00N065;1 00N070;1 00N076;1 00N082;1 00N082;1 00N087;1 00N093;1 00N104;1	MIDRCD.059 MIDRCD.009 MIDRCD.009 MIDRCD.009 MIDRCD.010 MIDRCD.120 MIDRCD.104	00N189;1 00N194;1 00N200;1 00N205;1 00N217;1 00N279;1 00N284;1 00N290;1	MIDRCD.024 MIDRCD.024 MIDRCD.025 MIDRCD.027 MIDRCD.027 MIDRCD.046 MIDRCD.049 MIDRCD.093	05N070;1 05N076;1 05N082;1 05N087;1 05N093;1 05N098;1 05N132;1	MIDRCD.009 MIDRCD.008 MIDRCD.010 MIDRCD.015 MIDRCD.015 MIDRCD.015 MIDRCD.017
00N132;1 00N138;1 00N149;1 00N155;1	MIDRCD.017 MIDRCD.124 MIDRCD.111 MIDRCD.111	00N290;1 00N318;1 00N357;1 05N020;1 05N065;1	MIDRCD.093 MIDRCD.093 MIDRCD.005 MIDRCD.110 MIDRCD.009	05N177;1 05N183;1 05N188;1 05N194;1 05N200;1	MIDRCD.023 MIDRCD.077 MIDRCD.024 MIDRCD.024 MIDRCD.025

Table 7.7. Cycle-1 F-MIDRs by Compact Disk (Cont.).

F-MIDR	COMPACT DISK IDENTIFICATION	F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK
05N205	= 110 21027	10N188;1	MIDRCD.025		
05N217	(CD,0L)	10N194;1		15N197;1	MIDRCD.025
05N228		10N200;1		15N203;1	
05N239		10N205;1		15N220;1	MIDRCD.066
05N273;	I MIDRCD.045	10N211;1	- 1102100/L	15N237;1	
05N284;	1 MIDRCD.045	10N217;1		15N249;1	
05N290;	I MIDRCD.046	10N228;1	MIDRCD.032	15N260;1	
05N301;	1 MIDRCD.052	10N234;1	MIDRCD.038	15N266;1	
05N307;	I MIDRCD.053	10N267;1	MIDRCD.032	15N283;1	MIDRCD.093
05N318;	I MIDRCD.053	10N273;1	MIDRCD.045	15N312;1	MIDRCD.053
05N357;			MIDRCD.045	15N340;1	MIDRCD.003
05S059;1		10N279;1	MIDRCD.049	158020;1	MIDRCD.105
05\$065;1		10N284;1	MIDRCD.045	15\$077;1	MIDRCD.066
058070;1		10N290;1	MIDRCD.059	158094;1	MIDRCD.120
05\$076;1		10N301;1	MIDRCD.093	15\$106;1	MIDRCD.104
05S082;1		10N307;1	MIDRCD.052	15\$123:1	MIDRCD.018
05S087;1	MIDRCD.010	108031;1	MIDRCD.106	15\$129;1	MIDRCD.094
05S098;1	MIDRCD.015	10\$059;1	MIDRCD.059	15\$134;1	MIDRCD.094 MIDRCD.094
)5S104;1	MIDRCD.104	10\$065;1	MIDRCD.010	15\$140;1	
05S132;1		10\$070;1	MIDRCD.009	155146;1	MIDRCD.093
5S149;1	MIDRCD.015	10\$076;1	MIDRCD.009	158152;1	MIDRCD.122
5\$155;1	MIDRCD.111	10\$082;1	MIDRCD.009	158157;1	MIDRCD.125
5\$155;1	MIDRCD.093	10\$087;1	MIDRCD.010		MIDRCD.023
58177;1	MIDRCD.107	10\$093;1	MIDRCD.080	15\$163;1	MIDRCD.023
5S183;1	MIDRCD.024	10\$098;1	MIDRCD.015	158169;1	MIDRCD.065
5\$189;1	MIDRCD.026	10\$104;1	MIDRCD.104	158174;1	MIDRCD.068
5\$205;1	MIDRCD.093	10\$132;1	MIDRCD.015	15S180;1 15S214;1	MIDRCD.025
	MIDRCD.028	105144;1	MIDRCD.120		MIDRCD.029
S211;1	MIDRCD.029	10\$155;1	MIDRCD,023	158220;1	MIDRCD.067
S217;1	MIDRCD.028	10S177;1	MIDRCD.024	158226;1	MIDRCD.067
\$222;1	MIDRCD.032	10\$183;1	MIDRCD.026	158237;1	MIDRCD.035
S239;1	MIDRCD.035	105188;1	MIDRCD.025	15\$243;1	MIDRCD.038
S250;1	MIDRCD.036	10\$200;1	MIDRCD.023	15\$249;1	MIDRCD.038
S279;1	MIDRCD.046	10\$211;1	MIDRCD.029	158254;1	MIDRCD.038
S284;1	MIDRCD.070	10\$245;1	MIDRCD.039	15\$260;1	MIDRCD.038
\$290;1	MIDRCD.070		MIDRCD.039	158277;1	MIDRCD.070
\$295;1	MIDRCD.050		MIDRCD.036	15\$283;1	MIDRCD.046
\$312;1	MIDRCD.059			15\$289;1	MIDRCD.046
3357;1	MIDRCD.005	100000	MIDRCD.045		MIDRCD.007
1014;1	MIDRCD.010		MIDRCD.070	20N080;1	MIDRCD.015
1020;1	MIDRCD.008	100000	MIDRCD.046	20N097;1	MIDRCD.015
1065;1	MIDRCD.013		MIDRCD.046		MIDRCD.017
1076;1	MIDRCD.066		MIDRCD.050	20N174;1	MIDRCD.062
082;1	MIDRCD.120		MIDRCD.052	20N186;1	MIDRCD.025
093;1	MIDRCD.120		MIDRCD.011	20N192;1	MIDRCD.024
098;1	MIDRCD.017		MIDRCD.011	20N198;1	MIDRCD.025
132;1	MIDRCD.017	15111.00	AIDRCD.013	201720 4	MIDRCD.028
166;1	MIDRCD.065		AIDRCD.015		MIDRCD.032
	MIDRCD.065		AIDRCD.065		AIDRCD.036
177;1	MIDRCD.024		1IDRCD.065		AIDRCD.035
	MIDRCD.077		IIDRCD.032		IDRCD.044
		15N191;1 N	IIDRCD.025		1IDRCD.093

		s by Compact Disk (Cont.).	
T-610 77	Cycle-1 F-MIDR	s by Compact Disk (contain	

_

_ _ _ _ _ _

_

- -

-MIDR	ycle-1 F-MIDRs by Compact		COMPACT DISK IDENTIFICATION	F-MIDR	COMPACT DISK
	IDENTIFICATION			30\$268;1	MIDRCD.042
an 1000 - 1	MIDRCD.046		MIDRCD.006	30\$275;1	MIDRCD.045
0N280;1	MIDRCD.046	258009;1	MIDRCD.007	305287;1	MIDRCD.094
0N286;1	MIDRCD.044	25\$034;1	MIDRCD.105	30\$357;1	MIDRCD.005
ON292;1	MIDRCD.053	25\$082;1	MIDRCD.013	35N077;1	MIDRCD.011
20N328;1	MIDRCD.004	258095;1	MIDRCD.125	35N083;1	MIDRCD.119
20N351;1	MIDRCD.005	25\$101;1	MIDRCD.110	35N090;1	MIDRCD.108
20N357;1	MIDRCD.006	25\$131;1	MIDRCD.013	35N150;1	MIDRCD.106
205003;1	MIDRCD.105	25\$137;1	MIDRCD.094	35N157;1	MIDRCD.080
20\$033;1	MIDRCD.108	25\$156;1	MIDRCD.023	35N163;1	MIDRCD.065
20\$103;1	MIDRCD.017	25\$162;1	MIDRCD.023	35N170;1	MIDRCD.103
205121;1	MIDRCD.080	25\$168;1	MIDRCD.071	35N197;1	MIDRCD.027
20\$127;1	MIDRCD.080 MIDRCD.094	25\$174;1	MIDRCD.071	35N210;1	MIDRCD.080
20\$139;1	MIDRCD.094 MIDRCD.018	25\$192;1	MIDRCD.074	35N230;1	MIDRCD.035
20\$145;1		25\$198;1	MIDRCD.071	-	MIDRCD.044
20\$156;1	MIDRCD.023	258247;1	MIDRCD.039	35N270;1	MIDRCD.044
20\$162;1	MIDRCD.024	258253;1	MIDRCD.042	35N277;1	MIDRCD.044
20\$168;1	MIDRCD.070	258259;1	MIDRCD.042	35N283;1	MIDRCD.036
20\$174;1	MIDRCD.065	25\$296;1	MIDRCD.050	35N290;1	MIDRCD.050
20\$180;1	MIDRCD.026	25\$302;1	MIDRCD.052	35N297;1	MIDRCD.063
20\$204;1	MIDRCD.029	25\$345;1	MIDRCD.003	35N303;1	MIDRCD.052
20\$210;1	MIDRCD.029	25\$357;1	MIDRCD.005	35N330;1	MIDRCD.006
20\$221;1	MIDRCD.029	30N066;1	MIDRCD.080	35\$003;1	MIDRCD.011
20\$227;1	MIDRCD.067	30N085;1	MIDRCD.111	35\$083;1	MIDRCD.011
20\$233;1		30N123;1	MIDRCD.013	358090;1	MIDRCD.013
20\$245;1	MIDRCD.039	30N161;1	MIDRCD.065	35\$130;1	MIDRCD.07
208251;1	MIDRCD.039	30N167;1	MIDRCD.065	35\$137;1	MIDRCD.07
20\$257;1	MIDRCD.038	30N174;1	MIDRCD.065	358143;1	
20\$280;1	MIDRCD.070	30N237;1	MIDRCD.038	358157;1	MIDRCD.07
20\$286;1	1 MIDRCD.039	30N256;1	MIDRCD.038	35\$163;1	MIDRCD.02
20\$357;	1 MIDRCD.005	30N262;1	MIDRCD.036	35\$170,1	MIDRCD.07
25N003;				35\$203;1	MIDRCD.09
25N028		30N269;1		35\$243;1	MIDRCD.03
25N082	100	30N275;1	1 11 D D C D 042	35\$250;1	MIDRCD.09
25N089	- UDD 0D 100	30N281;1		35\$270;1	MIDRCD.06
25N119		30N287;1		35\$277;1	
25N143		30N294;1		35\$283;1	
25N174		30N300;1		35\$290;1	
25N180		30\$003;1		35\$297;1	
25N20	,	30\$009;1	1 17 D C D 010	35\$357;	
25N21	- COD 017	30\$022;1	1000 D 111	40N018;	
25N22	,	30\$085;	105 INS	40N025;	
		30\$104;	· · · · · · · · · · · · · · · · · · ·	40N081;	I MIDRCD.I
25N22	0.50	30\$129;	- mpp (D) (15	40N088	
25N25		30\$136;		40N138	
25N27	·	30\$142;		40N159	
25N27		30\$155		40N166	
25N28		30\$161		40N194	
25N29	- (IDD OD 052	30\$205		40N230	
25N3		30\$212		40N244	. HER CD
25N3		30\$218		40N25	
25N3	51;1 MIDRCD.004	30\$262	:1 MIDRCD.042	401N23	.,

-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK
				60N164;1	MIDRCD.026
40N272;1	MIDRCD.044	50N054;1	MIDRCD.013	60N207;1	MIDRCD.028
ON279;1	MIDRCD.045	50N147;1	MIDRCD.026	60N270;1	MIDRCD.042
ON286;1	MIDRCD.046	50N163;1	MIDRCD.066	60N281;1	MIDRCD.045
WN321;1	MIDRCD.052	50N172;1	MIDRCD.027	60N302;1	MIDRCD.059
IOS004 ;1	MIDRCD.006	50N180;1	MIDRCD.066	60N312;1	MIDRCD.050
405011;1	MIDRCD.080	50N197;1	MIDRCD.027		MIDRCD.053
105074;1	MIDRCD.018	50N205;1	MIDRCD.028	60N323;1	MIDRCD.003
40S131;1	MIDRCD.018	50N247;1	MIDRCD.039	60N334;1	MIDRCD.004
40S138;1	MIDRCD.013	50N264;1	MIDRCD.042	60N344;1	MIDRCD.004
405145;1	MIDRCD.018	50N297;1	MIDRCD.049	60N355;1	MIDRCD.005
40S166;1	MIDRCD.121	50N306;1	MIDRCD.052	60\$005;1	MIDRCD.009
40S201;1	MIDRCD.067	50N356;1	MIDRCD.006	60S016;1	
405201;1	MIDRCD.067	50\$013;1	MIDRCD.018	60S164;1	MIDRCD.063
40S222;1	MIDRCD.029	50S021;1	MIDRCD.039	60\$175;1	MIDRCD.077
40\$230;1	MIDRCD.032	50\$088;1	MIDRCD.011	60S185;1	MIDRCD.077
40S244;1	MIDRCD.035	50S147;1	MIDRCD.076	60\$196;1	MIDRCD.070
	MIDRCD.067	50S180;1	MIDRCD.076	60\$207;1	MIDRCD.026
40S272;1	MIDRCD.049	505188;1	MIDRCD.076	60\$355;1	MIDRCD.003
40S279;1	MIDRCD.049	50\$230;1	MIDRCD.070	65N006;1	MIDRCD.008
40\$286;1	MIDRCD.071	50\$272;1	MIDRCD.039	65N018;1	MIDRCD.007
40\$293;1	MIDRCD.050	50\$345;1	MIDRCD.003	65N102;1	MIDRCD.01
40\$300;1	MIDRCD.004	50\$356;1	MIDRCD.004	65N114;1	MIDRCD.01
40\$349;1	MIDRCD.007	55N023;1	MIDRCD.008	65N126;1	MIDRCD.01
45N004;1	MIDRCD.011	55N060;1	MIDRCD.011	65N162;1	MIDRCD.02
45N019;1	MIDRCD.011	55N152;1	MIDRCD.023	65N186;1	MIDRCD.02
45N080;1	MIDRCD.070	55N171;1	MIDRCD.066	65N198;1	MIDRCD.02
45N088;1	· · · -	55N180;1	MIDRCD.066	65N294;1	MIDRCD.05
45N119;1		55N208;1	MIDRCD.028	65N306;1	MIDRCD.05
45N126;1		55N236;1	MIDRCD.036	65N318;1	MIDRCD.05
45N157;1		55N263;1	MIDRCD.042	65N330;1	MIDRCD.00
45N188;1		55N291;1	MIDRCD.049	65N342;1	MIDRCD.00
45N195;1		55N319;1	MIDRCD.053	65N354;1	MIDRCD.0
45N211;1	MIDRCD.027	55N328;1	MIDRCD.052	65\$005;2	MIDRCD.0
45N241;2		55N337;1	MIDRCD.003	65\$114;1	MIDRCD.0
45N249;1		55N346;1	MIDRCD.004	65\$186;1	MIDRCD.0
45N295;1			MIDRCD.018	65\$354;1	MIDRCD.0
45\$012;1		55\$014;1	MIDRCD.077	70N007;1	MIDRCD.0
45S019;1		558097;1	MIDRCD.077	70N296;1	0
45S111;1		55\$171;1	MIDRCD.077	70N310;	
45\$142;	1 MIDRCD.038	55\$180;1	MIDRCD.076	70N324;	
45\$211;		55\$199;1		70N339;	
45S218;	1 MIDRCD.029	558355;1		70N353;	-
45\$226;	I MIDRCD.076	60N005;		75N237;	
45\$234;		60N016;		75N313;	
45\$280;		60N026;		75N332;	
45\$349;		60N111;		75N352 75N351	
50N021		60N132;	1 MIDRCD.018	1211221	i indiced.

_

Table 7.8. Cycle-2 Cn-MIDRs by Compa	ct Disk.	

Cn-MIDR	COMPACT DISK IDENTIFICATION	Cn-MIDR	COMPACT DISK	Cn-MIDR	COMPACT DISK
00N028;201	MIDRCD.083	15\$146;201			
00N028;201	MIDRCD.084	15\$163;201	MIDRCD.061	30\$335;201	MIDRCD.082
00N043;201	MIDRCD.057	15\$180;201	MIDRCD.090	30\$335;202	MIDRCD.081
00N060;201	MIDRCD.057		MIDRCD.090	45N032;201	MIDRCD.054
00N060;202	MIDRCD.060	15\$197;201	MIDRCD.090	45N053;201	MIDRCD.060
00N077;201	MIDRCD.079	158215;201	MIDRCD.089	45N074;201	MIDRCD.126
00N080;201	MIDRCD.084	15\$232;201	MIDRCD.079	45N096;201	MIDRCD.061
00N080;202	MIDRCD.083	15\$283;201	MIDRCD.126	45N117;201	MIDRCD.079
00N095;201	MIDRCD.089	15\$300;201	MIDRCD.089	45N329;201	MIDRCD.079
00N112;201	MIDRCD.088	15\$317;201	MIDRCD.089	45\$011;201	MIDRCD.060
00N131;201	MIDRCD.081	30N026;201	MIDRCD.126	45\$032;201	MIDRCD.095
00N146;201	MIDRCD.061	30N027;201	MIDRCD.060	45\$032;202	MIDRCD.092
00N163;201	MIDRCD.089	30N045;201	MIDRCD.057	45\$053;201	MIDRCD.060
00N180;201	MIDRCD.088	30N078;201	MIDRCD.083	45\$053;202	MIDRCD.061
00N183;201	MIDRCD.081	30N078;202	MIDRCD.084	458074;201	MIDRCD.092
00N197;201	MIDRCD.081	30N081;201	MIDRCD.126	458096;201	MIDRCD.092
00N215;201	MIDRCD.088	30N099;201	MIDRCD.061	45\$117;201	MIDRCD.072
00N234;201	MIDRCD.081	30N117;201	MIDRCD.069	45\$138;201	MIDRCD.092
0N283;201	MIDRCD.081 MIDRCD.088	30N129;201	MIDRCD.083	45\$159;201	MIDRCD.092 MIDRCD.092
0N286;201	MIDRCD.088 MIDRCD.083	30N333;201	MIDRCD.079	45\$180;201	MIDRCD.092 MIDRCD.092
0N286;202	MIDRCD.083 MIDRCD.084	30N335;201	MIDRCD.126	45\$202;201	
0N300;201	MIDRCD.084 MIDRCD.088	30\$026;201	MIDRCD.084	45\$223;201	MIDRCD.092
0N317;201	MIDRCD.088	30\$026;202	MIDRCD.081	45\$244;201	MIDRCD.078
0N337;201	MIDRCD.126	30\$045;201	MIDRCD.057	45\$265;201	MIDRCD.085
4N060;201	MIDRCD.085	30\$063;201	MIDRCD.069	45\$286;201	MIDRCD.091
4N060;202	MIDRCD.126	30\$063;202	MIDRCD.091	45\$307;201	MIDRCD.091
4N180;201	MIDRCD.126	30\$078;201	MIDRCD.084	45\$329;201	MIDRCD.091
4N300;201	MIDRCD.084	30\$078;202	MIDRCD.081	45\$350;201	MIDRCD.085
4\$060;201		30\$081;201	MIDRCD.091	60N033;201	MIDRCD.060
4S300;202	MIDRCD.084	30\$099;201	MIDRCD.091	60N033;202	MIDRCD.083
5N043;201	MIDRCD.126	30\$117;201	MIDRCD.079	60N070;201	MIDRCD.084
N060;201	MIDRCD.057	30\$129;201	MIDRCD.082		MIDRCD.089
N060;202	MIDRCD.089	30\$135;201	MIDRCD.079	60N093;202	MIDRCD.083
N077;201	MIDRCD.092	30\$153;201	MIDRCD.091	60N097;201	MIDRCD.089
N095;201	MIDRCD.078	30\$171;201	MIDRCD.091	60N153;202	MIDRCD.082
N112;201	MIDRCD.089	30\$181;201	MIDRCD.081	60N333;201	MIDRCD.081
N129;201	MIDRCD.061	30\$189;201	MIDRCD.091	60N347;201	MIDRCD.069
	MIDRCD.069	30\$207;201	MIDRCD.091	60S014;202	MIDRCD.060
N335;201 S026;201	MIDRCD.089	30\$225;201	MIDRCD.079	60S033;201	MIDRCD.082
	MIDRCD.090	30\$232;201	MIDRCD.081	60\$033;202	MIDRCD.083
\$043;201	MIDRCD.057	30\$243;201	MIDRCD,090	60S042;202	MIDRCD.057
S060;201	MIDRCD.057	30\$261;201	MIDRCD.079	60S070;201	MIDRCD.085
5060;202	MIDRCD.060	30\$279;201	MIDRCD.090	60\$093;202	MIDRCD.082
507 7;201	MIDRCD.078	30\$284;201	MIDRCD.082	60\$097;201	MIDRCD.095
095;201	MIDRCD.090	30S284;202	MIDRCD.081	60S125;201	MIDRCD.095
112;201	MIDRCD.079	30\$297;201	MIDRCD.090	60\$153;201	MIDRCD.082
129;201	MIDRCD.069	30\$315;201	MIDRCD.090	60S153;201	MIDRCD.095
				60\$208;201	MIDRCD.095

Table 7.8. Cycle-2 Cn-MIDRs by Compact Disk (Cont.).

Cn-MIDR	COMPACT DISK	Cn-MIDR	COMPACT DISK	Cn-MIDR	COMPACT DISK
60S213;202	MIDRCD.082	60S333;201	MIDRCD.082	75\$158;201	MIDRCD.096
60\$236;201	MIDRCD.095	60\$333;202	MIDRCD.083	758203;201	MIDRCD.084
60\$263;201	MIDRCD.085	60\$347;201	MIDRCD.060	75\$248;201	MIDRCD.085
60S273;201	MIDRCD.082	75N074;201	MIDRCD.069	75\$293:201	MIDRCD.085
60S273;202	MIDRCD.083	758023;201	MIDRCD.085	75\$338:201	MIDRCD.095
60S291;201	MIDRCD.095	75S068;201	MIDRCD.096	75\$338:202	MIDRCD.097
60\$319;201	MIDRCD.092	75\$113;201	MIDRCD.085		mbreb.077

Table 7.9. Cycle-2 F-MIDRs by Compact Disk.

F-MIDR		F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK
	IDENTIFICATION	- <u></u>	IDENTIFICATION	<u></u>	IDENTIFICATION
00N037;201	MIDRCD.055	10N076;201	MIDRCD.080	25N046;201	MIDRCD.055
00N042;201	MIDRCD.055	10\$054;201	MIDRCD.056	25N052:201	MIDRCD.062
00N048;201	MIDRCD.058	10\$087;201	MIDRCD.072	25N119;201	MIDRCD.068
00N054;201	MIDRCD.062	10\$115;201	MIDRCD.068	25N333;201	MIDRCD.058
00N070;201	MIDRCD.072	10\$177;201	MIDRCD.072	25\$131;201	MIDRCD.068
00N115;201	MIDRCD.064	10\$183;201	MIDRCD.072	25\$168;201	MIDRCD.074
00N149;201	MIDRCD.110	15N037;201	MIDRCD.056	25\$168;202	MIDRCD.107
00N155;201	MIDRCD.119	15N043;201	MIDRCD.055	25\$174;201	MIDRCD.074
00N189;201	MIDRCD.064	15N049;201	MIDRCD.055	25\$198;201	MIDRCD.074
00N194;201	MIDRCD.064	15N054;201	MIDRCD.062	25\$198;202	MIDRCD.123
00N200;201	MIDRCD.072	15N112;201	MIDRCD.063	30N035;201	MIDRCD.056
05N048;201	MIDRCD.055	15S049;201	MIDRCD.053	30N041;201	MIDRCD.056
05N054;201	MIDRCD.062	15\$054;201	MIDRCD.058	30N047;201	MIDRCD.055
05N087;201	MIDRCD.111	15\$060;201	MIRDCD.073	30N054;201	MIDRCD.063
05N115;201	MIDRCD.067	15\$077;202	MIDRCD.103	30\$041;201	MIDRCD.058
05N194;201	MIDRCD.064	15\$112;201	MIDRCD.064	30\$098;201	MIDRCD.064
05N200;201	MIDRCD.072	15\$117;201	MIDRCD.063	30\$142;201	MIDRCD.063
058031;201	MIDRCD.059	15\$157;201	MIDRCD.073	30\$142;202	MIDRCD.068
05\$037;201	MIDRCD.055	15\$163;201	MIDRCD.064	30\$205;201	MIDRCD.074
058042;201	MIDRCD.055	15\$169;201	MIDRCD.073	30\$218;201	MIDRCD.074
058054;201	MIDRCD.062	15\$174;201	MIDRCD.073	35N050;201	MIDRCD.062
058087;201	MIDRCD.072	15\$180;201	MIDRCD.073	35N077;201	MIDRCD.080
058093;201	MIDRCD.072	15\$214;201	MIDRCD.073	35\$043;201	MIDRCD.074
058093;202	MIDRCD.102	20N038;201	MIDRCD.056	35\$137;201	MIDRCD.063
05\$099;201	MIDRCD.072	20N044;201	MIDRCD.058	35\$143;201	MIDRCD.063
058099;202	MIDRCD.108	20N050;201	MIDRCD.056	35\$143;202	MIDRCD.068
05\$115;201	MIDRCD.064	20N080;201	MIDRCD.087	40N046;201	MIDRCD.056
058149;201	MIDRCD.105	20N080;202	MIDRCD.098	40N053;201	MIDRCD.062
05\$155;201	MIDRCD.108	20N334;201	MIDRCD.056	40N088;201	MIDRCD.072
05\$205;201	MIDRCD.068	20S109;201	MIDRCD.074	40S138;201	MIDRCD.063
05\$205;202	MIDRCD.119	20\$162;201	MIDRCD.064	40\$145;201	MIDRCD.068
ION031;201	MIDRCD.058	20\$168;201	MIDRCD.074	45N081;201	MIDRCD.071
ION042;201	MIDRCD.058	20\$174;201	MIDRCD.073	45N088;201	MIDRCD.071
ION048;201	MIDRCD.055	20\$180;201	MIDRCD.073	45S019;201	MIDRCD.075
ION054;201	MIDRCD.062	20\$221;201	MIDRCD.073	45\$211;201	MIDRCD.075
ION065;201	MIDRCD.059	208227;201	MIDRCD.073	45\$218;201	MIDRCD.068

Table 7.9. Cycle-2 F-MIDRs by Compact Disk (Cont.).

F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK
45\$226:201	MIDRCD.098	55N337;201	MIDRCD.058	60\$175;201	MIDRCD.094
45\$234;201	MIDRCD.074	55\$014;201	MIDRCD.075	60\$185;201	MIDRCD.076
45\$234:202	MIDRCD.121	558097;201	MIDRCD.094	60\$196;201	MIDRCD.075
45\$349;201	MIDRCD.062	55\$097;202	MIDRCD.106	60S207;201	MIDRCD.075
50\$013;201	MIDRCD.080	558199;201	MIDRCD.075	65N102;201	MIDRCD.068
50S021;201	MIDRCD.075	55\$319;201	MIDRCD.075	65\$006;201	MIDRCD.111
50\$230;201	MIDRCD.075	55\$328;201	MIDRCD.075	65\$114;201	MIDRCD.076
50\$230;202	MIDRCD.121	55\$356;201	MIDRCD.063	65\$186;201	MIDRCD.077
50S348:201	MIDRCD.059	60\$016;201	MIDRCD.077		
50\$356;201	MIDRCD.059	60\$101;201	MIDRCD.076		

Table 7.10. Cycle-3 Cn-MIDRs by Compact Disk.

Cn-MIDR	COMPACT DISK IDENTIFICATION	Cn-MIDR	COMPACT DISK	Cn-MIDR	COMPACT DISK
00N009;301	MIDRCD.114	15S009;301	MIDRCD.115	30\$153;301	MIDRCD.116
00N026;301	MIDRCD.114	158026;301	MIDRCD.115	30\$171;301	MIDRCD.099
00N028;301	MIDRCD.096	15\$060;301	MIDRCD.113	30\$181;301	MIDRCD.118
00N060;301	MIDRCD.113	158077;301	MIDRCD.114	30\$315;301	MIDRCD.100
00N077;301	MIDRCD.114	158095;301	MIDRCD.117	30\$333;301	MIDRCD.100
00N080;301	MIDRCD.092	15\$112;301	MIDRCD.115	30\$335;301	MIDRCD.119
00N095;301	MIDRCD.116	15\$129;301	MIDRCD.099	45N032;301	MIDRCD.116
00N112;301	MIDRCD.085	15\$146;301	MIDRCD.117	45N053;301	MIDRCD.116
00N129;301	MIDRCD.112	15\$163;301	MIDRCD.117	45N074;301	MIDRCD.113
00N131;301	MIDRCD.118	15\$180;301	MIDRCD.099	45N096;301	MIDRCD.114
00N146;301	MIDRCD.114	15\$232;301	MIDRCD.113	45N138;301	MIDRCD.115
00N163;301	MIDRCD.116	15\$317;301	MIDRCD.100	45N159;301	MIDRCD.099
00N180;301	MIDRCD.117	15\$335;301	MIDRCD.100	45N180;301	MIDRCD.117
00N183;301	MIDRCD.118	30N009;301	MIDRCD.115	45N350;301	MIDRCD.088
00N317;301	MIDRCD.100	30N045;301	MIDRCD.113	45\$053;301	MIDRCD.116
00N335;301	MIDRCD.100	30N063;301	MIDRCD.113	45\$074;301	MIDRCD.096
00N373;302	MIDRCD.118	30N078;301	MIDRCD.119	45\$096;301	MIDRCD.114
14N060;301	MIDRCD.119	30N081;301	MIDRCD.115	45\$138;301	MIDRCD.117
14N160;301	MIDRCD.119	30N099;301	MIDRCD.114	45\$159;301	MIDRCD.116
14N300;301	MIDRCD.119	30N135;301	MIDRCD.114	45\$180;301	MIDRCD.099
15N009;301	MIDRCD.116	30N153;301	MIDRCD.116	458244;301	MIDRCD.113
15N026;301	MIDRCD.115	30N171;301	MIDRCD.099	45\$329;301	MIDRCD.099
15N043;301	MIDRCD.113	30N181;301	MIDRCD.112	60N014;301	MIDRCD.115
15N060;301	MIDRCD.114	30N335;301	MIDRCD.090	60N033;301	MIDRCD.118
15N077;301	MIDRCD.113	30N335;301	MIDRCD.118	60N042;301	MIDRCD.115
15N095;301	MIDRCD.115	30N335;302	MIDRCD.112	60N093;301	MIDRCD.118
15N129;301	MIDRCD.112	30N351;301	MIDRCD.088	60N153;301	MIDRCD.118
15N146;301	MIDRCD.116	30\$063;301	MIDRCD.117	60N333;301	MIDRCD.118
15N163;301	MIDRCD.099	30\$078;301	MIDRCD.096	60N347;301	MIDRCD.113
15N180;301	MIDRCD.099	30S081;301	MIDRCD.117	75N029;301	MIDRCD.100
15N317;301	MIDRCD.099	30\$099;301	MIDRCD.117	75N344;301	MIDRCD.100
15N335;301	MIDRCD.100	30\$129;301	MIDRCD.118		
15N352;301	MIDRCD.088	30\$135;301	MIDRCD.117		

Table 7.11. Cycle-3 F-MIDRs by Compact Disk.

F-MIDR	COMPACT DISK IDENTIFICATION	F-MIDR	COMPACT DISK	F-MIDR	COMPACT DISK
00N159;301	MIDRCD.122	10\$155;301	MIDRCD.109	258327;301	MIDRCD.098
00N065;301	MIDRCD.087	10\$177;301	MIDRCD.101	30N054;301	MIDRCD.121
00N070;301	MIDRCD.123	10\$324;301	MIDRCD.098	30N085;301	MIDRCD.120
00N076;301	MIDRCD.124	15N014;301	MIDRCD.087	30N161;301	MIDRCD.106
00N082;301	MIDRCD.086	15N020;301	MIDRCD.086	30N167;301	MIDRCD.101
00N087;301	MIDRCD.124	15N037;301	MIDRCD.107	30\$136;301	MIDRCD.110
00N093;301	MIDRCD.121	15N043;301	MIDRCD.086	30\$142;301	MIDRCD.111
00N132;301	MIDRCD.108	15N049;301	MIDRCD.086	30\$161;301	MIDRCD.109
00N138;301	MIDRCD.125	15N054;301	MIDRCD.122	30\$325;301	MIDRCD.103
00N149;301	MIDRCD.106	15N169;301	MIDRCD.102	30\$332;301	MIDRCD.103
00N155;301	MIDRCD.104	15N174;301	MIDRCD.101	35N077;301	MIDRCD.123
05N020;301	MIDRCD.121	155094;301	MIDRCD.121	35N083;301	MIDRCD.123
05N065;301	MIDRCD.086	15\$134;301	MIDRCD.108	35N083,301 35N090;301	
05N070;301	MIDRCD.123	15\$140;301	MIDRCD.109		MIDRCD.121
05N082;301	MIDRCD.086	15\$157;301	MIDRCD.109	35N150;301	MIDRCD.120
05N087;301	MIDRCD.106	15\$163:301	MIDRCD.102	35N157;301	MIDRCD.109
05N093;301	MIDRCD.124	15\$169;301	MIDRCD.102	35N163;301	MIDRCD.102
05N099;301	MIDRCD.104	15\$174;301	MIDRCD.102 MIDRCD.101	35N170;301	MIDRCD.111
05N132;301	MIDRCD.104	15\$323;301	MIDRCD.098	35\$083;301	MIDRCD.122
05N329;301	MIDRCD.103	158329;301		358090;301	MIDRCD.101
058059;301	MIDRCD.122		MIDRCD.103	358137;301	MIDRCD.104
05\$065;301	MIDRCD.122 MIDRCD.123	20N003;301	MIDRCD.087	35\$143;301	MIDRCD.109
058070;301	MIDRCD.106	20N003;302	MIDRCD.125	358157;301	MIDRCD.105
05\$076;301	MIDRCD.123	20N038;301	MIDRCD.122	35\$163;301	MIDRCD.102
05\$082;301	MIDRCD.087	20N044;301	MIDRCD.086	35\$170;301	MIDRCD.102
058082,301	MIDRCD.124	20N080;301	MIDRCD.125	358323;301	MIDRCD.110
05S093;301	MIDRCD.107	20N097;301	MIDRCD.098	35\$330;301	MIDRCD.103
058099;301	MIDRCD.107	20N145;301	MIDRCD.109	40N088;301	MIDRCD.104
05\$132;301	MIDRCD.110	20N351;301	MIDRCD.125	40N138;301	MIDRCD.093
05\$132,301	MIDRCD.119	20N357;301	MIDRCD.087	40N159;301	MIDRCD.109
058155;301	MIDRCD.111	208139;301	MIDRCD.110	40N166;301	MIDRCD.119
05\$155,301	MIDRCD,101	208145;301	MIDRCD.109	40\$074;301	MIDRCD.124
10N014;301	MIDRCD.098	208156;301	MIDRCD.107	40S138;301	MIDRCD.108
10N014,301 10N020;301	MIDRCD.098	208162;301	MIDRCD.106	40S145;301	MIDRCD.109
10N020,301	MIDRCD.086	205168;301	MIDRCD.107	40S328;301	MIDRCD.103
10N076;301		208174;301	MIDRCD.101	40\$321;301	MIDRCD.110
	MIDRCD.107	20\$322;301	MIDRCD.098	45S218;301	MIDRCD.068
10N082;301	MIDRCD.123	25N003;301	MIDRCD.087	45S234;301	MIDRCD.108
10N093;301	MIDRCD.121	25N003;302	MIDRCD.125	45\$349;301	MIDRCD.062
10N132;301	MIDRCD.108	25N082;301	MIDRCD.123	50N356;301	MIDRCD.098
10N166;301	MIDRCD.102	25N089;301	MIDRCD.125	50\$348;301	MIDRCD.059
ION172;301	MIDRCD.101	25N143;301	MIDRCD, 109	50\$356;301	MIDRCD.059
10\$059;301	MIDRCD.122	25N345;301	MIDRCD.086	55N337;301	MIDRCD.058
108065;301	MIDRCD.124	25N351;301	MIDRCD.107	55\$356;301	MIDRCD.063
10\$070;301	MIDRCD.106	25N357;301	MIDRCD.124	60N005;301	MIDRCD.122
108076;301	MIDRCD.123	25S082;301	MIDRCD.111	60N026;301	MIDRCD.087
10\$082;301	MIDRCD.087	25\$137;301	MIDRCD.110	60N355;301	MIDRCD.105
10\$087;301	MIDRCD.107	25\$156;301	MIDRCD.105	65N102;301	MIDRCD.068
10\$093;301	MIDRCD.125	25\$162;301	MIDRCD.102	65N354;301	MIDRCD.106
108099;301	MIDRCD.104	25\$168;301	MIDRCD.101	70N353;301	MIDRCD.122
10\$132;301	MIDRCD.104	25\$174;301	MIDRCD.101	75N351;301	MIDRCD.122
10\$144;301	MIDRCD.125	25\$320;301	MIDRCD.110		

Table 7.12.	Magellan	Data	Product	List.
-------------	----------	------	---------	-------

DATA PRODUCT	RECORDED MEDIUM	DESCRIPTION	ARCHIVE FACILITY
AEDR (Archive engineering data record)	Tape	All spacecraft engineering data. DSN Monitor data, data number-to-engineering-unit conversion tables, and decommutation maps. Note: this product is for archive purposes only.	PDS Imaging Node
ALT-EDR (Altimeter experiment data record)	Таре	Digital data recorded by the altimeter on board Magellan. This product includes altimeter data plus echo data, radiometer data, and ancillary data. Each ALT-EDR contains data from one Magellan orbit; seven ALT-EDRs are contained on each tape.	<u> </u>
ANTL (Telecommunications antenna pattern listings)	Таре	X- and S-band antenna patterns generated from data collected during near-field test of the antenna.	-
APIOP (Annotated Public Information Office photographs)	Photographic print/negative	Images that have been released to the public.	_
ARCDR (Altimeter/radiometer composite data record)	CD-ROM	Altimeter and radiometer data in time sequence, orbit by orbit.	NSSDC
BADR (Basic altimeter data record)	Таре	A compilation of range measurements to the Venusian surface as well as terrain elevation measurements from each altimeter burst. Note: this product was produced in Cycle 1 only.	
BOUGDR (Bouguer map data record)	Tape	Contains the digital data necessary to contour a Bouguer map on a plotting system.	PDS Geophysics Node; NSSDC
BRDR (Basic radiometer data record)	Tape	Contains brightness temperature and effective black-body source temperature information derived from the radiometer data samples. It also contains ancillary, engineering, calibration, and ephemeris data. Note: this product was produced in Cycle 1 only.	
C-BIDR (Compressed basic image data record)	Таре	Contains all F-BIDR data compressed from 75-m pixel spacing to 225-m pixel spacing by averaging 3-by-3 arrays of F-BIDR pixels. Each C-BIDR contains data from one Magellan orbit; five C-BIDRs are contained on each tape.	

Table 7.12. Magellan Data Product List (Cont.).

Table 7.12. Magellan Data DATA PRODUCT		DESCRIPTION	ARCHIVE FACILITY
Cn-MIDR (Compressed <n times=""> resolution mosaicked image data record)</n>	CD-ROM	Mosaicked images produced from C-BIDRs or from lower-order Cn-MIDRs by combining multiple orbits of C-BIDR data. Edge effects from the combination may or may not be removed. C1-MIDRs have 225-m pixels and cover 15° of latitude; C2-MIDRs, 675-m pixels and 45° of latitude; C3-MIDRs, 2025-m pixels and 80° of latitude.	
Cn-MIDRP (Compressed <n times=""> resolution mosaicked image data record photoproduct)</n>	Photographic print/negative	Photoproduct associated with Cn-MIDRs.	
DSNCL (DSN controllers' logs)	Hardcopy	Log sheets describing details of each DSN pass with Magellan.	
EPHEMDR (Ephemeris data record)	Таре	Navigation and ephemeris files associated with the radio-science experiment. Note: these products were collected during the radio- science experiments.	-
F-BIDR (Full-resolution basic image data record)	Таре	SAR image containing 75-m pixel spacing. Each tape contains one Magellan orbit of SAR data and its corresponding ancillary data.	NSSDC
F-MIDR (Full-resolution mosaicked image data record)	CD-ROM	Mosaicked images produced from F-BIDRs by combining multiple orbits of F-BIDR data. Edge effects from the combination may or may not be removed. Each F-MIDR covers 5° of latitude.	NSSDC
F-MIDRP (Full-resolution mosaicked image data record photoproduct)	Photographic print/negative	Photoproduct associated with F-MIDRs.	
GADR (Global altimeter data record)	Таре	Global map of topographic and backscatter information derived from altimetry data. Note: this product was produced in Cycle 1 only.	
GEOIDR (Geoid map data record	Tape d)	Contains digital data necessary to contour a geoid map on a plotting system.	PDS Geophysics Node NSSDC
GRDR (Global radiometer dat record)	Tape	Contains BRDR data compiled into global map of brightness temperatures with 10-km-pixel spacing. The data corresponding to each quarte of Venus are contained on separate tapes.	
GRDRP (Global radiometer da record photoproduct)	Photographic ta print/negative		_
GREDR (Global reflectivity da record)	CD-ROM ata	Contains resampled reflectivity data from the ARCDR. These products are sinusoidal equal- area map projections with 5-km-pixel spacing	 - -

DATA PRODUCT	RECORDED MEDIUM	DESCRIPTION	ARCHIVE FACILITY
GREDRP (Global reflectivity data record photoproduct)	Photographic a print/negative		
GSDR (Global slope data record)	CD-ROM	Contains root-mean-square (rms) meter-scale roughness derived using the Hagfors, 1970, model of radar surface scattering.	_
GSDRP (Global slope data record photoproduct)	Photographic print/negative	Photoproduct of the GSDRs	_
GTDR (Global topography data record)	CD-ROM	Contains topography data from the ARCDR. These products are sinusoidal equal-area map projections with 5-km-pixel spacing.	
GTDRP (Global topography data record photoproduct)	Photographic print/negative	Photoproduct of the GTDRs.	
LOSAPDR (Line-of-sight acceleration profiles data record)	Таре	Contains digital data of line-of-sight accelerations on an orbit-by-orbit basis. Note: this was a special data product in Cycle 2.	PDS Geophysics Node; NSSDC
LTMAGCDR (Limb track maneuver and S-band AGC data record)	Таре	Data to indicate the direction and orientation of the high-gain antenna boresight.	_
MCFDR (Media calibration file data record)	Tape	Contains corrections for the effects of transmission media on the Doppler data.	PDS Geophysics Node; JPL RPIF
MPL Maneuver profile list)	Hardcopy	Delta-velocity maneuvers, timing, and associated information for midcourse and trim maneuvers.	PDS Geophysics Node; NAIF
NCFDR Navigation constants ile data record)	Tape	Contains the navigation constants file.	PDS Geophysics Node; NAIF
NPDR Experimenters' notepad ata record)	3.5-in. floppy disk	Scaled-down version of the Experimenters' Notebook containing a subsampling of the information supplied in the Notebook. The intent of this product is to supply pertinent spacecraft information to individuals who have no access to the Notebook.	
DFDR Drbit data file data ecord)	Таре	Contains the DSN Doppler observables.	PDS Geophysics Node; NSSDC
IDR Polar image data cord)	Таре	Contains full-resolution SAR image strips for the latitude range 80° to 90° N and 80° to 90° S. Each PIDR contains one orbit of polar SAR data; each tape contains 20 PIDRs.	_
MIDR olar mosaicked image ta record)	CD-ROM	Mosaicked images covering the north and south poles.	_

Table 7.12. Magellan Data Product List (Cont.). **DATA PRODUCT** RECORDED DESCRIPTION **ARCHIVE FACILITY** MEDIUM P-MIDRP Photographic Photoproduct of the P-MIDRs. (Polar mosaicked image print/negative data record photoproduct) RADR Processed radio-science data, which were Tape NSSDC: ATMOS (Radio-science data collected during the radio-science experiments. record) RDR Tape Contains observations and residuals for (Residuals data record) requested time periods. Note: this was a special data product in Cycle 2. RSODR Tape All raw Magellan radio-science data transmitted ATMOS (Radio-science original to Earth along with selected ancillary data data record) regarding the DSN station configuration. SAR-EDR Tape Complete, nonredundant set of SAR, altimetry, (SAR experiment data radiometry, and ancillary data. The recorded record) data associated with each SAR burst are synchronously packed into the SAR-EDR, along with spacecraft engineering, DSN configuration, ephemeris, and other ancillary data necessary for radar data processing. **SCVDR** Tape Contains sorted scattering function segments NSSDC (Surface characteristics from altimetry and SAR analysis, electrical vector data record) properties estimates from altimetry and SAR analysis, plus radiometer and confidence estimates (Tyler et al., 1992). Digital data represent averages over surface elements of approximately 20 by 20 km. SFFDR Lists known forces other than gravitation acting Tape PDS Geophysics Node; (Small forces file data on the spacecraft. NAIF record) SHDR Tape Contains digital tabulation of the spherical (Spherical harmonics harmonic coefficients estimated from the data record) Doppler data. Note: this was a special data product in Cycle 2. SPEDR-N Contains data equivalent to the SPEDR-S, but Tape (Spacecraft planetary in a format compatible with the Navigation ephemeris data record-Ancillary Archive Files. Note: this product was NAIF) deleted during Cycle 1. SPEDR-S Tape Contains special data for geodetic control NAIF; PDS Imaging (Spacecraft planetary network including SAR, altimetry, and Doppler Node ephemeris data recordinputs. Note: this was a special product in special)

> PDS Geophysics Node; NAIF

63

Contains the timing and polar motion files.

Cycle 2.

Tape

TPMFDR

(Timing and polar

motion file data record)



Ordering Products

Magellan data products can be ordered through a variety of sources (see Appendix 3). NSSDC, PDS, and RPIFs all have access to Magellan data products; however, NSSDC is the primary contact for ordering specific products. NSSDC can be reached as follows:

National Space Science Data Center (NSSDC) Goddard Space Flight Center Greenbelt, Maryland 20771

Tel: (301) 286-6695 E-mail: request@nssdc.gsfc.nasa.gov

NSSDC can also be reached by logging onto their computer. In order to log onto the NSSDC computer, telnet to *NSSDC.GSFC.NASA.GOV* (or *128.183.36.25*) and give the user name *NSSDC*. You will then be connected to a menu system which allows you to use the master directory or to leave questions or product orders for the NSSDC staff. If this is the first time you have used the NSSDC NODIS system, you will be asked for information that will be added to a database of NSSDC users.

Besides offering Magellan data products, NSSDC also provides the following software to display digital images:

- IMDISP (IBM PC)
- Browser (Macintosh)
- Pixel Pusher (Macintosh)
- True Color (Macintosh)

MIDRs can be ordered in both digital and hardcopy versions. When ordering hardcopies, the label identification is all that is needed to fill a request. An exception to this rule exists when ordering the Engineering F-MIDRs (see Section 7).

When ordering digital versions of MIDRs, use the appropriate CD-ROM identification listed for that image in the tables in Section 7. Each CD-ROM contains 10 MIDR images which were determined when the disk was first produced.

Many additional Magellan products are available through other sources. Appendix 3 describes some of these sources and provides contact information.

This publication is available from PDS and NSSDC, and from the following:

NASA Center for AeroSpace Information 800 Elkridge Landing Rd. Linthicum Heights, Maryland 21090-2934

Tel: (301) 621-0390 E-mail: help@sti.nasa.gov

Appendix

1

Acronyms and Abbreviations

Note: For a complete listing of Magellan data product acro- nyms, see Table 7.12.		GxDR	global x data record (x = altimeter, emissivity, ra- diometer, reflectivity, slope, or topography)
AEDR	archive engineering data record	HGA	high-gain antenna
ALTA	altimeter antenna	нн	horizontally polarized transmit, horizontally
ALT-EDR	altimeter experiment data record		polarized receive
ANSI	American National Standard	ISO	International Standards Organization
ARCDR	altimeter/radiometer composite data record		Jet Propulsion Laboratory
BIDR	basic image data record	JPL	
	compressed basis image data record	MGA	medium-gain antenna
C-BIDR	compressed basic image data record	MHR	Magellan High-Rate Processor
CD	compact disk	MIDR	mosaicked image data record
CD-ROM	compact disk read-only memory Command and Data Subsystem	MIT	Massachusetts Institute of Technology
CDS	compressed < <i>n</i> times> resolution mosaicked	NASA	National Aeronautics and Space Administration
Cn-MIDRs	image data records, denoting compressed-	NSSDC	National Space Science Data Center
	once MIDRs (C1-MIDRs), compressed-twice	ODR	original data record
	MIDRs (C2-MIDRs), and compressed-thrice MIDRs (C3-MIDRs)	OTM	orbit trim maneuver
DLAP	desired look-angle profile	PC	personal computer
DMS-A or -B	data management subsystem–A or –B	PDS	Planetary Data System
DN	data number	P-MIDR	polar mosaicked image data record
DSN	Deep Space Network	PRF	pulse repetition frequency
DSS	deep space station	RAM	random access memory
EDR	experiment data record	rms	root-mean-square
F-BIDR	full-resolution basic image data record	RPIF	Regional Planetary Image Facility
FEM	forward equipment module	SAR	synthetic aperture radar
F-MIDR	full-resolution mosaicked image data record	SAR-EDR	SAR experiment data record
FPU	floating-point unit	SDPS	SAR Data-Processing Subsystem
FTP	File Transfer Protocol	SEP	Sun–Earth–probe
GCR	Group Coding Recording (Method)	SIS	Software Interface Specification
GADR	global altimeter data record	TSP	time since periapsis
GEDR	global emissivity data record		
GRDR	global radiometer data record	VOI	Venus orbit insertion
GREDR	global reflectivity data record	vv	vertically polarized transmit, vertically polarized receive
GSDR	global slope data record		
GTDR	global topography data record	XAR	extended attribute record



Curlander, J., and McDonough, R., 1991. *Synthetic Aperture Radar: Systems and Signal Processing*, John Wiley and Sons, New York.

Elachi, C., 1988. Spaceborne Radar Remote Sensing: Applications and Techniques, IEEE Press, New York.

Giuli, D., 1986. "Polarization Diversity in Radars," *Proc. IEEE* 74, 245–269.

Hagfors, T., 1970. "Remote Probing of the Moon by Infrared and Microwave Emissions and by Radar," *Radio Sci.* 5, 189–227.

Hunten, D. M., Colin, L., Donahue, T. M., and Moroz, V. I., eds., 1983. *Venus*, University of Arizona, Tucson.

Jet Propulsion Laboratory, 1991. *Planetary Data System Data Preparation Workbook*, JPL Internal Document D-7669.

Johnson, W., 1991. "Magellan Imaging Radar Mission to Venus," Proc. IEEE 79, 6.

Li, F., and Goldstein, R., 1990. "Studies of Multibaseline Spaceborne Interferometric Synthetic Aperture Radars," *IEEE Trans. Geosci. Rem. Sens.* 28, 1.

Muhleman, D. O., 1964. "Radar Scattering from Venus and the Moon," *Astron. J.* 69, 34–41.

Pettengill, G. H., Ford, P. G., and Chapman, B. D., 1988. "Venus: Surface Electromagnetic Properties," *J. Geophys. Res.* 93, B12, 14,881–14,892.

Saunders, R. S., and Pettengill, G. H., 1991. "Magellan Mission Summary," *Science* 252, 247.

Saunders, R. S., Spear, A. J., Allin, P. C., Austin, R. S., Berman, A. L., Chandlee, R. C., Clark, J., de Charon, A. V., de Jong, E. M., Griffith, D. G., Gunn, J. M., Hensley, S., Johnson, W. T. K., Kirby, C. E., Leung, K. S., Lyons, D. T., Michaels, G. A., Miller, J., Morris, R. B., Morrison, A. D., Piereson, R. G., Scott, J. F., Shaffer, S. J., Slonski, J. P., Stofan, E. R., Thompson, T. W., and Wall, S. D., 1992. "Magellan Mission Summary," *J. Geophys. Res.* 97, E8. (See also articles in *J. Geophys. Res.* 97, E10.)

Scott, C., Shaffer, S., and Nussbaum, H., 1993. "Magellan Recorder Data Recovery Algorithms," *Proc. Int. Telemetering Conf.*, Las Vegas, Nevada.

Tyler, G. L., Simpson, R. A., Maurier, M. J., and Holmann, E., 1992. "Scattering Properties of the Venusian Surface: Preliminary Results from Magellan," *J. Geophys. Res.* 97, E8.

Ulaby, F. T., Moore, R. K., and Fung, A. K., 1982. *Microwave Remote Sensing, Volume II: Radar Remote Sensing and Surface Scattering and Emission Theory*, Addison–Wesley, Massachusetts.

Wall, S. D., 1989. "Venus Unveiled," *Astronomy* (April issue).

Wall, S. D., and Ledbetter, K. W., 1992. Design of Mission Operations Systems for Scientific Remote Sensing, Taylor & Francis, London.

Yewell, S., 1993. *The Magellan Data Product Information Handbook*, Jet Propulsion Laboratory Internal Document 630-512 (D-11020).





Magellan Resources Document

MGN 1630-114

MAGELLAN RESOURCES

ACCESS TO MAGELLAN PROJECT INFORMATION AND SCIENCE DATA

AUGUST 1992



JPL D-9934



MGN 1630-114

MAGELLAN RESOURCES

ACCESS TO MAGELLAN PROJECT INFORMATION AND SCIENCE DATA

PREPARED BY

DAVID OKERSON

MAGELLAN PROJECT ENGINEER, SCIENCE APPLICATIONS INTERNATIONAL CORP.

AUGUST 1992

JPL D-9934

PRECEDING PAGE BLANK NOT FILMED

(Appendix) 69

PAGE 68 INTENTIONALLY BLANK

TABLE OF CONTENTS

How To Get Magellan Materials	1
Summary	1
Members of the Public	1
Educators	4
Members of the Press or Writers	5
Researchers	
Products Available	
On-Line Computer Access	
Other Sources	
NASA Teacher Resource Centers	
NASA Education Division	
NASA Teacher Resource Center Network	
Teacher Resource Centers	
Regional Teacher Resource Centers	
Central Operation of Resources for Educators (CORE)	
Other Specialized Resource Centers	
TRCs/RTRCs	
User Information	
Using The Magellan CD-ROMS	
Getting Started	
What Are All These Files?	20
IBM-Type Personal Computers	
Macintosh Computers	
Try Before You Buy	
For Further Help	
Magellan Data Products Support Office	
Appendix A – Regional Planetary Image Facilities	25
Appendix B – Planetary Data System Nodes	

PRECEDING PAGE BLANK NOT FILMED

HOW TO GET MAGELLAN MATERIALS

Summary

NASA's Magellan mission has mapped almost all of the planet Venus using a high-resolution radar instrument. Hundreds of photographs, more than 48 CD-ROMs, and many other Magellan materials are available through a number of different sources. This resource guide describes the most appropriate routes through which different products can be obtained by the public, educators, the press and writers, and researchers.

Although these descriptions specifically address Magellan products, the same sources also provide access to products from most of NASA's other missions. Choosing the most appropriate source will depend on the type of requesters, the product they want, and their location.

Members of the Public

Members of the public interested in information about the Magellan mission will find the following sources most useful. Those with particular interest in photographic or digital materials from Magellan may find the additional sources listed in the section for Researchers useful. A list of sources outside NASA with Magellan materials available to the public is included at the end of this document, as well as a list of on-line computer sources.



Jet Propulsion Laboratory

4800 Oak Grove Drive Pasadena, California 91109 (818) 354-4321

The Magellan mission is managed by NASA's Jet Propulsion Laboratory (JPL) in Pasadena, California. JPL supports several major sources through which Magellan materials can be obtained. The mail stop of each source should be added to JPL's general address.

Public Information Office Mail Stop 180-200 (818) 354-5011

The Public Information Office (PIO) can provide most available information about the Magellan mission. The office's primary responsibility is to provide Magellan materials to the working press. It maintains a list of recognized press to whom it sends advance notice of Magellan press conferences. Official PIO materials released at press conferences are given to those members of the press who attend the conferences and are sent simultaneously to those on the list who do not attend. Additional materials shown at press conferences or otherwise released by the Magellan Project are also available if specifically requested. All Magellan images carry captions describing the area covered and the features of particular scientific interest.

The recognized press list is limited in size. Currently, the list is limited to organizations in the United States. In order to assist those not on the list, JPL has arranged for released materials to be available quickly through contractors.

All released Magellan images are available to anyone (both press and the public) at nominal cost through the JPL contractor listed below. The images are provided to the contractor simultaneously with their release, and are available in a variety of formats. The contractor maintains and sells to requestors a catalog of available images which is updated periodically. Contact:

Newell Color

221 North Westmoreland Avenue Los Angeles, California 90064-4892 (213) 380-2980 ext 269 Facsimile: (213) 739-6984

(Appendix) 73

Videotapes of released Magellan materials can be purchased at nominal cost from a second JPL contractor listed below. Copies can be produced in a variety of video formats and standards, including PAL and SECAM. A list of the titles, identifying numbers, and running times of current Magellan videos is noted below. Contact:

The Videotape Company

10523-45 Burbank Blvd. North Hollywood, California 91601 (818) 985-1666, Facsimile: (818) 985-1013, Att: David Rodgers

The current tapes are:

AVC092-01	Ten minute "Magellan: Mapping the Planet Venus"; narrated
AVC91-091	Four 2-3 minute computer- generated flyovers;
AVC90-180	music only Earlier computer-generated flyovers; music only

Magellan Project Office

Mail Stop 230-201 (818) 393-0600

The Magellan Project Office can provide assistance with questions which none of the other sources listed in this document can answer. However, in order to allow the Project to conduct the important work of operating the spacecraft and processing the data, please treat this source as your last, rather than your first, alternative.

Suggestions of appropriate names for Venus features can be sent to the Project Office for possible nomination to the International Astronomical Union. Names should honor women who have been dead at least 3 years and been notable and worthy of the honor. Political or military figures of the 19th and 20th centuries are not permitted, nor are notable representatives of religious faiths.

NASA Headquarters Washington, DC 20546 (202) 453-1000

NASA Headquarters in Washington can provide some Magellan materials, assist in answering questions, and help in locating sources. The specific address of each source should be added to the general NASA Headquarters address.

Public Affairs Office Code S (202) 453-1547

The Public Affairs Office (PAO) can provide some Magellan materials, including lithographed prints of some of the imagery, and can assist in answering questions.

Public Services Division Public Inquiry Coordinator Code PO (202) 453-8315

The Public Services Division can assist with inquiries about the Magellan mission and direct them to the appropriate sources.

Publications 883> Code FEP (202) 453-8332

The Publications office can provide printed materials on the Magellan mission.



Magellan Program Office

Code SL (202) 453-1587

The Magellan Program Office can provide assistance with questions which none of the other sources listed in this document can answer. However, in order to allow the Program Office to conduct the important work of managing the Magellan program, please treat this source as your last, rather than your first, alternative.

A "Traveling Exhibit" of Magellan images, videotapes, and digital imagery is available for public display to libraries, museums, and other public groups through a NASA Headquarters contractor. Contact:

Science Applications International Corporation

400 Virginia Avenue, SW, Suite 810 Washington, DC 20024 (202) 479-0750, Facsimile (202) 479-0856

Educators

Educators interested in additional information about the Magellan mission will find the following sources most useful.



Teacher Resource Centers

NASA's Education Division supports Teacher Resource Centers (TRCs) at each NASA Center, as well as a large number of Regional TRCs in cooperation with educational organizations around the country. It also supports a center for distribution of audiovisual materials, the Central Operation of Resources for Educators (CORE). A list of all the TRCs can be found on pages 14 to 17.

The TRC at NASA's Jet Propulsion Laboratory usually has a wider variety of planetary material than the other Teacher Resource Centers. It can be reached at:

Jet Propulsion Laboratory

Teacher Resource Center Mail Stop CS-530 4800 Oak Grove Drive Pasadena, California 91109 (818) 354-6916, Facsimile: (818) 354-8080

TRCs provide teachers with access to NASA's materials, including Magellan materials. In general, visiting teachers can browse through the materials, and the center can assist in duplicating materials, including slides and videotapes, in their collection. (In particular, centers can copy videotapes onto a blank tape provided by the teacher.) TRCs can also respond to requests by mail or telephone.

TRCs should be the principal source for educators interested in teaching material or suggestions for approaches to using the Magellan materials. The TRCs should also be able to provide assistance to teachers in understanding and using the materials beyond the ability of the National Space Science Data Center. Each TRC should have some Magellan materials. Because of the logistical difficulties of distributing some of the materials, such as posters, the JPL TRC usually has a wider selection of materials on planetary exploration than other TRCs.



NASA Headquarters

Education Division Educational Publications Code FEP Washington, DC 20546 (202) 453-8332

Requests for information about education programs based on the Magellan mission or for additional educational material to support teaching based on the Magellan mission can be answered by NASA's Education Division. In particular, the Educational Publications branch can provide a wide range of printed materials.

SPACELINK

SPACELINK is an electronic information system for educators (a computer bulletin board) particularly oriented toward teachers interested in using NASA materials in their classes. It is operated by NASA's Marshall Space Flight Center in Alabama. SPACELINK can be reached by a telephone modem or through the Internet network. It contains a wide variety of information, as well as software and digital image files in the GIF format, which are suitable for classroom computer display. Contact:

telnet: spacelink.msfc.nasa.gov (192.149.89.61) modem: (205) 895-0028

Members of the Press or Writers

Members of the Press or writers interested in additional information about the Magellan mission will find the following sources most useful. The first points of contact should be the Public Information Offices of the Jet Propulsion Laboratory or NASA Headquarters listed in the section above for the general public. In addition to the sources of images shown in the general public section, NASA maintains an image library particularly for the use of the Press and writers.

NASA Headquarters

Photographic Library Code PMD Washington, DC 20546 (202) 453-8375

NASA Headquarters maintains a library of publicly released images from all NASA programs, including Magellan. Requests from the press or requests from publishers or authors preparing books for print can be provided without charge as 4x5 inch positive color or black and white transparencies. Requests for other formats or requests from other members of the public may be supplied at nominal cost. Visitors can browse through the collection to select images. Requests for assistance in obtaining images by mail or telephone can be supported to a limited extent.

Researchers

Researchers interested in additional information about the Magellan mission, access to imagery or data collected, or detailed catalog information will find the following sources most useful.

National Space Science Data Center

Goddard Space Flight Center Coordinated Request and User Support Office Mail Code 933.4 Greenbelt, Maryland 20771 (301) 286-6695, Facsimile: (301) 286-4952 On-line Catalog: NSSDC:: or nssdc.gsfc.nasa.gov (128.183.36.25) Username: nssdc E-mail: NSSDC::REQUEST or request@nssdc.gsfc.nasa.gov

The National Space Science Data Center (NSSDC) at NASA's Goddard Space Flight Center is the principal archive and distribution center for all NASA missions. It has all of Magellan's standard mosaic image products that have been released by the Project in both photographic and digital form on CD-ROMs. It also has press-released images, videotapes, software with which to display the CD-ROM digital images, planning maps of Venus, a fact sheet, and documentation.

NSSDC's principal charter is to support data distribution to researchers. Requests from NASA centers, Federal, State, and local governments, and NASAfunded researchers are supplied without charge. Other requests are supplied at a nominal charge. NSSDC will consider waiving these charges for educational requests for a limited quantity of material if the requestor explains the need for such treatment.

NSSDC has the equipment necessary to supply special requests, such as large photographic enlargements. It has a limited staff able to assist with questions about the products or the identification of products showing a specific feature. It is not, however, able to support requests for extensive assistance either by researchers, the public, or teachers.

A general catalog showing the classes of materials available through NSSDC is available for on-line computer access. Requests for materials can be made through the on-line catalog, by electronic mail, or by telephone.

Regional Planetary Image Facilities

NASA's Planetary Geology and Geophysics program supports a group of Regional Planetary Image Facilities (RPIFs) around the United States, as well as overseas. A list of these facilities is attached in Appendix A.

The RPIFs have a charter to support researchers in planetary science. In practice, they are open by appointment to members of the public. Each RPIF maintains a complete photographic library of NASA's lunar and planetary exploration, including Magellan materials. Visitors can browse through Magellan materials, including the CD-ROM digital imagery collection and videotapes. Although the RPIF cannot provide copies of this material, its manager can assist visitors in ordering the materials they have selected.

The RPIF at NASA's Jet Propulsion Laboratory may have the broadest collection of Magellan materials available most quickly. In practice, it is open by appointment on Monday, Wednesday, and Friday to both researchers and members of the public. The RPIF houses a complete image library of NASA's lunar and planetary missions, including Magellan. Visitors can browse through Magellan materials, including the CD-ROM digital imagery collection and videotapes.

Jet Propulsion Laboratory

Regional Planetary Image Facility Mail Stop 202-101 4800 Oak Grove Drive Pasadena, California 91109 (818) 354-3343 Facsimile: (818) 354-3437

Planetary Data System

Jet Propulsion Laboratory 4800 Oak Grove Drive Mail Stop 525-3610 Pasadena, California 91109 (818) 306-6130, Facsimile: (818) 306-6929 E-mail: JPLPDS::PDS_OPERATOR or pds_operator@jplpds.jpl.nasa.gov (137.79.104.100)

Researchers funded by NASA's Solar System Exploration Division can obtain Magellan materials through the Planetary Data System (PDS). PDS consists of a central on-line catalog at the Jet Propulsion Laboratory and a number of "nodes" located at research facilities with particular expertise in specific planetary research areas. The Geosciences Node at Washington University is particularly responsible for cataloging and supporting Magellan data. A list of the current Planetary Data System nodes for different research areas is attached in Appendix B.

PDS provides an on-line central catalog showing the general classes of Magellan material available, and allowing the user to identify specific digital and photographic products. Requests for materials can be made through this central catalog. The requests are typically fulfilled by forwarding the request to NSSDC. Contact PDS to request an account.

The Geosciences Node provides a much more detailed catalog of the Magellan materials. This node can be reached through the central PDS catalog or directly. The Geophysics Node also supports visiting researchers and provides image processing capabilities to use the digital imagery. Contact:

Planetary Data System, Geosciences Node

Earth and Planetary Remote Sensing Laboratory Washington University, Campus Box 1169 One Brookings Drive St. Louis, Missouri 63130-4899 (314) 935-5493, Facsimile: (314) 935-7361 E-mail: WURST::MGNSO or mgnso@wurst.wustl.edu (128.252.135.4) The Washington University PDS Node provides a direct and knowledgeable source of assistance in using Magellan data through a Magellan Data Products Support Office. The purpose of the Support Office is to provide users with information about and assistance in getting Magellan data. Standard and special data products are supported, including digital products, photographs, slides, videotapes, and NASA Public Information Office (PIO) products. The Support Office serves NASA-sponsored scientists, other researchers and educators, and the general public.

The Support Office is staffed by researchers experienced in working with Magellan data products. The primary contact is Dr. Edward Guinness. The Office can answer questions such as what data products exist, where they can be obtained and at what cost, and how to read digital data products. The Office can provide the information necessary to complete an NSSDC order form and will help users place an order.

In general, a user is referred to NSSDC when the Support Office is certain that NSSDC has the product in question. The Support Office gives the user the phone number and/or electronic mail address of NSSDC, and helps the user determine exactly what to request. For a non-standard product, or when the Support Office is not certain that NSSDC has a product, the Office tries to locate information about the product and then calls the user back. It then does whatever it can to help the user obtain the product.

NSSDC personnel will refer a user to the Magellan Data Products Support Office in cases where they cannot help the user and know the Support Office can. If NSSDC is not sure the Support Office has the answer, it will work directly with the Support Office to find the information, and then get back to the user.

The Support Office does not:

Fill orders for standard products from the Geosciences Node inventory when the orders can be filled by NSSDC. Exceptions are made in special cases, for example if NSSDC is temporarily out of stock and the Geosciences Node can easily provide the product. Provide users with accounts on Geosciences Node computers. The Office will help users obtain accounts on the Planetary Data System computer in order to use the Magellan Detailed-Level Catalog or other parts of the PDS Catalog.

U.S. Geological Survey

The U.S. Geological Survey (USGS) has a program to produce maps of the planets based on the best available data from NASA and foreign missions, including Soviet missions. The Venus maps currently available from USGS are based on data from NASA's Pioneer Venus Orbiter and the Soviet Venera 15/16 missions. New maps will be produced and made available based on the Magellan data over the next several years. NASA-funded researchers can obtain maps directly by contacting:

Ms. Jody Swann Planetary Data Facility U.S. Geological Survey 2255 North Gemini Drive Flagstaff, Arizona 86001-1698 (602) 556-7262, Facsimile: (602) 556-7090

All interested persons can obtain a listing of planetary maps from the same address. Those not funded by NASA can order maps by writing:

U.S. Geological Survey

Mail Stop 306 Branch of Distribution Denver Federal Center P.O. Box 25286 Denver, Colorado 80225

For more information, contact:

Earth Science Information Center

U.S. Geological Survey 507 National Center Reston, Virginia 22092 (703) 860-6045

Products Available

The following Magellan materials are currently available:

- General Fact sheet
- Photographic standard map mosaic images
- CD-ROMs (standard map mosaic images in digital form)
- □ Software with which to use the CD-ROMs
- □ Released (press release) images
- Digital images available over computer net works

- Videotapes
- Venus maps
- Magellan Mapping Mission Planning Chart
- □ 35 mm slide set (20 slides)
- □ Lithographed prints of images
- □ Magellan spacecraft paper model
- Poster on Venus volcanism
- **D** Traveling Exhibit

On-Line Computer Access

In addition to the on-line computer catalogs provided by NSSDC and PDS described above, Magellan information and digital imagery can be obtained through several computer networks.

SPACELINK is an electronic information system for educators (a computer bulletin board) particularly oriented toward teachers interested in using NASA materials in their classes. It is operated by NASA's Marshall Space Flight Center in Alabama. SPACELINK can be reached by a telephone modem or through the Internet network. It contains a wide variety of information, as well as software and digital image files in the GIF format, which are suitable for classroom computer display. Contact:

telnet: spacelink.msfc.nasa.gov (192.149.89.61) modem: (205) 895-0028 NASA's Ames Research Center in California allows public access through the Internet network to a large collection of information on NASA's missions, as well as image display software, digital image files in a variety of formats, and captions for all the released (press) images. Magellan imagery is available in GIF and VICAR formats. In addition, the Magellan CD-ROMs are available in rotation with other NASA image CD-ROMs as a pair of publicly accessible directories. Contact:

ftp: ames.arc.nasa.gov (128.102.18.3)

user: anonymous

cd: pub/SPACE/MAGELLAN, VICAR, GIF, CDROM, CDROM2, SOFTWARE

The PDS Geosciences Node at Washington University (described earlier) permits access through the Internet network to selected Magellan data and documentation. Contact:

ftp: wuarchive.wustl.edu (128.252.135.4)

user: anonymous

cd: graphics/magellan

Other Sources

The Astronomical Society of the Pacific, a non-profit scientific and educational organization, sells a number of Magellan materials, including a set of 20 slides with an information booklet, a teacher's newsletter, and a videotape. Contact:

Astronomical Society of the Pacific

390 Ashton Avenue San Francisco, California 94112 (415) 337-1100, Facsimile: (415) 337-5205

Sets of 35mm slides with a short printed description of the images, or sets of slides with audio cassette tape narrations can be purchased from:

Finley Holiday Film Corporation

12607 E. Philadelphia St. Whittier, California 90601 (213) 945-5325, Facsimile: (213) 693-4756

JPL's Employee Recreation Club sells some Magellan materials, currently including a slide set with a short description of the images and a paper model of the spacecraft. The materials available change with time, and may include pins, badges, and other unique items.

Jet Propulsion Laboratory

Employee Recreation Club Mail Stop 114-104 4800 Oak Grove Drive Pasadena, California 91109 (818) 354-6120, Facsimile: (818) 393-6632 The Planetary Society, a non-profit organization interested in supporting the nation's planetary research program, sells a number of materials, including a videotape of Magellan computer-generated flights over the surface of Venus. Contact:

The Planetary Society

65 North Catalina Avenue Pasadena, California 91106 (818) 793-1675 Facsimile: (800) 966-STAR or (818) 793-5528

The Smithsonian's Air and Space Museum sells a wide variety of unusual materials, including slide sets and videotapes on planetary exploration. Contact:

Smithsonian Institution

Air and Space Museum Shop 4th and Independence Avenue, SW Washington, DC 20560 To obtain a catalog: (703) 455-1700 To order from the catalog: (202) 357-1826 To order from the shop (items not yet in the catalog): (703) 603-6041 Attention: Susie or Yvonne

► NASA TEACHER RESOURCE CENTERS

NASA Education Division

NASA's Education Division provides educational programs and materials for teachers and students from the elementary to the university level. The NASA Teacher Resource Center Network, a dissemination mechanism to provide educators with NASA educational materials, is one of the programs that has helped science and mathematics teachers over the years.

NASA Teacher Resource Center Network

Teachers need immediate access to the information that is generated by NASA programs, technologies, and discoveries, so they can bring that excitement into their classrooms. NASA educational materials are related to art, mathematics, energy, physics, careers, spaceflight, aeronautics, technology utilization, physical science, and social science. They are a valuable supplement to the curriculum.

To help disseminate these materials to elementary and secondary educators, the NASA Education Division has established the NASA Teacher Resource Center Network (TRCN). The Network comprises Teacher Resource Centers (TRCs) located at NASA centers, Regional Teacher Resource Centers (RTRCs) at colleges and museums, and the Central Operation of Resources for Educators (CORE).

Teacher Resource Centers

Located at the nine NASA research centers, TRCs have a variety of NASA-related educational materials in several formats: videotapes, slides, audio tapes, publications, lesson plans, and activities. NASA educational materials are available to be copied at the TRCs.

Regional Teacher Resource Centers

To offer more educators the opportunity to visit the TRCN, NASA forms partnerships with universities and museums to serve as RTRCs and plans to have RTRCs as broadly distributed geographically as possible. Teachers may preview NASA materials at these RTRCs or make copies of the materials.

Central Operation of Resources for Educators (CORE)

Designed for the national and international distribution of aerospace educational materials to enhance the NASA Teacher Resource Center Network, CORE provides educators with another source for NASA educational audiovisual materials. CORE will process teacher requests by mail for a minimal fee. On school letterhead, educators can request a catalogue and order form from:

> Ms. Tina Salyer NASA CORE Lorain County Joint Vocational School 15181 Route 58 South Oberlin, OH 44074 (216) 774-1051, ext 293/294 Fax: (216) 774-2144

Other Specialized Resource Centers

Serving inquiries related to space exploration and other activities:

NASA Jet Propulsion Laboratory

Teacher Resource Center JPL Educational Outreach 4800 Oak Grove Drive Mail Code CS-530 Pasadena, CA 91109 (818) 354-6916 Fax: (818) 354-8080

NASA TRCs/RTRCs

Delaware

Maryland

New Jersey

New York

Vermont

Pennsylvania

Rhode Island

Maine

Serving all states through workshops and materials:

National Air and Space Museum

Smithsonian Institution Education Resource Center, MRC 305 Washington, DC 20560 (202) 786-2109 Fax: (202) 786-2262

NASA Goddard Space Flight Center District of Columbia Teacher Resource Laboratory Mail Code 130.3 Greenbelt, MD 20771 Massachusetts (301) 286-8570 Fax: (301) 286-2184 New Hampshire

Delaware Teacher Center/NASA Regional Teacher Resource Center

Newark High School Newark, DE 19711 (302) 736-6723 Fax: none

The City College

NASA Regional Teacher Resource Center NAC Building, Room 5/224 Convent Avenue at 138th Street New York, NY 10031 (212) 650-6993 Fax: none

NASA Teacher Resource Center

823 William Pitt Union University of Pittsburgh Pittsburgh, PA 15260 (412) 648-7008 Fax: (412) 648-7003

Florida Georgia Puerto Rico Virgin Islands

NASA

John F. Kennedy Space Center Educators Resources Laboratory Mail Code ERL Kennedy Space Center, FL 32899 (407) 867-4090 Fax: none

University of the District of Columbia

NASA Regional Teacher Resource Center Mail Stop 4201 4200 Connecticut Ave., N.W. Washington, DC 20008 (202) 282-7338 Fax: (202) 282-3677

Vermont College

NASA Regional Teacher Resource Center Schulmier Hall Montpelier, VT 05602 (802) 828-8845 Fax: (802) 828-8855

Wallops Flight Facility

Education Complex--Visitor Center NASA Teacher Resource Center Bldg. J-17 Wallops Island, VA 23337

Alaska Arizona California Hawaii Idaho Montana Nevada Oregon Utah Washington Wyoming

NASA Ames Research Center

Teacher Resource Center Mail Stop TO-25 Moffett Field, CA 94035 (415) 604-3574 Fax: (415) 604-3445

NASA Dryden Flight

Research Facility Public Affairs Office (Trl. 42) NASA Teacher Resource Center Edwards AFB, CA 93523 (805) 258-3456 Fax: (805) 258-3566

Flandrau Science Center

NASA Regional Teacher Resource Center University of Arizona Tucson, AZ 85721 (602) 621-4515 Fax: (602) 621-8451

NASA Johnson Space Center

Teacher Resource Center Mail Code AP-4 Houston, TX 77058 (713) 483-8696 Fax: (713) 483-4876

Kansas Cosmosphere and Space Center

NASA Regional Teacher Resource Center 1100 North Plum Hutchinson, KS 67501 (316) 662-2305/665-3387 Fax: (316) 662-3693

Oklahoma State University

NASA Regional Teacher Resource Center 300 North Cordell Stillwater, OK 74078-0422 (405) 744-7015 Fax: (405) 744-7785

University of Washington

NASA Regional Teacher Resource Center AK-50, c/o Geophysics Department Seattle, WA 98195 (206) 543-1943 Fax: (206) 685-3815

University of Wyoming

NASA Regional Teacher Resource Center Learning Resource Center P.O. Box 3374 University Station Laramie, WY 82071-3374 (307) 766-2527 Fax: (307) 766-3062

U.S. Space Foundation

NASA Regional Teacher Resource Center 1525 Vapor Trail Colorado Springs, CO 80916 (719) 550-1000 Fax: (719) 550-1011

University of New Mexico

NASA Regional Teacher Resource Center University College Albuquerque, NM 87131 (505) 277-2631 Fax: (505) 277-3173

Kansas Nebraska New Mexico North Dakota Oklahoma South Dakota Texas

Colorado

Kentucky North Carolina South Carolina Virginia West Virginia

Illinois

Indiana

Ohio

Michigan

Minnesota

Wisconsin

NASA Langley Research Center

Teacher Resource Center Mail Stop 146 Hampton, VA 23665-5225 (804) 727-0900 Fax: (804) 727-0898

Murray State University

NASA Regional Teacher Resource Center Waterfield Library Murray, KY 42071 (502) 762-4420 Fax: (502) 762-3736

NASA Lewis Research Center

Teacher Resource Center Mail Stop 8-1 21000 Brookpark Road Cleveland, OH 44135 (216) 433-2017 Fax: (216) 433-8000

Central Michigan University

NASA Regional Teacher Resource Center Ronan Hall, Room 101 Mount Pleasant, MI 48859 (517) 774-4387 Fax: (517) 774-3152

Mankato State University

NASA Regional Teacher Resource Center Department of Curriculum and Instruction MSU Box 52/P.O. Box 8400 Mankato, MN 56002-8400 (507) 389-5710 or -1516 Fax: (507) 389-5853

Chicago Museum of Science and Industry

NASA Regional Teacher Resource Center 57th Street and Lakeshore Drive Chicago, IL 60637-2093 (312) 684-1414 x429 Fax: (312) 684-5580

Northern Michigan University

NASA Regional Teacher Resource Center Olson Library Media Center Marquette, MI 49855 (906) 227-2270 Fax: (906) 227-1333

University of North Carolina -Charlotte

NASA Regional Teacher Resource Center J. Murrey Atkins Library Charlotte, NC 28223 (704) 547-2559 Fax: (704) 547-3050

Wheeling Jesuit College

NASA Regional Teacher Resource Center 220 Washington Avenue Wheeling, WV 26003 (304) 243-2388 Fax: (304) 243-2497

Oakland University

NASA Regional Teacher Resource Center O'Dowd Hall, Room 216 Rochester, MI 48309-4401 (313) 370-2485 Fax: (313) 370-4226

Parks College of St. Louis University

NASA Regional Teacher Resource Center 500 Falling Springs Road Cahokia, IL 62206 (618) 337-7500 Fax: (618) 332-6802

St. Cloud State University

Center for Information Media NASA Regional Teacher Resource Center 720 4th Avenue South St. Cloud, MN 56301-4498 (612) 255-2062 Fax: (612) 255-4778

University of Evansville

NASA Regional Teacher Resource Center School of Education 1800 Lincoln Avenue Evansville, IN 47722 (812) 479-2393 Fax: none

University of Wisconsin at LaCrosse

NASA Regional Teacher Resource Center Morris Hall, Room 200 LaCrosse, WI 54601 (608) 785-8148 or -8650 Fax: (608) 785-8909

Alabama Arkansas Iowa Louisiana Missouri Tennessee	U. S. Space and Rocket Center NASA Teacher Resource Center 1 Tranquility Base Huntsville, AL 35807 (205) 544-5812 or (205) 837-3400, Ext 115	Southern University NASA Regional Teacher Resource Center Downtown Metro Center 610 Texas Street Shreveport, LA 71101 (318) 674-3444 Fax: (318) 674-3385
	Bossier Parish Community College NASA Regional Teacher Resource Center 2719 Airline Drive Bossier City, LA 71111 (318) 746-7754 Fax: (318) 742-8664	University of Northern Iowa NASA Regional Teacher Resource Center Curriculum Laboratory Room 222 Schindler Education Center Cedar Falls, IA 50614-0609 (319) 273-6066 Fax: (319) 273-6997
Mississippi	NASA Stennis Space Center Teacher Resource Center Building 1200 Stennis Space Center, MS 39529-6000 (601) 688-3338 Fax: (601) (00 7530	Tri-State Learning Center (SSC-TRC) NASA Teacher Resource Center P. O. Box 508 Iuka, MS 38852-508

(601) 688-3338 Fax: (601) 688-7528

P.O. Box 668

Moorehead, MS 38761

Mississippi Delta Community College NASA Regional Teacher Resource Center

(601) 246-5631 x126 Fax: (601) 246-8627

(601) 423-4373 Fax: (601 423-4375

15 (Appendix) 87

User Information

For more information, contact the Center Education Program Officer (CEPO) for the region in which the TRC/ RTRC is located.

Alaska Arizona California Hawaii Idaho Montana Nevada Oregon Utah Washington Wyoming

Connecticut Delaware District of Columbia Maryland Massachusetts Maine

Colorado Kansas Nebraska New Mexico

Florida

Georgia

North Dakota Oklahoma South Dakota

Puerto Rico

Virgin Islands

New Hampshire

New Jersey

New York

Vermont

Texas

Pennsylvania

Rhode Island

Mr. Garth A. Hull, Chief

Educational Programs Branch Mail Stop TO-25 NASA Ames Research Center Moffett Field, CA 94035 Phone: (415) 604-5543 Fax: (415) 604-3445

Mr. Elva Bailey

Educational Programs Public Affairs Officer (130.3) NASA Goddard Space Flight Center Greenbelt, MD 20771 Phone: (301) 286-7207 Fax: (301) 286-8142

Dr. Robert W. Fitzmaurice

Center Education Programs Officer Public Affairs Office (AP-4) NASA Johnson Space Center Houston, TX 77058 Phone: (713) 483-1257 Fax: (713) 483-4876

Mr. Raymond R. Corey

Chief, Education and Awareness Branch Mail Code PA-EAB NASA Kennedy Space Center Kennedy Space Center, FL 32899 Phone: (407) 867-4444 Fax: (407) 867-3395

Kentucky North Carolina South Carolina Virginia West Virginia Dr. Karen R. Credeur

Head, Office of Public Services Mail Stop 154 NASA Langley Research Center Hampton, VA 23665-5225 Phone: (804) 864-3307/3312 Fax: (804) 864-7732 Illinois Indiana Michigan

Alabama Arkansas Iowa Minnesota Ohio Wisconsin

Louisiana

Tennessee

Missouri

Dr. Lynn Bondurant

Chief, Office of Educational Programs Mail Stop 7-4 NASA Lewis Research Center 21000 Brookpark Road Cleveland, OH 44135 Phone: (216) 433-5583 Fax: (216) 433-3344

Mr. Bill Anderson Chief, Education Branch Public Affairs Office (CA21) NASA Marshall Space Flight Center Marshall Space Flight Center, AL 35812 Phone: (205) 544-7391 Fax: (205) 544-5852

Mississippi

The Jet Propulsion Laboratory can provide special assistance with questions about NASA's planetary exploration program and other JPL activities.

Dr. Marco Giardino

Center Education Program Officer Mail Stop HA 00 NASA John C. Stennis Space Center Stennis Space Center, MS 39529 Phone: (601) 688-2739 Fax: (601) 688-1925

Mr. Richard Alvidrez

Public Education Office Jet Propulsion Laboratory Mail Code 180-205 4800 Oak Grove Drive Pasadena, CA 91109 Phone: (818) 354-8592 Fax: (818) 354-8080

18 (Appendix) 90

_____.

· - - · - · - · - · - · -

USING THE MAGELLAN CD-ROMS

The current Magellan CD-ROMs contain the digital image mosaics produced by the spacecraft's synthetic aperture radar instrument during the first 243-day cycle around Venus. Individual disks contain Full-Resolution Mosaic Image Data Records (F-MIDRs), which show the imagery at full resolution, or Compressed (Once or Twice) Mosaic Image Data Records (C1-MIDRs, C2-MIDRs) which cover larger areas at lower resolution. The C-MIDRs cover the entire planet, while the F-MIDRs cover selected areas of probable interest, comprising in total about 15 percent of the planet.

These disks are the basic archive of Magellan's scientific data for both research and public interest. They have been designed to be usable on all types of computers. The National Space Science Data Center (NSSDC) is the principal distributor of the CD-ROM disks. NSSDC can also provide software to display the images on most computers. NSSDC can be reached at:

National Space Science Data Center

Goddard Space Flight Center Coordinated Request and User Support Office Mail Code 933.4 Greenbelt, Maryland 20771 (301) 286-6695, Facsimile: (301) 286-4952

On-line Catalog:	NSSDC::
or	nssdc.gsfc.nasa.gov(128.183.36.25)
	Username: nssdc
E-mail:	NSSDC::REQUEST
or	request@nssdc.gsfc.nasa.gov

The CDs have been produced in approximately the order in which their imagery was collected by the Magellan spacecraft. However, identifying the precise disk which is needed to view a specific feature or area can be difficult. NSSDC can also provide a simple program which tells the latitude and longitude of any named feature on Venus, and then shows the specific CD-ROM(s) and mosaic images which cover that area.

The images are stored in directories named by the latitude and longitude at which the mosaic is centered. Each directory contains a "browse" image, which shows the entire mosaic at reduced resolution, and 56 "tiles," which show the mosaic broken into smaller pieces of 7 rows by 8 columns. Each image consists of a pair of files, named*.img and*.lbl, the "image" and "label" files.

Each digital image is in VICAR format, the standard Jet Propulsion Laboratory format for digital imagery. VICAR stores individual pixels by row and column, with a single extra initial row describing the image in ASCII text. If you wish, you can read this first row (the "VICAR label") as text. You can also read as text the •.lbl file, which contains a complete description of the image file in a form which both you and your computer can understand. You can convert the imagery from VICAR into other formats (GIF, PICT, ...) for use with other software.

Getting Started

The first necessity is a CD-ROM reader. It is important that the drivers for the CD-ROM reader properly support the ISO-9660 standard. Older drivers which do not properly implement this standard will typically show the disks or subdirectories (folders) to be empty. Since drivers are specific to different CD-ROM readers, you should first contact your hardware supplier. Appropriate drivers for some of the most common CD-ROM readers can be obtained from NSSDC.

IBM-type personal computers need both a driver for the CD-ROM player and Microsoft's CD-ROM extensions for DOS. The driver is typically placed in the CONFIG.SYS file in your C:\ directory. The CD-ROM extensions are typically invoked through a batch file, either the AUTOEXEC.BAT file which runs as the computer starts, or a separate batch file run just before using the CD-ROM player. These two pieces of software use parts of the computer's memory, and may interfere with running other programs which use very large amounts of memory. Macintosh computers need a set of CD-ROM files placed into their System folder in order to use the CD-ROM drive. After loading these files, the computer must be re-started, with the CD-ROM drive turned on before the computer itself. Since Macintosh CD-ROM drives are normally SCSI devices, it is important to avoid conflicts in the cabling, addressing, or termination with other SCSI devices connected to the computer.

Once you have the appropriate software installed, you can "open" the CD-ROM disk just as you would any other computer disk. On an IBM-type machine, you can change to the CD disk, change to a subdirectory, display the contents, or type a file. On a Macintosh, you can double-click on the CD icon to open the disk. CD-ROMs' particular strength is the amount of data they contain, rather than their speed. If you are going to work extensively with any file or image, it may be wise to copy it onto your hard disk first and use it there in order to speed up your work.

You might find it interesting that the Magellan CD-ROMs can actually be played in your audio CD player. Be sure to turn the volume down to minimum before you try this. The sound you hear will be a fairly loud buzz; it is the same data used to store the images for your computer, interpreted as though it were music.

What Are All These Files?

The Magellan CD-ROMs contain a number of files besides the image files themselves. The most useful is a file in the top directory of the CD named "AAREAD.ME", which describes the disk's contents in considerable detail. Like the other non-image files, it can be read with any word processor. If you are using a Macintosh, you may find that the file contains characters at the end of each line which the Macintosh doesn't recognize (linefeeds) and shows as "boxes." You can either ignore them, or remove them with your word processor.

Each disk contains a file that can act as an index of the named geologic features on Venus. This file can be loaded into a spreadsheet or database and used to locate features. (This function can also be performed using the special program from NSSDC described above.) Each disk also has a set of the accumulated "problem reports" for earlier disks.

IBM-Type Personal Computers

IMDISP, the IBM-type personal computer image display software available from NSSDC, should be loaded into a directory on your hard disk. This directory should be added to the "path" specified in your AUTOEXEC.BAT file, so that IMDISP can be executed easily. Alternatively, use a batch file in a common batch directory which is on the path to locate and run IMDISP. The program is distributed in a compressed form which needs to be de-compressed with the program PKUNZIP before it can be run.

IMDISP works with IBM-type personal computers with at least EGA display cards. Much better results are obtained with VGA displays, and still better with Super-VGA displays. IMDISP can be adjusted to work with a variety of different Super-VGA displays, as explained in its documentation. To see the up-to-date list of displays supported, type "help set" at the IMDISP prompt. If your display system is one of those specifically listed, you can type "set display ..." (where ... represents one of the possible choices, such as ATI800) at IMDISP's prompt to configure the display, or enter the line "set imdisp=..." in your CONFIG.SYS file. If your Super-VGA display is not one of those listed and you wish to experiment, type "set disp ..." and observe whether the screen is readable, or stays blank. If it stays blank, type "set disp vga" (in the blind) and the display will return. Work your way through the list until you find one which works.

IMDISP will use very large amounts of expanded memory if it is available. This memory will be used to buffer the data read from the CD-ROM, so that subsequent manipulation of the image is much faster. However, the program will run in machines with only 640K of memory.

To start the program, type "imdisp". Change drives to the CD-ROM drive just as you would in DOS. That is, if you set up the CD-ROM to be drive "H", type "H:" at the IMDISP prompt. Then type "files". Use the display of directory and file names to move to the image which you wish to view. If you wish at first to see only the browse images, rather than the long list of tiles, type "file browse.*". For the best performance, rather than selecting the *.img file which you wish to view, select the corresponding *.lbl file. The label file gives IMDISP extra information about the image which allows it to work more effectively.

If you are viewing a browse image, you may use the cursor (controlled by either the arrow keys or a mouse) to mark a particular region, and then ask IMDISP to call up the higher-resolution "tile" of the area selected. Type "cursor", move the cursor until it is on the area which interests you, and then hit the "period" key. Then type "disp source" to bring up the high resolution image centered on the cursor.

IMDISP allows a wide range of image processing procedures, including zooming, changing the brightness and contrast, and coloring the image. The command "help" and the IMDISP documentation explain these capabilities. In addition, IMDISP can be commanded to "browse" through all of a set of images (including the entire disk), or to perform a set of commands repeatedly in order to cycle through a display of images. IMDISP can save an image which has been processed, either as a VICAR image or in the GIF format, if the file name chosen is *.gif. The GIF format can be displayed on a very wide range of computers, including many inexpensive types.

Macintosh Computers

In order to display the Magellan images, you will need a Macintosh computer with at least an 8-bit color display card (although it may have a grey-scale monochrome display). You need the file "32-bit Quickdraw" in your System folder. You will also need as much memory as possible; at least 4 megabytes is recommended. Your computer should have a numeric co-processor. If not, it will be necessary to use a special file placed into your System folder to cause the computer to emulate the co-processor in software. Such emulation will reduce the speed of the program markedly.

Several programs are available for the Macintosh to display the Magellan images. The newest and most flexible is "Image4PDS" (Image for Planetary Data System CD-ROMs). This is a modified version of "Image 1.41," which was developed by the National Institutes of Health. The modification allows the program to open the Magellan images by "opening" the *.lbl file corresponding to the image. Unmodified versions of Image have difficulty opening the CD-ROM files directly.

Place the Image program into a folder on your hard disk. The program is distributed in compressed form and needs to be de-compressed with STUFFIT before it can be run. If you are running under Multifinder, it is wise to allocate as much memory as possible to Image through its Information box. When you first open Image, you may wish to adjust the sizes of the Cut and Paste buffers, set them as the default, and then restart the program. Large buffers are necessary if you wish to extract part of the image into a new image. Small buffers allow you to open large images in a machine with limited memory.

Use the "Open" command (Command-O) to select the CD-ROM drive, the desired folder, and the desired image. (Select the *.lbl, not the *.img file.) You can use normal Macintosh commands to adjust the size of the image window, or move it on the screen. A selection of "tools" lets you scroll the image within the window, adjust its brightness and contrast, change the magnification, and color the image. You can have multiple images open simultaneously in separate windows. Image lets you save the file in a number of formats, including PICT, which can be used by many different Macintosh programs.

Try Before You Buy

It is possible to try out some of the Magellan images even if you don't yet own a CD-ROM drive. You will need the display software from NSSDC appropriate for your computer and either a modem or a connection to the Internet computer network. Alternatively, you may be able to ask a friend to copy the images onto a diskette for you. The limitation of this approach is that the Magellan image files are quite large, and therefore take time to move electronically (or fill diskettes quickly). CD-ROMs are particularly effective for distributing such large sets of data easily. Some sources of Magellan images are the following: □ SPACELINK is intended to provide information useful for school teachers and contains a collection of digital images, as well as some of the "browse" images showing the standard mosaic images. SPACELINK's images are in GIF format, which helps to make them smaller and suitable for display on a variety of inexpensive classroom computers. They are accompanied by text files which give the captions released with the images. IMDISP will display the GIF images on IBM-type computers; a variety of GIF viewers exist for the Macintosh. You can connect to SPACELINK either through the Internet or by modem.

telnet: spacelink.msfc.nasa.gov(192.149.89.61) modem: (205) 895-0028

- NASA's Ames Research Center in California allows public access through the Internet network to a large collection of information on NASA's missions, as well as image display software, digital image files in a variety of formats, and captions for all the released (press) images. Magellan imagery is available in GIF and VICAR formats. In addition, the Magellan CD-ROMs are available in rotation with other NASA image CD-ROMs as a pair of publicly accessible directories. Contact: ftp: ames.arc.nasa.gov (128.102.18.3)
 - user: anonymous
 - cd: pub/SPACE/MAGELLAN, VICAR, GIF, CDROM, CDROM2, SOFTWARE
 - □ The PDS Geosciences Node at Washington University permits access through the Internet network to selected Magellan data and documentation. Contact:
 - ftp: wuarchive.wustl.edu (128.252.135.4)
 - user: anonymous
 - cd: graphics/magellan

For Further Help

The best source for further help will depend on your problem, your location and what type of user you are.

The Lord created documentation to be read. (He didn't promise it would be easy to read, but ...)

- □ If your problem is difficulty in understanding how to install your CD-ROM drive and its drivers, you need to consult your hardware supplier or a friend who has experience with such hardware.
- □ If the CD-ROM disks appear to be blank, or you cannot open the sub-directories (folders), you probably have old driver software which cannot handle the ISO-9660 standard and need to obtain up-to-date versions.
- □ If you cannot read a software diskette from NSSDC, please try it in another machine, check that it is intended for your machine, and ensure that you are not placing a high-density diskette into a low-density drive.
- □ Ensure that you have the appropriate hardware with which to actually show the images. Older personal computers, particularly IBMs with mono chrome (Hercules) displays, will not work, nor will small monochrome Macintoshes (Mac Plus, SE, ...). IBMs with EGA displays will work, but the images shown will be very discouraging. It is possible to show GIF images on inexpensive machines, but it is difficult to obtain results which really show the Magellan imagery satisfactorily.
- □ If you are a teacher, the system of NASA Teacher Resource Centers may have a center near you which could provide assistance. In addition to helping you display the imagery, they may be able to assist with other material to use in incorporating the Magellan data into your teaching.
- NSSDC is not able to provide detailed assistance to users in making the Magellan CD-ROMs work. A special Magellan Support Office has been established at Washington University to provide more assistance than NSSDC can supply.

Magellan Data Products Support Office

Planetary Data System, Geosciences Node

Earth and Planetary Remote Sensing Laboratory Washington University, Campus Box 1169 One Brookings Drive St. Louis, Missouri 63130-4899 (314) 935-5493, Facsimile: (314) 935-7361 E-mail: WURST::MGNSO or mgnso@wurst.wustl.edu (128.252.135.4)

The Washington University PDS node provides a direct and knowledgeable source of assistance in using Magellan data through a Magellan Data Products Support Office. The purpose of the Support Office is to provide users with information about and assistance in getting Magellan data. Standard and special data products are supported, including digital products, photoproducts, slides, videotapes, and NASA Public Information Office (PIO) products. The Support Office serves NASA-sponsored scientists, other researchers and educators, and the general public.

The Support Office is staffed by researchers experienced in working with Magellan data products. The primary contact is Dr. Edward Guinness. The Office can answer questions such as what data products exist, where they can be obtained and at what cost, and how to read digital data products. The Office can provide the information necessary to complete an NSSDC order form and will help users place an order. In general, a user is referred to NSSDC when the Support Office is certain that NSSDC has the product in question. The Support Office gives the user the phone number and/or electronic mail address of NSSDC, and helps the user determine exactly what to request. For a non-standard product, or when the Support Office is not certain that NSSDC has a product, the Office tries to locate information about the product and then calls the user back. It then does whatever it can to help the user obtain the product.

NSSDC personnel will refer a user to the Magellan Data Products Support Office in cases where they cannot help the user and know the Support Office can. If NSSDC is not sure the Support Office has the answer, it will work directly with the Support Office to find the information, and then get back to the user. The Support Office does not:

- Fill orders for standard products from the Geosciences Node inventory when the orders can be filled by NSSDC. Exceptions are made in special cases, for example if NSSDC is temporarily out of stock and the Geosciences Node can easily provide the product.
- Provide users with accounts on Geosciences Node computers. The Office will help users obtain accounts on the Planetary Data System computer in order to use the Magellan Detailed-Level Catalog or other parts of the PDS Catalog.

24 (Appendix) 96

APPENDIX A – REGIONAL PLANETARY IMAGE FACILITIES

The Planetary Geology and Geophysics Program cosponsors an international system of regional planetary image facilities (RPIFs). These facilities function as a library of planetary image data and associated information. Each of the 15 facilities contains nearly half a million planetary images. The facilities maintain photographic copies and digital data. In addition, several RPIFs offer workstations for users to conduct on-site image and cartographic processing. Each facility's general holdings, containing images of planets and their satellites taken from both Earth and space, together with topographic and geologic maps produced from these images, include the following:

The Moon

Selected Earth-based telescopic photos Ranger 7 through 9 Surveyor 1, 3, 5 through 7 Lunar Orbiter 1 through 5 Apollo 8, 10 through 17

Mercury

Mariner 10

Venus

Mariner 10 Pioneer Venus Magellan

Mars and Its Satellites

Mariner 4, 6, 7, and 9 Viking Orbiter 1 and 2 Viking Lander 1 and 2

Jupiter and Its Satellites Voyager 1 and 2

Pioneer 10 and 11

Saturn and Its Satellites Voyager 1 and 2

Pioneer 11

Uranus, Neptune and their Satellites Voyager 2

Each facility has a video disk system that allows users to rapidly scan a collection of images. Additionally, holdings may be searched through an on-line data catalog that is supported by the network of RPIFs. Because the RPIFs are reference centers for studying and selecting lunar and planetary images, images are not permitted to leave except under exceptional circumstances. Reproductions of a few photographs at the user's expense may be possible, however, data managers are available to assist with the ordering of materials for user's retention from the National Space Science Data Center (NSSDC) in Greenbelt, Maryland.

Regional Planetary Image Facilities are located at the following institutions in the United States and Overseas:

Space Imagery Center

Lunar and Planetary Laboratory University of Arizona Tucson, AZ 85721 (602) 621-4861 Fax: (602) 621-4933

Arizona State University

Space Photography Laboratory Department of Geology Tempe, AZ 85287-1404 (602) 965-7029 Fax: (602) 965-8102

Planetary Data Center

Brown University Department of Geological Sciences Box 1846 Providence, RI 02912 (401) 863-3243 Fax: (401) 863-3978

Cornell University

Spacecraft Planetary Imaging Facility 317 Space Sciences Building Ithaca, NY 14853-6801 (607) 255-3833 Fax: (607) 255-9002

25

PRECEDING PAGE BLANK NOT FILMED

University of Hawaii

Pacific Regional Planetary Data Center Planetary Geosciences 2525 Correa Road Honolulu, HI 96822 (808) 956-3131 Fax: (808) 956-6322

Jet Propulsion Laboratory

California Institute of Technology Mail Stop 202-101 4800 Oak Grove Drive Pasadena, CA 91109 (818) 354-3343 Fax: (818) 354-3437

Lunar and Planetary Institute

Center for Research and Information Services 3600 Bay Area Blvd. Houston, TX 77058-1113 (713) 486-2136 or -2182 Fax: (713) 486-2186

Center for Earth and Planetary Studies

National Air and Space Museum 4th & Independence Avenue, S.W. Room 3790 Smithsonian Institution Washington, DC 20560 (202) 357-1457 Fax: (202) 786-2566

U.S. Geological Survey

Branch of Astrogeology 2255 North Gemini Drive Flagstaff, AZ 86001 (602) 556-7262 Fax: (602) 556-7090

Department of Earth and Planetary Sciences

Campus Box 1169 Washington University St. Louis, MO 63130 (314) 935-6652 Fax: (314) 935-7361

OVERSEAS FACILITIES

DFVLR Oberpfaffenhofen

RPIF NE-OE-PE 8031 Wessling Germany 011 (49) 89 520-2417 Fax: 011 (49) 8153-2476

ISAS

Division of Planetary Science 3-1-1 Yoshinodai Sagamihara Kanagawa 229 Japan 011 (81) 427-51-3925 Fax: 011 (81) 427-59-4237

Phototheque Planetaire d'Orsay

Laboratoire de Geologie Dynamique Interne Batiment 509 Universite Paris-Sud F-91405 Orsay Cedex France 011 (33) 1 69-41-61-49 or 51 Fax: 011 (33) 1 60-19-14-46 TELEX: FACORS 602166F

Southern-Europe RPIF

c/o Instituto di Astrofisicia Spaziale-CNR Reparto di Planetologia Viale dell'Universita' n. 11 00185 Rome Italy 011 (39) 6 49-56-951

University of London Observatory

Observatory Annex and ULO Planetary Image Center 33-35 Daws Lane Mill Hill London NW7 4SD England 011 (44) 81 959 0421 Fax: 011 (44) 71 380 7145

APPENDIX B – PLANETARY DATA SYSTEM NODES

Central Node

Planetary Data System Jet Propulsion Laboratory 4800 Oak Grove Drive Mail Stop 525-3610 Pasadena, California 91109 (818) 306-6130 Facsimile: (818) 306-6929 VAXmail: jplpds::pds_operator

Andrea Alazard
 PDS Administrator
 (818) 306-6028
 VAXmail: jplpds::pdssa

Atmospheres Node

University of Colorado
 LASP Campus Box 392
 Boulder, CO 80309

Steve Lee (303) 492-5348 Fax: (303) 492-6946 NASAmail: SWLEE VAXmail: oroin::lee

Randy Davis
 (303) 492-5081
 Fax: (303) 492-5105
 NASAmail: RLDAVIS
 VAXmail: aquila::davis

Geosciences Node

- Washington University Campus Box 1169 One Brookings Drive St. Louis, MO 63130-4899 Fax: (314) 935-7361
 - Ray Arvidson
 (314) 935-5609
 NASAmail: RARVIDSON
 VAXmail: wurst::arvidson

Ed Guinness (314) 935-5493 NASAmail: EGUINNESS VAXmail: wurst::guinness

Imaging Node

 USGS Astrogeology 2255 N. Gemini Dr. Flagstaff, AZ 86001 Fax: (602) 556-7014

Larry Soderblom
 (602) 556-7018
 NASAmail: LSODERBLOM
 VAXmail: astrog::lsoderblom

Eric Eliason
 (602) 556-7113
 NASAmail: EELIASON
 VAXmail: astrog:eeliason

NAIF Node

\$

JPL MS 301-125L 4800 Oak Grove Dr. Pasadena, CA 91109 (818) 354-3869 Fax: (818) 393-6388

Chuck Acton NASAmail: CACTON VAXmail: naif::cha

Planetary Plasma Interactions UCLA IGPP Los Angeles, CA 90024 Fax: (310) 206-8042

Ray Walker (310) 825-7685 NASAmail: RAYWALKER VAXmail: uclasp::rwalker


Steve Joy (310) 206-6073 NASAmail: SJOY VAXmail: uclasp::sjoy

0.1.

Rings Node

- NASA/AMES Research Center
 MS 245-3
 Moffett Field, CA 94035
 Fax: (415) 604-6779
- Jeff Cuzzi
 (415) 604-6343
 NASAmail: JNCUZZI
 VAXmail: gal::cuzzi
- Mark Showalter (415) 604-3382 NASAmail: MSHOWALTER VAXmail: gal::showalter

Small Bodies Node



Astronomy Program College Park, MD 20742 Fax: (301) 314-9067

Michael A'Hearn (301) 405-6076 NASAmail: MAHEARN VAXmail: east::"ma@astro.umd.edu"

Ed Grayzeck
 (301) 405-1539
 VAXmail: nssdca::grayzeck



SIS Reverse Reference List

SIS Reverse Reference List (RRL)

Introduction: Science readers and users of Magellan Software Interface Specifications (SISs) and related documentation have expressed concern over the nested and/or hierachical structure with which the overall package has been put together. Two problem situations are readily identified:

(1) The user of a SIS must locate and read other SISs in order to discover the format and content of the data product of interest. In some cases the nesting is several layers deep, meaning that considerable time may be lost as these documents are retrieved one at a time and found to be insufficient (because of further nesting).

(2) When one SIS changes, it is difficult (and sometimes impossible) to anticipate consequences to other SISs and to end users. When the nesting is several layers deep, the end user may be completely unaware that a change has taken place in either the format or the content of the data product.

Overview: The following pages contain a reverse reference list to the SIS documents of most interest to science users. That is, each document listed is followed by a list of other documents which reference *it*. The full list has been culled from Magellan science (and supporting) SISs. An appendix gives single page summaries for each SIS included in the compilation. The complete Reverse Reference List (RRL) is more comprehensive than most science users will require, but all of the data have been retained so that (1) the magnitude of the problem may be appreciated and (2) the impact of supposedly distant

Caveats: Users of this list should be aware of its limitations. In particular these include:

(1) This list was compiled by hand from SIS documents available in late May 1990. Only TPS-140 (AEDR SIS) had not been signed off at that time, but several documents were undergoing post-approval change. Major changes in applicable document lists or in SIS organization seem unlikely, but that cannot be ruled out. Thus, because of the continued evolution of the SISs and because there are no real checks built into the compilation, the RRL should be used with some respect for its limitations. It should be, however, better than having no list at all.

(2) The same document is often given different identification codes by different orignizations, i.e. the Magellan Project, SFOC, HAC, NAIF, MIT, etc. There are also two cases where the Magellan Project has collected several documents under the same code (NAV-135 and TPS-113). In the current document, the Magellan Project code is used whenever it is available. Cross-references to the other names are to be found in the Reverse Reference List, e.g.

> JPL D-2719 see PD 630-530

(3) In general the reverse referencing goes to only one level of depth. The heritage of a file which has been simply copied from one product to another to a third, etc. will not be apparent from a casual

SIS RRL

6/8/93 14:36

27

glance at the RRL. For example, the Spacecraft and Planet Ephemeris File is specified by SIS NAV-135. This (disk) file is copied to several tapes, including the SAR-EDR (SIS TPS-101) from which it is copied to the F-BIDR (SIS SDPS-101) and thence to the C-BIDR (SIS IDPS-102). The situation is more confusing since the TPS-101 document refers to NAV-135 by its SFOC designation: SFOC-2-DPS-CDB-Ephemeris, which is only one part of NAV-135, the Magellan Project designation. The RRL shows the pairwise reverse referencing but the user must, in general, query the RRL repeatedly (in conjunction with the relevant pages in the appendix) to discover that NAV-135 is needed to interpret the C-BIDR ... or that a change in NAV-135 will be carried to (at least) the C-BIDR product. Limited multi-level reverse referencing has been included (through use of [] notation) where direct copies are involved (in fact, the example given here is covered by this exception).

(4) SIS documents rarely describe more than format. The user should realize that some quantities will be passed on from one product to another even though the format changes. MIDR tapes, for example, are derived from F-BIDR and C-BIDR tapes. The MIDR format is defined almost entirely by IDPS-109. The MIDR user should be aware, however, that there may be circumstances in which *some* of the MIDR contents will change if the parent F-BIDR or C-BIDR changes.

> Dick Simpson and Peter Ford June 90

Mapping Between MGN Data Product and SIS

The following table shows Magellan data product in the left column and the primary Software Interface Specification (SIS) in the right column.

The user can find the primary SIS in the appendix, which follows, and identify additional SISs which may be needed to unpack the data.

<u>Name</u>	Description	SIS ID
AEDR	Archive Engineering Data Record	TPS-140
ARCDR	Altimetry and Radiometry Composite Data Record	SCI-002
ATDF	Archival Tracking Data File	TRK-105
BADR	Basic Altimetric Data Record	IDPS-119
BRDR	Basic Radiometer Data Record	IDPS-123
C-BIDR	Compressed-Resolution Basic Image Data Record	IDPS-102
F-BIDR	Full-Resolution Basic Image Data Record	SDPS-101
GADR	Global Altimetric Data Record	IDPS-135
GRDR	Global Radiometric Data Record	IDPS-124
GxDR	Global Image Data Record (x = T, S, RE, E)	SCI-001
MIDR	Mosaicked Image Data Record	IDPS-109
ODF	Orbit Data File	TRK-101
PIDR	Polar Image Data Record	IDPS-107
SCI-EDR	Science (SAR or ALT) Experiment Data Record	TPS-101

Simplified Reference List

The following table shows the Software Interface Specification documents that are *absolutely* necessary in order to understand the *format*, but not necessarily the *content*, of each of the Magellan radar data products distributed to the scientific community. A more complete list is to be found in the Appendix, but that list shows only direct dependencies, which must be iterated in order to locate all source documents. The simplified table shows *all* dependencies.

Product	SIS ID	Depends on
ARCDR	SCI-002	NAV-135
BADR	IDPS-119	
BRDR	IDPS-123	SDPS-101
C-BIDR	IDPS-102	SDPS-101, TPS-101, Aux
F-BIDR	SDPS-101	TPS-101, Aux
GADR	IDPS-135	
GRDR	IDPS-124	
GxDR	SCI-001	
MIDR	IDPS-109	
PIDR	IDPS-107	NAV-135, TPS-101
SCI-EDR	TPS-101	Aux

The following documents (shown above as **Aux**) are required in order to read SCI-EDR tapes and several products derived from them.

Man ID	Subsystem SIS ID
MON-105	SFOC-1-GIF-DSN-MgnGCFMon
NAV-135	(SFOC-2-DPS-CDB-Ephemeris,
	NAIF-167.0,
	NAIF-168.0,
	NAIF-169.0)
RES-101	SFOC-1-CDB-Mgn-Bandwidth
RES-104	SFOC-1-CDB-MGN-Quaterni
SES-112	SFOC-1-CDB-MGN-SCLKvSCET
SES-115	SFOC-1-DMD-Mgn-DECAL
TPS-113	(SFOC-5-SYS-*DU-NJPL,
	SFOC-5-TIS-*DU-MgnSFDU,
	SFOC-5-TIS-*DU-SFDU)
TPS-129	SFOC-1-TIS-Any-DecomRpt

All users of Magellan products should have copies of PD 630-79. In addition, recipients of tape products (all the above except MIDR, ARCDR, and GxDR) will require copies of ANSI X3.27-1978 and ANSI X3.54-1976.

Reverse Reference List

[bold]

[bold, italicized]

Each entry in the Reverse Reference List includes:

- [1] SIS or document code (if any),
- [2] document title (if any), and
- [3] other documents (if any) in which it is referenced

If a document is known by more than one code, all the recognized ones are given after the "most commonly encountered" code. For example, the SCIEDR product is described by a SIS known as TPS-101 in some circles and as SFOC-1-MHR-Mgn-SCIEDR in others. The "most commonly encountered" code (for science purposes) is TPS-101, so the SIS is listed in the RRL under that. The other code (SFOC-1-MHR-Mgn-SCIEDR) appears separately in the list, but only with a pointer to TPS-101.

Documents are listed in alpha/numerical order. Where both a document and a section within that document (e.g., 820-13, Rev. A and its sections) are identified separately, the full document appears first and the sections, in alpha/numerical order, follow.

Note that SFOC apparently uses "temporary" codes like SXXXnnnn-nn-nn-nn to designate SISs which are in the process of being written. Designations starting with "SFOC0038-" are particularly common. It was found in compiling the RRL that these were not unique. For example, the code SFOC0038-01-04-01 referred to at least two different SISs. All of the "SFOC0038-" entries have been purged from the RRL, but they remain in the appendix listings. Users of the RRL and appendix should be wary of the others; the preferred (stable and unique) designation for these SISs starts with "SFOC-".

In the few cases where reverse referencing is shown to more than one depth, the additional references are shown set off by square brackets []. For the example above involving the ephemeris file to C-BIDR propagation, the TPS-101 entry is modified to

TPS-101 [SDPS-101 [IDPS-102] [IDPS-107]]

to indicate that the file is copied with at most minor changes through to the C-BIDR (and also to the PIDR, described by IDPS-107). Where more than minor modifications take place, multiple reverse referencing has not been attempted.

ANSI X3.27-1978 American National Standards Institute, Magnetic Tape Label for Information Exchange IDPS-102 IDPS-107 IDPS-109 IDPS-119 IDPS-123 IDPS-124 IDPS-135 SCI-001 SCI-002 SDPS-101 TPS-101 TPS-140
ANSI X3.54-1976 American National Standards Institute, Recorded Magentic Tape for Information Interchange (6250 cpi, Group-Coded Recording) IDPS-102 IDPS-107 IDPS-109 IDPS-119 IDPS-123 IDPS-124 IDPS-135 SDPS-101
DDN Protocol Handbook NAV-135
DMD SDD Channel Conversion Language SES-115
DPTRAJ and ODP (4 volumes) see PD 630-336
DS 32466-101 VRM Radar System Sensor Subsystem Development Specification PD 630-204
DS 32466-111 Venus Radar Mapper PRF/Timing Unit Development Specification PD 630-204
DS 32466-121 Venus Radar Mapper Data Formatter Unit Development Specification PD 630-204
DS 32466-141 Venus Radar Mapper Telemetry and Command Unit Development Specification PD 630-204

DS 32466-402 MGN Software Requirements Document, Radar Mapping Sequencing Software RES-101 **RES-104** ______ HS 513-034E MGN Radar System Software Management Plan **RES-101** RES-104 _____ HS 513-088 VRM Radar System Design Description PD 630-204 ______ IDPS-102 Compressed-Resolution Basic Image Data Record SCI-002 _____ **IDPS-107** Polar Image Data Record IDPS-109 Mosaicked Image Data Record IDPS-119 Basic Altimetric Data Record IDPS-135 _____ IDPS-123 Basic Radiometer Data Record IDPS-124 _____ IDPS-124 Global Radiometric Data Record IDPS-135 Global Altimetric Data Record _____ JJPL0006-00-02 unknown title (referenced in RES-101 page 4-1; perhaps it should be JJPL0006-01-00)

JJPL0006-01-00 JPL Standard Formatted Data Unit (SFDU) Usage and Description IDPS-102 IDPS-107 IDPS-109 IDPS-119 IDPS-123 IDPS-124 IDPS-135 NAV-135 **RES-101** RES-104 SCI-001 SCI-002 SDPS-101 NAV-135 **TPS-113** _____ **JPL D-2560** Multimission Image Processing Laboratory Requirements Document IDPS-109 _____ _____ JPL D-2719 see PD 630-530 _____ JPL D-2769 see PD 630-300 _____ JPL D-3198 JPL Standard Formatted Data Unit Description and Draft Standard **IDPS-102 IDPS-107** IDPS-109 IDPS-119 IDPS-123 IDPS-124 IDPS-135 JPL D-4037 Space Flight Operations Center, Telemetry Input Subsystem, Functional Requirement **TPS-113** ______ JPL D-4186 VICAR User's Manual, Issue 1 IDPS-109 IDPS-124 IDPS-135 SCI-001 _____ JPL D-4421 see STIS0007-00-06 _____ **JPL D-4683** Standards for the Preparation and Interchange of Data Sets SCI-001 _____

MGN-MOS-4-240 Spacecraft Engineering Subsystem Functional Requirements SES-112 SES-115 _____ MGN-SFOP-10-220, SDPT-SP-12 Software Installation and Delivery SDPS-101 -----MGN SRD WE2-03 STISMG06-02-00-09 (in SFOC-5-TIS-*DU-MgnSFDU) SFOC-TISMGN-09 (in SFOC-5-TIS-*DU-SFDU) Magellan Spacecraft Project, Mission Operations System Requirements, Telemetry Processing Subsystem: MRO, DED, Flood, Starcal, Normal MRO Processing **TPS-113** MHR SSD MHR Software Specifcation Document MIT-MGN-ARCDR see SCI-002 _____ MIT-MGN-ERR MIT Magellan Altimetry Error Analysis SCI-002 _____ MIT-MGN-GxDR see SCI-001 _____ MIT-MGN-SDD MIT Magellan A&R Data Processing Software Design Document SCI-001 SCI-002 _____ MIT-MGN-SDMP MIT Magellan A&R Data Processing Software and Data Management Plan SCI-001 SCI-002 _____ MO 642-530 **JPL D-1672** Mars Observer, Spacecraft Data Standards **TPS-113** MON-105 820-13, Rev. A; MON-5-12 SFOC-1-GIF-DSN-MgnGCFMon DSN Monitor and Control System Interface with Magellan Project Telecommunication Link Analysis **TPS-113 TPS-140** _____ MOS - 4 - 272JPL D-6425 MGN/IDPS Functional Requirements Documents IDPS-102 IDPS-119 IDPS-124 IDPS-135 _____

MSDS-104 Average Orbital Elements TPS-101 ------NAIF Document 167.0 Double Precision Array Files (DAF) Specification and User's Guide see NAV-135 -----NAIF Document 168.0 S- and P-Kernel (SPK) Specification and User's Guide see NAV-135 -----NAIF Document 169.0 SPACEIT Version 1.0 User's Guide see NAV-135 ------(The) NAIF Ephmeris System -----NAV-135 NAV-103 Navigation Constants File NAV-134 REGRESS (Residual Data) File -----NAV-135 NAIF Ephemeris File (a collection of the following documents: SFOC-2-DPS-CDB-Ephemeris, NAIF 167.0, 168.0, and 169.0) [SDPS-101 [IDPS-102] [IDPS-107]] TPS-101 SCI-002 ------NAV-136 Average Orbital Elements RES-104 ------**OPS-6-8** (Probably a subsection of 820-13, Rev. A) MON-105-----PD 630-52 VRM Information System Plan PD 630-204 -----JPL D-2300 PD 630-79 Planetary Constants and Models IDPS-102 IDPS-107 IDPS-109 IDPS-119 IDPS-123 IDPS-124 IDPS-135 **RES-104** SCI-001 SCI-002 SDPS-101

PD 630-100 VRM Spacecraft System Requirements PD 630-204 _____ PD 630-104 Spacecraft System - Radar System IRD PD 630-204 PD 630-105 see VRM-SE-004-014 ------PD 630-200 VRM Radar System Requirements PD 630-204 _____ PD 630-202, Rev. B Venus Radar Mapper Radar Data Processing Subsystem Functional Requirements IDPS-109 PD 630-204 MGN Mission Operations System, Radar System Interface Requirements Document SFOC-1-MHR-Mgn-SABHdr TPS-101 PD 630-258 SDPS Software Design Document, Offline Analysis SDPS-101 _____ PD 630-300 JPL D-2769 Venus Radar Mapper, Mission Design Functional Requirements PD 630-204 **TPS-101 TPS-140** _____ PD 630-300, 2-100 MGN MOS Requirements, Uplink Process PD 630-204 RES-104 _____ PD 630-300, 2-200 MGN MOS Requirements, Downlink Process PD 630-204 _ _ _ _ _ _ . PD 630-300, 3-200 MGN MOS Requirements, Ground Data System RES-104 PD 630-300, 4-130 MGN MOS Requirements, Radar System Engineering Team PD 630-204 **RES-101** RES-104 _____ PD 630-300, 4-170 MGN MOS Requirements, Radar Data Processing Team PD 630-204

______ PD 630-300, 4-230 MGN MOS Requirements, GDS Radar Engineering Subsystem PD 630-204 **RES-101 RES-104** ______ _____ PD 630-300-VRM-MOS-004-240 see MGN-MOS-4-240 _____ PD 630-300, 4-251 MGN MOS Requirements, Telemetry Processing Subsystem Functional Requirements PD 630-204 SES-115 PD 630-300, 4-270 MGN MOS Requirements, Radar Data Processing Subsystem PD 630-204 _____ PD 630-300-VRM-MOS-004-251 see PD 630-300, 4-251 _____ _____ PD 630-336 DPTRAJ and ODP (4 volumes) NAV-103 NAV-134 _____ PD 630-369 SDPS Functional Design Document SDPS-101 _____ _____ JPL D-2719 PD 630-530 Magellan Altimeter Processing: Algorithms and Constants IDPS-119 _____ _____ PD 630-610 see SES-112 _____ SFOC-1-CDB-Mgn-Bandwidth **RES-101** Radar Processing Bandwidths File TPS-101 [SDPS-101 [IDPS-102]] _____ _____ _____ **RES-102** Radar Control Parameter File PD 630-204 _____ SFOC-1-CDB-MGN-Quaterni RES-104 Mapping Quaternions Polynomial Coefficients File TPS-101 [SDPS-101 [IDPS-102]] ____ ______ SCDA 0007-00-03 Common Data Access Software Specification Document NAV-135 SCDA 0007-00-04 see SCDA 0007-00-03

SCI-001 MIT-MGN-GXDR MIT Global Image Data Records SCI-002 _____ SCI-002 MIT-MGN-ARCDR Altimetry and Radiometry Composite Data Record SCI-001 _____ SDPS-101 Full-Resolution Basic Image Data Record IDPS-102 **IDPS-107 IDPS-123** _____ SDTS0008-00-02-05 SFOC-6-DTS-DTS-GlobalDa Programmer's Note TPS-129 ______ SFOC-1-CDB-MGN-SCLKvSCET PD 630-610 SES-112 Magellan SCLK/SCET Coefficients File TPS-101 [SDPS-101 [IDPS-102]] ______ _____ SFOC-1-DMD-Mgn-DECAL SES-115 MGN Decalibration File to DMD TPS-101 [SDPS-101 [IDPS-102]] _____ _____ SFOC-TISMGN--9 see MGN SRD WE2-03 _____ SFOC-1-CDB-Mgn-Bandwidth see RES-101 _____ SFOC-1-CDB-MGN-Quaterni see RES-104 _____ SFOC-1-CDB-MGN-SCLKvSCET see SES-112 _____ SFOC-1-CDB-Mgn-Timesfile Processing Times File NAV-135 _____ SFOC-1-DMD-Mgn-Chn1Proc Processing and Decom Map Data **TPS-140** _____ SFOC-1-DPS-MGN-EPHEMERIS Spacecraft Ephemeris File NAV-135 _____ SFOC-1-DMD-Mgn-DECAL see SES-115 _____ _____ SFOC-1-GIF-DSN-MgnGCFMon see MON-105 _____

SFOC-1-GIF-DSN-MgnGIFMon Magellan DSN Monitor Data **TPS-101** _____ SFOC-1-MHR-Mgn-ArEngDR see TPS-140 SFOC-1-MHR-Mgn-SABHdr SAB Headers _____ SFOC-1-MHR-Mgn-SCIEDR see TPS-101 ______ SFOC-1-TIS-AnyDecomMap title unknown **TPS-129** _____ SFOC-1-TIS-Any-DecomRpt Decommutation Report Form [SDPS-101 [IDPS-102]] TPS-101 **TPS-140** _____ _____ SFOC-2-CDB-AnyAncillary Ancillary Files NAV-135 SFOC-2-CDB-ANY-Ancillary title unknown (see also SFOC-2-CDB-AnyAncillary) **TPS-129** NAV-135 SFOC-2-CDB-ANY-Catalog title unknown **TPS-129** SFOC-2-DPS-CDB-Ephemeris Spacecraft and Planet Ephemeris, NAIF S and P Kernels see NAV-135 ______ SFOC-2-TIS-Any-DecomRpt see TPS-129 _____ SFOC-2-TIS-Any-MgnTelem Magellan Telemetry Formats Generated by Telemetry Input Subsystem TPS-101 ______ SFOC-2-TIS-Any-Telem Telemetry Minor Frame Formats from Telemetry Input Subsystem **TPS-101 TPS-113** SFOC-2-TIS-CDB-Telem title unknown **TPS-113** SFOC-2-TIS-DMD-Telem title unknown TPS-113 SFOC-2-TIS-MPL-Telem title unknown _____ **TPS-113** _____ SFOC-5-SYS-*DU-NJPL see TPS-113 ______ SFOC-5-TIS-*DU-MgnSFDU see TPS-113 ------_____ SFOC-5-TIS-*DU-SFDU see TPS-113 SFOC-6-DTS-DTS-GlobalDa see SDTS0008-00-02-05 SGS-107 Standard Sequence Data File RES-104 SGS-108: Phase 1 Key Spacecraft Events Times File ------TPS-101 _____ STISMG06-02-00-09 see MGN SRD WE2-03 ------STISMG06-01-00-15 Trickle Telemtry Processing ------**TPS-113** _____ STIS0004-02-01 -----see JPL D-4037 JPL D-4421 STIS0007-00-06 Spaceflight Operations Center, Telemetry Input Subsystem Software Specification Document TPS-129 SFOC-1-MHR-Mgn-SCIEDR **TPS-101** SAR and Altimeter EDR/TEDR Tapes IDPS-119 SCI-002 SDPS-101 SFOC-1-MHR-Mgn-SABHdr NAV-135 -----____ **TPS-110** Engineering Telemetry File SES-115

TPS-113 Magellan SFDU Formats (includes 3 SFOC documents: SFOC-5-SYS-*DU-NJPL, SFOC-5-TIS-*DU-MgnSFDU, and SFOC-5-TIS-*DU-SFDU) RES-101 RES-104 SFOC-1-MHR-Mgn-SABHdr TPS-101 **TPS-129 TPS-140** _____ **TPS-129** SFOC-2-TIS-Any-DecomRpt EDR Decom Map Report Form SFOC-2-CDB-ANY-Ancillary SFOC-2-CDB-ANY-CatalogDa **TPS-113** ____ _____ _____ **TPS-140** SFOC-1-MHR-Mgn-ArEngDR Archival Engineering Data Record **TRK-101** 820-13, Rev. A; TRK-2-18 Orbit Data File _____ **TRK-103** 820-13, Rev. A; TRK-2-23 Media Calibration Data **TRK-104** 820-13, Rev. A; TRK-2-21 Timing and Polar Motion File _____ **TRK-105** 820-13, Rev. A; TRK-2-25 Archival Tracking Data File _____ UP 4144.31 Sperry Unisys 1100 Series Executive Vol 3 SES-112 _____ USGS Bulletin 1532 Map Projections Used by the U.S. Geological Survey IDPS-109 IDPS-124 IDPS-135 SCI-001 _____ VAX Architecture Handbook IDPS-102 IDPS-107 IDPS-109 IDPS-119 IDPS-124 IDPS-135 SDPS-101 ______ VICAR User's Guide see JPL D-4186 _____ _____

VICAR Run-Time Reference Manual, Rev. 1 IDPS-109 IDPS-124 IDPS-135 SCI-001 -----VRM-MOS-4-271 Magellan MOS Requirements, SAR Data Processing Subsystem (SDPS) SDPS-101 _____ VRM-SE018 Telemetry Calibration Report SES-115 VRM-SE-001-002, VRM-2-270 Spacecraft System and Subsystem Design Book: Data System Bus PD 630-204 VRM-SE-001-002, VRM-2-280 Spacecraft System and Subsystem Design Book: Telemetry Measurements and Data Formats PD 630-204 SES-115 **TPS-113 TPS-113 TPS-101** VRM-SE-001-002, VRM-2-290 Spacecraft System and Subsystem Design Book: Command Structures and Assignments PD 630-204 **TPS-140 VRM-SE-003-010** Spacecraft System - Radar System ICD PD 630-204 VRM-SE-004-014 Spacecraft Flight System - MOS IRD PD 630-204 _____ VRM-2-280 see VRM-SE-001-002, VRM-2-280 820-13, Rev. A DSN System Requirements, Detailed Interface Design TPS-101 _____ 820-13, Rev. A; MON-5-12 see Mon-105 _____ 820-13, Rev. A; TLM 3-17 DSN Telemetry Interface with SFOC - Magellan TPS-101 _____

820-13, Rev. A; TLM-3-17 DSN Telemetry Interface with SFOC - Magellan **TPS-113** -----820-13, Rev. A; TRK-2-18 see TRK-101 _____ 820-13, Rev. A; TRK-2-21 see TRK-104 _____ 820-13, Rev. A; TRK-2-23 see TRK-103 _____ _____ 820-13, Rev. A; TRK-2-25 see TRK-105 -----956572 JPL Magellan Radar System Full Scale Development Contract PD 630-204

Appendix

Science Software Interface Specifications (references to Applicable Documents)

On the following pages data needed in compiling the Reverse Reference Listing have been abstracted. For each SIS of interest to science, the list of applicable documents has been reproduced. Where a specific file structure is relevant, that has been shown as well.

Pages are ordered by the Magellan SIS code.

Product: C-BIDR

Applicable Documents (AD):

1 2	SDPS-101 ANSI X3.54-1976 ANSI X3.27-1978	
3	JJPL0006-01-00	
4	JPL D-3198	JPL D-2300
5	PD 630-79	
6	VAX Architecture Handbook	JPL D-6425
7	MOS-4-272	

Files:

F-BIDR tape in, C-BIDR tape out. Many files are simply copied over. Image files have been compressed from F-BIDR resolution.

Defined here Volume Header File 1 Copied from F-BIDR (see AD#1) Orbit Header File Copied from F-BIDR (see AD#1) 2 Data Quality File Copied from F-BIDR (see AD#1) 3 Spacecraft Ephemeris File Copied from F-BIDR (see AD#1) 4 SCLK/SCET Coefficients File 5 Copied from F-BIDR (see AD#1) DSN Monitor File 6 Copied from F-BIDR (see AD#1) 7 MOPC File Copied from F-BIDR (see AD#1) Processing Bandwidths File Copied from F-BIDR (see AD#1) 8 Decom/Decal File Copied from F-BIDR (see AD#1) 9 Engineering Data File Copied from F-BIDR (see AD#1) 10 SAB Header Records File Copied from F-BIDR (see AD#1) 11 Per-orbit Parameters File 12 Defined here Oblique Sinusoidal Image Data Copied from F-BIDR (see AD#1) 13 Processing Parameters for 13 14 Defined here Sinusoidal Image Data Copied from F-BIDR (see AD#1) 15 Processing Parameters for 15 16 Defined here Volume Trailer File n

Product: PIDR

Applicable Documents (AD):

- 1 SDPS-101 2 VAX Architecture Handbook
- 3 ANSI X3.54-1976
- ANSI X3.27-1978
- 4 JPL D-3198
- 5 JJPL0006-01-00
- 6 PD 630-79 JPL D-2300

Files:

F-BIDR tape in, PIDR tape out. Many files are simply copied over. Image files have been compressed from F-BIDR resolution.

1 Volume Header File Defined here 2 Spacecraft Ephemeris File Copied from F-BIDR (see AD#1) 3 Per-orbit Parameters File Copied from F-BIDR (see AD#1) 4 Oblique Sinusoidal Image Data Copied from F-BIDR (see AD#1) 5 Processing Parameters for 13 Copied from F-BIDR (see AD#1) Volume Trailer File n Defined here

Product: MIDR

Applicable Documents (AD):

1	PD 630-202, Rev. B	
2	JPL D-2560	
3	VICAR Run-Time Reference Manual,	
4	VICAR User's Guide, Issue 1	JPL D-4186
5	ANSI X3.54-1976	
6	ANSI X3.27-1978	
7	JJPL0006-01-00	
8	JPL D-3198	
9	VAX Architecture Handbook	
10	USGS Bulletin 1532	
11	PD 630-79	JPL D-2300

Files:

F-BIDR or C-BIDR tapes in; F-MIDR, C1-MIDR, C2-MIDR, or C3-MIDR tape out. Image data are stored on output tape as subframes, one subframe per tape file.

.

NB: The Seam Locations File does not appear on C2-MIDR and C3-MIDR tapes.

1	SFDU Header File	Defined here
2	Tape Header File	Defined here
3-58	Subframes #1-56	Defined here
59-114	Subframes #1-56	Defined here
115	Seam Locations File	Defined here
116	SFDU Trailer File	Defined here

SIS: IDPS-119

Product: BADR

Applicable Documents (AD):

1 2 3	MOS-4-272 ANSI X3.54-1976 ANSI X3.27-1978	
4	JJPL0006-01-00	
5	JPL D-3198	
6	VAX Architecture Handbook	
7	PD 630-79	JPL D-2300
8	TPS-101	SFOC-1-MHR-SCIEDR
9	PD 630-530	JPL D-2719

Files:

Up to 40 ALT-EDR tapes in; BADR tape out.

1	SFDU Header File	Defined here
2-41	Altimetry Files	Defined here
42	SFDU Trailer File	Defined here

Product: BRDR

Applicable Documents (AD):

1 SDPS-101 2 ANSI X3.54-1976 ANSI X3.27-1978 3 JPL D-3198 4 JJPL0006-01-00 5 PD 630-79

JPL D-2300

Files:

UP to 232 F-BIDR tapes in, BRDR tape out.

1	Volume Header File	Defined here
2-233	Processed Radiometer Data	Copied from F-BIDR (see AD#1)
234	Cold Sky Calibrations	Copied from F-BIDR (see AD#1)
235	Volume Trailer File	Defined here

Product: GRDR

Applicable Documents (AD):

1	MOS-4-272	- 1
2	VICAR Run-Time Reference Manual,	Rev. 1
3	VICAR User's Guide, Issue 1	JPL D-4186
4	ANSI X3.54-1976	
5	ANSI X3.27-1978	
6	JJPL0006-01-00	
7	JPL D-3198	
8	VAX Architecture Handbook	
9	USGS Bulletin 1532	0000
10	PD 630-79	JPL D-2300
11	IDPS-123	

Files:

BRDR tape in; GRDR tape out.

1	Header File	Defined here
2	Data Header File	Defined here
3	Black Body Temperature	See AD#11 for BBT definition
4	Equivalent Surface Brightness	See AD#11 for ESB definition
5	Trailer File	Defined here

SIS: IDPS-135

Product: GADR

Applicable Documents (AD):

1	MOS-4-272	D
2	VICAR Run-Time Reference Manual,	Rev. 1
3	VICAR User's Guide, Issue 1	JPL D-4186
4	ANSI X3.54-1976	
5	ANSI X3.27-1978	
6	JJPL0006-01-00	
7	JPL D-3198	
8	VAX Architecture Handbook	
9	USGS Bulletin 1532	
10	PD 630-79	JPL D-2300
11	IDPS-119	

Files:

BADR tapes in; GADR tape out.

1	Header File	Defined here
2	Data Header File	Defined here
	Global Terrain Elevation Image	Defined here
Ŷ	Trailer File	Defined here
4	Tidilei file	

SIS: MON-105

820-13, Rev. A; MON-5-12, SFOC-1-GIF-DSN-MgnGCFMon

Product: DSN Monitor Data File

Applicable Documents (AD):

1 Module OPS-6-8

Note: Any early version of this SIS was also labeled SFOC-1-GIF-DSN-MgnGCFMon

SIS: NAV-103

Product: Navigation Constants File

Applicable Documents (AD):

1 PD 630-336, Volumes 1-4

SIS: NAV-134

Product: REGRES (Residual Data) File

Applicable Documents (AD):

1 DPTRAJ and ODP (PD 630-336) (4 volumes)

SIS: NAV-135

Product: NAIF Ephemeris File

Note: This document is a collection of 4 lower-level SIS documents:

SFOC-2-DPS-CDB-Ephemeris NAIF-167.0 NAIF-168.0 NAIF-169.0

Applicable Documents (AD):

1	SCDA	0007-	-00	-04	
			-		-

2 DDN Protocol Handbook

3 JJPL0006-01-00

4a SFOC-2-CDB-Any-Ancillary

4b SFOC-1-MHR-Mgn-SCIEDR

4c NAV-135

- 4d SFOC-1-CDB-MGN-TimesFile
- 4e SFOC-1-MHR-MGN-SCIEDR

SIS: PD 630-204

Product: MOS/Radar System IRD

Applicable Documents (AD):

1a	PD 630-52
1b	PD 630-100
1c	PD 630-104
1d	PD 630-200
le	PD 630-300
1f	RES-102
2a	VRM-SE-004-014
2b	VRM-SE-003-010
2c	VRM-SE-001-002
3a	956572
3b	DS 32466-101
3c	DS 32466-111
3d	DS 32466-121
3e	DS 32466-141
3£	HS 513-088

۰.

SFOC-1-DPS-MGN-Ephemeris

SIS: RES-101

SFOC-1-CDB-Mgn-Bandwidth

Product: Processing Bandwidths File

Applicable Documents (AD):

1	PD 630-300, 4-130	
2	PD 630-300, 4-230	
3	DS 32466-402	
4	HS 513-034E	
5	JJPL0006-01-00	
6	TPS-113	
7	JJPL0006-00-02	

SFOC-1-CDB-MGN-Quaterni

SFOC-5-SYS-*DU-NJPL

Product: MQPC File

SIS: RES-104

Applicable Documents (AD):

1a 1b 1c 1d 2	PD 630-300, 2-100 PD 630-300, 3-200 PD 630-300, 4-130 PD 630-300, 4-230 NAV-136	
3	SGS-107	
4	DS 32466-402	
5	PD 630-79	JPL D-2300
6	HS 513-034E	011 0 2500
7	JJPL0006-01-00	
8	TPS-113	SFOC-5-SYS-*DU-NJPL

MIT-MGN-GXDR

SIS: SCI-001

Products:

GTDR	Global Topographic Data Record
GREDR	Global Reflectivity Data Record
GSDR	Global Slope Data Record
GEDR	Global Emissivity Data Record

Applicable Documents (AD):

1 2 3 4 5	ANSI X3.27-1978 JJPL0006-01-00 MIT-MGN-SDMP MIT-MGN-SDMP SCI-002 JPL D-4311	MIT-MGN-ARCDR
6 7 8 9 10	JPL D-4181 JPL D-4186 USGS GSB-1532 PD 630-79 JPL D-4683	JPL D-2300

Files:

ARCDR tapes in, GxDR tapes out, subsequently copied to a single CD-ROM containing all 4 data types as VICAR-2 image frames in 4 cartographic projections. GTDR includes a 5th image of radius error.

0) 0 0 1 0 1 0 1		
1 2 3-34 35 36-39 40 41-44 45 46-77	Volume Header File Sinusoidal Header File Sinusoidal Image Frames North Polar Header File Stereographic Image Files South Polar Header File Stereographic Image Files Mercator Header File Mercator Image Frames	Defined here Defined here Defined Here Defined Here Defined Here Defined Here Defined Here Defined Here Defined Here
*** Fo:	r GTDR only ************************************	*****
79-110	Error Header File Error Image Frames	Defined Here Defined Here
*** En	d of GTDR only *********************	**********
78 or 111	Volume Trailer File	Defined here

SIS: SCI-002

MIT-MGN-ARCDR

Product: ARCDR

Applicable Documents (AD):

1	ANSI X3.27-1978	
2	JJPL0006-01-00	
3	TPS-101	SFOC-1-MHR-MGN-SCIEDR
4	NAV-135	SFOC-2-DPS-CDB-Ephemeris
5	IDPS-102	
6	MIT-MGN-SDMP	
7	MIT-MGN-SDD	
8	SCI-001	MIT-MGN-GxDR
9	PD 630-79	JPL D-2300
10	USGS Bulletin 1532	
11	MIT-MGN-ERR	

Files:

ALT-EDR tapes in, ARCDR tape out, subsequently copied to CD-ROM. SPK ephemeris files are simply copied over. The other files are the result of processing at MIT.

Volume Header File Defined here 1 Defined here 2 Orbit Header File 3 Spacecraft Ephemeris File Copied from ALT-EDR (see AD#3, AD#4)4 Defined here Altimetry Data File Radiometry Data File Defined here 5 Volume Trailer File Defined here n

SIS: SDPS-101

Product: F-BIDR

Applicable Documents (AD):

1	TPS-101	SFOC-1-MHR-MGN-SCIEDR
2	ANSI X3.54-1976	
	ANSI X3.27-1978	
3	VAX Architecture Handbook	
4	JJPL0006-01-00	
5	VRM-MOS-4-271	
6	PD 630-79	JPL D-2300
7	PD 630-258	
8	PD 630-369	
9	MGN-SFOP-10-220, SDPT-SP-12	

Files:

SAR-EDR tape in, F-BIDR tape out. Many files are simply copied over. Image and radiometry files represent results of processing. Parameter and processing monitor files provide view into processing.

1	BIDR Header File	Defined here
2	Orbit Header File	Copied from SAR-EDR (see AD#1)
3	Data Quality File	Copied from SAR-EDR (see AD#1)
4	Spacecraft Ephemeris File	Copied from SAR-EDR (see AD#1)
5	SCLK/SCET Coefficients File	Copied from SAR-EDR (see AD#1)
6	DSN Monitor File	Copied from SAR-EDR (see AD#1)
7	MQPC File	Copied from SAR-EDR (see AD#1)
8	Processing Bandwidths File	Copied from SAR-EDR (see AD#1)
9	Decom/Decal File	Copied from SAR-EDR (see AD#1)
10	Engineering Data File	Copied from SAR-EDR (see AD#1)
11	SAR Header Records File	Copied from SAR-EDR (see AD#1)
12	Per-orbit Parameters File	Defined here
13	Oblique Sinusoidal Image Data	Defined here
14	Processing Parameters for 13	Defined here
15	Sinusoidal Image Data	Defined here
16	Processing Parameters for 15	Defined here
17	Processed Radiometer Data	Format defined here
		Algorithms in AD#5
18	Cold Sky Calibrations	Defined here
19	Processing Monitor Results	Defined here
20	BIDR Trailer File	Defined here

Product: SCLK/SCET Coefficient File

Applicable Documents (AD):

1 MGN-MOS-4-240 2 UP 4144.31

SIS: SES-115

SFOC-1-DMD-Mgn-DECAL

Product: Telemetry Decommutation/Decalibration Data

Applicable Documents (AD):

- 1 PD 630-300-VRM-MOS-004-240
- 2 PD 630-300-VRM-MOS-004-251
- 3 VRM-SE018
- 4 TPS-110
- 5 VRM-SE-001-002
- 6 DMD SDD

SIS: SFOC-1-MHR-Mgn-SABHdr

Product: SAB Headers

Applicable Documents (AD):

- 2 TPS-113
- 3 SMHR0007-00-03-00
- 4 TPS-113
- 5 PD 630-204
- 6 TPS-101

SFOC-5-TIS-*DU-MgnSFDU SFOC-5-TIS-*DU-SFDU MHR SSD SFOC-5-SYS-*DU-NJPL

SFOC-1-MHR-Mgn-SCIEDR

SIS: TPS-101

SFOC-1-MHR-Mgn-SCIEDR

Product: ALT-EDR or SAR-EDR

Applicable Documents (AD):

1 2	PD 630-300 820-13, Rev. A	
3	ANSI X3.27-1978	
4	MSDS-104	
5	SGS-108: Phase 1	
6	RES-101	S
7	SES-112	SI
8	RES-104	SI
9	TPS-129	SI
10	SES-115	SI
11	NAV-135	SI
12	SFOC-5-TIS-Any-MgnTelem	
13	SFOC-5-TIS-Any-Telem	
14	TPS-113	SI
15	TPS-113	SE
16	TPS-113	SE
17	VRM 2-280	
18	MON-105	SI
19	PD 630-204	
20	820-13, Module TLM 3-17	

SFOC-1-CDB-Mgn-Bandwidth SFOC-1-CDB-MGN-SCLKvSCET SFOC-1-CDB-MGN-Quaterni SFOC-1-TIS-Any-DecomRpt SFOC-1-DMD-Mgn-DECAL SFOC-2-DPS-CDB-Ephemeris

SFOC-5-SYS-*DU-NJPL SFOC-5-TIS-*DU-MgnSFDU SFOC-5-TIS-*DU-SFDU

SFOC-1-GIF-DSN-MgnGIFMon

Files:

ODR tape(s) plus many disk files in; ALT-EDR or SAR-EDR tape out. Disk files are reformatted as a result of the change in media; content is as given in the Applicable Document (AD).

ALT-EDR contains data from up to 7 orbits (in repeating sets of files as per below); SAR-EDR contains data from only one orbit. ALT-EDR does not have Processing Bandwidths File (File 8 below).

***	Start repeating sets of files	(ALT-EDR only) ************************************
		(
2	Orbit Header Record File	Defined here
3	Data Quality Summary File	Defined here
4	Spacecraft Ephemeris File	AD#11
5	SCLK/SCET Coefficients File	AD#7, 11
6	DSN Monitor File	AD#16, 18
7	MQPC File	AD#8, 14
8	Processing Bandwidths File	AD#6, 14
9	Decom/Decal File	AD#9, 10
10	Engineering Data File	AD#14, 15, 16, 17
11	SAB Header Records File	AD#14, 15, 16, 17, 19
12	ALT or SAR Data File	AD#15, 16, 19

Defined here

SIS: TPS-113 Product: SFDU Header Reference Note: This is a set of 3 subsystem interface specifications: SFOC-5-SYS-*DU-NJPL NJPL SFDU Global Definitions SFOC-5-TIS-*DU-MgnSFDUSFDUs Generated from TIS for MagellanSFOC-5-TIS-*DU-SFDUSFDUs Generated/Received by TIS SFDUs Generated/Received by TIS Applicable Documents (AD): SFOC-5-SYS-*DU-NJPL 1 JJPL0006-01-00 SFOC-5-TIS-*DU-MgnSFDU MGN SRD WE2-03 1 STISMG06-02-00-09 2 SFOC-2-TIS-DMD-Telem 3 SFOC-2-TIS-CDB-Telem 4 SFOC-2-TIS-MPL-Telem 7 STISMG06-01-00-15 8 VRM 2-280 SFOC-5-TIS-*DU-SFDU: 1 VRM 2-280 2a 820-13, Rev. A; TLM-3-17 2b 820-13, Rev. A; MON-5-12 MO 642-530 3 JPL D-1672 5 JPL D-4037 6 MGN SRD WE2-03 SFOC-TISMGN-09

SIS: **TPS-129** SFOC-1-TIS-Any-DecomRpt Product: EDR Decom Map Report Form Applicable Documents (AD): 1a **TPS-113** SFOC-5-TIS-*DU-SFDU 1b **TPS-129** SFOC-1-TIS-AnyDecomMap 1cSFOC-2-CDB-ANY-Ancillary 1d SFOC-2-CDB-ANY-Catalog 1e **TPS-113**

SFOC-5-SYS-*DU-NJPL JPL D-4421 SFOC-6-DTS-DTS-GlobalDa

2

3

STIS0007-00-06

SDTS0008-00-02-05

SIS: TPS-140

Product: AEDR

Applicable Documents (AD):

1 2	ANSI X3.27-1978 820-13, Rev. A; MON-5-12	
2	PD 630-300	JPL D-2769
4 5a 5b 5c	VRM-2-280 TPS-129 TPS-113 TPS-113	SFOC-1-TIS-Any-DecomRpt SFOC-5-TIS-*DU-MgnSFDU SFOC-5-TIS-*DU-SFDU
5d 5e	SFOC-1-DMD-Mgn-Chn1Proc TPS-113	SFOC-5-SYS-*DU-NJPL

Files:

Engineering and Monitor files from CDB are input; AEDR tape is output. Approximately 72 hrs of spacecraft time per AEDR tape.

1 Volume Header File Defined here

- 2 Decom Map File
- 3 Decal Data File
- 4 Engineering Minor Frames
- 5 Monitor 5-15 File
- n Volume Trailer File

Defined here

SFOC-1-MHR-Mgn-ArEngDR

SIS: TRK-101

Product: Orbit Data File

Applicable Documents (AD):

none

SIS: TRK-103

820-13, Rev. A; TRK-2-23

820-13, Rev.A; TRK-2-18

Product: Media Calibration Data

Applicable Documents (AD):

none

SIS: TRK-104 820-13, Rev. A; TRK-2-21

Product: Timing and Polar Motion File

Applicable Documents (AD):

none

SIS: TRK-105 820-13, Rev. A; TRK-2-25 Product: Archival Tracking Data File Applicable Documents (AD):


none





MIDR Browse Images

 E_{ach} CD-ROM contains 10 MIDRs. For each of the first 69 CD-ROMs produced, Browse Brochures were created. These images serve as a hardcopy index to the CD-ROMs and can be used to quickly locate a particular region of interest. The following pages contain the Browse Brochures for the first 69 CD-ROMs. Each image is annotated with the Magellan


CD-ROM identification number and version, the production date, and the type of MIDR on the CD-ROM (F-MIDR or C*n*-MIDR) — as well as the MIDR identification numbers for the individual products. Tables 7.6–7.11 should be used to locate images on the CD-ROMs beyond MIDR CD-ROM 69.

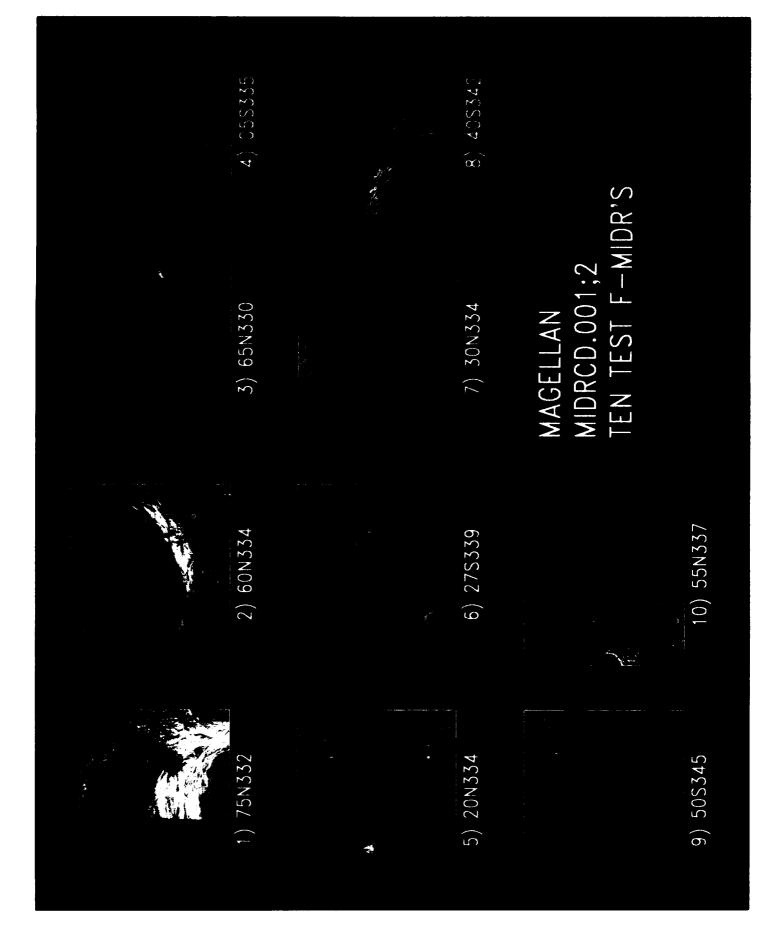


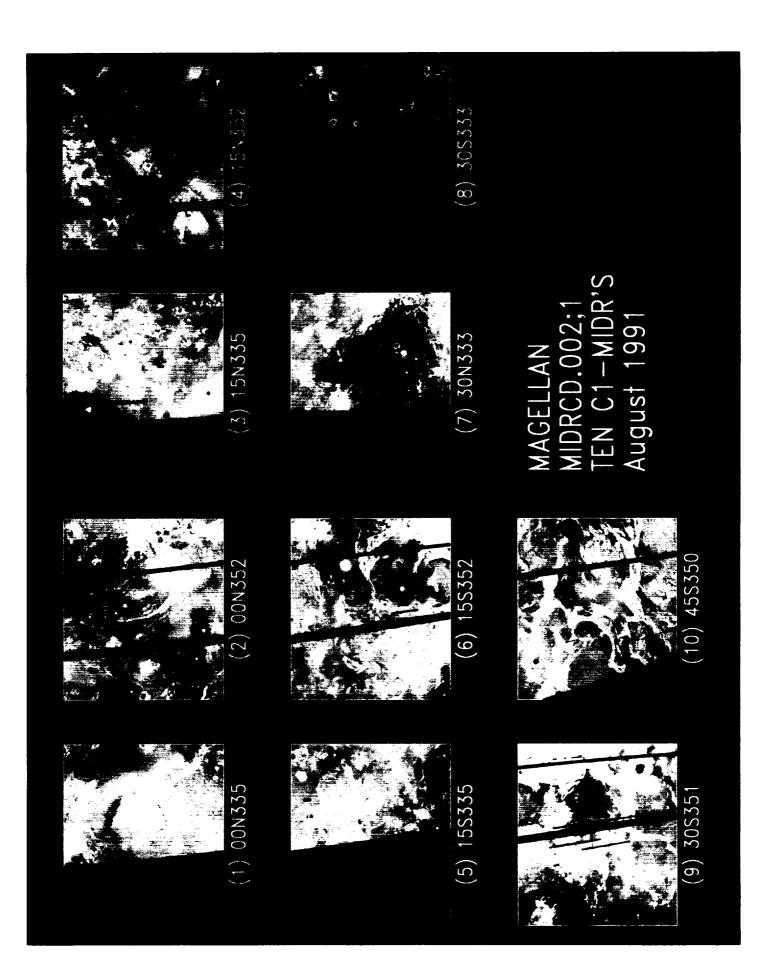


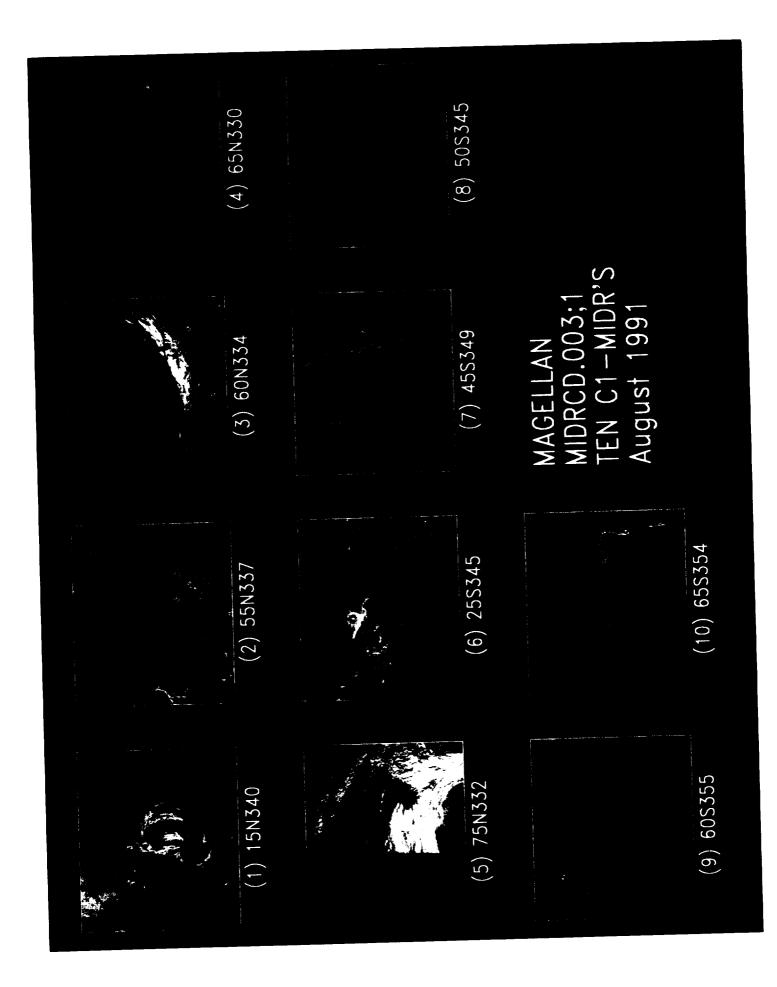





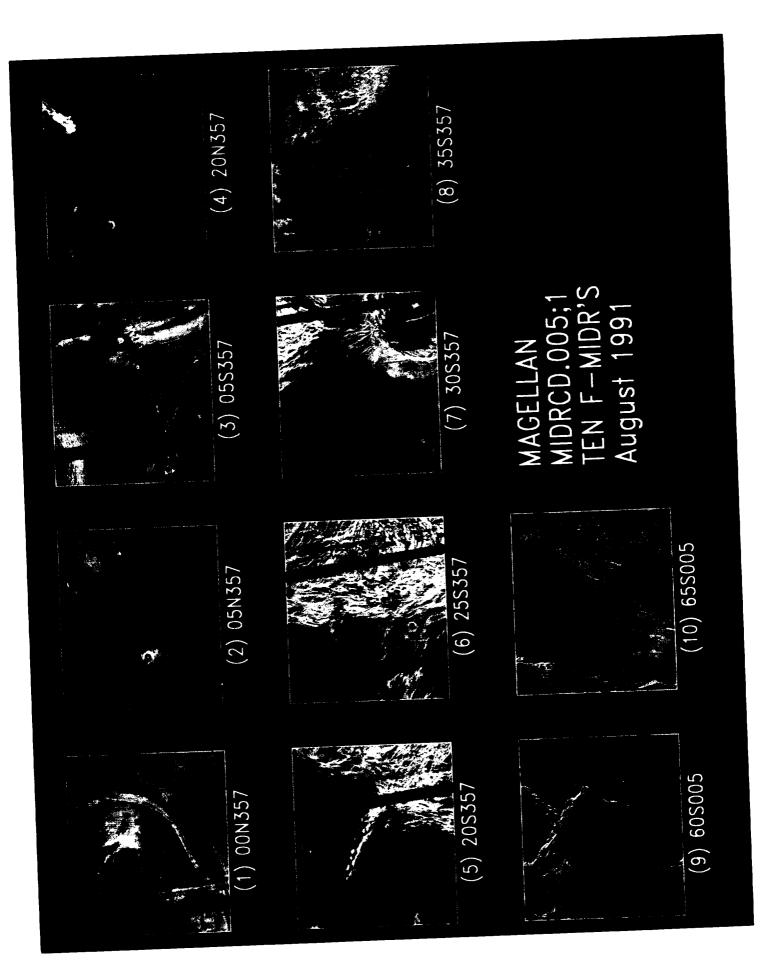

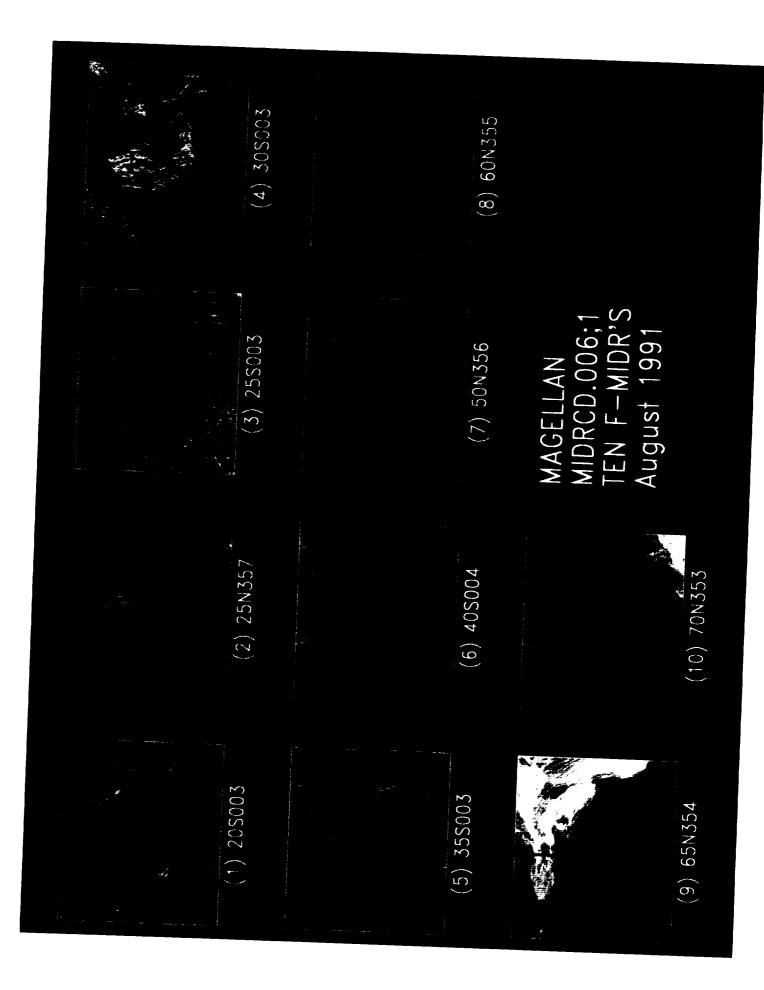


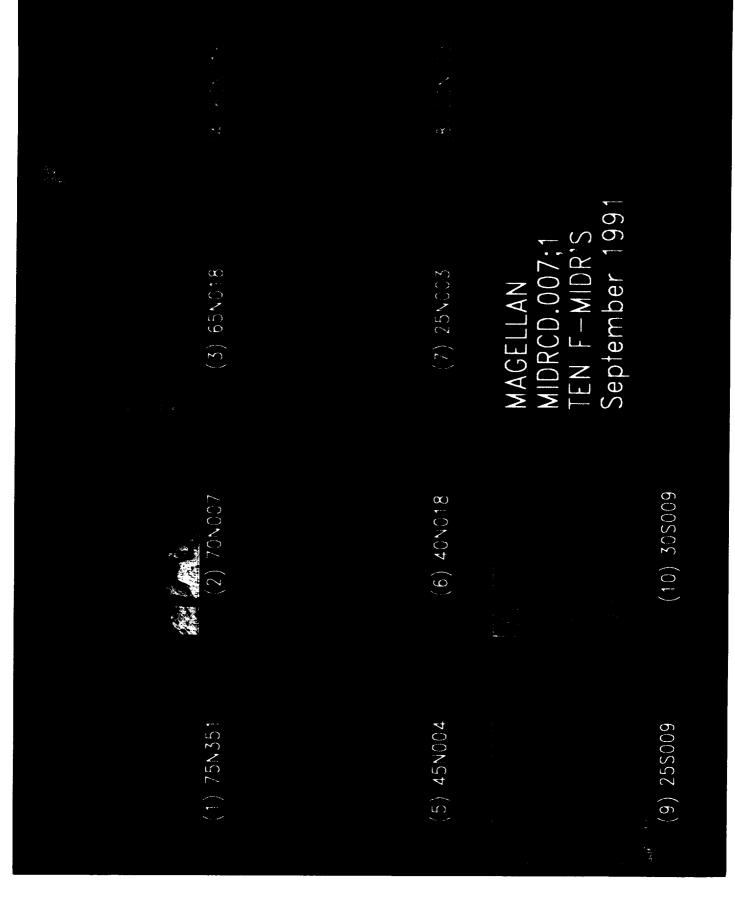


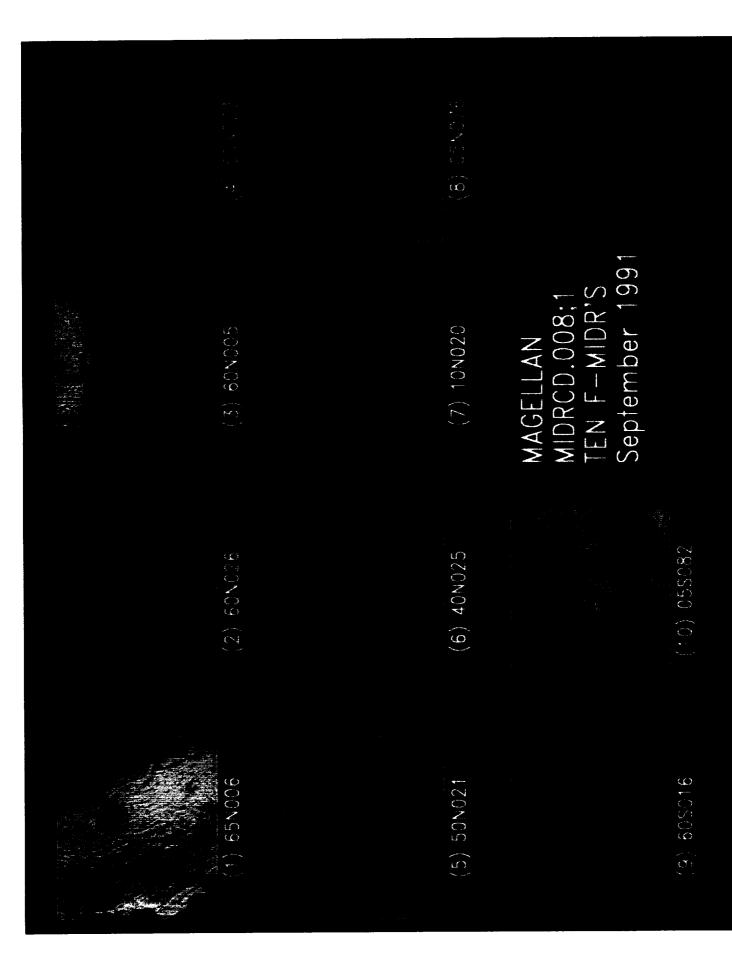


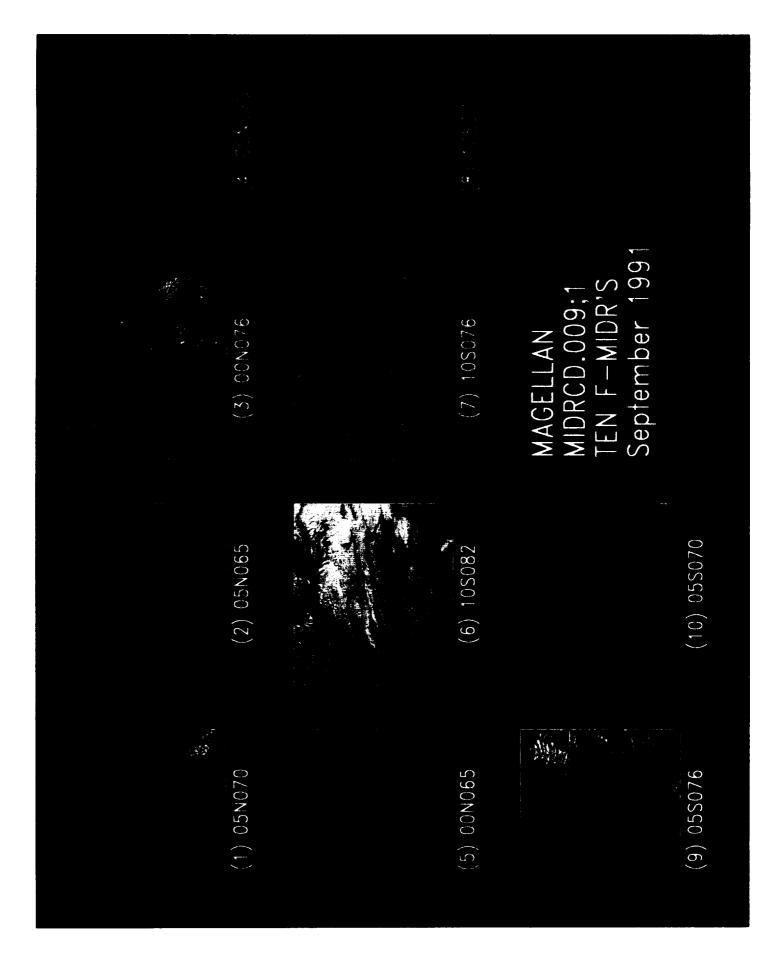




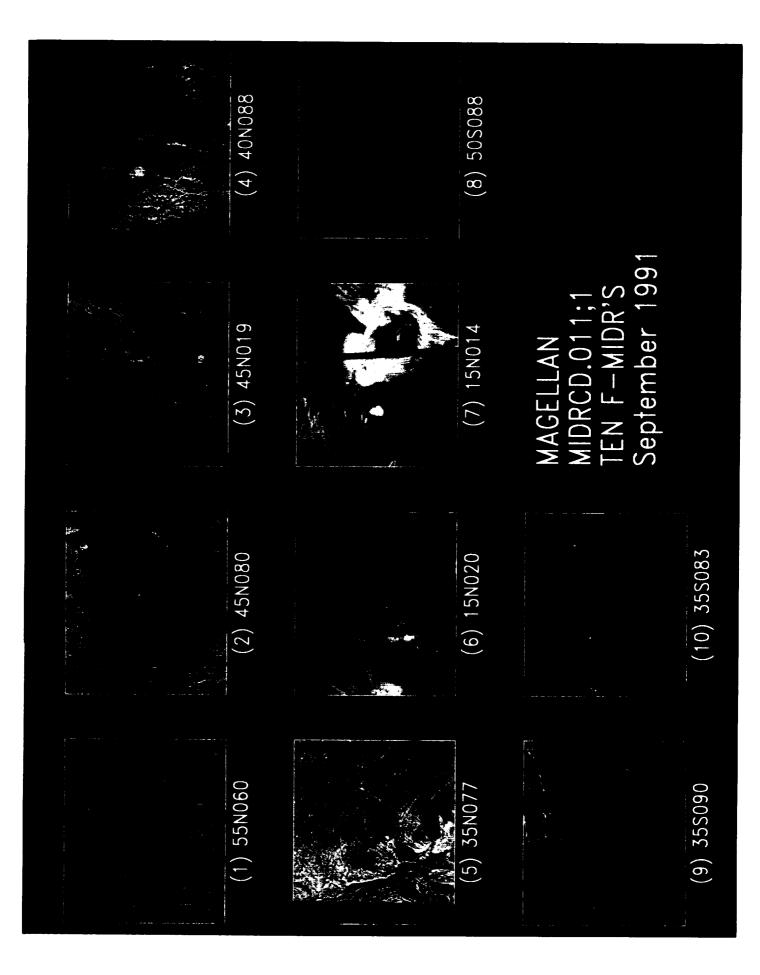


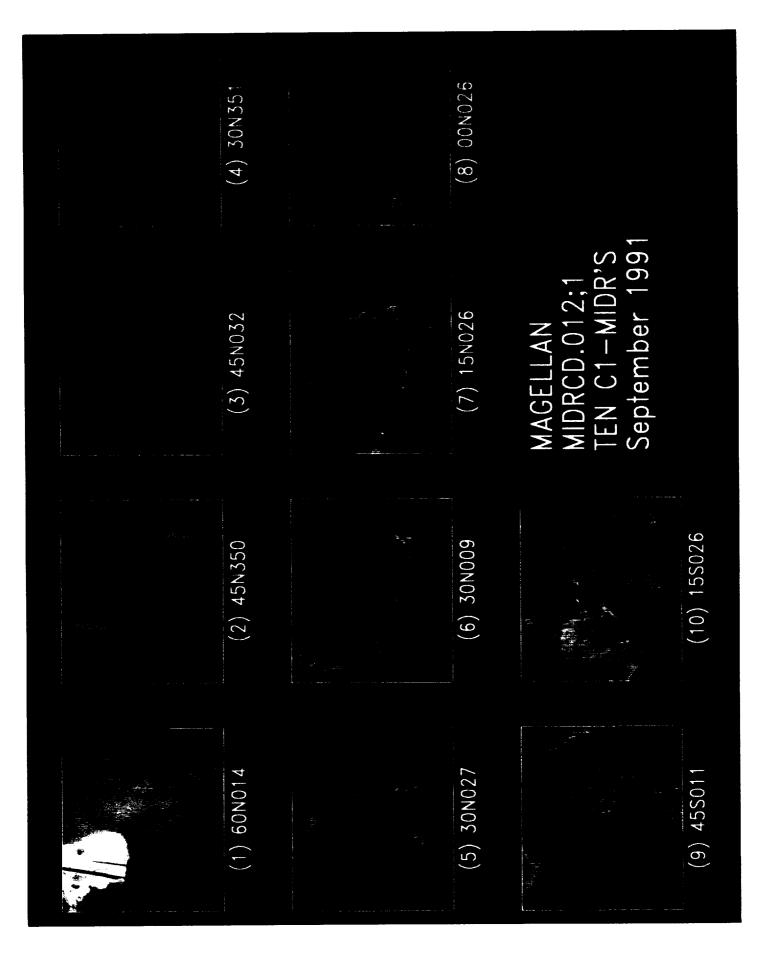


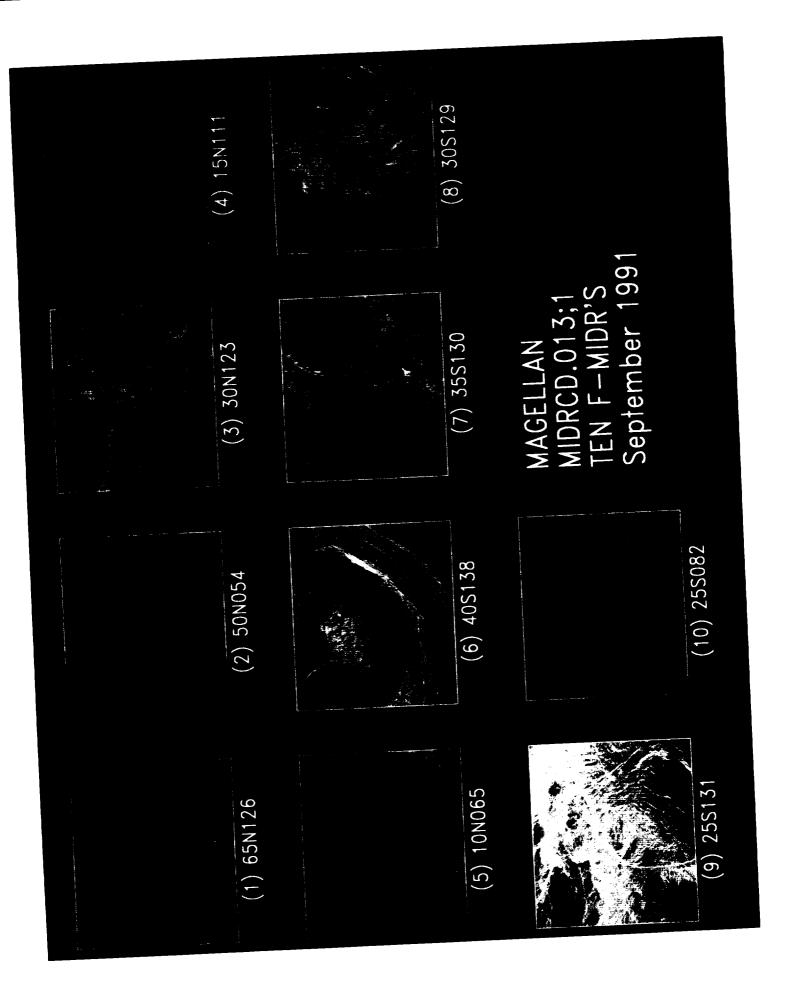



(4) 15NCC9 (8) 30S027 MAGELLAN MIDRCD.014;1 TEN C1-MIDR'S September 1991 (3) 45N011 (7) 455032 (2) 60N347 (6) 00N00 (10) 15S009 (1) 75N338 (5) 00N060 (9) 305009

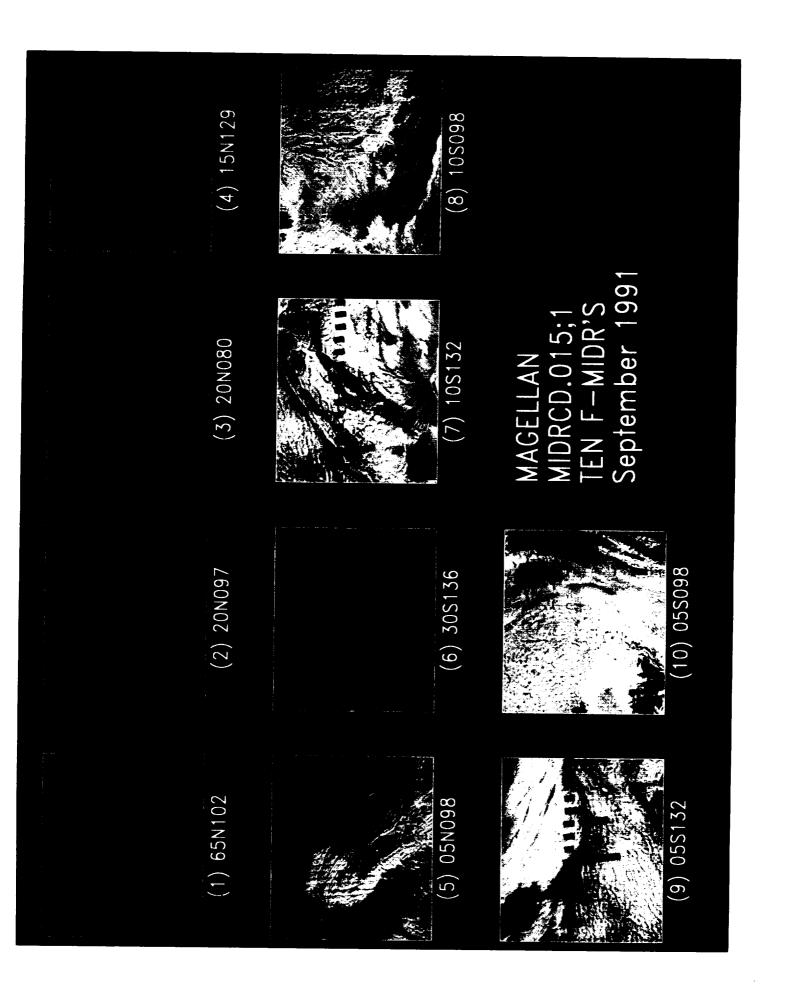

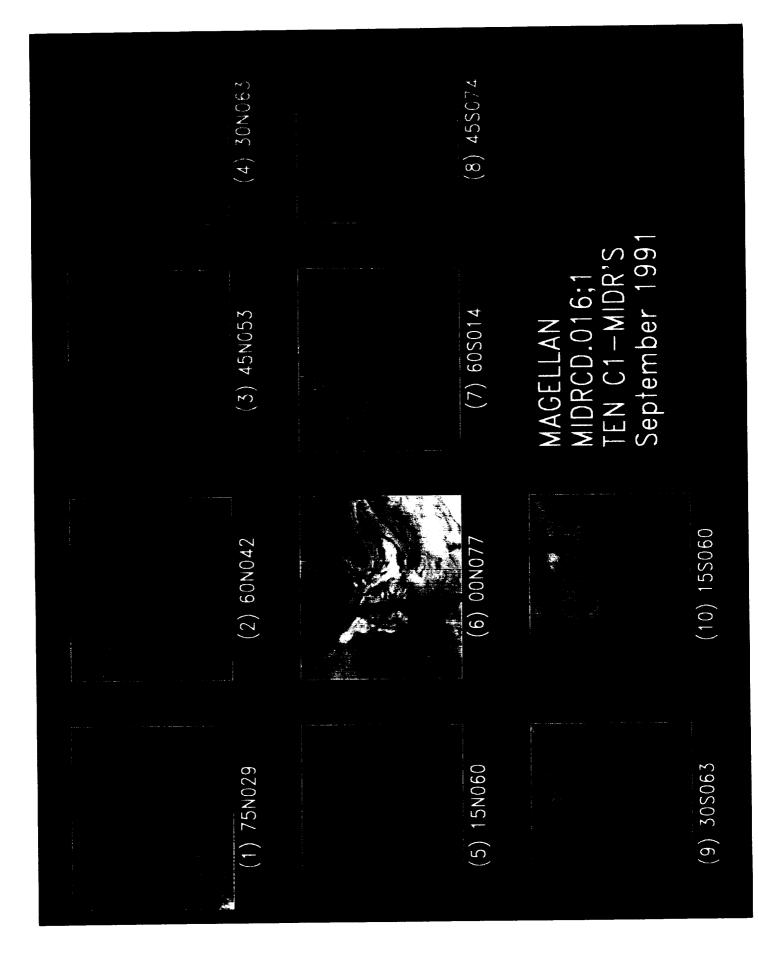


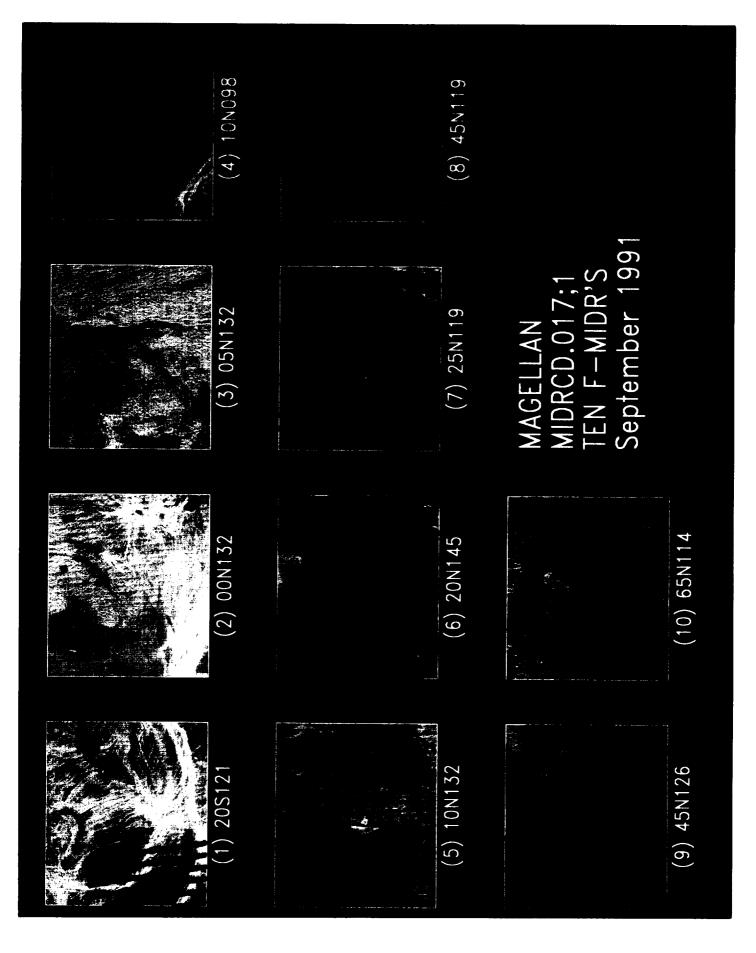

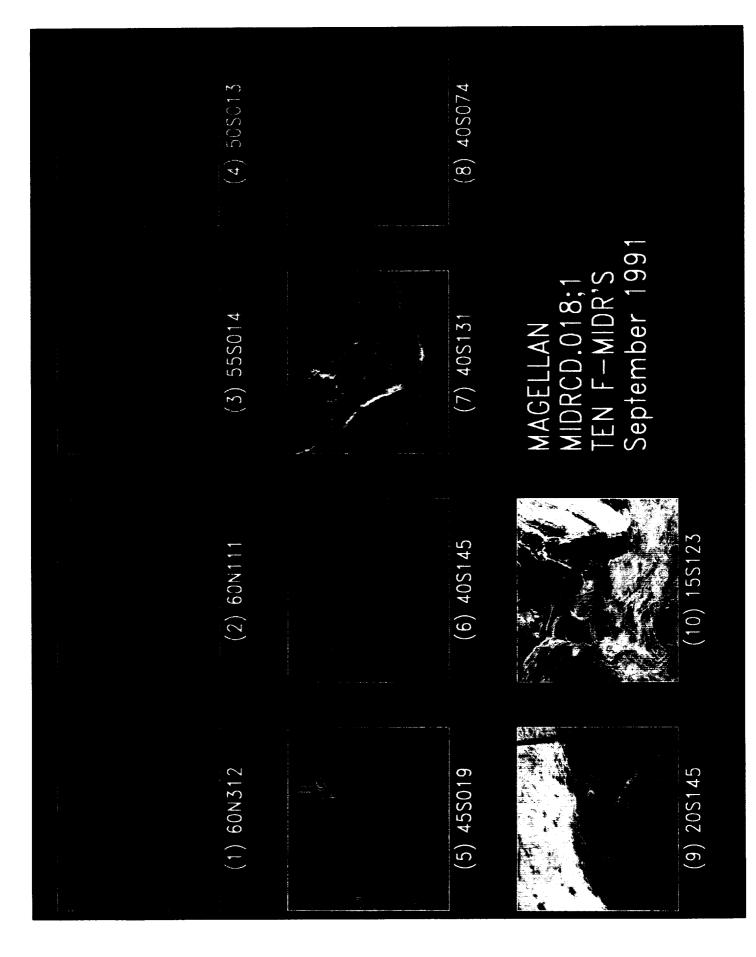

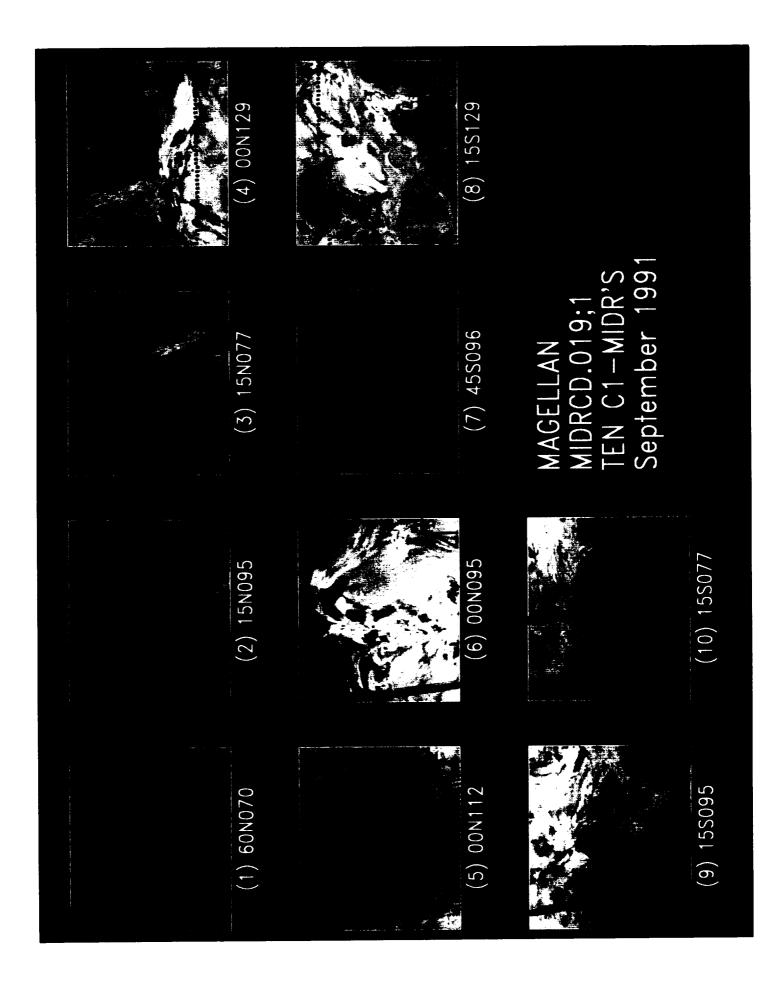




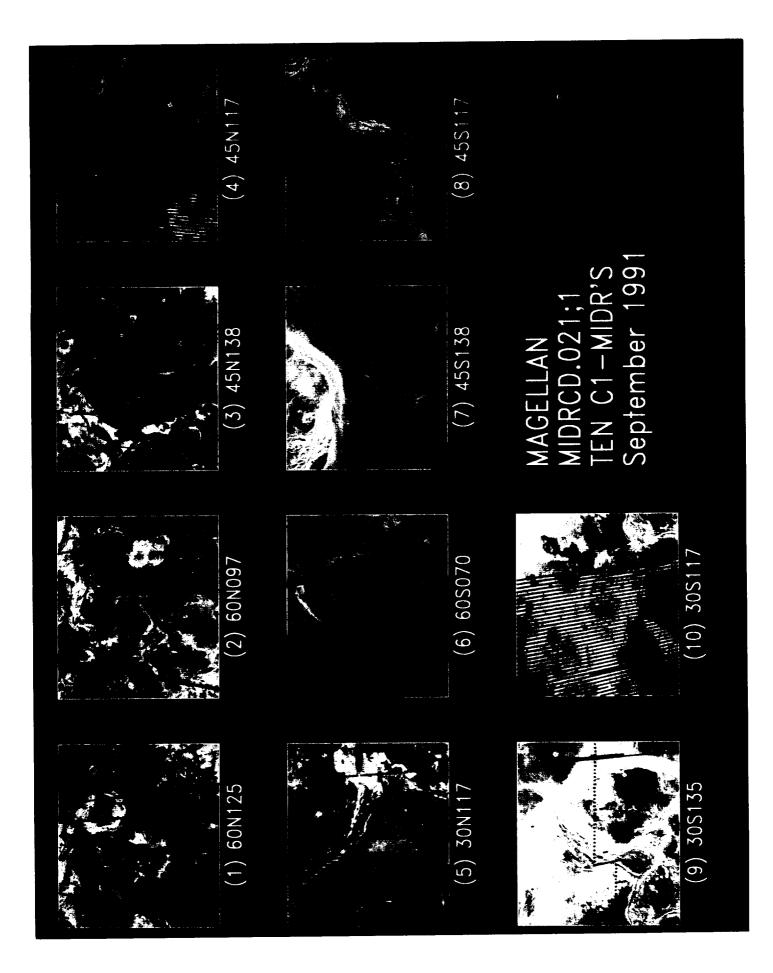










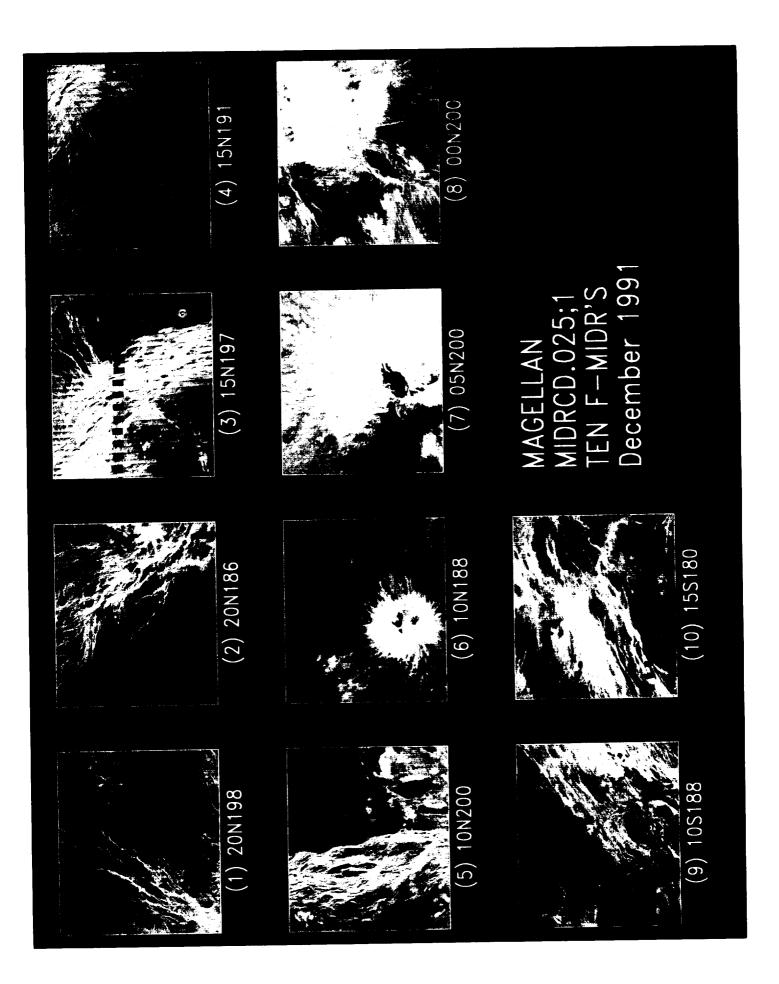


(4) 45N195 (8) 20S180 MAGELLAN MIDRCD.026;1 TEN F-MIDR'S December 199 (3) 50N147 (7) 10S183 (2) 60N164 (6) 05S183 (10) 60S207 (1) 65N162 25N186 (9) 30S205 (2)

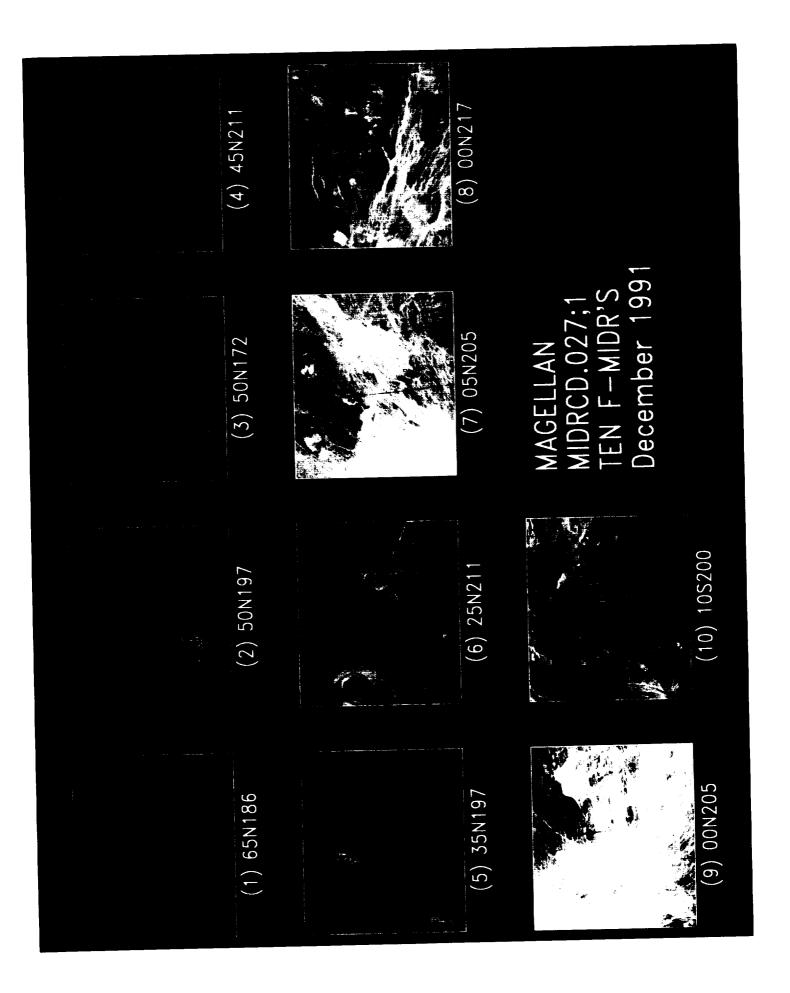


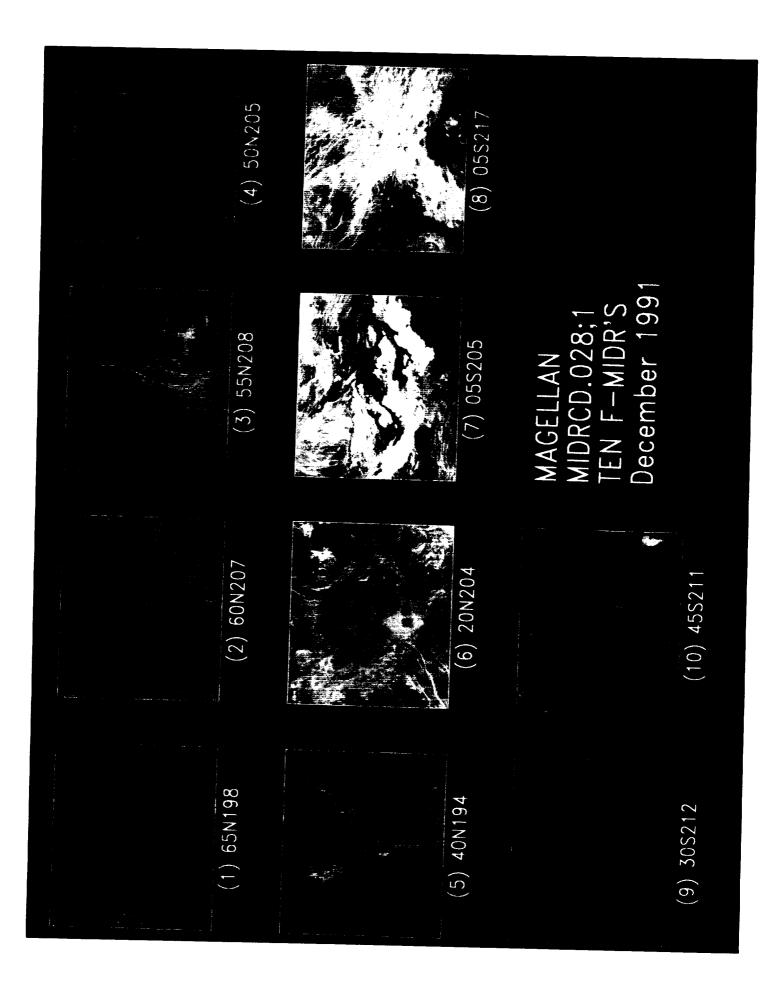


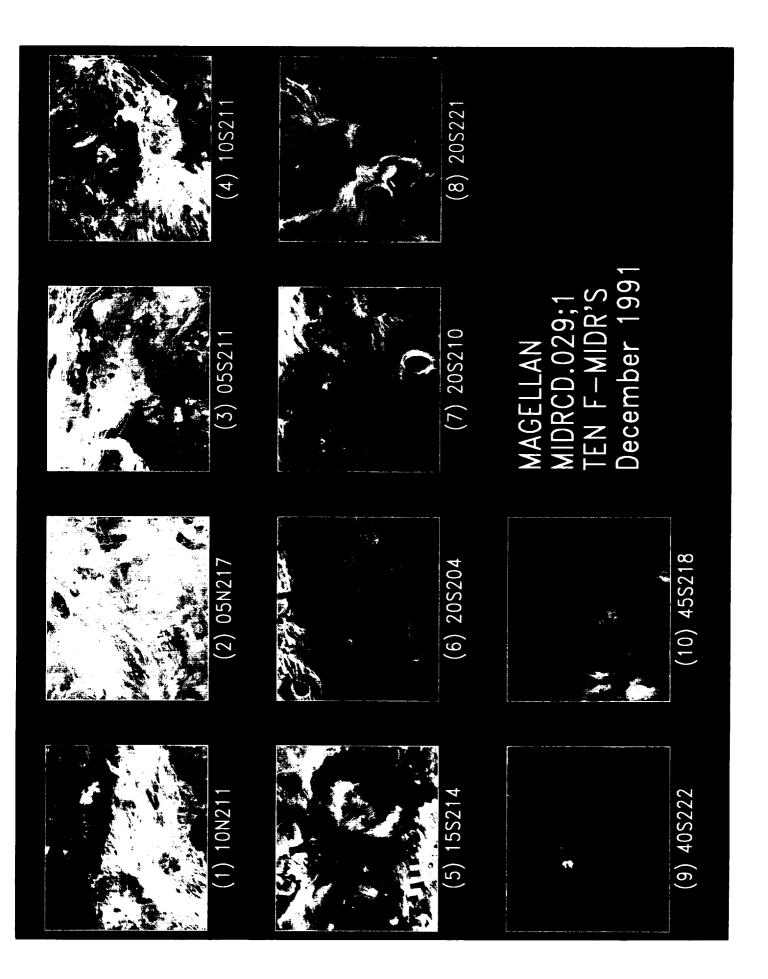



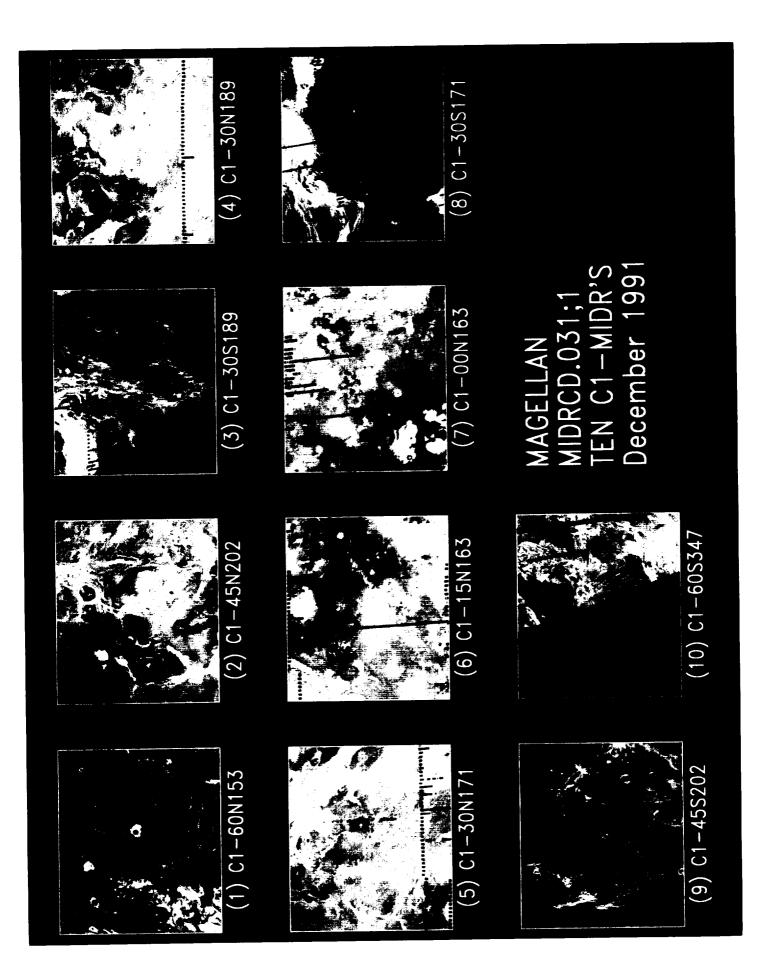

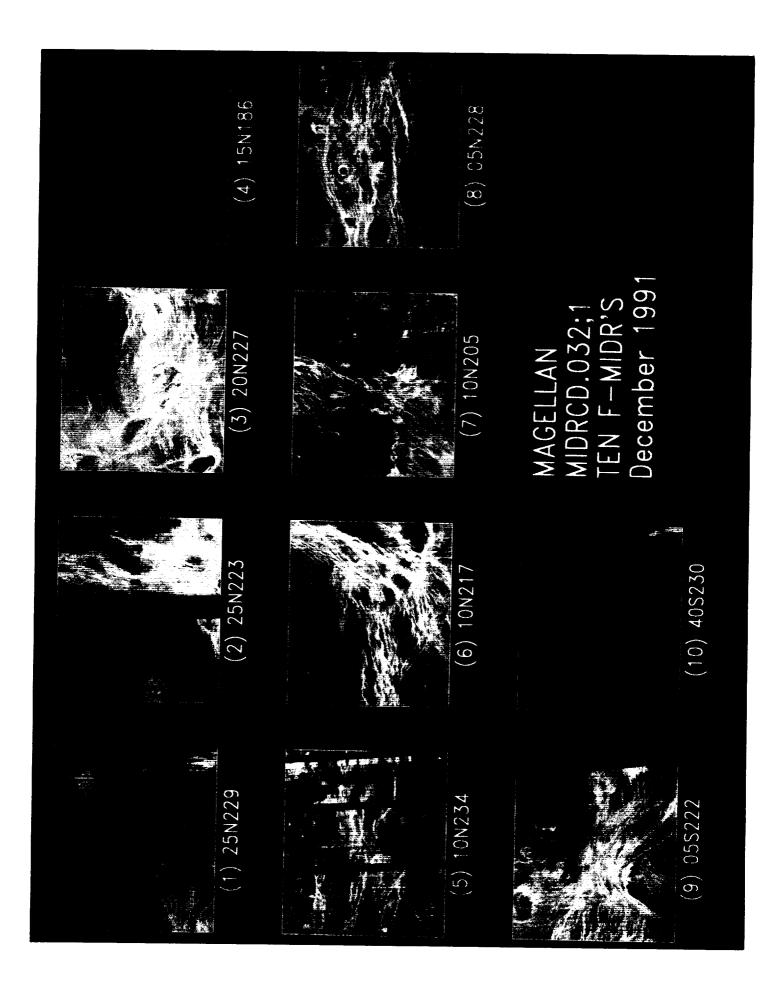

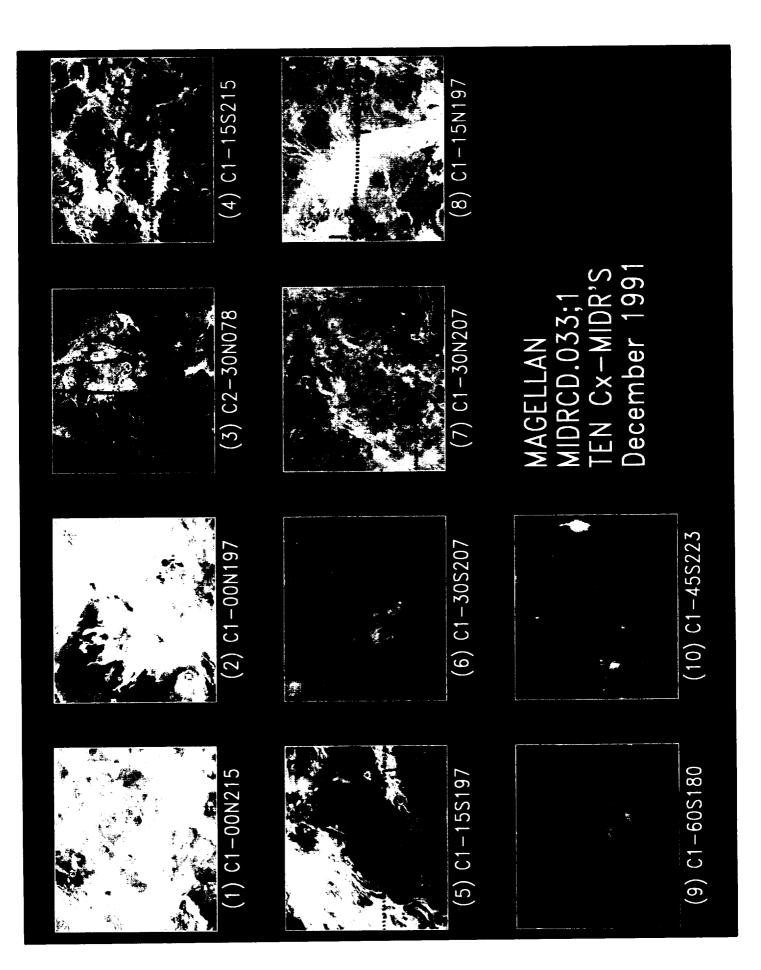













(4) 30N237 15S254 (\mathfrak{B}) MAGELLAN MIDRCD.038;1 TEN F-MIDR'S 199 (3) 155260 10N228 December 15S249 (10) 45S142 (6) 45N241 (2)15S243 30N256 (9) 20S257 ົມ

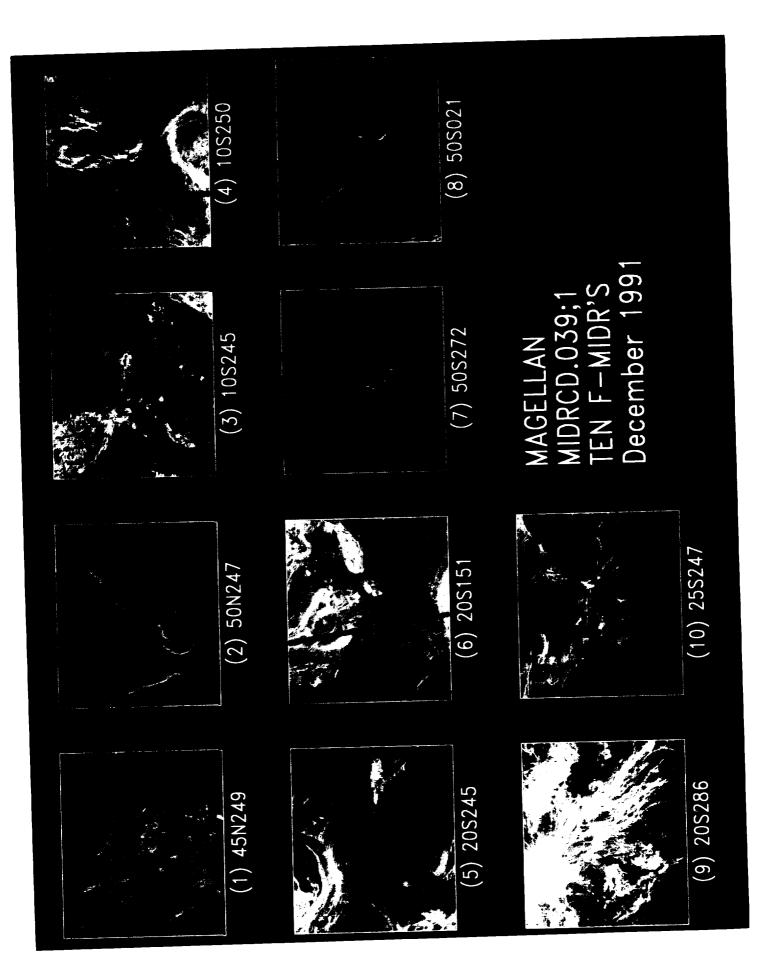





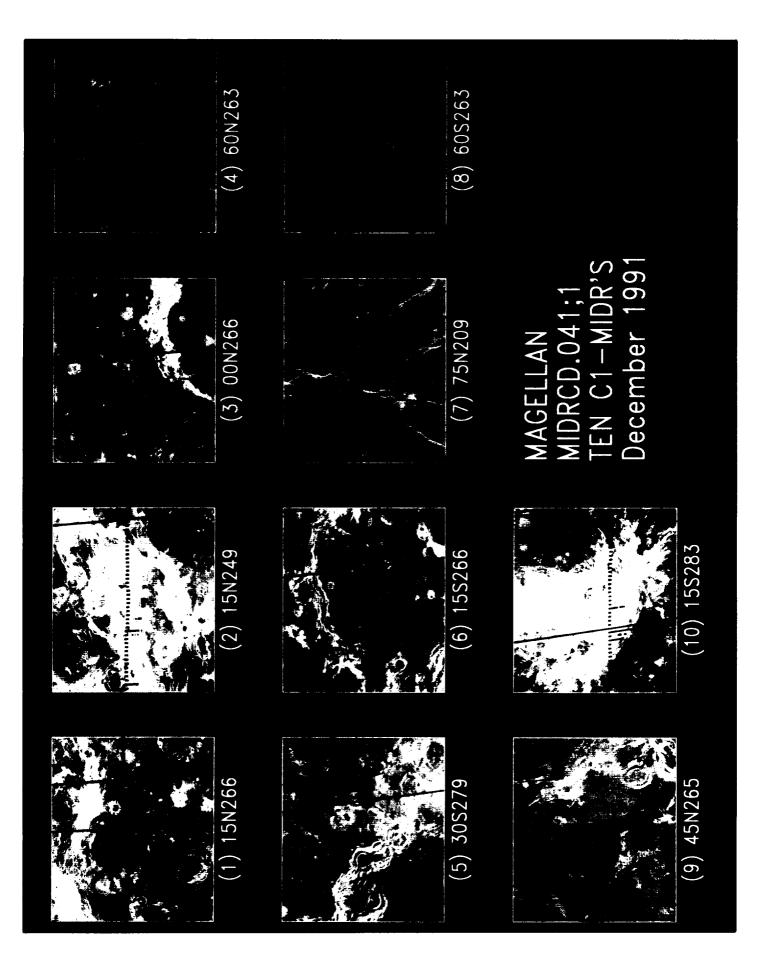


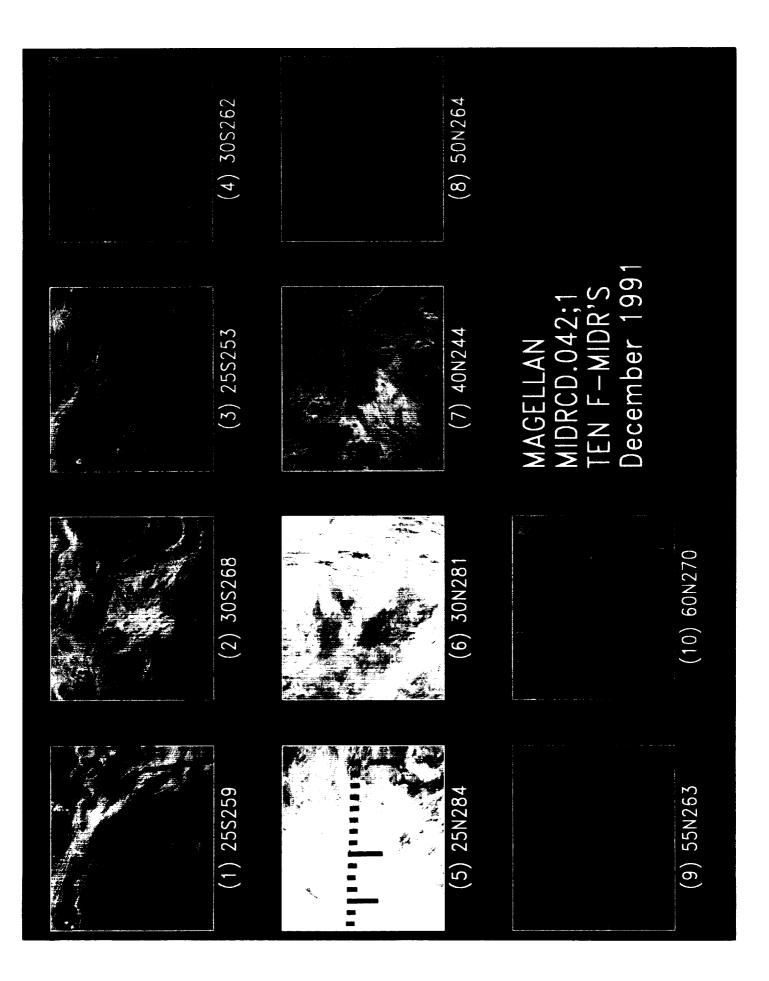


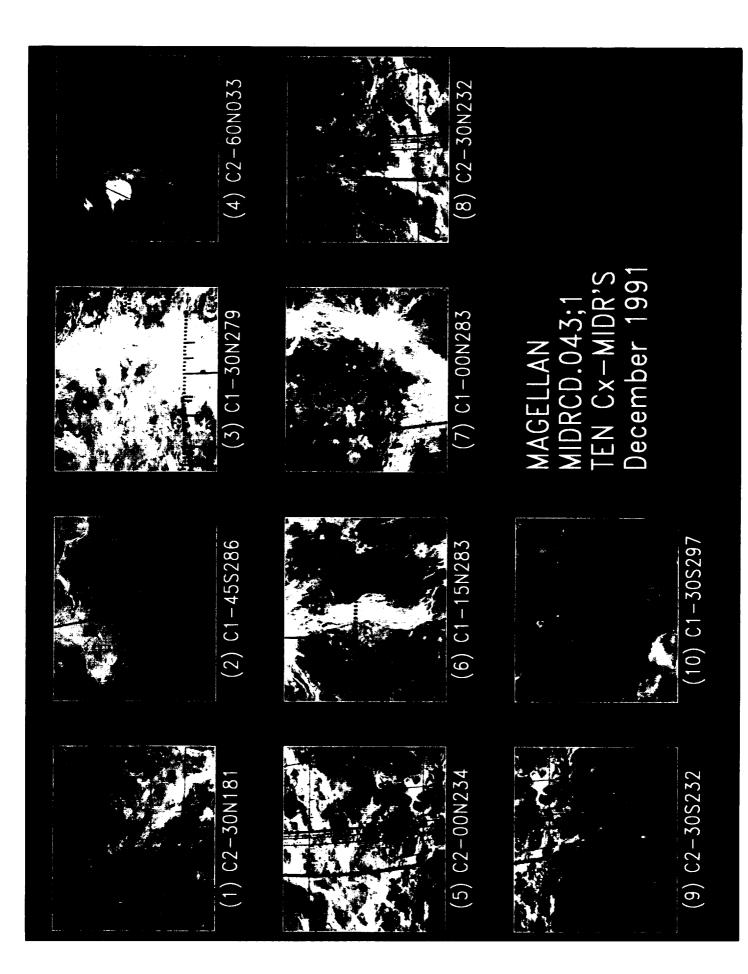


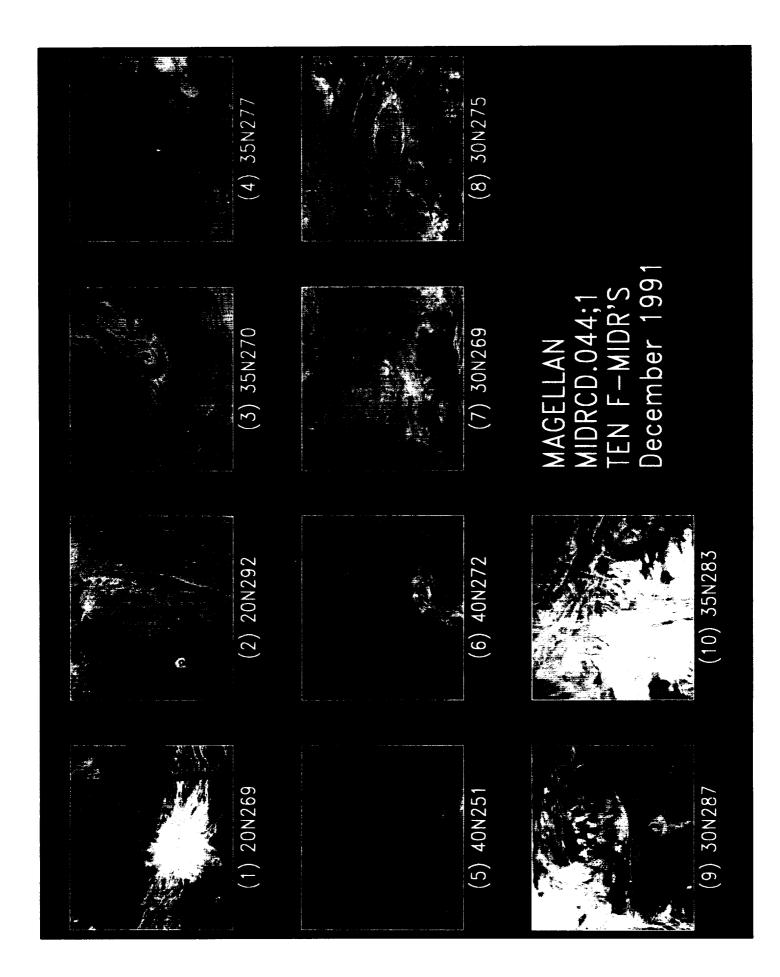

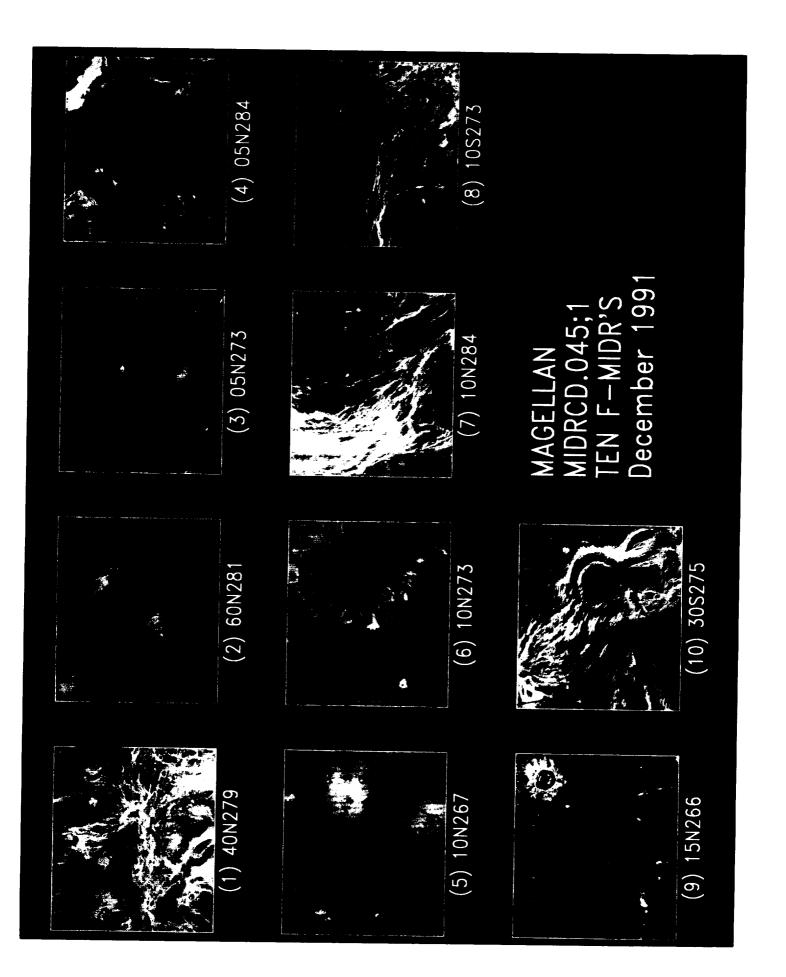


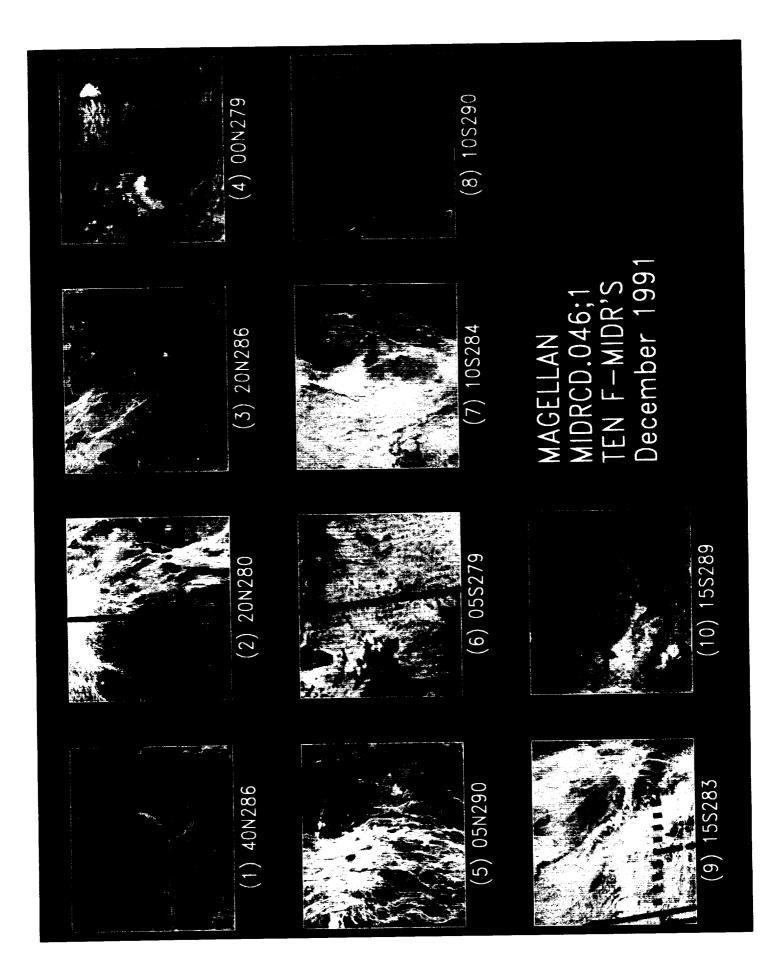


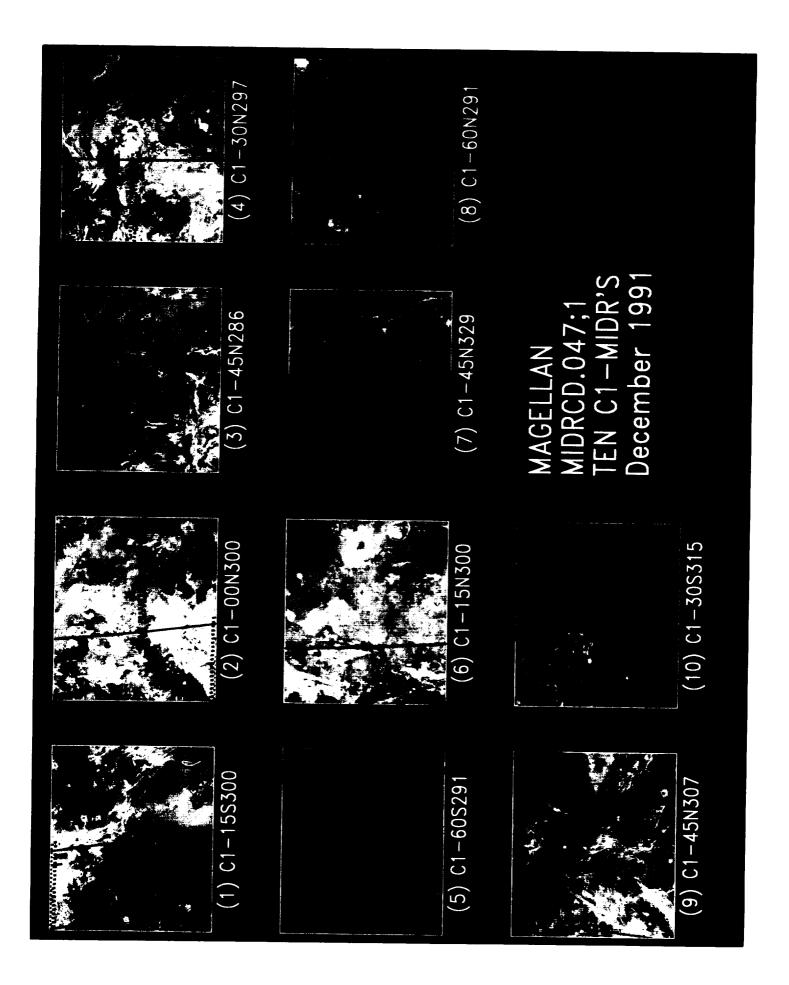


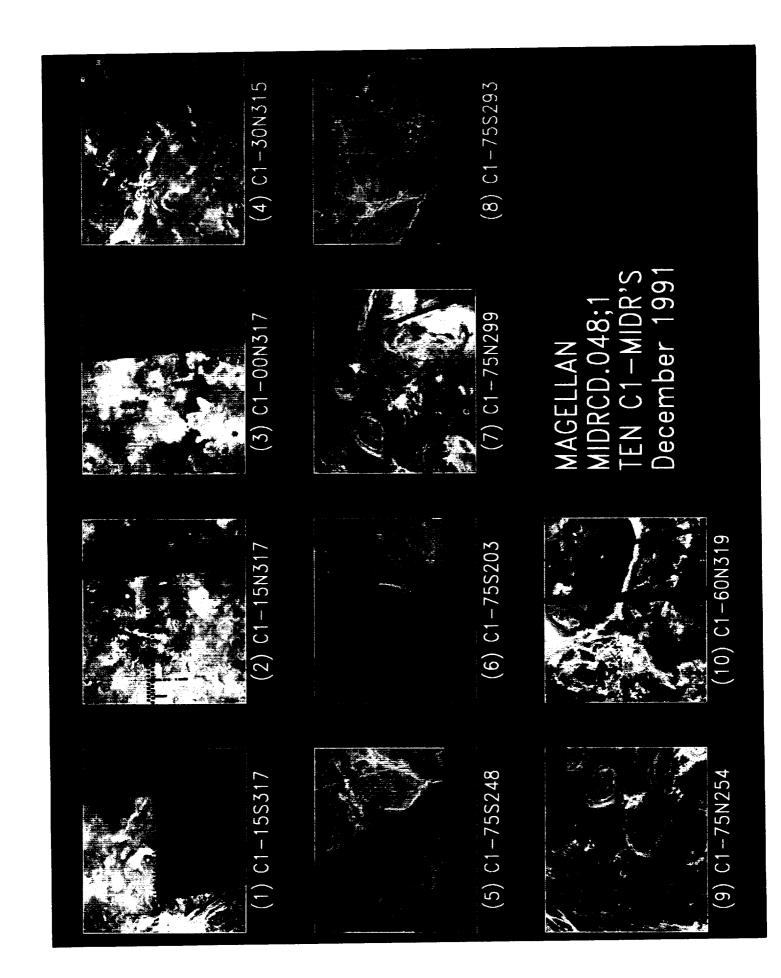



(8) 455280 (4) 00N284 MAGELLAN MIDRCD.049;1 TEN F-MIDR'S April 1992 (7) 50N297 (3) 10N279 (10) 40S286 (6) 55N291 (2) 35S290 (9) 45N295 (5) 70N296 **.**

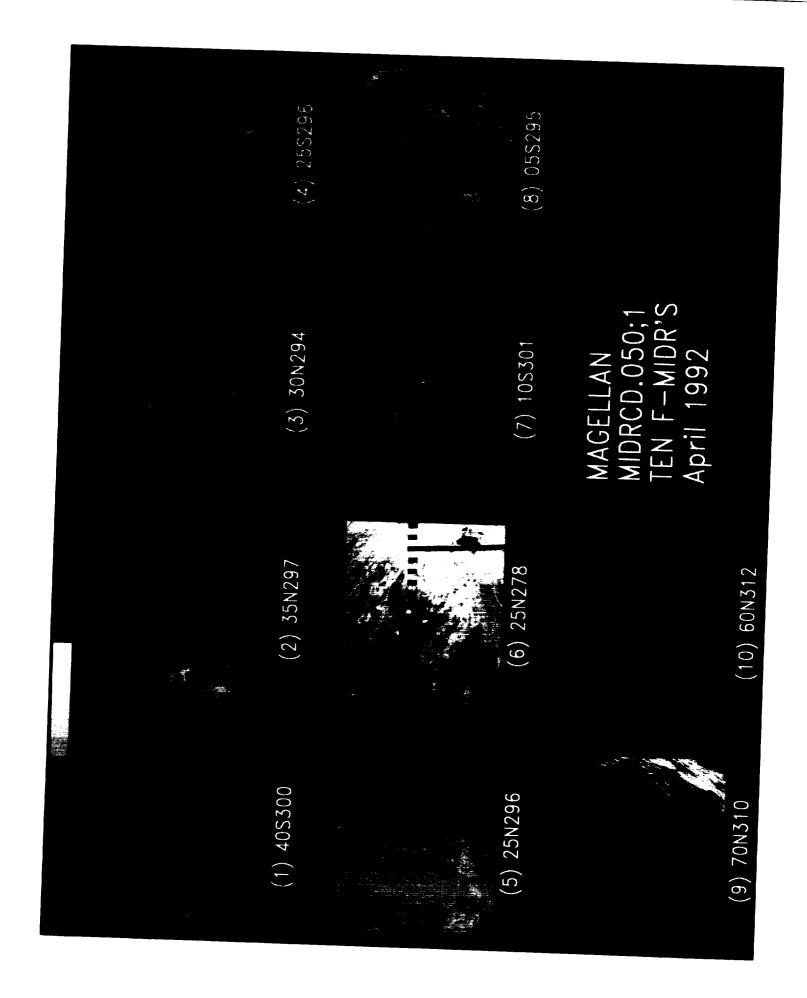


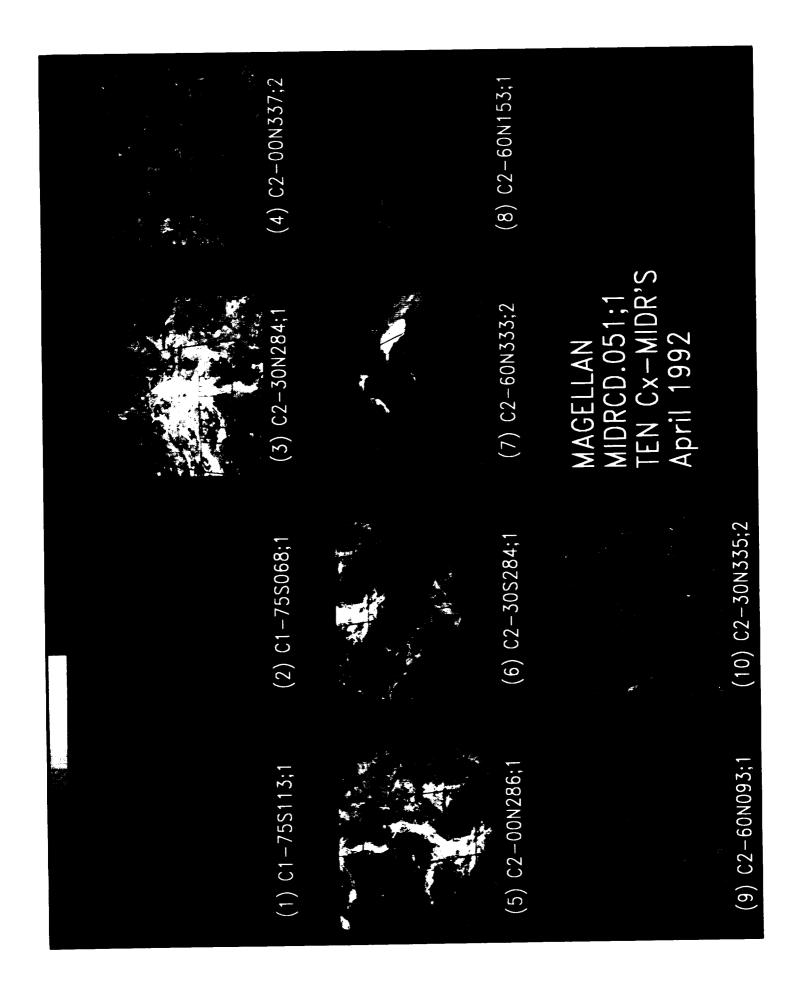

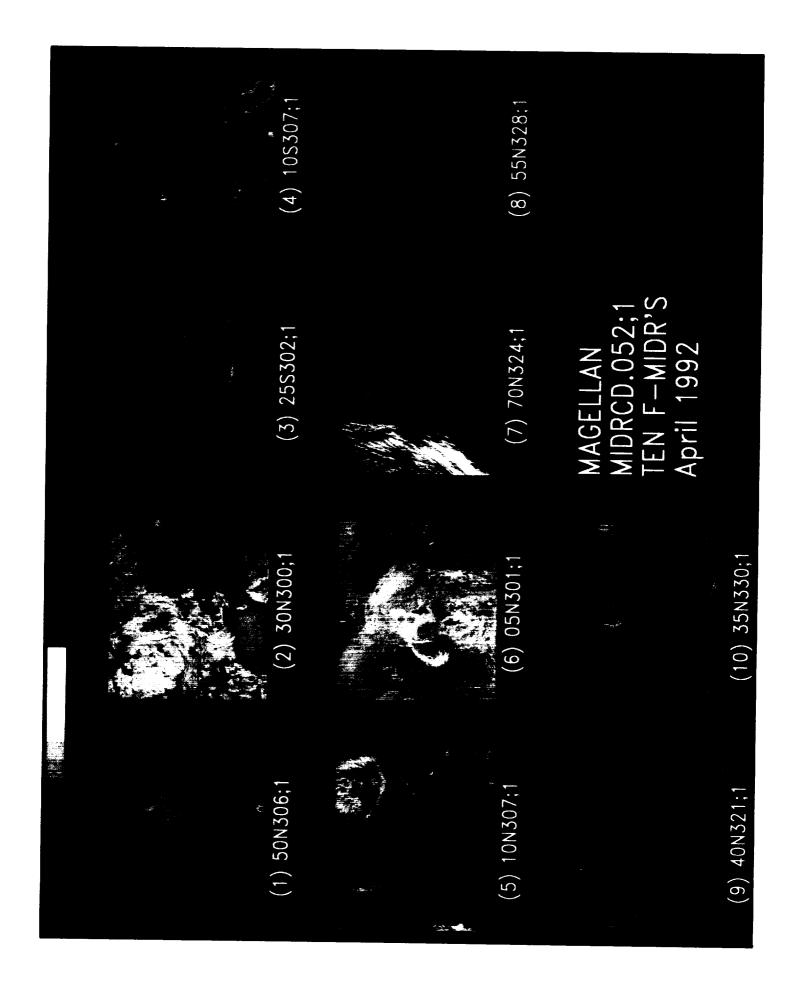


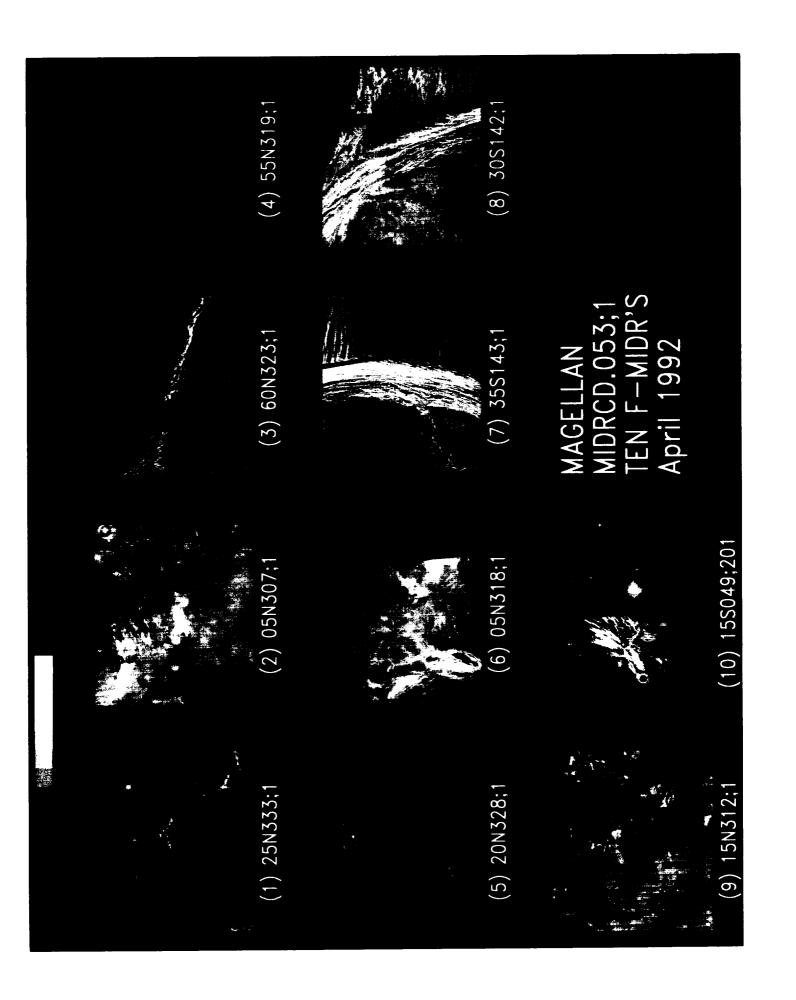


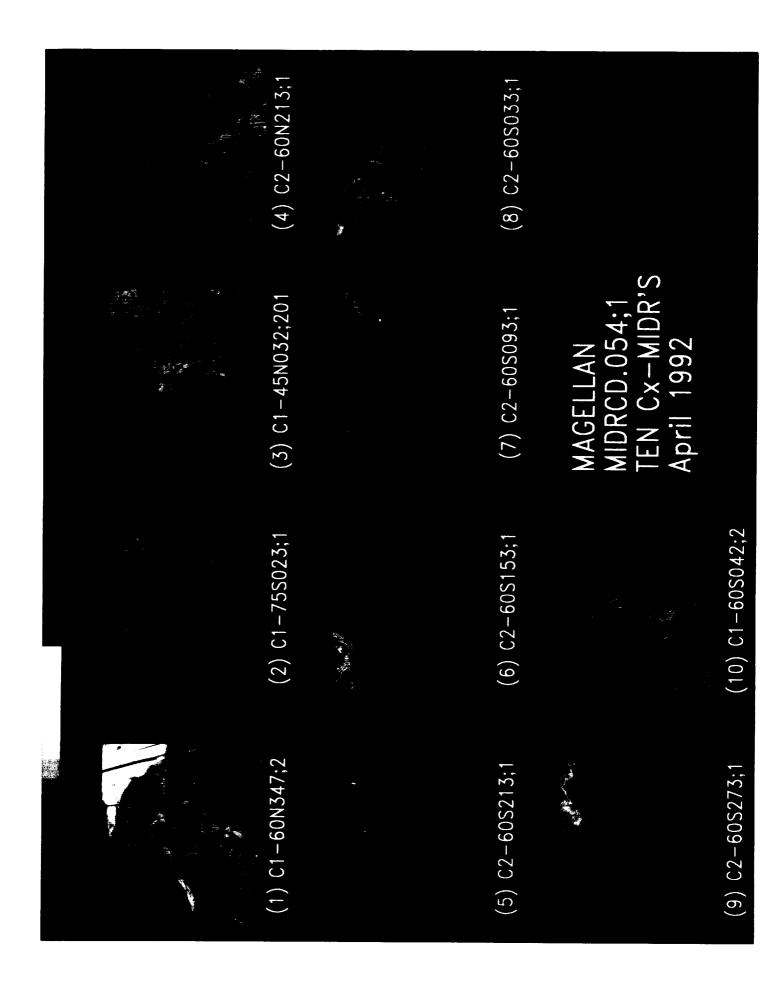


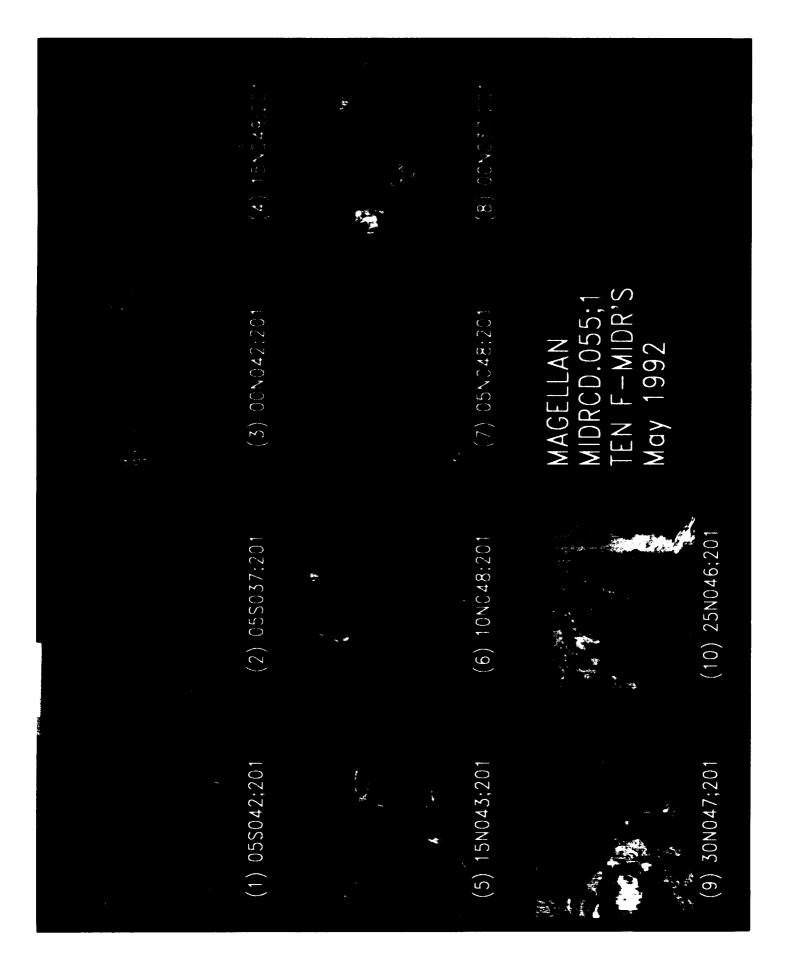


(4) 30N035 ်တ MAGELLAN MIDRCD.056;1 TEN F-MIDR'S (3) 30N041:201 (7) 20NC38;201 1992 April (6) 20N050:201 (2) 40N046;201 165×306; :201 (5) 20N334;201 3. (3) 75N3

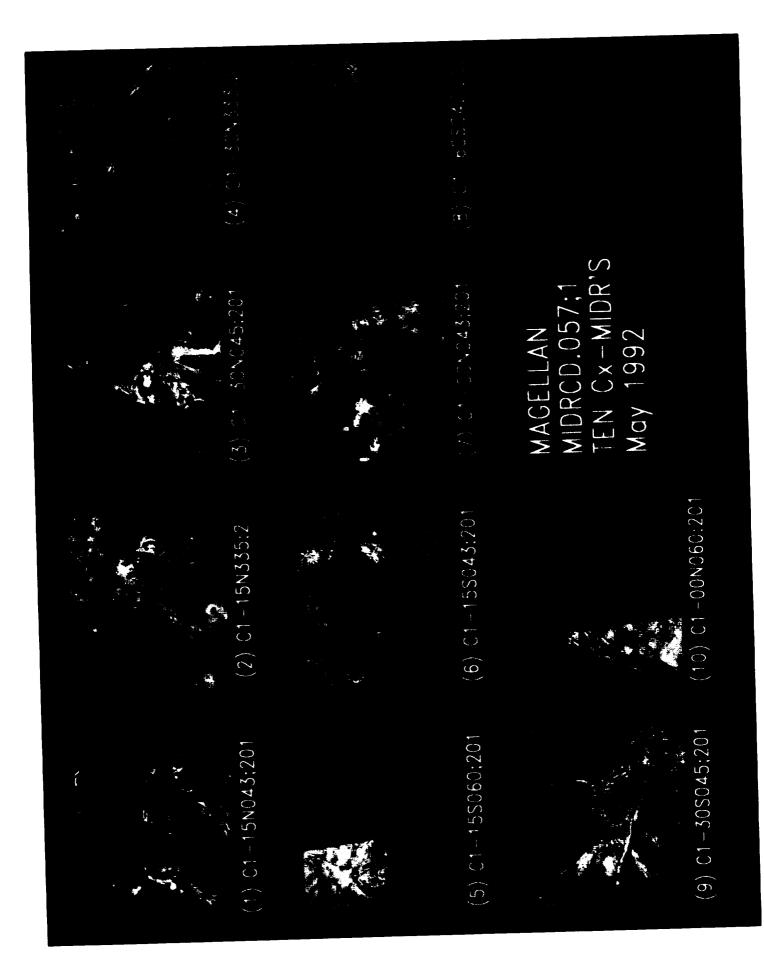

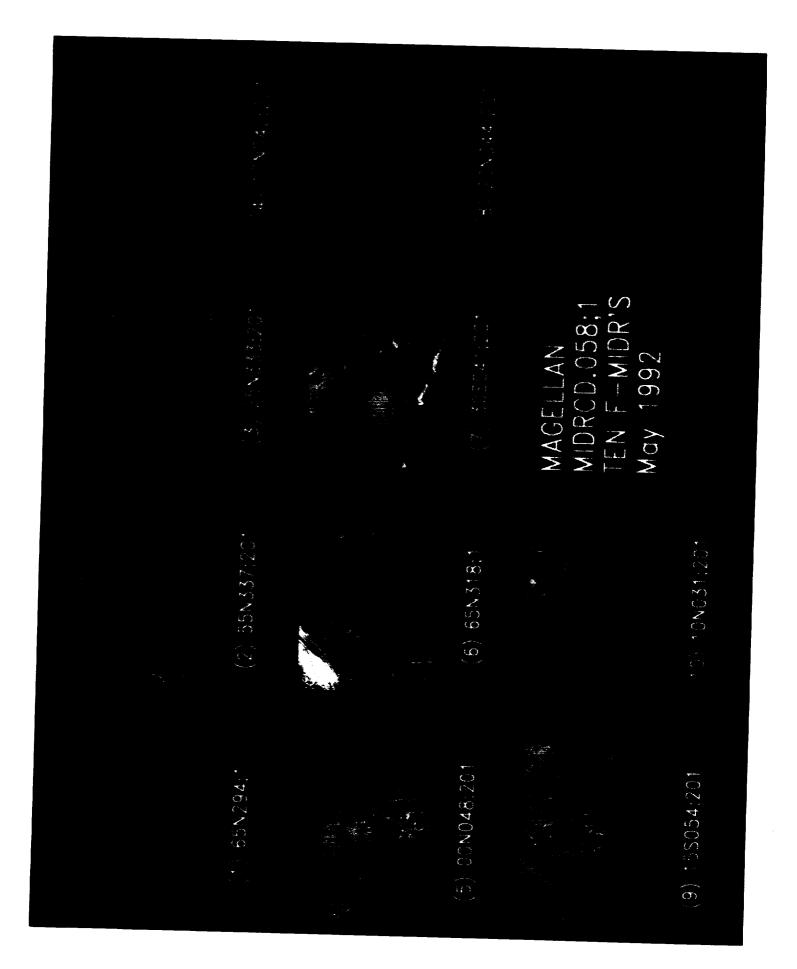


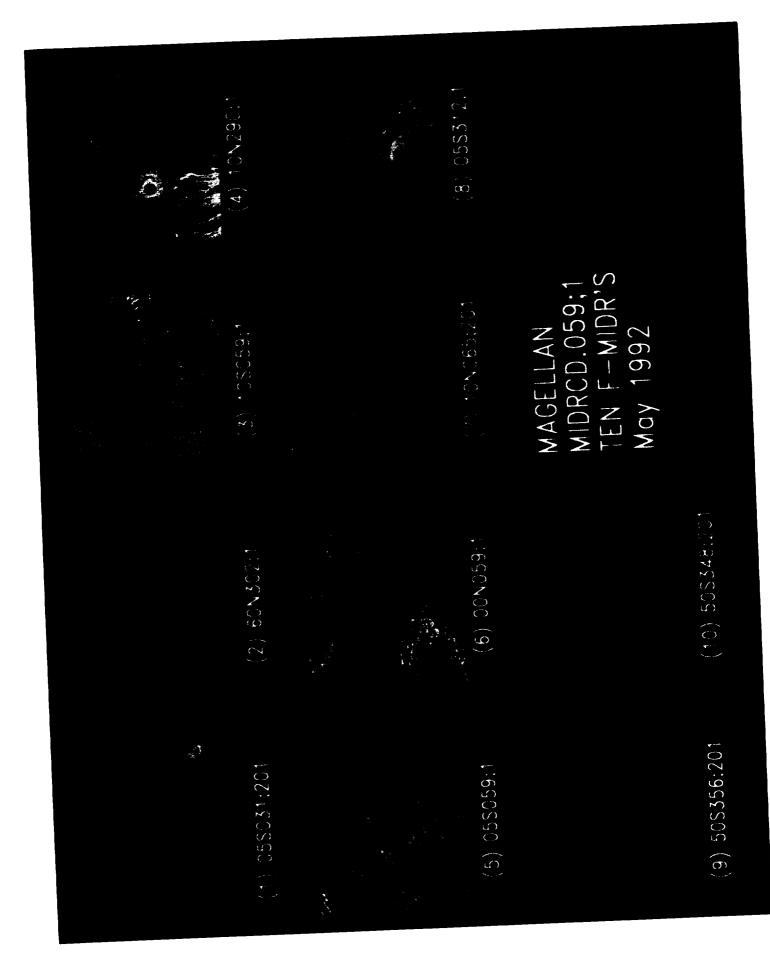


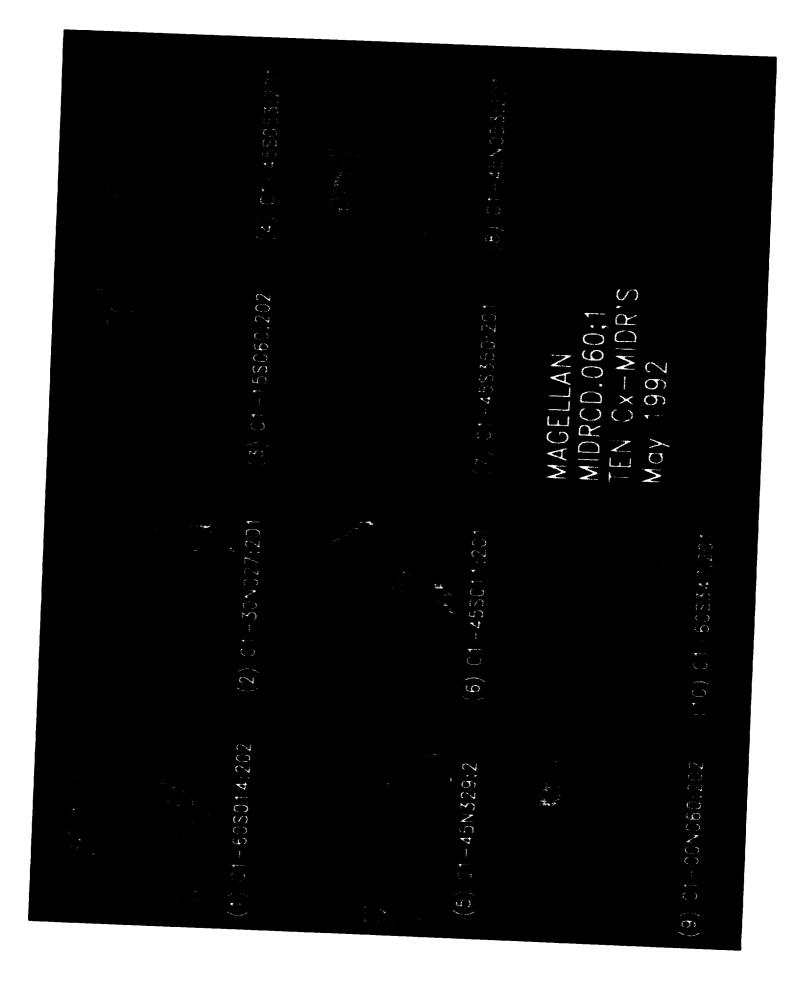


C-3


.

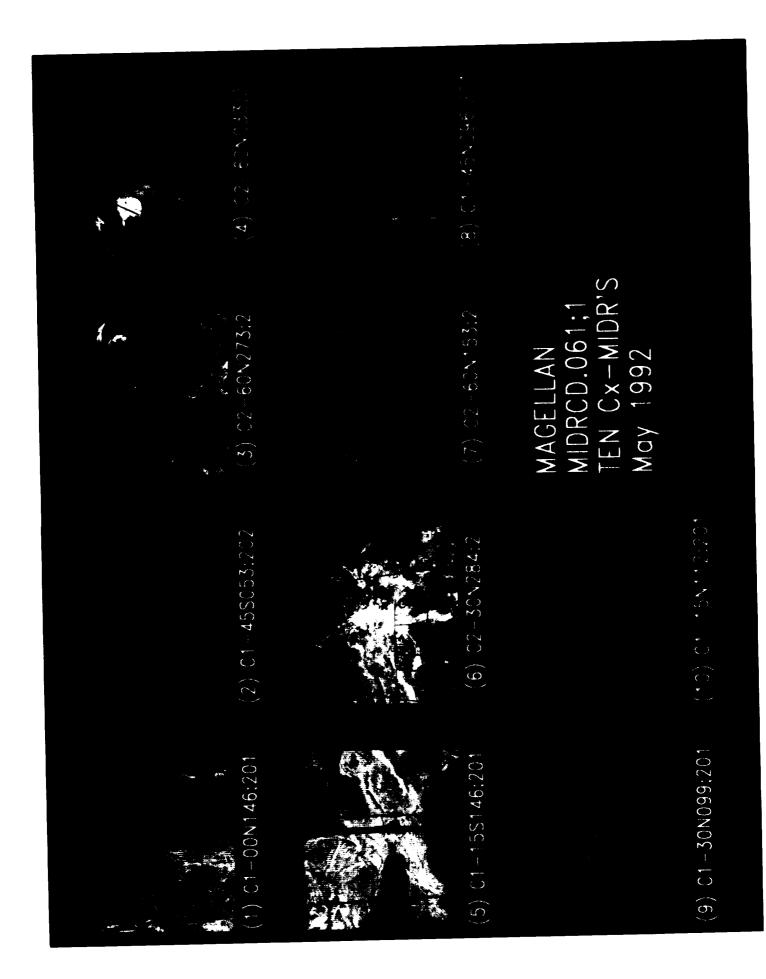


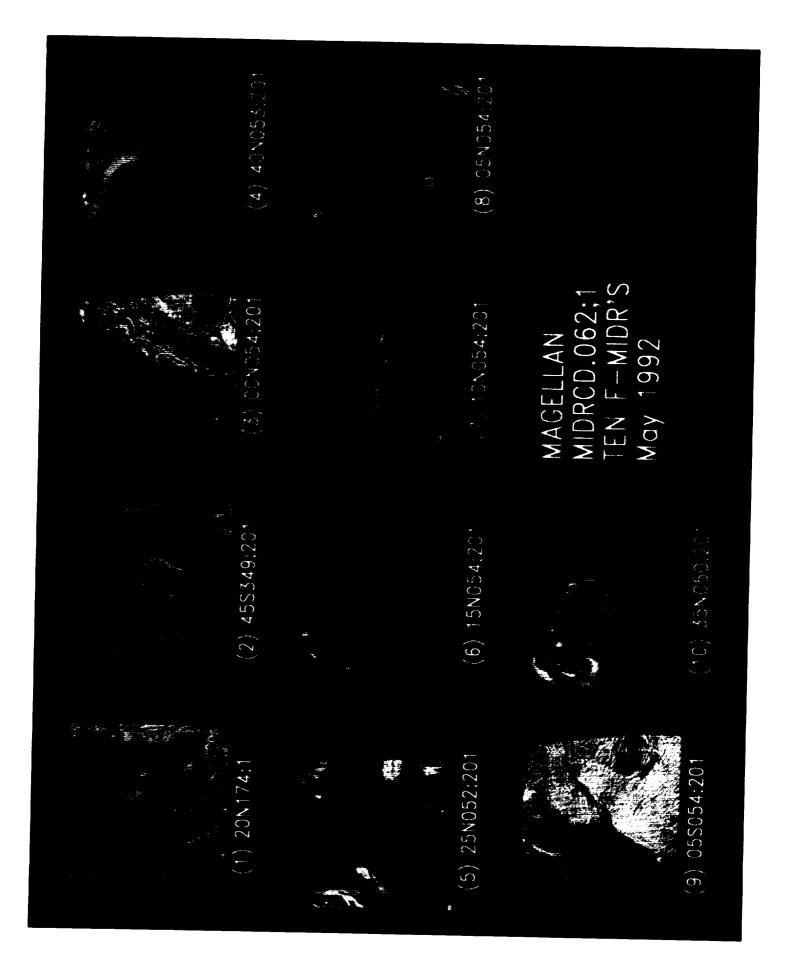

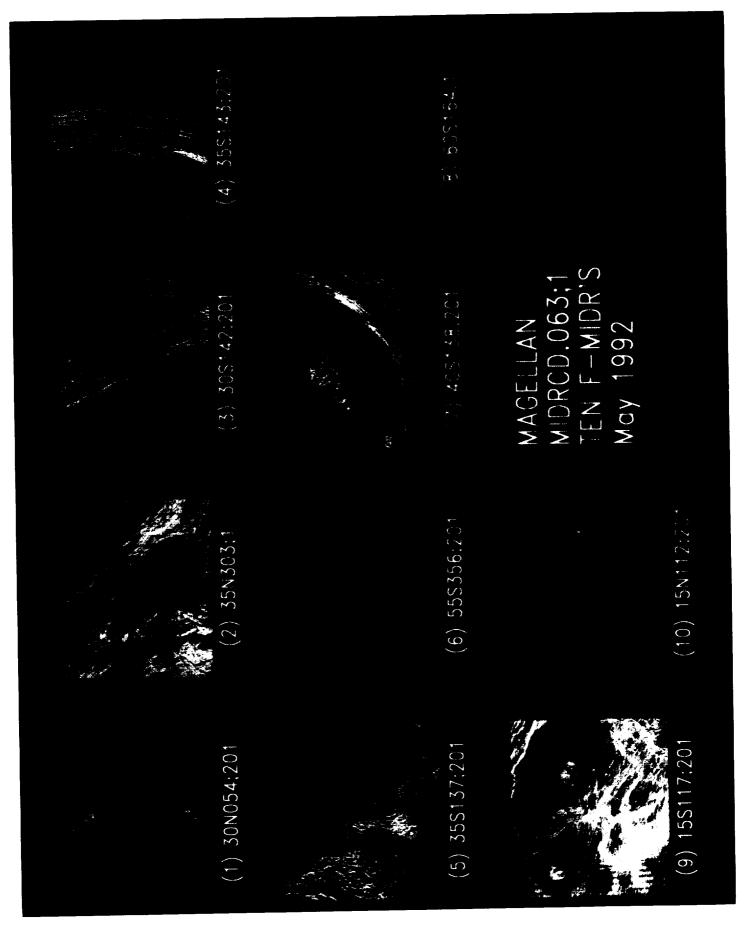


20S162 N00 ((8)MAGELLAN MIDRCD.064;1 TEN F-MIDR'S May 1992 (7) 15S112;201 05S115;20 (2) 25N174;1 5:2 (6) 00N1 (5) 00N189;201 5S163:20 (9) 30S098:20

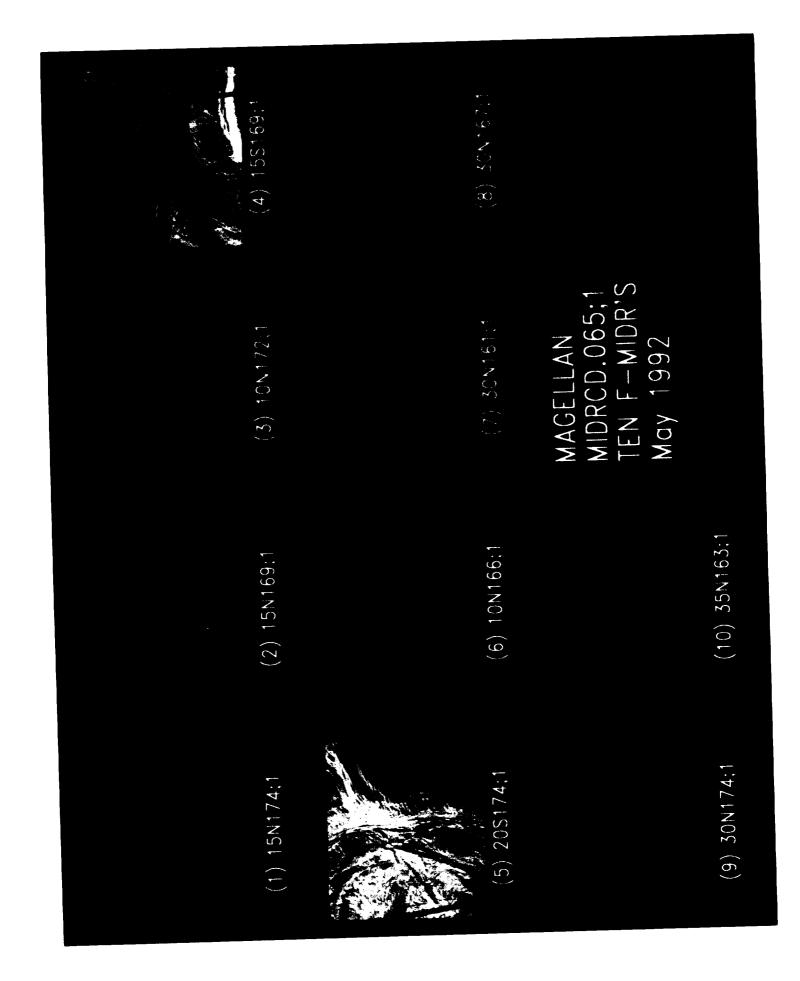

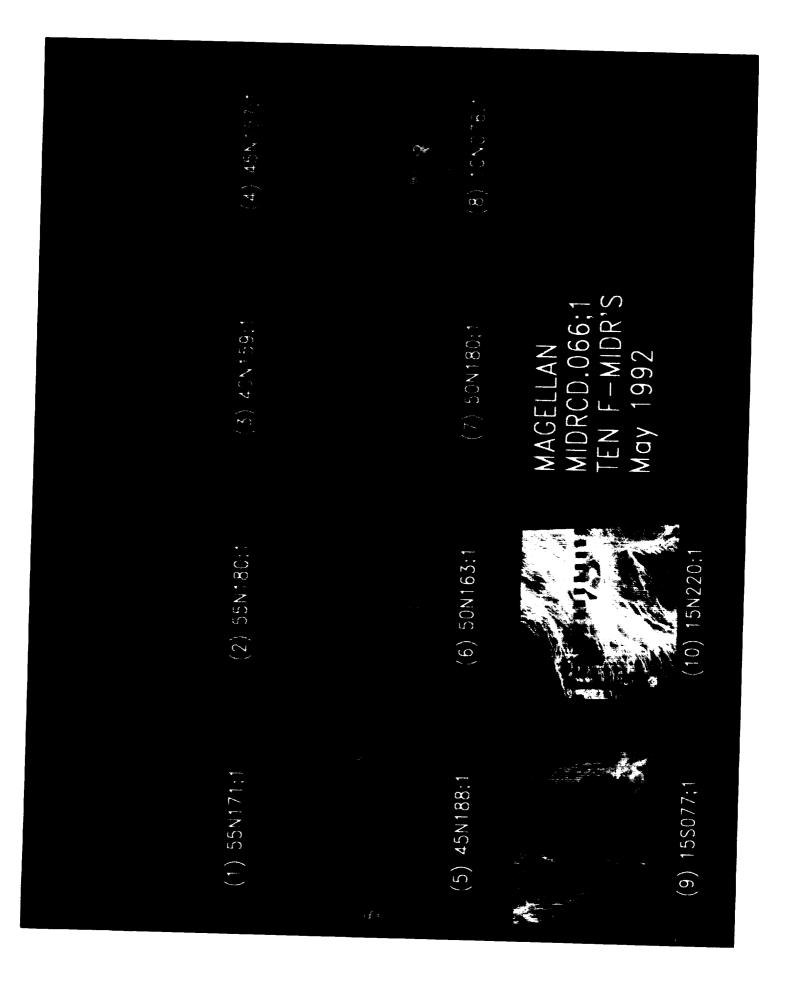





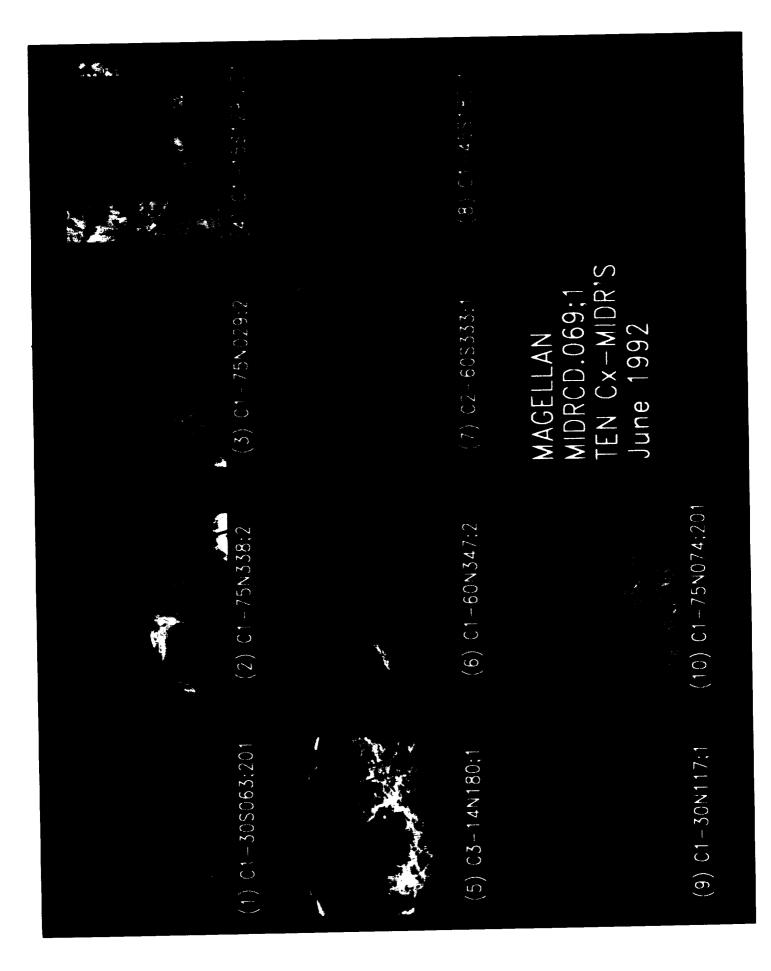

National Aeronautics and Space Administration AGENCY REPORT NUMBER Nashington, DC 20546-0001 NASA RP-1356 11. SUPPLEMENTARY NOTES 12b. DISTRIBUTION /AVAILABILITY STATEMENT Unclassified Unlimited 12b. DISTRIBUTION CODE Subject Category 91 12b. DISTRIBUTION CODE This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION CODE 13. ABSTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and data-processing techniques used in the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. 4. SUBJECT TERMS 15. NUMBER OF PAGE 210 Agellan; Venus; Radar; Geology; SAR 15. NUMBER OF PAGE 210 7. SECURITY CLASSIFICATION OF THIS PAGE 19. SECURITY CLASSIFICATION OF ABSTRACT 11. Detection 18. SECURITY CLASSIFICATION OF ABSTRACT	REPORT	Form Approved OMB No. 0704-0188		
1. Addret Out (Lieve bank) 1. REPORT PYFE AND DATES COVERED 4. THE AND SUBTILE March 1995 Reference Publication 4. THE AND SUBTILE Narch 1995 Reference Publication User Guide to the Magellan Synthetic Aperture NASA7-1260 8. AUTHOR(S) NASA7-1260 5. Wall, S. McConnell, C. Leff, R. Austin, NASA7-1260 7. REFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 8. PEFFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 9. JEVENDMING ORGANIZATION NAME(S) AND ADDRESS(ES) 8. PEFFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 9. SPONSONING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) 10. SPONSONING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration NASA RP-1356 Nashington, DC 20546-0001 10. SPONSONING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) 11. SUPPLEMENTARY NOTES 12b. DISTRUUTION CODE 22. DISTRUCTION/AVAILABLITY STATEMENT 12b. DISTRUCTION CODE 11. SUPPLEMENTARY NOTES 12b. DISTRUCTION CODE 23. ABIRACT (MAXIMUM STATEMENT 12b. DISTRUCTION CODE 11. SUPPLEMENTARY NOTES 12b. DISTRUCTION CODE 24. DISTRUCTION / AND ADDRESS (COLOR) 12b. DISTRUCTION CODE 3. ABIRACT (MAXIMUM STATEMENT 12b. DISTRUCTION CODE	Public reporting burden for this collection of gathering and maintaining the data needee collection of information, including suggest Davis Highway, Suite 1204, Arlington, VA 2	of information is estimated to average 1 h d, and completing and reviewing the collec- tions for reducing this burden, to Washing (2202-4302, and to the Office of Managem	our per response, including the time for tion of information. Send comments re ton Headquarters Services, Directorate ent and Rudget Pareswork Reductions	or reviewing Instructions, searching existing data source egarding this burden estimate or any other aspect of the for Information Operations and Reports, 1215 Jeffer
A THLE AND SUBTINE March 1995 Reference Publication User Guide to the Magellan Synthetic Aperture Radar Images S. FUNDONG NUMBERS 6. AUTHOR(S) NASA7-1260 S. Wall, S. McConnell, C. Leff, R. Austin, K. Beratan, M. Rokey NASA7-1260 7. FREFORMING ORGANIZATION NAME(S) AND ADDRESS[ES) Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Drive Pasadena, California 91109-8099 B. PIRFORMING ORGANIZAT REPORT NUMBER National Aeronautics and Space Administration Washington, DC 20546-0001 In. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS[ES) 1. SUPPLEMENTARY NOTES In. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS[ES) In. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS[ES) 22. DISTRIBUTION/AVAILABULTY STATEMENT Unclassified Unlimited Subject Category 91 In. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS[ES) 3. SUPPLEMENTARY NOTES In. SPONSORING/MONITORING AGENCY MAME(S) AND ADDRESS[ES) In. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS[ES) 3. ASSTRACT (MARING TO A MARIE) Intermission Radar mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and actarprocessing techniques used in the mission. Radar-mapping parameters as well as data acquisition issues are dis	1. AGENCY USE ONLY (Leave L	blank) 2. REPORT DATE	3. REPORT TYPE A	ND DATES COVERED
User Guide to the Magellan Synthetic Aperture Radar Images 5. FUNDING NUMBERS S. Wall, S. McConnell, C. Leff, R. Austin, K. Bertan, M. Rokey NASA7-1260 PEFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 8. PERFORMING ORGANIZATION REPORT NUMBER Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Drive Pasadena, California 91109-8099 8. PERFORMING ORGANIZATION NATIONAL ACTION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001 10. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) 1. SUPPLEMENTARY NOTES 12b. DISTRIBUTION CODE 2a. DISTRIBUTION/AVAILABULTY STATEMENT Unclassified Unlimited Subject Category 91 12b. DISTRIBUTION CODE 1. SUPPLEMENTARY NOTES 12b. DISTRIBUTION CODE 2a. DISTRIBUTION/AVAILABULTY STATEMENT Unclassified Unlimited Subject Category 91 12b. DISTRIBUTION CODE 1. SUPPLEMENTARY NOTES 12b. DISTRIBUTION CODE 2a. DISTRIBUTION/AVAILABULTY STATEMENT Unclassified Unlimited Subject Category 91 12b. DISTRIBUTION CODE 1. SUPPLEMENTARY NOTES 12b. DISTRIBUTION CODE 2a. DISTRIBUTION/AVAILABULTY STATEMENT Unclassified Unlimited Subject Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION CODE 3. ASTRACT (Maximum 200 words) 15 NUMBER OF PAGE are discussed. In addition, this user guide provides information on how		March 1995		ublication
Radar Images AUTHOR(S) S. Wall, S. McConnell, C. Leff, R. Austin, K. Beratan, M. Rokey PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Drive Pasadena, California 91109-8099 SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001 This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights ND 21090-2934, (301) 621-0390 ASTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and data-processing techniques used in the mission. Radar-mapping parameters as well as data caquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 Astrony CLASSIFICATION of HIS PAGE 19. SECURITY CLASSIFICATION OF HIS PAGE 19. SECURITY CLASSIFICATION OF ABSTRACT 20. UMITATION of ABSTRACT	· · · · · · · · · · · · · · · · · · ·			5. FUNDING NUMBERS
S. Wall, S. McConnell, C. Leff, R. Austin, K. Beratan, M. Rokey	Radar Images	NASA7-1260		
K. Beratan, M. Rokey FREFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) S. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Jet Propulsion Laboratory Galifornia Institute of Technology RFPORT NUMBER California Institute of Technology 4800 Oak Grove Drive		ell, C. Leff, R. Aus	stin.	1
PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 8. PERFORMING ORGANIZATION TO THE PROPERTIES OF THE PROPERTIES			,	
Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Drive Pasadena, California 91109-8099 Image: Comparison of the compari		•		
4800 Oak Grove Drive Pasadena, California 91109-8099 SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) 10. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration NASA RP-1356 Supplementary NOTES 12b. DISTRIBUTION / AVAILABILITY STATEMENT Unclassified Unlimited 12b. DISTRIBUTION CODE Subject Category 91 12b. DISTRIBUTION CODE This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION CODE ABSTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone work in the mission. This user guide outlines the mission operations and data set so that someone work in the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 SUBJECT TERMS 18. SECURITY CLASSIFICATION OF ABSTRACT SUBJECT TERMS 18. SECURITY CLASSIFICATION OF ABSTRACT		8. PERFORMING ORGANIZATION REPORT NUMBER		
Pasadena, California 91109-8099 10. SPONSORING/MONITORING AGENCY NAME(\$) AND ADDRESS(E5) 10. SPONSORING/MONITORING AGENCY NAME(\$) AND ADDRESS(E5) National Aeronautics and Space Administration NASA RP-1356 Nashington, DC 20546-0001 NASA RP-1356 SUPPLEMENTARY NOTES 12b. DISTRIBUTION/AVAILABLITY STATEMENT Unclassified Unlimited NASA RP-1356 Subject Category 91 12b. DISTRIBUTION CODE This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION code ABSTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and data-processing techniques used in the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 agellan; Venus; Radar; Geology; SAR 15. NUMBER OF PAGE 210 SECURITY CLASSIFICATION OF ABSTRACT 19. SECURITY CLASSIFICATION OF ABSTRACT	California Institut			
SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) 10. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration NASA RP-1356 National Aeronautics and Space Administration NASA RP-1356 SUPPLEMENTARY NOTES 12b. DISTRIBUTION / AVAILABILITY STATEMENT Unclassified Unlimited 12b. DISTRIBUTION CODE Subject Category 91 12b. DISTRIBUTION CODE This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION code Mastract (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and data-processing techniques used in the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 SUBJECT TERMS 19. SECURITY CLASSIFICATION OF ABSTRACT Isophanized and where specific elements of the set can be located. 20. UMITATION OF ABSTRACT				
National Aeronautics and Space Administration AGENCY REPORT NUMBER NASA RP-1356 SUPPLEMENTARY NOTES a. DISTRIBUTION/AVAILABILITY STATEMENT 12b. DISTRIBUTION CODE This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION CODE ABSTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and data-processing techniques used in the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 SUBJECT TERMS 18. SECURITY CLASSIFICATION OF ABSTRACT SUBJECT TERMS 18. SECURITY CLASSIFICATION OF ABSTRACT SUBJECT TERMS 19. SECURITY CLASSIFICATION OF ABSTRACT	rasauena, Californi	La 91109-8099		1
SUPPLEMENTARY NOTES 12b. DISTRIBUTION/AVAILABULITY STATEMENT Unclassified Unlimited 12b. DISTRIBUTION CODE Subject Category 91 12b. DISTRIBUTION CODE This publication is available from the NASA Center for 12b. DISTRIBUTION CODE AeroSpace Information, 800 Elkridge Landing Road, 12b. DISTRIBUTION CODE Linthicum Heights MD 21090-2934, (301) 621-0390 12b. DISTRIBUTION code ABSTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 fagellan; Venus; Radar; Geology; SAR 15. NUMBER OF PAGE 210 SECURITY CLASSIFICATION OF ABSTRACT 18. SECURITY CLASSIFICATION OF ABSTRACT		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
a. DISTRIBUTION/AVAILABILITY STATEMENT 12b. DISTRIBUTION CODE Unclassified Unlimited Subject Category 91 This publication is available from the NASA Center for AeroSpace Information, 800 Elkridge Landing Road, Linthicum Heights MD 21090-2934, (301) 621-0390 Image: Community, this data ABSTRACT (Maximum 200 words) The Magellan radar-mapping mission collected a large amount of science and engineering data. Now available to the general scientific community, this data set can be overwhelming to someone who is unfamiliar with the mission. This user guide outlines the mission operations and data set so that someone workin with the data can understand the mapping and data-processing techniques used in the mission. Radar-mapping parameters as well as data acquisition issues are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS 15. NUMBER OF PAGE 210 Gagellan; Venus; Radar; Geology; SAR 19. SECURITY CLASSIFICATION OF THIS PAGE SECURITY CLASSIFICATION OF THIS PAGE 19. SECURITY CLASSIFICATION OF ABSTRACT	National Aeronautics and Space Administration Washington, DC 20546-0001			NASA RP-1356
are discussed. In addition, this user guide provides information on how the data set is organized and where specific elements of the set can be located. SUBJECT TERMS Magellan; Venus; Radar; Geology; SAR SECURITY CLASSIFICATION OF THIS PAGE 18. SECURITY CLASSIFICATION OF THIS PAGE 19. SECURITY CLASSIFICATION OF ABSTRACT 20. LIMITATION OF ABSTRACT	Subject Category 91 This publication is AeroSpace Informati Linthicum Heights M . ABSTRACT (Maximum 200 wor The Magellan radar- engineering data. No set can be overwhelm user guide outlines with the data can un	available from the on, 800 Elkridge Lan D 21090-2934, (301) rds) mapping mission coll ow available to the ming to someone who the mission operati nderstand the mappin	ding Road, 621-0390 ected a large amou general scientific is unfamiliar with ons and data set s g and data-process	community, this data the mission. This o that someone working
SECURITY CLASSIFICATION 18. SECURITY CLASSIFICATION 19. SECURITY CLASSIFICATION 20. LIMITATION OF ABSTRACT	Are discussed. In ad data set is organize	ddition, this user g ed and where specifi	uide provides info	rmation on how the set can be located. 15. NUMBER OF PAGES 210
	SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE		
	Unclassified	Unclassified	Unclassified	UL

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89) Prescribed by ANSI Std. 239-18 298-102