

## NASA Contractor Report 178239

# Application of Decomposition Techniques to the Preliminary Design of a Transport Aircraft

(NASA-CR-178239) APPLICATION OF  
DECOMPOSITION TECHNIQUES TO THE PRELIMINARY  
DESIGN OF A TRANSPORT AIRCRAFT Final Report  
(Lockheed-Georgia Co., Marietta.) 300 p

N87-18563

CSSL 01C G3/05 43841  
Unclas

J. E. Rogan and M. A. Kolb

Lockheed-Georgia Company  
Marietta, Georgia 30063

Contract NAS1 - 18068

February 1987



National Aeronautics and  
Space Administration

Langley Research Center  
Hampton, Virginia 23665-5225

**NASA Contractor Report 178239**

**Application of Decomposition  
Techniques to the Preliminary  
Design of a Transport Aircraft**

**J. E. Rogan and M. A. Kolb**

**Lockheed-Georgia Company  
Marietta, Georgia 30063**

**Contract NAS1 - 18068  
February 1987**

**NASA**

National Aeronautics and  
Space Administration

**Langley Research Center**  
Hampton, Virginia 23665-5225

## FOREWORD

Lockheed-Georgia Company recognizes the important role that advanced decomposition techniques for numerical optimization will play in the design of future aerospace systems. Examination of the impact of these techniques on aircraft preliminary design is highly topical for two reasons. First, progress in the development of a linear decomposition technique at NASA Langley has reached the point where a large-scale test of the formulation is required. Second, continually increasing emphasis on expanding the performance envelope, integrating more engineering specialties into the design process, and lowering development and support costs has made the use of design optimization more critical in the preliminary design phase. This final contract report contributes to the examination of the impact of linear decomposition on preliminary design by studying the formulation of a transport aircraft design problem.

This report is also identified by Lockheed report number LG86ER0092 for Lockheed internal control purposes.

Table of Contents

Foreword.....iii

List of Figures.....v

List of Tables.....vi

Summary.....1

1. System Engineering in the Aircraft Design Process.....1

    1.1 Models and Decomposition.....2

    1.2 Scope of this Work.....4

2. The Design Process Decomposition  
    for a Transport Aircraft.....6

    2.1 Subproblems of the Design Process  
        Decomposition.....7

    2.2 Features of the Decomposition.....7

3. Impact on Aircraft Design.....9

    3.1 Scheduling of Design Tasks.....9

    3.2 Configuration Control.....9

    3.3 Design Applications of Object-Oriented  
        Programming.....9

Appendix A. Decomposition Heuristics.....11

Appendix B. Iteration through the Multifaceted Design  
    Process Decomposition.....12

Appendix C. Formulation of Nonlinear Programming  
    Problems in the Multifaceted Decomposition.....14

References.....15

Tables.....18

Figures.....268

~~PRECEDING PAGE BLANK NOT FILMED~~

List of Figures

1. Part of the Aircraft Subsystem Decomposition.....	268
2. Part of the Aircraft Functional Decomposition.....	269
3. Representation of Functional Relationships.....	270
4. Design Optimization Model.....	271
5 (a). Multifaceted Design Process Decomposition.....	272
5 (b). Multifaceted Design Process Decomposition , (cont.)...	273
6. Heuristic for Finding Design Process Levels.....	274
7. Heuristic for Eliminating Coupling within Levels.....	275
8. Iteration through the System Hierarchy.....	276
9. Form of the Multifaceted Decomposition.....	277
10. Subproblem with More than One Predecessor.....	278
11. Divergence in the Multifaceted Decomposition.....	279
12. Proposed Iteration Procedure for the Multifaceted Decomposition.....	280

## List of Tables

1. Design Tasks of the Multifaceted Design Process Decomposition.....	18
2. Formulation of Subproblem 1-01 as a Nonlinear Programming Problem.....	22
3. Formulation of Subproblem 2-04 as a Nonlinear Programming Problem.....	23
4. Design Relationships in Subproblem 1-01.....	24
5. Subproblem 1-01 Interfaces.....	24
6. Design Relationships in Subproblem 2-01.....	25
7. Subproblem 2-01 Interfaces.....	26
8. Design Relationships in Subproblem 2-02.....	27
9. Subproblem 2-02 Interfaces.....	27
10. Design Relationships in Subproblem 2-03.....	28
11. Subproblem 2-03 Interfaces.....	28
12. Design Relationships in Subproblem 2-04.....	30
13. Subproblem 2-04-Interfaces.....	30
14. Design Relationships in Subproblem 2-05.....	31
15. Subproblem 2-05 Interfaces.....	31
16. Design Relationships in Subproblem 3-01.....	32
17. Subproblem 3-01 Interfaces.....	32
18. Design Relationships in Subproblem 3-02.....	32
19. Subproblem 3-02 Interfaces.....	33
20. Design Relationships in Subproblem 3-03.....	34
21. Subproblem 3-03 Interfaces.....	35

List of Tables, (cont.)

22. Design Relationships in Subproblem 3-04.....	35
23. Subproblem 3-04 Interfaces.....	36
24. Design Relationships in Subproblem 3-05.....	36
25. Subproblem 3-05 Interfaces.....	37
26. Design Relationships in Subproblem 3-06.....	38
27. Subproblem 3-06 Interfaces.....	38
28. Design Relationships in Subproblem 3-07.....	39
29. Subproblem 3-07 Interfaces.....	40
30. Design Relationships in Subproblem 3-08.....	41
31. Subproblem 3-08 Interfaces.....	41
32. Design Relationships in Subproblem 3-09.....	42
33. Subproblem 3-09 Interfaces.....	42
34. Design Relationships in Subproblem 3-10.....	43
35. Subproblem 3-10 Interfaces.....	43
36. Design Relationships in Subproblem 3-11.....	43
37. Subproblem 3-11 Interfaces.....	44
38. Design Relationships in Subproblem 3-12.....	44
39. Subproblem 3-12 Interfaces.....	45
40. Design Relationships in Subproblem 3-13.....	46
41. Subproblem 3-13 Interfaces.....	46
42. Design Relationships in Subproblem 3-14.....	47
43. Subproblem 3-14 Interfaces.....	47
44. Design Relationships in Subproblem 3-15.....	47

List of Tables, (cont.)

45. Subproblem 3-15 Interfaces.....	48
46. Design Relationships in Subproblem 3-16.....	48
47. Subproblem 3-16 Interfaces.....	48
48. Design Relationships in Subproblem 3-17.....	50
49. Subproblem 3-17 Interfaces.....	50
50. Design Relationships in Subproblem 4-01.....	51
51. Subproblem 4-01 Interfaces.....	51
52. Design Relationships in Subproblem 4-02.....	52
53. Subproblem 4-02 Interfaces.....	52
54. Design Relationships in Subproblem 4-03.....	53
55. Subproblem 4-03 Interfaces.....	53
56. Design Relationships in Subproblem 4-04.....	54
57. Subproblem 4-04 Interfaces.....	55
58. Design Relationships in Subproblem 4-05.....	55
59. Subproblem 4-05 Interfaces.....	56
60. Design Relationships in Subproblem 4-06.....	57
61. Subproblem 4-06 Interfaces.....	57
62. Design Relationships in Subproblem 4-07.....	58
63. Subproblem 4-07 Interfaces.....	58
64. Design Relationships in Subproblem 4-08.....	59
65. Subproblem 4-08 Interfaces.....	70
66. Design Relationships in Subproblem 4-09.....	75
67. Subproblem 4-09 Interfaces.....	75
68. Design Relationships in Subproblem 4-10.....	76



List of Tables, (cont.)

69. Subproblem 4-10 Interfaces.....	77
70. Design Relationships in Subproblem 4-11.....	78
71. Subproblem 4-11 Interfaces.....	78
72. Design Relationships in Subproblem 4-12.....	79
73. Subproblem 4-12 Interfaces.....	80
74. Design Relationships in Subproblem 4-13.....	81
75. Subproblem 4-13 Interfaces.....	81
76. Design Relationships in Subproblem 4-14.....	82
77. Subproblem 4-14 Interfaces.....	82
78. Design Relationships in Subproblem 4-15.....	83
79. Subproblem 4-15 Interfaces.....	83
80. Design Relationships in Subproblem 4-16.....	84
81. Subproblem 4-16 Interfaces.....	84
82. Design Relationships in Subproblem 4-17.....	84
83. Subproblem 4-17 Interfaces.....	85
84. Design Relationships in Subproblem 4-18.....	85
85. Subproblem 4-18 Interfaces.....	86
86. Design Relationships in Subproblem 4-19.....	86
87. Subproblem 4-19 Interfaces.....	87
88. Design Relationships in Subproblem 4-20.....	87
89. Subproblem 4-20 Interfaces.....	88
90. Design Relationships in Subproblem 4-21.....	88
91. Subproblem 4-21 Interfaces.....	88

List of Tables, (cont.)

92. Design Relationships in Subproblem 4-22.....	89
93. Subproblem 4-22 Interfaces.....	89
94. Design Relationships in Subproblem 4-23.....	90
95. Subproblem 4-23 Interfaces.....	90
96. Design Relationships in Subproblem 5-01.....	90
97. Subproblem 5-01 Interfaces.....	91
98. Design Relationships in Subproblem 5-02.....	93
99. Subproblem 5-02 Interfaces.....	93
100. Design Relationships in Subproblem 5-03.....	94
101. Subproblem 5-03 Interfaces.....	94
102. Design Relationships in Subproblem 5-04.....	95
103. Subproblem 5-04 Interfaces.....	95
104. Design Relationships in Subproblem 5-05.....	95
105. Subproblem 5-05 Interfaces.....	95
106. Design Relationships in Subproblem 5-06.....	96
107. Subproblem 5-06 Interfaces.....	97
108. Design Relationships in Subproblem 5-07.....	97
109. Subproblem 5-07 Interfaces.....	97
110. Design Relationships in Subproblem 5-08.....	97
111. Subproblem 5-08 Interfaces.....	98
112. Design Relationships in Subproblem 5-09.....	98
113. Subproblem 5-09 Interfaces.....	99
114. Design Relationships in Subproblem 5-10.....	99
115. Subproblem 5-10 Interfaces.....	99

List of Tables, (cont.)

116. Design Relationships in Subproblem 5-11.....	100
117. Subproblem 5-11 Interfaces.....	100
118. Design Relationships in Subproblem 5-12.....	100
119. Subproblem 5-12 Interfaces.....	101
120. Design Relationships in Subproblem 5-13.....	101
121. Subproblem 5-13 Interfaces.....	102
122. Design Relationships in Subproblem 5-14.....	102
123. Subproblem 5-14 Interfaces.....	134
124. Design Relationships in Subproblem 5-15.....	150
125. Subproblem 5-15 Interfaces.....	151
126. Design Relationships in Subproblem 5-16.....	151
127. Subproblem 5-16 Interfaces.....	151
128. Design Relationships in Subproblem 5-17.....	152
129. Subproblem 5-17 Interfaces.....	154
130. Design Relationships in Subproblem 5-18.....	157
131. Subproblem 5-18 Interfaces.....	158
132. Design Relationships in Subproblem 5-19.....	158
133. Subproblem 5-19 Interfaces.....	158
134. Design Relationships in Subproblem 6-01.....	159
135. Subproblem 6-01 Interfaces.....	159
136. Design Relationships in Subproblem 6-02.....	160
137. Subproblem 6-02 Interfaces.....	160
138. Design Relationships in Subproblem 6-03.....	160

List of Tables, (cont.)

139. Subproblem 6-03 Interfaces.....	161
140. Design Relationships in Subproblem 6-04.....	161
141. Subproblem 6-04 Interfaces.....	161
142. Design Relationships in Subproblem 6-05.....	162
143. Subproblem 6-05 Interfaces.....	162
144. Design Relationships in Subproblem 6-06.....	163
145. Subproblem 6-06 Interfaces.....	197
146. Design Relationships in Subproblem 6-07.....	209
147. Subproblem 6-07 Interfaces.....	210
148. Design Relationships in Subproblem 6-08.....	210
149. Subproblem 6-08 Interfaces.....	211
150. Design Relationships in Subproblem 6-09.....	211
151. Subproblem 6-09 Interfaces.....	214
152. Design Relationships in Subproblem 6-10.....	217
153. Subproblem 6-10 Interfaces.....	218
154. Design Relationships in Subproblem 6-11.....	218
155. Subproblem 6-11 Interfaces.....	222
156. Design Relationships in Subproblem 6-12.....	224
157. Subproblem 6-12 Interfaces.....	224
158. Design Relationships in Subproblem 6-13.....	225
159. Subproblem 6-13 Interfaces.....	225
160. Design Relationships in Subproblem 6-14.....	226
161. Subproblem 6-14 Interfaces.....	226
162. Design Relationships in Subproblem 6-15.....	227

List of Tables, (cont.)

163. Subproblem 6-15 Interfaces.....	227
164. Design Relationships in Subproblem 6-16.....	228
165. Subproblem 6-16 Interfaces.....	229
166. Design Relationships in Subproblem 6-17.....	230
167. Subproblem 6-17 Interfaces.....	230
168. Design Relationships in Subproblem 6-18.....	230
169. Subproblem 6-18 Interfaces.....	231
170. Design Relationships in Subproblem 6-19.....	231
171. Subproblem 6-19 Interfaces.....	231
172. Design Relationships in Subproblem 6-20.....	232
173. Subproblem 6-20 Interfaces.....	232
174. Design Relationships in Subproblem 6-21.....	233
175. Subproblem 6-21 Interfaces.....	234
176. Design Relationships in Subproblem 6-22.....	234
177. Subproblem 6-22 Interfaces.....	234
178. Design Relationships in Subproblem 6-23.....	235
179. Subproblem 6-23 Interfaces.....	235
180. Design Relationships in Subproblem 6-24.....	235
181. Subproblem 6-24 Interfaces.....	235
182. Design Relationships in Subproblem 7-01.....	236
183. Subproblem 7-01 Interfaces.....	236
184. Design Relationships in Subproblem 7-02.....	236
185. Subproblem 7-02 Interfaces.....	237

List of Tables, (cont.)

186. Design Relationships in Subproblem 7-03.....	237
187. Subproblem 7-03 Interfaces.....	237
188. Design Relationships in Subproblem 7-04.....	237
189. Subproblem 7-04 Interfaces.....	238
190. Design Relationships in Subproblem 7-05.....	238
191. Subproblem 7-05 Interfaces.....	238
192. Design Relationships in Subproblem 7-06.....	238
193. Subproblem 7-06 Interfaces.....	239
194. Design Relationships in Subproblem 7-07.....	239
195. Subproblem 7-07 Interfaces.....	239
196. Design Relationships in Subproblem 7-08.....	239
197. Subproblem 7-08 Interfaces.....	240
198. Design Relationships in Subproblem 7-09.....	240
199. Subproblem 7-09 Interfaces.....	240
200. Design Relationships in Subproblem 7-10.....	240
201. Subproblem 7-10 Interfaces.....	241
202. Design Relationships in Subproblem 7-11.....	241
203. Subproblem 7-11 Interfaces.....	241
204. Design Relationships in Subproblem 7-12.....	241
205. Subproblem 7-12 Interfaces.....	242
206. Design Relationships in Subproblem 7-13.....	242
207. Subproblem 7-13 Interfaces.....	242

List of Tables, (cont.)

208. Design Relationships in Subproblem 7-14.....	242
209. Subproblem 7-14 Interfaces.....	243
210. Design Relationships in Subproblem 7-15.....	243
211. Subproblem 7-15 Interfaces.....	243
212. Design Relationships in Subproblem 7-16.....	243
213. Subproblem 7-16 Interfaces.....	244
214. Design Relationships in Subproblem 7-17.....	244
215. Subproblem 7-17 Interfaces.....	244
216. Design Relationships in Subproblem 7-18.....	244
217. Subproblem 7-18 Interfaces.....	245
218. Design Relationships in Subproblem 7-19.....	245
219. Subproblem 7-19 Interfaces.....	245
220. Design Relationships in Subproblem 7-20.....	245
221. Subproblem 7-20 Interfaces.....	246
222. Design Relationships in Subproblem 7-21.....	246
223. Subproblem 7-21 Interfaces.....	246
224. Design Relationships in Subproblem 7-22.....	246
225. Subproblem 7-22 Interfaces.....	247
226. Design Relationships in Subproblem 7-23.....	247
227. Subproblem 7-23 Interfaces.....	247
228. Design Relationships in Subproblem 7-24.....	247
229. Subproblem 7-24 Interfaces.....	248
230. Design Relationships in Subproblem 7-25.....	248
231. Subproblem 7-25 Interfaces.....	248

List of Tables, (cont.)

232. Design Relationships in Subproblem 7-26.....	248
233. Subproblem 7-26 Interfaces.....	249
234. Design Relationships in Subproblem 7-27.....	249
235. Subproblem 7-27 Interfaces.....	249
236. Design Relationships in Subproblem 7-28.....	249
237. Subproblem 7-28 Interfaces.....	250
238. Design Relationships in Subproblem 7-29.....	250
239. Subproblem 7-29 Interfaces.....	250
240. Design Relationships in Subproblem 7-30.....	250
241. Subproblem 7-30 Interfaces.....	251
242. Design Relationships in Subproblem 7-31.....	251
243. Subproblem 7-31 Interfaces.....	251
244. Design Relationships in Subproblem 7-32.....	251
245. Subproblem 7-32 Interfaces.....	252
246. Design Relationships in Subproblem 7-33.....	252
247. Subproblem 7-33 Interfaces.....	252
248. Design Relationships in Subproblem 7-34.....	252
249. Subproblem 7-34 Interfaces.....	253
250. Design Relationships in Subproblem 7-35.....	253
251. Subproblem 7-35 Interfaces.....	253
252. Design Relationships in Subproblem 7-36.....	253
253. Subproblem 7-36 Interfaces.....	254
254. Design Relationships in Subproblem 7-37.....	254
255. Subproblem 7-37 Interfaces.....	254



List of Tables, (cont.)

256. Design Relationships in Subproblem 7-38.....	254
257. Subproblem 7-38 Interfaces.....	255
258. Design Relationships in Subproblem 7-39.....	255
259. Subproblem 7-39 Interfaces.....	255
260. Design Relationships in Subproblem 7-40.....	256
261. Subproblem 7-40 Interfaces.....	256
262. Design Relationships in Subproblem 7-41.....	257
263. Subproblem 7-41 Interfaces.....	257
264. Design Relationships in Subproblem 7-42.....	257
265. Subproblem 7-42 Interfaces.....	258
266. Design Relationships in Subproblem 7-43.....	258
267. Subproblem 7-43 Interfaces.....	258
268. Design Relationships in Subproblem 7-44.....	259
269. Subproblem 7-44 Interfaces.....	259
270. Design Relationships in Subproblem 7-45.....	260
271. Subproblem 7-45 Interfaces.....	260
272. Design Relationships in Subproblem 7-46.....	260
273. Subproblem 7-46 Interfaces.....	261
274. Design Relationships in Subproblem 7-47.....	261
275. Subproblem 7-47 Interfaces.....	261
276. Design Relationships in Subproblem 7-48.....	262
277. Subproblem 7-48 Interfaces.....	262
278. Design Relationships in Subproblem 7-49.....	263

List of Tables, (cont.)

279. Subproblem 7-49 Interfaces.....	263
280. Design Relationships in Subproblem 7-50.....	263
281. Subproblem 7-50 Interfaces.....	264
282. Design Relationships in Subproblem 7-51.....	264
283. Subproblem 7-51 Interfaces.....	264
284. Design Relationships in Subproblem 7-52.....	265
285. Subproblem 7-52 Interfaces.....	265
286. Design Relationships in Subproblem 7-53.....	266
287. Subproblem 7-53 Interfaces.....	266
288. Design Relationships in Subproblem 7-54.....	266
289. Subproblem 7-54 Interfaces.....	266
290. Design Relationships in Subproblem 7-55.....	267
291. Subproblem 7-55 Interfaces.....	267

## Summary

A nonlinear constrained optimization problem describing the preliminary design process for a transport aircraft has been formulated. A multifaceted decomposition of the optimization problem has been made. Flight dynamics, flexible aircraft loads and deformations, and preliminary structural design subproblems appear prominently in the decomposition. The use of design process decomposition for scheduling design projects, a new system integration approach to configuration control, and the application of object-centered programming to a new generation of design tools are discussed.

### 1. System Engineering in the Aircraft Design Process

Decomposition is a fundamental problem-solving technique of system engineering. The system hierarchy and functional decomposition are used in system definition and mission requirements analysis, requirements flowdown and allocation, and in the planning of system integration, interface management and trade studies (ref. 1). The system hierarchy and functional decompositions are arranged in levels. At each level, there is a correspondence between the subsystems appearing on the system hierarchy and the functional units appearing in the functional decomposition. The interfaces between the subsystems are defined by the functional decomposition.

At the lowest level of the system hierarchy, these interfaces are used to generate specifications for the functional units which make up the system. The functional units at the lowest level of the system hierarchy cannot be decomposed any further without forcing the designer to adopt a particular design solution. The components that make up system elements at the lowest level of the system hierarchy may perform more than one function. In some cases, several components making up a system element at the lowest level of the system hierarchy may be required to accomplish a single function. Although the system-subsystem-component decomposition and the functional decomposition can be carried down below this level, the one-to-one correspondence between them breaks down.

An aircraft-based transportation system is made up of bases and airfields, cargo, maintenance and support, training, and other elements. Considered as a part of such a transportation system, the transport aircraft itself is a functional unit at the lowest level of the system hierarchy. The aircraft functional unit can not be decomposed into components by the techniques of reference 1 without forcing the aircraft designer to adopt a particular design solution. This study is concerned with the aircraft functional unit of a transportation system and with decomposition techniques that are appropriate for aircraft design, as distinguished from system engineering.

The system-subsystem-component decomposition can be carried down into the aircraft system element. This is done by the Work Breakdown Structure (ref. 1). Part of this decomposition is shown in Figure 1 to illustrate

the idea that the continuation of the system hierarchy breaks the configuration into manageable parts. The functions performed by the aircraft can also be decomposed, and Figure 2 shows part of the aircraft functional decomposition. Each of these functions corresponds to a design analysis discipline.

The system integration process of reference 1 cannot be carried down into the aircraft system elements because the functions in Figure 2 cannot be assigned to the components in Figure 1. For example, although the wing, fuselage, and empennage all have primary functions (develop lift, carry payload, and ensure static stability), they all have a "secondary" function: to support the structural loads encountered by the aircraft in flight. Of course, this function is not really "secondary": it is just as important as the components' primary functions.

System integration methodology along the lines of the reference 1 approach can be carried much further in the engineering design of avionics and software. In these disciplines, the system hierarchy and functional decompositions can be carried down to the level where the component elements can be developed by a single designer working alone. The design of an aircraft necessarily involves a larger team.

An extension of system integration methodology which could coordinate the efforts of the design team without interfering with design decisions would be a very valuable tool. The decomposition of the configuration (Figure 1) and of the design analysis (Figure 2) are fundamental to current aircraft design practice. The process aspect of design activity is equally important: system integration is a process.

This report is about decomposition of the process aspect of design. The design process decomposition defines the elements of the design process (design tasks or subproblems) and the interfaces between these elements. Since the design process is iterative, its decomposition must define how the iteration is to be performed. The design process decomposition is used to plan, schedule, and control the design effort to ensure that definite progress toward system integration goals is made at each step.

### 1.1 Models and Decomposition

The basic model for the configuration is geometry. Configuration geometry is essentially hierarchical. The system hierarchy provides a way to decompose the configuration that corresponds naturally to the geometric model. The functional aspects of a system are modeled by functional relationships among system parameters and requirements. Three equivalent models for these functional relationships are available (Figure 3): equations/inequalities, directed graphs, and the adjacency matrix of the directed graph (ref. 2). The  $n$ -squared matrix, used in System Engineering to represent the functional decomposition (ref. 1), is closely tied to the adjacency matrix model: the  $n$ -squared matrix imposes a block submatrix structure on the adjacency matrix. Blocks along the diagonal correspond to the functional units, and the off-diagonal blocks represent coupling

between functions.

In order to model the process aspects of the design activity, directed graph models such as task flow and PERT diagrams have been applied (ref. 1). Iterative loops are usually modeled explicitly on a task flow diagram. PERT handles iteration indirectly by allowing uncertainty in subtask completion times. Neither technique defines a controlling procedure for performing the iterations. Without a model of the controlling procedure, there is no way to distinguish a successful design process decomposition - one that rapidly converges system integration efforts on an optimal design - from a divergent design process that cannot produce a design meeting all system requirements at any cost.

Design optimization (refs. 3, 4, and 5) provides a model for control of the design process. Design optimization is the statement of a design problem as a nonlinear constrained optimization problem. Techniques for solving the nonlinear constrained optimization problem (ref. 6) can then be applied to find a solution to the original design problem. One form of the nonlinear constrained optimization problem is:

To minimize the objective function,  $f(x)$ ,

Subject to the equality constraints,

$$h(x) - b = 0$$

and to the inequality constraints,

$$g(x) - c \leq 0$$

The design optimization model provides a definition for the procedure through which the three aspects of design activity interact. The configuration and functional aspects of design are given simple representations in the design optimization model. These simple representations emphasize interaction of the design configuration and function with the design process control. The configuration aspect of design is represented by a set of design variables or design parameters. Design synthesis is the result of interaction of the configuration and the design process. The design process interacts with the functional aspect of design through the application of engineering design analysis to evaluate the functional relationships. The iteration procedure is diagrammed in Figure 4.

As seen in Figure 4, an initial guess for the values of the design variables is evaluated by the design analysis. The evaluation of system performance as a function of the parametric configuration description corresponds to the objective function  $f(x)$  and the equality and inequality constraint functions  $h(x)$  and  $g(x)$  of the nonlinear constrained optimization problem. The design analysis evaluations are compared with system requirements (represented by the vectors  $b$  and  $c$  of the constraints). Based on the sensitivity of the system performance to changes in the design variables/parameters, a new parametric design,  $x + \Delta x$  is identified and the

process is iterated. A globally convergent algorithm (ref. 6) for solving the nonlinear constrained optimization problem is used in the design optimization model to identify a new parametric design and iterate the process.

Design optimization provides a model of the process aspects of design activity that is able to capture the idea of a convergent design process. The design process decomposition can be based on techniques that have been successfully applied to solve large design optimization problems (refs. 7 and 8). The work reported here is based on an iterative scheme for converging a network of design optimization subproblems developed by Sobieski (ref. 9). The technique is called linear decomposition. Sobieski and co-workers have suggested (ref. 10) that linear decomposition may be used to iterate through the system hierarchy, using reoptimization with optimal sensitivity constraints (refs. 9, 11) to resolve conflicting design requirements between system elements.

## 1.2 Scope of this work

This idea was investigated by formulating a significant portion of the aircraft preliminary design activity for a transport aircraft as a nonlinear constrained optimization problem. A combination of heuristics and experience was used to decompose this problem into a network of design optimization subproblems. (A heuristic is a "rule of thumb" used to find an approximate solution close to the correct one.) The decomposition specified how the design parameters were to be passed between the subproblems so that the Sobieski technique for iterating through the decomposition could be used. Following the approach in reference 10, a decomposition was sought that corresponded to the system hierarchy form: that is, a hierarchical (tree) structure in which each subproblem corresponds to a system element (such as a subsystem or a component.)

Fitting the subproblems into the system hierarchy form proved to be a difficult problem. The subproblems tended to be large and did not correspond well to the elements of the aircraft system hierarchy. The reason for this incompatibility is that the functional aspect of design is not reflected in the system hierarchy. For example, all the hardware components on the aircraft have mass, and, as a result, almost all of the aircraft system components are coupled with more than one system function. This suggests that the design process decomposition has its own form, distinct from the functional and system hierarchy decompositions.

The process of preliminary design for a transport aircraft has been decomposed into a multifaceted form. The multifaceted form reflects both the functional and system hierarchy decompositions. Significant advantages of the system hierarchy decomposition, such as parallel solution of design problems at the same level (ref. 10) are carried over into the multifaceted decomposition.

Results of the multifaceted design process decomposition for a transport aircraft are reported in Section 2. Section 3 examines the issues

involved in applying the multifaceted decomposition to system integration in preliminary design. The heuristics used to form the design process decomposition are found in Appendix A. Appendix B discusses the problem of divergence in the multifaceted decomposition and proposes a direction for further research. Appendix C describes the details of the linear decomposition formulation of two of the subproblems in the multifaceted decomposition and discusses the iteration between them.

## 2. The Design Process Decomposition for a Transport Aircraft

The nonlinear programming formulation used to construct the design process decomposition does not attempt to completely describe the extremely complex process of aircraft preliminary design. The interaction of the aerodynamic, structural, propulsion, control, and, to a limited extent, operational aspects of a transport aircraft in determining a design with the minimum take-off gross weight is considered. Performance of a design mission (or missions) impacts the take-off gross weight through the weight of the fuel required to fly the mission. Take-off gross weight measures how efficiently alternative designs perform the design mission(s).

The size of a nonlinear programming problem can be measured by the sum of the number of design variables and the number of constraint and objective functions. This quantity is 470 for the part of the preliminary design process considered in this report. In developing this formulation, an initial set of design relationships was defined using references 12, 13, 14, 15, 16, 17, 18, 19, 20, and 21. Questions and ambiguities concerning how the design relationships are applied in practice were resolved through discussions with aircraft designers and engineering analysis specialists. Some of the design relationships are based more heavily on the references, and some more heavily on discussions with engineers. The flight controls design relationships, for example, are based almost entirely on reference 15, while the approach to structural dynamics is based much more on conversations with structural dynamicists and landing gear designers.

Design relationships were included in the formulation if they determined a design quantity that was explicitly constrained or was subject to different levels of approximation as iterations of the design process were made. Difficult choices were made in the case of the mass matrix for finite element analysis and the stability derivatives used in flight dynamics. These design quantities were not included in the final formulation.

The details of design criteria considered in the preliminary design of a transport aircraft differ considerably depending on the aircraft system specification. The analysis process is also configuration-dependent to some extent. Rather than attempting to advocate a particular analysis approach, the results presented in this report give a concise, accurate description of the interconnections between the preliminary design analyses.

The faithfulness of the representation of the design process offered here could be improved considerably through additional critique by expert analytical engineers and designers. However, while these improvements may alter the details of the design tasks, the multifaceted structure of the design process decomposition is determined by the interconnections between the physical and operational relationships which, along with the aircraft components, define the concept of a transport aircraft. These relationships will not be substantially changed by taking a different approach to the design analysis.

An interesting issue encountered in developing the formulation



involved finding a practical representation for the design relationships. Sobieski (ref. 10) originally stated the problem in terms of the adjacency matrix (Figure 3c). The signal flow graph representation (Figure 3b) provided the best means for describing how the decomposition heuristics should work. Both of these representations became increasingly difficult to use as additional design relationships were defined. The complexity of the signal flow graph and the size of the adjacency matrix (220,900 entries, most of which are zero) made it difficult to use these tools to convey useful information. The direct representation in terms of functional relationships (Figure 3a) provided the most practical means to present the completed formulation.

## 2.1 Subproblems of the Design Process Decomposition

The 470 design relationships were decomposed into 144 subproblems using the technique described in Appendix A. The overall form of the design process decomposition can be seen in Figure 5. Design tasks were assigned to each subproblem based on the design relationships in the subproblem and on the interfaces to other subproblems. Table 1 lists the design tasks assigned to each of the subproblems in Figure 5. The design relationships in each of the subproblems and the interfaces between the subproblems are detailed in Tables 4 through 291. A discussion of the formulation of the subproblems as nonlinear programming problems and their solution using linear decomposition is presented in Appendix C.

## 2.2 Features of the Decomposition

Lines connecting the subproblems in Figure 5 indicate parameter flows between the subproblems. Examining the form of the design process decomposition in Figure 5, three pivotal design tasks are prominent. Lines representing parameter flows are seen to converge on and radiate from subproblems 4-08, 5-14, and 6-06. From Table 1, these subproblems correspond to (a) the flight dynamics problem (subproblem 4-08), (b) the flexible aircraft maneuvering shapes and loads problem (subproblem 5-14) and (c) the preliminary structural design problem (subproblem 6-06). The central importance of these design tasks in the multifaceted decomposition is confirmed by an examination of Tables 4 through 291. Subproblem 4-08 involves 50 design relationships, 30 input parameters, and 59 output parameters; subproblem 5-14 involves 102 design relationships, 98 input parameters, and 150 output parameters; and subproblem 6-06 involves 88 design relationships, 71 input parameters, and 116 output parameters. Reference 22 describes an integrated design system for determining flexible aircraft loads and bringing this information into the structural design process. The number of other design tasks which interface with these problems in the design process decomposition emphasizes the importance of such a design tool. Similar integrated design capability is needed to address the flight dynamics problem.

The results suggest that there are varying roles for the subproblems of the decomposition. Consider, for example, subproblem 3-05. Subproblem 3-05 provides a consistent value for the low-speed-drag-polar parameter to

the other subproblems. Other subproblems (e.g., 4-08, 5-14, and 6-06) seem to take a more active role in altering the configuration in response to design requirements.

The nature of the parameters that are passed between subproblems raises several problems. The design relationships were defined in terms of objects, such as the cruise 3-d shape, that are used in the design process. These objects are passed back and forth between subproblems as "parameters" in the multifaceted decomposition. The optimal sensitivity derivatives are defined in reference 11 only for real-valued parameters. Further research is required to develop techniques to handle more general types of "parameters". For example: the cruise-3d-shape parameter must be passed between subproblems 4-08 and 5-14 (Table 65). How are optimal sensitivities to be computed for a design quantity representing the aircraft's shape? Recent results in shape optimization (ref. 23) and shape design sensitivity analysis (ref. 24) may prove useful in addressing this issue.

The fuselage-structural-arrangement is passed as a parameter between subproblems 4-09 and 5-14. The structural arrangement specifies the type and location of structural elements and the joints connecting them. The discrete nature of the fuselage-structural-arrangement design relationship indicates that development of some heuristics for determining optimal sensitivities for discrete parameters is important. The work of Schmit and Fleury (ref. 25) suggests that duality theory can be applied to address this problem.

Subproblems 7-4 through 7-51 are responsible for ensuring that the elastic properties of the individual structural elements are adequate for satisfaction of the stress constraints. In the past, when material selection was limited (i.e., to aluminum and similar metals), there was little freedom of design in meeting these constraints. However, increased use of composite materials and the accompanying ability to tailor the design of structural elements to very specific stress conditions will greatly expand the importance of these tasks within the design process. The decomposition structure illustrates the key role of these subproblems and the impact of structural element design techniques on the design process as a whole.

### 3. Impact on Aircraft Design

The design process decomposition promises to be very useful for aircraft preliminary design. The decomposition can be used for planning and scheduling. An interesting approach to configuration control is suggested by the way the design process decomposition seems to manage many different configurations. The design process decomposition technique will be an important component of a new generation of object-centered design tools currently being developed.

#### 3.1 Scheduling of Design Tasks

The subproblems in the design process decomposition can be interpreted as design tasks. Each of the design tasks is iterative, and will have to be performed several times during the preliminary design effort. The design task will take a certain amount of work each time. In planning the design effort, project managers and design engineers will have to make some estimate of the number of times each task will be iterated. Once the length of time and the number of iterations for each task has been estimated, the design process decomposition can be used to develop a project schedule, identify configuration release milestones, and plan trade studies.

#### 3.2 Configuration Control

Ever-increasing design definition is required throughout the design process in order to thoroughly explore alternative design solutions. Paradoxically, the investment in developing this design definition tends to limit the designers' freedom to subsequently change the design (ref. 10). A closely related and recurring situation in aircraft design is the difficulty of getting all of the design task groups to analyze the same configuration. The solution has traditionally been "better configuration control". In order to control the configuration, we have to know what it is. The problem is that by the time we know what the configuration is, it is already designed.

The design process decomposition suggests another way of doing things: decentralize the configuration control and concentrate management on the interfaces. The design process decomposition clearly models the existence of many different configurations. The system integration process converges these configurations on a single, optimal configuration.

#### 3.3 Design Applications of Object-Oriented Programming

In developing computer models of design activity, it is particularly appropriate to model the design configuration and its components and sub-components using object-oriented programming techniques (ref. 26). Representing design components as software objects allows associated computer programs to manipulate the components and their attributes (e.g., dimensions, mass, etc.) in much the same way the designer would. Design activities may then be directly implemented in terms of actions and responses to be associated with these software objects, thereby modelling the relevant physical behavior of the design components (ref. 27).

Analysis of the design configuration can also be modelled using the object-oriented approach. Insofar as analysis consists of the application of appropriate design functions to calculate values for the design variables (e.g., component attributes), analysis programs may be thought of as "analytical model" objects which manipulate both design function and design variable objects (ref. 28).

Finally, the present work serves to demonstrate the applicability of object-oriented programming to computer models of the process aspect of design activity. The decomposition heuristics described in Appendix A are implemented as acting on subproblem (i.e., task) objects, between which the transfer of parameters and optimal sensitivity derivatives takes place.

Combining an object-oriented representation of the configuration ("components"), an object-oriented representation of the analysis ("models"), and an appropriate technique for both numeric and symbolic constraint propagation (see ref. 29), it should be possible to develop a computer representation of the vehicle under design which provides the ability to quickly implement and investigate design changes, and readily maintain a consistent configuration, as desired. Combining these capabilities with an object-oriented model of the design process (to include sub-problem managers, optimization handlers, documentation facilities, and the like) could result in a system which could manage the design problem from conceptual design through the final stages of advanced preliminary design.

## Appendix A. Decomposition Heuristics

The design process decomposition was constructed by applying two heuristic rules to the subproblems. The method is related to techniques for resolving the structure of complex systems described in references 30, 31, 32, and 33. The heuristics build up the decomposition from the design relationships by coupling connected subproblems. Subproblems are coupled if design parameters that are set in one of the subproblems are inputs to a design relationship in another.

The decomposition procedure first defines a subproblem for each of the design relationships. One of the design relationships is identified as the objective function for the optimization problem.

The first heuristic defines the levels of the design process decomposition. The subproblem containing the objective design relationship is placed at level 0. The rest of the levels are computed by iteration as shown in Figure 6. Subproblems are placed at level  $(i + 1)$  if they are coupled to subproblems at level  $(i)$ , but not coupled to any subproblems at a level above (i.e., with a numerically smaller level index) level  $(i)$ .

The second heuristic merges coupled subproblems that are on the same level of the design process decomposition (Figure 7).

## Appendix B. Iteration through the Multifaceted Design Process Decomposition

The system hierarchy decomposition has definite advantages for iteration. The system hierarchy network has a special structure, called a "tree" in graph theory. The tree structure of the system hierarchy implies that once subproblems are decoupled, they remain decoupled at all subsequent levels of the system hierarchy. This fact makes it relatively simple to define how the design parameters and optimal sensitivity derivatives are to be passed from one subproblem to another. As shown in Figure 8, (ref. 10), parameters flow top-down and optimal sensitivity derivatives flow bottom-up.

The multifaceted decomposition captures the functional form of the design and thus is more appropriate for the design process decomposition than the system hierarchy. However, iteration through the multifaceted decomposition is necessarily more complex than iteration through the system hierarchy. The form of the multifaceted decomposition is shown in Figure 9. Subproblems typically have more than one predecessor at a higher level in the multifaceted decomposition (e.g. subproblem 5-14 in Figure 5.)

### Divergence in the Multifaceted Decomposition

The top-down parameter flow/bottom-up sensitivity flow scheme of Figure 8 is potentially divergent if applied to the multifaceted decomposition. Consider the situation shown in Figure 10. Subproblem 3 has two predecessors, subproblem 1 and subproblem 2. A value for parameter 1 is set by an optimal solution of subproblem 1 and passed to subproblem 3. Parameter 2 is set by an optimal solution of subproblem 2 and is also passed to subproblem 3. A optimal solution to subproblem 3 is found and its sensitivity to variation of parameters 1 and 2 is calculated using the technique of reference 11. The optimal sensitivity derivative with respect to parameter 1 is passed back up from subproblem 3 to subproblem 1, and similarly for parameter 2. Subproblems 1 and 2 are resolved subject to the optimal sensitivity constraints. A possible outcome of the re-solutions is shown in Figure 11.

In Figure 11, the results of line searches in subproblems 1 and 2 are superimposed on the level curves of the optimal solution (penalty function) of subproblem 3. The subproblem 1 line search is performed by varying parameter 1 with the value of parameter 2 held fixed. Point C is found to be optimum. Point B is the subproblem 2 optimum. The new values of parameters 1 and 2 that will be passed to subproblem 3 in the next iteration correspond to point D. But point D results in a lower value of the subproblem 3 optimal solution penalty function than point A. The iteration is divergent.

### Proposed Iteration Procedure for the Multifaceted Decomposition

Reference 9 considers more general iteration strategies than the Figure 8 procedure proposed in reference 10. An alternative to the top-down parameter flow/bottom-up sensitivity flow strategy can be developed based on the reference 9 iteration techniques. Divergence in the multifaceted

decomposition example (Figure 11) is caused by the fact that the optimizations in parameters 1 and 2 are not coordinated. Coordination of these optimizations can be achieved by including them both in the same subproblem. In order to do this, the parameter and sensitivity flows must be inverted in some cases, as shown in Figure 12.

This inversion may still result in divergence. The bottom-up parameter flow/top-down sensitivity flow iteration strategy can diverge when it is applied to subproblems with more than one successor. This is because when the parameter and sensitivity flows are reversed, as in the bottom-up parameter flow/top-down sensitivity flow iteration strategy, the roles of predecessor and successor are switched. Thus, applying the bottom-up parameter flow/top-down sensitivity flow in the case where a subproblem has more than one successor is completely analogous, from the standpoint of the divergence phenomenon, to the application of the top-down parameter flow/bottom-up sensitivity flow in the case of a subproblem with more than one predecessor. Thus, to avoid divergence, some parameters will have to be passed both ways (Figure 12). Conflicts between the parameter values can then be resolved by constraining them to be equal in both subproblems (Reference 9). Whether this technique is actually convergent has not yet been established and requires further investigation.

## Appendix C. Formulation of Nonlinear Programming Problems in the Multifaceted Decomposition

The formulation of subproblem 1-01 of Table 1, take-off weight allocation, as a nonlinear programming problem is given in Table 2. The constraints in subproblem 1-01 are of two types: design relationship and optimal sensitivity. Design relationships in subproblem 1-01 are listed in Table 4. The design relationship constraint, constraint (1) of Table 2, equates the take-off-gross-weight design parameter to a function of the mission-fuel and empty-weight design parameters. (Explicitly, this function would be:

$$\begin{aligned} \text{take-off-gross-weight} &= \text{mission-fuel} + \text{empty-weight} \\ &+ \text{trapped fuel, etc.}) \end{aligned}$$

The decision variables of this nonlinear programming problem are take-off-gross-weight, mission-fuel, and empty-weight.

Applying the linear decomposition technique for iterating through the subproblem network, an initial solution for subproblem 1-01 consists of an allocation of take-off-gross-weight to mission-fuel and empty-weight so that constraint (1) of Table 2 is satisfied. The initial allocation would be based on an examination of weight data for similar aircraft, and would not involve application of any numerical optimization techniques.

The interfaces between subproblem 1-01 and subproblems at level 2 of the multifaceted decomposition are listed in Table 5. Table 3 gives the nonlinear programming formulation for one of these subproblems, subproblem 2-04. The initial solution for subproblem 2-04 involves finding a combination of trimmed-drag-polar,  $f-x-t$  (thrust in the direction of the flight path), and specific-fuel-consumption satisfying constraint (1) of Table 3. take-off-gross-weight and mission-fuel are held fixed at the values determined by subproblem 1-01. Partial derivatives of a penalty function,  $K$ , measuring how successful we were in satisfying constraint (1) of Table 3 are passed to subproblem 1-01 on level 1. These partial derivatives are taken with respect to take-off-gross-weight and mission-fuel, with the trimmed-drag-polar,  $f-x-t$ , and specific-fuel-consumption design quantities adjusted to maintain the optimal value of the penalty function (using the technique of Reference 11).

The optimal sensitivity constraints, (2) through (6) of Table 2, are included in the second and subsequent iterations re-solving subproblem 1-01. These constraints force subproblem 1-01 to adjust the take-off-gross-weight allocation to improve the feasibility of the solutions to the level 2 subproblems. For example, constraint (5) of Table 2 requires that any adjustments to the take-off-gross-weight allocation will not adversely affect the aircraft's ability to perform the design mission.



## References

1. System Engineering Management Guide, Defense System Management College, Contract MDA 903-82-C-0339, Lockheed Missiles and Space Company, Inc., October 1983.
2. Carre, Bernard: Graphs and Networks. Oxford University Press, Oxford, 1979.
3. Schmit, L.A.: Structural Design by Systematic Synthesis. Proc 2nd. Conf. on Electronic Computation ASCE, New York, 1960, pp. 105-122.
4. Fox, R.L.: Optimization Methods for Engineering Design. Addison-Wesley, Reading, MA, 1971.
5. Vanderplaats, G.N.: Numerical Optimization Techniques for Engineering Design; with Applications. McGraw-Hill, New York, 1984.
6. Luenberger, D.G.: Linear and Nonlinear Programming. Second Edition. Addison-Wesley, Reading, MA, 1984.
7. Akagi, S.; Yokoyama, R.; and Ito, K.: Optimal Design of Semisubmersible's Form Based on Systems Analysis. Trans. ASME, v. 106, Dec. 1984, pp. 524-530.
8. Barthelemy, J.M.: Development of a Multilevel Optimization Approach to the Design of Modern Engineering Systems. NASA-CR-172184, August 1983.
9. Sobieszczanski-Sobieski, J.: A Linear Decomposition Method for Large Optimization Problems - Blueprint for Development. NASA TM-83248, February 1982.
10. Sobieszczanski-Sobieski, J.; Barthelemy, J.-F.M.; and Giles, G.L.: Aerospace Engineering Design by Systematic Decomposition and Multilevel Optimization. ICAS-84-4.7.3, September, 1984.
11. Sobieszczanski-Sobieski, J.; Barthelemy, J.F.; and Riley, K.M.: Sensitivity of Optimum Solutions to Problem Parameters. AIAA 81-0548R, AIAA Journal, v. 20, n. 9, September 1982, pgs. 1291-1299.
12. Kuchemann, D.: The Aerodynamic Design of Aircraft, Pergamon Press, Oxford, United Kingdom, 1978.
13. Oates, G.C.: The Aerothermodynamics of Aircraft Gas Turbine Engines. AFAPL-TR-78-52, July 1978.

## References, cont.

14. Bisplinghoff, R.L., and Ashley, H.: Principles of Aeroelasticity. Dover, New York, 1975.
15. Roskam, J.: Airplane Flight Dynamics and Automatic Flight Controls, Parts I and II, Roskam Aviation and Engineering Corporation, Ottawa, Kansas, 1979
16. Zienkiewicz, O.C.: The Finite Element Method. McGraw-Hill (UK), London, 1977.
17. Torenbeek, E.: Synthesis of Subsonic Airplane Design. Delft University Press, Delft, Holland, 1982.
18. Currey, N.S.: Landing Gear Design Handbook. Lockheed-Georgia Company, Marietta, Georgia, 1982.
19. Roskam, J.: Airplane Design; Parts II, III, and V. Roskam Aviation and Engineering Corporation, Ottawa, Kansas, 1986.
20. Lan, C.-T. E.; and Roskam, J.: Airplane Aerodynamics and Performance. Roskam Aviation and Engineering Corporation, Ottawa, Kansas, 1980.
21. Megson, T.H.G: Aircraft Structures for Engineering Students. Edward Arnold, London, 1972.
22. Johnson, E.H.; Venkayya, V.B.: Progress Report on the "Automated Strength-Aeroelastic Design of Aerospace Structures" Program. Recent Experiences in Multidisciplinary Analysis and Optimization. J. Sobieski, comp., NASA Conference Publication 2327, 1984.
23. Kikuchi, N.; Taylor, J.E.: Shape Optimization including Finite Element Grid Adaptation. Recent Experiences in Multidisciplinary Analysis and Optimization. J. Sobieski, comp., NASA Conference Publication 2327, 1984.
24. Choi, K.K.: Shape Design Sensitivity Analysis of Built-up Structures. Recent Experiences in Multidisciplinary Analysis and Optimization. J. Sobieski, comp., NASA Conference Publication 2327, 1984.

References, cont.

25. Schmit, L.A.; and Fleury, Claude: Discrete-Continuous Variable Synthesis using Dual Methods. AIAA Journal, v. 18, n. 12, December 1980, pgs. 1515-1524.
26. Abelson, H.; Sussman, G.J.; and Sussman, J.: Structure and Interpretation of Computer Programs. The MIT Press, Cambridge, MA, 1985.
27. Kolb, M.A.: Rubber Airplane, a Paradigm for Computer-Aided Preliminary Design Based on Component-Modelling. Ph.D. thesis proposal (preliminary draft). Department of Aeronautics and Astronautics, Massachusetts Institute of Technology, Cambridge, MA, 1986.
28. Elias, A.L.: Knowledge Engineering of the Aircraft Design Process. Knowledge Based Problem Solving. J.S. Kowalic, ed., Prentice-Hall, Englewood Cliffs, NJ, 1985.
29. Winston, P.H.: Artificial Intelligence. Second Edition. Addison-Wesley, Reading, MA, 1984.
30. Malone, D. W.: An Introduction to the Application of Interpretive Structural Modeling. Proc. IEEE, v. 63, no. 3, March 1975, pp. 397-404.
31. Steward, D.V.: The Design Structure System: A Method for Managing the Design of Complex Systems. IEEE Trans. on Eng. Mgmt., v. EM 28, no. 3, August, 1981.
32. Tang, W.; Michel, A.N.; and Hale, H.W.: On Structure and Stability of Interconnected Dynamical Systems. IEEE Trans. on Circuits and Systems, v. CAS-27, no. 5, May 1980.
33. Kevorkian, A.K.; and Snoek, J.: Decomposition of Large Scale Systems - Theory and Applications of Structural Analysis in Partitioning, Disjointing and Constructing Hierarchical Systems. Decomposition of Large Scale Problems. D.M. Himmelblau, ed., North-Holland/American Elsevier, 1973.
34. Alexander, C.W.: Notes on the Synthesis of Form. Harvard Univ. Pr., Cambridge, Mass., 1964.

Table 1.  
Design Tasks of the Multifaceted Design Process Decomposition.

Subproblem -----	Design Task -----
1-01	take-off weight allocation
2-01	balanced field take-off acceleration and climb gradient
2-02	take-off stall speed
2-03	nose wheel lift-off
2-04	mission performance
2-05	empty weight allocation
3-01	tire/runway friction coeff.
3-02	thrust vector
3-03	take-off (C-L)max
3-04	braking effective thrust
3-05	low speed drag polar
3-06	main gear location
3-07	balanced-field takeoff distance
3-08	landing gross weight
3-09	horizontal tail (C-L)max
3-10	wing/body aerodynamic center
3-11	wing/body moment coefficient
3-12	aircraft c.g. location, sizing of the horizontal tail
3-13	trimmed flight drag polar
3-14	specific fuel consumption
3-15	flight design gross weight
3-16	structural weight allocation
3-17	control system weight

Table 1., cont.

4-01	landing stall speed
4-02	landing descent gradient
4-03	nose gear braking loads
4-04	adjusted tire/runway friction coefficient (take-off)
4-05	landing brake deceleration
4-06	landing equivalent inertia time
4-07	main gear landing impact loads
4-08	flight dynamics
4-09	fuselage c.g. location
4-10	horizontal tail c.g. location
4-11	vertical tail c.g. location
4-12	wing c.g. location
4-13	main gear c.g. location
4-14	nose gear c.g. location
4-15	fuselage structural weight
4-16	main gear structural weight
4-17	wing structural weight
4-18	rudder actuator weight
4-19	horizontal tail structural weight
4-20	aileron actuator weight
4-21	elevator actuator weight
4-22	vertical tail structural weight
4-23	nose gear structural weight

Table 1., cont.

5-01	landing speeds, distances
5-02	landing flap settings
5-03	nose gear attachment loads
5-04	wing/body angle-of-attack lift derivative
5-05	engine installation losses
5-06	airplane angle-of-attack lift and pitching moment derivatives
5-07	horizontal tail angle-of-attack lift derivative
5-08	engine support structure aerodynamics loads
5-09	fuselage aerodynamic loads
5-10	horizontal tail aerodynamic loads
5-11	vertical tail aerodynamic loads
5-12	pull-up angle of attack
5-13	vertical tail location
5-14	flexible aircraft loads, deformations
5-15	horizontal tail location
5-16	pull-up elevator deflection
5-17	airplane moments of inertia
5-18	elevator quasi-static aerodynamic loads
5-19	nose gear geometry

Table 1., cont.

6-01	landing distance
6-02	engine inlet pressure recovery
6-03	engine inlet distortion
6-04	engine ram drag
6-05	engine boattail drag
6-06	preliminary structural design
6-07	rudder actuator flutter analysis
6-08	rudder maximum hinge moment
6-09	flutter deformations
6-10	nose gear kinematics
6-11	wing structural arrangement
6-12	vertical tail moments of inertia
6-13	main gear moments of inertia
6-14	fuselage moments of inertia
6-15	wing moments of inertia
6-16	horizontal tail moments of inertia
6-17	nose gear moments of inertia
6-18	load factor determination
6-19	main gear kinematics
6-20	elevator actuator flutter analysis
6-21	aileron actuator flutter analysis
6-22	aileron maximum hinge moment
6-23	aircraft quasi-steady aerodynamic loads (landing)
6-24	wing center-of-pressure distribution
7-01	inlet-3d-geometry
7-02	fuselage aerodynamic loads (pull-up)
7-03	horizontal tail aerodynamic loads (pull-up)
7-04	vertical tail aerodynamic loads (pull-up)
7-05 - 7-52	structural element stresses
7-53	fuselage aerodynamic loads (turn)
7-54	horizontal tail aerodynamic loads (turn)
7-55	vertical tail aerodynamic loads (turn)

Table 2. Formulation of Subproblem 1-01 as a Nonlinear Programming Problem.

Minimize: take-off-gross-weight

Subject to Constraints:

$$\text{take-off-gross-weight} = f_1(\text{mission-fuel}, \text{empty-weight}) \quad (1)$$

$$K(2-01)(\text{take-off-gross-weight}) \leq K^*(2-01) \quad (2)$$

$$K(2-02)(\text{take-off-gross-weight}) \leq K^*(2-02) \quad (3)$$

$$K(2-03)(\text{take-off-gross-weight}) \leq K^*(2-03) \quad (4)$$

$$K(2-04)(\text{take-off-gross-weight}, \text{mission-fuel}) \leq K^*(2-04) \quad (5)$$

$$K(2-05)(\text{empty-weight}) \leq K^*(2-05) \quad (6)$$

Decision Variables:

take-off-gross-weight, mission-fuel, empty-weight



Table 3. Formulation of Subproblem 2-04 as a Nonlinear Programming Problem.

Find a Feasible Solution to:

$$\text{mission-fuel (1-01)} = f_2(\text{trimmed-drag-polar}, f\text{-x-t}, \text{specific-fuel-consumption}, \text{take-off-gross-weight (1-01)}) \quad (1)$$

$$K(3-02)(f\text{-x-t}) \leq K^*(3-02) \quad (2)$$

$$K(3-13)(\text{trimmed-drag-polar}) \leq K^*(3-13) \quad (3)$$

$$K(3-14)(\text{specific-fuel-consumption}) \leq K^*(3-14) \quad (4)$$

$$f\text{-x-t} = f\text{-x-t (3-02)} \quad (5)$$

Decision Variables:

trimmed-drag-polar, f-x-t, specific-fuel-consumption

Table 4. Design Relationships in Subproblem 1-01

take-off-gross-weight is a function of:

mission-fuel  
empty-weight

Table 5. Subproblem 1-01 Interfaces

SUCCESSORS

Input Parameters To Subproblem 2-03

take-off-gross-weight

Input Parameters To Subproblem 2-04

take-off-gross-weight  
mission-fuel

Input Parameters To Subproblem 2-01

take-off-gross-weight

Input Parameters To Subproblem 2-02

take-off-gross-weight

Input Parameters To Subproblem 2-05

empty-weight

Table 6. Design Relationships in Subproblem 2-01

take-off-brake-deceleration is a function of:

- take-off-gross-weight
- braking-effective-thrust
- decision-speed
- low-speed-drag-polar

take-off-distance-to-failure is a function of:

- decision-speed
- f-x-t
- thrust-line
- low-speed-drag-polar
- take-off-gross-weight
- tire/runway-friction-coefficient

take-off-equivalent-climb-gradient is a function of:

- engine-out-f-x-t
- thrust-line
- low-speed-drag-polar
- take-off-gross-weight
- take-off-distance-from-failure-to-screen-height

take-off-equivalent-inertia-time is a function of:

- decision-speed
- take-off-gross-weight
- engine-out-f-x-t
- thrust-line

Table 7. Subproblem 2-01 Interfaces

PREDECESSORS

Output Parameters To Subproblem 1-01

take-off-gross-weight

SUCCESSORS

Input Parameters To Subproblem 3-07

take-off-equivalent-inertia-time  
take-off-equivalent-climb-gradient  
take-off-distance-to-failure  
take-off-distance-from-failure-to-screen-height  
decision-speed  
take-off-brake-deceleration

Output Parameters To Subproblem 3-07

take-off-equivalent-inertia-time  
take-off-equivalent-climb-gradient  
take-off-distance-to-failure  
take-off-distance-from-failure-to-screen-height  
decision-speed  
take-off-brake-deceleration

Input Parameters To Subproblem 3-04

braking-effective-thrust

Input Parameters To Subproblem 3-05

low-speed-drag-polar

Output Parameters To Subproblem 3-05

low-speed-drag-polar

Table 7. Subproblem 2-01 Interfaces, cont.

Input Parameters To Subproblem 3-02

engine-out-f-x-t  
f-x-t  
thrust-line

Output Parameters To Subproblem 3-02

engine-out-f-x-t  
f-x-t  
thrust-line

Input Parameters To Subproblem 3-01

tire/runway-friction-coefficient

Table 8. Design Relationships in Subproblem 2-02

v-stall-take-off is a function of:

take-off-gross-weight  
take-off-c-l-max

Table 9. Subproblem 2-02 Interfaces

PREDECESSORS

Output Parameters To Subproblem 1-01

take-off-gross-weight

SUCCESSORS

Input Parameters To Subproblem 3-07

v-stall-take-off

Table 9. Subproblem 2-02 Interfaces, cont.

Output Parameters To Subproblem 3-07

v-stall-take-off

Input Parameters To Subproblem 3-03

take-off-c-l-max

Table 10. Design Relationships in Subproblem 2-03

nose-wheel-lift-off is a function of:

horizontal-area

f-x-t

thrust-line

low-speed-drag-polar

airplane-cg

main-landing-gear-location

c-m-wing-body-ac

wing-body-ac

v-take-off-rotation

take-off-gross-weight

horizontal-c-l-max

horizontal-tail-volume-coefficient

Table 11. Subproblem 2-03 Interfaces

PREDECESSORS

Output Parameters To Subproblem 1-01

take-off-gross-weight

Table 11. Subproblem 2-03 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 3-12

airplane-cg  
horizontal-tail-volume-coefficient  
horizontal-area

Input Parameters To Subproblem 3-02

f-x-t  
thrust-line

Output Parameters To Subproblem 3-02

f-x-t  
thrust-line

Input Parameters To Subproblem 3-05

low-speed-drag-polar

Output Parameters To Subproblem 3-05

low-speed-drag-polar

Input Parameters To Subproblem 3-06

main-landing-gear-location

Input Parameters To Subproblem 3-11

c-m-wing-body-ac

Input Parameters To Subproblem 3-10

wing-body-ac

Input Parameters To Subproblem 3-07

v-take-off-rotation

Output Parameters To Subproblem 3-07

v-take-off-rotation

Table 11. Subproblem 2-03 Interfaces, cont.

Input Parameters To Subproblem 3-09

horizontal-c-l-max

Table 12. Design Relationships in Subproblem 2-04

mission-fuel is a function of:

trimmed-drag-polar

f-x-t

specific-fuel-consumption

take-off-gross-weight

Table 13. Subproblem 2-04 Interfaces

PREDECESSORS

Output Parameters To Subproblem 1-01

take-off-gross-weight

mission-fuel

SUCCESSORS

Input Parameters To Subproblem 3-13

trimmed-drag-polar

Input Parameters To Subproblem 3-02

f-x-t

Output Parameters To Subproblem 3-02

f-x-t



Table 13. Subproblem 2-04 Interfaces, cont.

Input Parameters To Subproblem 3-14

specific-fuel-consumption

Table 14. Design Relationships in Subproblem 2-05

empty-weight is a function of:

structural-weight  
control-system-weight

Table 15. Subproblem 2-05 Interfaces

PREDECESSORS

Output Parameters To Subproblem 1-01

empty-weight

SUCCESSORS

Input Parameters To Subproblem 3-15

empty-weight

Input Parameters To Subproblem 3-08

empty-weight

Input Parameters To Subproblem 3-16

structural-weight

Input Parameters To Subproblem 3-17

control-system-weight

Table 16. Design Relationships in Subproblem 3-01

tire/runway-friction-coefficient is an independent design parameter

Table 17. Subproblem 3-01 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-01

tire/runway-friction-coefficient

SUCCESSORS

Output Parameters To Subproblem 4-04

tire/runway-friction-coefficient

Table 18. Design Relationships in Subproblem 3-02

thrust-line is an independent design parameter

f-x-t is a function of:

thrust-line  
engine-net-thrust

engine-out-f-x-t is a function of:

f-x-t

Table 19. Subproblem 3-02 Interfaces

PREDECESSORS

Input Parameters To Subproblem 2-03

f-x-t  
thrust-line

Output Parameters To Subproblem 2-03

f-x-t  
thrust-line

Input Parameters To Subproblem 2-01

f-x-t  
thrust-line  
engine-out-f-x-t

Output Parameters To Subproblem 2-01

f-x-t  
thrust-line  
engine-out-f-x-t

Input Parameters To Subproblem 2-04

f-x-t

Output Parameters To Subproblem 2-04

f-x-t

SUCCESSORS

Input Parameters To Subproblem 4-08

thrust-line  
engine-net-thrust

Table 19. Subproblem 3-02 Interfaces, cont.

Output Parameters To Subproblem 4-08

thrust-line  
engine-net-thrust

Input Parameters To Subproblem 4-02

f-x-t  
thrust-line

Output Parameters To Subproblem 4-02

f-x-t  
thrust-line

Input Parameters To Subproblem 4-06

f-x-t  
thrust-line

Output Parameters To Subproblem 4-06

f-x-t  
thrust-line

Table 20. Design Relationships in Subproblem 3-03

take-off-c-l-max is a function of:

take-off-3d-shape

Table 21. Subproblem 3-03 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-02

take-off-c-1-max

SUCCESSORS

Input Parameters To Subproblem 4-04

take-off-c-1-max

Output Parameters To Subproblem 4-04

take-off-c-1-max

Input Parameters To Subproblem 4-08

take-off-3d-shape

Output Parameters To Subproblem 4-08

take-off-3d-shape

Table 22. Design Relationships in Subproblem 3-04

braking-effective-thrust is an independent design parameter

Table 23. Subproblem 3-04 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-01

braking-effective-thrust

SUCCESSORS

Input Parameters To Subproblem 4-05

braking-effective-thrust

Output Parameters To Subproblem 4-05

braking-effective-thrust

Input Parameters To Subproblem 4-03

braking-effective-thrust

Output Parameters To Subproblem 4-03

braking-effective-thrust

Table 24. Design Relationships in Subproblem 3-05

low-speed-drag-polar is a function of:

cruise-3d-shape

high-lift-device-3d-geometry

Table 25. Subproblem 3-05 Interfaces

PREDECESSORS

Input Parameters To Subproblem 2-03

low-speed-drag-polar

Output Parameters To Subproblem 2-03

low-speed-drag-polar

Input Parameters To Subproblem 2-01

low-speed-drag-polar

Output Parameters To Subproblem 2-01

low-speed-drag-polar

SUCCESSORS

Input Parameters To Subproblem 4-04

low-speed-drag-polar

Output Parameters To Subproblem 4-04

low-speed-drag-polar

Input Parameters To Subproblem 4-05

low-speed-drag-polar

Output Parameters To Subproblem 4-05

low-speed-drag-polar

Input Parameters To Subproblem 4-02

low-speed-drag-polar

Table 25. Subproblem 3-05 Interfaces, cont.

Output Parameters To Subproblem 4-02

low-speed-drag-polar

Input Parameters To Subproblem 4-08

high-lift-device-3d-geometry  
cruise-3d-shape

Output Parameters To Subproblem 4-08

high-lift-device-3d-geometry  
cruise-3d-shape

Table 26. Design Relationships in Subproblem 3-06

main-landing-gear-location is an independent design parameter

Table 27. Subproblem 3-06 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-03

main-landing-gear-location

SUCCESSORS

Output Parameters To Subproblem 4-03

main-landing-gear-location



Table 28. Design Relationships in Subproblem 3-07

decision-speed is a function of:

take-off-distance-from-failure-to-screen-height  
take-off-distance-from-failure-to-stop

take-off-distance-from-failure-to-screen-height is a function of:

decision-speed  
take-off-equivalent-climb-gradient

take-off-distance-from-failure-to-stop is a function of:

decision-speed  
take-off-brake-deceleration  
take-off-equivalent-inertia-time

v-take-off-rotation is a function of:

decision-speed  
v-stall-take-off

balanced-field-takeoff-distance is a function of:

take-off-distance-to-failure  
take-off-distance-from-failure-to-screen-height

Table 29. Subproblem 3-07 Interfaces

PREDECESSORS

Input Parameters To Subproblem 2-01

decision-speed  
take-off-brake-deceleration  
take-off-distance-to-failure  
take-off-equivalent-climb-gradient  
take-off-distance-from-failure-to-screen-height  
take-off-equivalent-inertia-time

Output Parameters To Subproblem 2-01

decision-speed  
take-off-brake-deceleration  
take-off-distance-to-failure  
take-off-equivalent-climb-gradient  
take-off-distance-from-failure-to-screen-height  
take-off-equivalent-inertia-time

Input Parameters To Subproblem 2-03

v-take-off-rotation

Output Parameters To Subproblem 2-03

v-take-off-rotation

Input Parameters To Subproblem 2-02

v-stall-take-off

Output Parameters To Subproblem 2-02

v-stall-take-off

Table 30. Design Relationships in Subproblem 3-08

landing-gross-weight is a function of:

empty-weight

Table 31. Subproblem 3-08 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-05

empty-weight

SUCCESSORS

Input Parameters To Subproblem 4-05

landing-gross-weight

Output Parameters To Subproblem 4-05

landing-gross-weight

Input Parameters To Subproblem 4-01

landing-gross-weight

Input Parameters To Subproblem 4-02

landing-gross-weight

Output Parameters To Subproblem 4-02

landing-gross-weight

Input Parameters To Subproblem 4-06

landing-gross-weight

Table 31. Subproblem 3-08 Interfaces, cont.

Output Parameters To Subproblem 4-06

landing-gross-weight

Input Parameters To Subproblem 4-07

landing-gross-weight

Table 32. Design Relationships in Subproblem 3-09

horizontal-c-1-max is a function of:

horizontal-3d-shape

Table 33. Subproblem 3-09 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-03

horizontal-c-1-max

SUCCESSORS

Output Parameters To Subproblem 4-08

horizontal-3d-shape

Table 34. Design Relationships in Subproblem 3-10

wing-body-ac is a function of:

wing-fuselage-3d-shape

Table 35. Subproblem 3-10 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-03

wing-body-ac

SUCCESSORS

Output Parameters To Subproblem 4-08

wing-body-ac  
wing-fuselage-3d-shape

Table 36. Design Relationships in Subproblem 3-11

c-m-wing-body-ac is a function of:

wing-fuselage-3d-shape

Table 37. Subproblem 3-11 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-03

c-m-wing-body-ac

SUCCESSORS

Output Parameters To Subproblem 4-08

wing-fuselage-3d-shape

Table 38. Design Relationships in Subproblem 3-12

horizontal-area is an independent design parameter

horizontal-tail-volume-coefficient is a function of:

horizontal-area  
airplane-cg  
horizontal-ac

airplane-cg is a function of:

fuselage-cg  
horizontal-cg  
vertical-cg  
wing-cg  
main-landing-gear-cg  
nose-landing-gear-cg

Table 39. Subproblem 3-12 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-03

airplane-cg  
horizontal-tail-volume-coefficient  
horizontal-area

SUCCESSORS

Input Parameters To Subproblem 4-08

airplane-cg  
horizontal-area  
horizontal-ac

Output Parameters To Subproblem 4-08

airplane-cg  
horizontal-area  
horizontal-ac

Input Parameters To Subproblem 4-09

fuselage-cg

Input Parameters To Subproblem 4-10

horizontal-cg

Input Parameters To Subproblem 4-11

vertical-cg

Input Parameters To Subproblem 4-12

wing-cg

Input Parameters To Subproblem 4-13

main-landing-gear-cg

Table 39. Subproblem 3-12 Interfaces, cont.

Input Parameters To Subproblem 4-14

nose-landing-gear-cg

Table 40. Design Relationships in Subproblem 3-13

trimmed-drag-polar is a function of:

trimmed-airplane-alpha  
elevator-3d-geometry  
trimmed-delta-e  
cruise-3d-shape

Table 41. Subproblem 3-13 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-04

trimmed-drag-polar

SUCCESSORS

Output Parameters To Subproblem 4-08

trimmed-drag-polar  
elevator-3d-geometry  
cruise-3d-shape  
trimmed-delta-e  
trimmed-airplane-alpha



Table 42. Design Relationships in Subproblem 3-14

specific-fuel-consumption is a function of:

engine-net-thrust

Table 43. Subproblem 3-14 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-04

specific-fuel-consumption

SUCCESSORS

Output Parameters To Subproblem 4-08

engine-net-thrust

Table 44. Design Relationships in Subproblem 3-15

flight-design-gross-weight is a function of:

empty-weight

Table 45. Subproblem 3-15 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-05

empty-weight

SUCCESSORS

Output Parameters To Subproblem 4-08

flight-design-gross-weight

Table 46. Design Relationships in Subproblem 3-16

structural-weight is a function of:

main-landing-gear-structural-weight  
nose-landing-gear-structural-weight  
wing-structural-weight  
fuselage-structural-weight  
vertical-structural-weight  
nacelle-pylon-structural-weight  
horizontal-structural-weight

Table 47. Subproblem 3-16 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-05

structural-weight

Table 47. Subproblem 3-16 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 4-16

main-landing-gear-structural-weight

Input Parameters To Subproblem 4-23

nose-landing-gear-structural-weight

Input Parameters To Subproblem 4-17

wing-structural-weight

Input Parameters To Subproblem 4-15

fuselage-structural-weight

Input Parameters To Subproblem 4-22

vertical-structural-weight

Input Parameters To Subproblem 4-08

nacelle-pylon-structural-weight

Output Parameters To Subproblem 4-08

nacelle-pylon-structural-weight

Input Parameters To Subproblem 4-19

horizontal-structural-weight

Table 48. Design Relationships in Subproblem 3-17

control-system-weight is a function of:

elevator-actuator-weight  
aileron-actuator-weight  
rudder-actuator-weight

Table 49. Subproblem 3-17 Interfaces

PREDECESSORS

Output Parameters To Subproblem 2-05

control-system-weight

SUCCESSORS

Input Parameters To Subproblem 4-21

elevator-actuator-weight

Input Parameters To Subproblem 4-20

aileron-actuator-weight

Input Parameters To Subproblem 4-18

rudder-actuator-weight

Table 50. Design Relationships in Subproblem 4-01

v-stall-landing is a function of:

landing-gross-weight  
landing-c-l-max

Table 51. Subproblem 4-01 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-08

landing-gross-weight

SUCCESSORS

Input Parameters To Subproblem 5-01

v-stall-landing

Output Parameters To Subproblem 5-01

v-stall-landing

Input Parameters To Subproblem 5-02

landing-c-l-max

Output Parameters To Subproblem 5-02

landing-c-l-max

Table 52. Design Relationships in Subproblem 4-02

landing-descent-gradient is a function of:

low-speed-drag-polar  
f-x-t  
thrust-line  
landing-gross-weight

Table 53. Subproblem 4-02 Interfaces

PREDECESSORS

Input Parameters To Subproblem 3-05

low-speed-drag-polar

Output Parameters To Subproblem 3-05

low-speed-drag-polar

Input Parameters To Subproblem 3-02

f-x-t  
thrust-line

Output Parameters To Subproblem 3-02

f-x-t  
thrust-line

Input Parameters To Subproblem 3-08

landing-gross-weight

Output Parameters To Subproblem 3-08

landing-gross-weight

Table 53. Subproblem 4-02 Interfaces, cont.

SUCCESSORS

Output Parameters To Subproblem 5-01

landing-descent-gradient

Table 54. Design Relationships in Subproblem 4-03

max-braking-nose-landing-gear-load is a function of:

v-touchdown  
braking-effective-thrust  
main-landing-gear-location  
nose-landing-gear-location  
landing-3d-shape

nose-landing-gear-location is an independent design parameter

Table 55. Subproblem 4-03 Interfaces

PREDECESSORS

Input Parameters To Subproblem 3-04

braking-effective-thrust

Output Parameters To Subproblem 3-04

braking-effective-thrust

Input Parameters To Subproblem 3-06

main-landing-gear-location

Table 55. Subproblem 4-03 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 5-03

max-braking-nose-landing-gear-load

Input Parameters To Subproblem 5-01

v-touchdown

Output Parameters To Subproblem 5-01

v-touchdown

Input Parameters To Subproblem 5-02

landing-3d-shape

Output Parameters To Subproblem 5-02

landing-3d-shape

Table 56. Design Relationships in Subproblem 4-04

adjusted-take-off-friction-coefficient is a function of:

tire/runway-friction-coefficient

low-speed-drag-polar

take-off-c-l-max



Table 57. Subproblem 4-04 Interfaces

PREDECESSORS

Input Parameters To Subproblem 3-01

tire/runway-friction-coefficient

Input Parameters To Subproblem 3-05

low-speed-drag-polar

Output Parameters To Subproblem 3-05

low-speed-drag-polar

Input Parameters To Subproblem 3-03

take-off-c-l-max

Output Parameters To Subproblem 3-03

take-off-c-l-max

Table 58. Design Relationships in Subproblem 4-05

landing-brake-deceleration is a function of:

landing-gross-weight

braking-effective-thrust

v-approach

low-speed-drag-polar

Table 59. Subproblem 4-05 Interfaces

PREDECESSORS

Input Parameters To Subproblem 3-08

landing-gross-weight

Output Parameters To Subproblem 3-08

landing-gross-weight

Input Parameters To Subproblem 3-04

braking-effective-thrust

Output Parameters To Subproblem 3-04

braking-effective-thrust

Input Parameters To Subproblem 3-05

low-speed-drag-polar

Output Parameters To Subproblem 3-05

low-speed-drag-polar

SUCCESSORS

Output Parameters To Subproblem 5-01

v-approach

landing-brake-deceleration

Table 60. Design Relationships in Subproblem 4-06

landing-equivalent-inertia-time is a function of:

v-touchdown  
landing-gross-weight  
f-x-t  
thrust-line

Table 61. Subproblem 4-06 Interfaces

PREDECESSORS

Input Parameters To Subproblem 3-08

landing-gross-weight

Output Parameters To Subproblem 3-08

landing-gross-weight

Input Parameters To Subproblem 3-02

f-x-t  
thrust-line

Output Parameters To Subproblem 3-02

f-x-t  
thrust-line

SUCCESSORS

Output Parameters To Subproblem 5-01

landing-equivalent-inertia-time  
v-touchdown

Table 62. Design Relationships in Subproblem 4-07

**main-landing-gear-attach-point-dynamic-loads** is a function of:

**main-landing-gear-design-concept**  
**landing-sink-rate**  
**landing-gross-weight**

Table 63. Subproblem 4-07 Interfaces

**PREDECESSORS**

Output Parameters To Subproblem 3-08

**landing-gross-weight**

**SUCCESSORS**

Input Parameters To Subproblem 5-14

**main-landing-gear-attach-point-dynamic-loads**  
**main-landing-gear-design-concept**

Output Parameters To Subproblem 5-14

**main-landing-gear-attach-point-dynamic-loads**  
**main-landing-gear-design-concept**

Input Parameters To Subproblem 5-01

**landing-sink-rate**

Output Parameters To Subproblem 5-01

**landing-sink-rate**

Table 64. Design Relationships in Subproblem 4-08

airplane-ac is a function of:

wing-body-ac  
horizontal-c-l-alpha  
wing-body-c-l-alpha  
horizontal-area  
wing-planform-area  
horizontal-ac  
downwash-alpha

static-margin is a function of:

airplane-cg  
airplane-ac

trimmed-airplane-alpha is a function of:

cruise-3d-shape  
horizontal-3d-shape  
elevators-3d-geometry  
phi-t  
airplane-ac  
horizontal-ac  
horizontal-location  
trimmed-delta-e  
d-t

trimmed-delta-e is a function of:

cruise-3d-shape  
horizontal-3d-shape  
elevators-3d-geometry  
phi-t  
airplane-ac  
horizontal-ac  
horizontal-location  
trimmed-airplane-alpha  
d-t

Table 64. Design Relationships in Subproblem 4-08, cont.

trimmed-airplane-beta is a function of:

f-y-t  
airplane-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
wing-body-ac  
wing-3d-shape  
aileron-3d-geometry  
rudder-3d-geometry  
l-t  
n-t  
trimmed-airplane-delta-a  
trimmed-airplane-delta-r

trimmed-airplane-delta-a is a function of:

f-y-t  
airplane-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
wing-body-ac  
wing-3d-shape  
aileron-3d-geometry  
rudder-3d-geometry  
l-t  
n-t  
trimmed-airplane-beta  
trimmed-airplane-delta-r

Table 64. Design Relationships in Subproblem 4-08, cont.

trimmed-airplane-delta-r is a function of:

f-y-t  
airplane-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
wing-body-ac  
wing-3d-shape  
aileron-3d-geometry  
rudder-3d-geometry  
l-t  
n-t  
trimmed-airplane-delta-a  
trimmed-airplane-beta

short-period-natural-frequency is a function of:

trimmed-drag-polar  
cruise-3d-shape  
horizontal-3d-shape  
elevator-3d-geometry  
thrust-line  
engine-gross-thrust  
installation-losses  
airplane-ac  
horizontal-ac  
horizontal-location  
i-y-y

short-period-damping-ratio is a function of:

trimmed-drag-polar  
cruise-3d-shape  
horizontal-3d-shape  
elevator-3d-geometry  
thrust-line  
engine-gross-thrust  
installation-losses  
airplane-ac  
horizontal-ac  
horizontal-location

Table 64. Design Relationships in Subproblem 4-08, cont.

short-period-damping-ratio is a function of: (cont.)

i-y-y

phugoid-natural-frequency is a function of:

trimmed-drag-polar  
cruise-3d-shape  
horizontal-3d-shape  
elevator-3d-geometry  
thrust-line  
engine-gross-thrust  
installation-losses  
airplane-ac  
horizontal-ac  
horizontal-location  
i-y-y

phugoid-damping-ratio is a function of:

trimmed-drag-polar  
cruise-3d-shape  
horizontal-3d-shape  
elevator-3d-geometry  
thrust-line  
engine-gross-thrust  
installation-losses  
airplane-ac  
horizontal-ac  
horizontal-location  
i-y-y



Table 64. Design Relationships in Subproblem 4-08, cont.

spiral-natural-frequency is a function of:

- airplane-ac
- vertical-ac
- vertical-location
- vertical-3d-shape
- cruise-3d-shape
- wing-body-ac
- wing-3d-shape
- aileron-3d-geometry
- rudder-3d-geometry
- i-x-x
- i-z-z

spiral-damping-ratio is a function of:

- airplane-ac
- vertical-ac
- vertical-location
- vertical-3d-shape
- cruise-3d-shape
- wing-body-ac
- wing-3d-shape
- aileron-3d-geometry
- rudder-3d-geometry
- i-x-x
- i-z-z

roll-natural-frequency is a function of:

- airplane-ac
- vertical-ac
- vertical-location
- vertical-3d-shape
- cruise-3d-shape
- wing-body-ac
- wing-3d-shape
- aileron-3d-geometry
- rudder-3d-geometry
- i-x-x
- i-z-z

Table 64. Design Relationships in Subproblem 4-08, cont.

roll-damping-ratio is a function of:

airplane-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
cruise-3d-shape  
wing-body-ac  
wing-3d-shape  
aileron-3d-geometry  
rudder-3d-geometry  
i-x-x  
i-z-z

dutch-roll-natural-frequency is a function of:

airplane-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
cruise-3d-shape  
wing-body-ac  
wing-3d-shape  
aileron-3d-geometry  
rudder-3d-geometry  
i-x-x  
i-z-z

dutch-roll-damping-ratio is a function of:

airplane-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
cruise-3d-shape  
wing-body-ac  
wing-3d-shape  
aileron-3d-geometry  
rudder-3d-geometry  
i-x-x  
i-z-z

Table 64. Design Relationships in Subproblem 4-08, cont.

elevator-actuator-rate is a function of:

design-pitch-rate  
short-period-natural-frequency  
short-period-damping-ratio  
phugoid-natural-frequency  
phugoid-damping-ratio  
cruise-3d-shape  
horizontal-3d-shape  
elevator-3d-geometry  
airplane-ac  
horizontal-ac  
horizontal-location  
i-y-y  
flight-design-gross-weight

aileron-actuator-rate is a function of:

design-roll-rate  
design-yaw-rate  
dutch-roll-natural-frequency  
dutch-roll-damping-ratio  
cruise-3d-shape  
airplane-ac  
wing-body-ac  
vertical-ac  
vertical-location  
vertical-3d-shape  
wing-3d-shape  
aileron-3d-geometry  
i-x-x  
i-x-z  
i-z-z  
flight-design-gross-weight

Table 64. Design Relationships in Subproblem 4-08, cont.

rudder-actuator-rate is a function of:

- design-roll-rate
- design-yaw-rate
- dutch-roll-natural-frequency
- dutch-roll-damping-ratio
- cruise-3d-shape
- airplane-ac
- vertical-ac
- vertical-location
- vertical-3d-shape
- rudder-3d-geometry
- i-x-x
- i-x-z
- i-z-z
- flight-design-gross-weight

horizontal-ac is a function of:

- horizontal-3d-shape

cruise-3d-shape is a function of:

- wing-fuselage-3d-shape
- nacelle-3d-shape
- pylon-3d-shape
- vertical-3d-shape
- vertical-location
- horizontal-3d-shape
- horizontal-location

horizontal-3d-shape is a function of:

- horizontal-airfoil-section
- horizontal-area
- horizontal-sweep-angle
- horizontal-taper-ratio
- horizontal-aspect-ratio

elevator-3d-geometry is an independent design parameter

Table 64. Design Relationships in Subproblem 4-08, cont.

$\phi$ -t is a function of:

thrust-line

d-t is a function of:

thrust-line

f-y-t is a function of:

thrust-line  
engine-net-thrust

l-t is a function of:

thrust-line  
engine-net-thrust

n-t is a function of:

thrust-line  
engine-net-thrust

take-off-3d-shape is a function of:

cruise-3d-shape  
high-lift-device-3d-geometry  
take-off-flap-setting

wing-fuselage-3d-shape is a function of:

wing-3d-shape  
fuselage-3d-shape

Table 64. Design Relationships in Subproblem 4-08, cont.

engine-net-thrust is a function of:

engine-gross-thrust  
engine-bleed  
power-extraction  
installation-losses

high-lift-device-3d-geometry is an independent design parameter

pylon-attach-point-loads-cruise is a function of:

nacelle-pylon-structural-geometry  
nacelle-pylon-structural-weight  
nacelle-pylon-structure-elastic-properties  
nacelle-pylon-structure-moments-of-inertia  
engine-net-thrust  
thrust-line  
engine-mount-locations  
nacelle-pylon-aerodynamic-loads

pylon-attach-point-loads-pull-up is a function of:

nacelle-pylon-structural-geometry  
nacelle-pylon-structural-weight  
nacelle-pylon-structure-elastic-properties  
nacelle-pylon-structure-moments-of-inertia  
engine-net-thrust  
thrust-line  
engine-mount-locations  
nacelle-pylon-aerodynamic-loads

pylon-attach-point-loads-turn is a function of:

nacelle-pylon-structural-geometry  
nacelle-pylon-structural-weight  
nacelle-pylon-structure-elastic-properties  
nacelle-pylon-structure-moments-of-inertia  
engine-net-thrust  
thrust-line  
engine-mount-locations  
nacelle-pylon-aerodynamic-loads

Table 64. Design Relationships in Subproblem 4-08, cont.

nacelle-pylon-structural-weight is an independent design parameter

horizontal-airfoil-section is an independent design parameter

horizontal-sweep-angle is an independent design parameter

horizontal-taper-ratio is an independent design parameter

horizontal-aspect-ratio is an independent design parameter

engine-mount-locations is an independent design parameter

engine-gross-thrust is an independent design parameter

engine-bleed is an independent design parameter

nacelle-pylon-structural-geometry is an independent design parameter

nacelle-pylon-structure-elastic-properties is an independent design parameter

nacelle-pylon-structure-moments-of-inertia is an independent design parameter

design-pitch-rate is an independent design parameter

design-roll-rate is an independent design parameter

design-yaw-rate is an independent design parameter

take-off-flap-setting is an independent design parameter

Table 65. Subproblem 4-08 Interfaces

PREDECESSORS

Input Parameters To Subproblem 3-10

wing-body-ac  
wing-fuselage-3d-shape

Input Parameters To Subproblem 3-12

airplane-cg  
horizontal-area  
horizontal-ac

Output Parameters To Subproblem 3-12

airplane-cg  
horizontal-area  
horizontal-ac

Input Parameters To Subproblem 3-13

trimmed-drag-polar  
elevator-3d-geometry  
cruise-3d-shape  
trimmed-delta-e  
trimmed-airplane-alpha

Input Parameters To Subproblem 3-02

thrust-line  
engine-net-thrust

Output Parameters To Subproblem 3-02

thrust-line  
engine-net-thrust

Input Parameters To Subproblem 3-15

flight-design-gross-weight



Table 65. Subproblem 4-08 Interfaces, cont.

Input Parameters To Subproblem 3-05

high-lift-device-3d-geometry  
cruise-3d-shape

Output Parameters To Subproblem 3-05

high-lift-device-3d-geometry  
cruise-3d-shape

Input Parameters To Subproblem 3-09

horizontal-3d-shape

Input Parameters To Subproblem 3-03

take-off-3d-shape

Output Parameters To Subproblem 3-03

take-off-3d-shape

Input Parameters To Subproblem 3-11

wing-fuselage-3d-shape

Input Parameters To Subproblem 3-14

engine-net-thrust

Input Parameters To Subproblem 3-16

nacelle-pylon-structural-weight

Output Parameters To Subproblem 3-16

nacelle-pylon-structural-weight

Table 65. Subproblem 4-08 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 5-07

horizontal-c-l-alpha  
horizontal-3d-shape

Input Parameters To Subproblem 5-04

wing-body-c-l-alpha  
wing-fuselage-3d-shape

Input Parameters To Subproblem 5-14

wing-planform-area  
downwash-alpha  
aileron-3d-geometry  
fuselage-3d-shape  
wing-3d-shape  
power-extraction  
rudder-3d-geometry  
vertical-3d-shape  
vertical-ac  
nacelle-pylon-structural-weight  
pylon-attach-point-loads-turn  
pylon-attach-point-loads-pull-up  
pylon-attach-point-loads-cruise  
elevator-3d-geometry  
horizontal-3d-shape  
cruise-3d-shape  
rudder-actuator-rate  
aileron-actuator-rate  
elevator-actuator-rate

Table 65. Subproblem 4-08 Interfaces, cont.

Output Parameters To Subproblem 5-14

wing-planform-area  
downwash-alpha  
aileron-3d-geometry  
fuselage-3d-shape  
wing-3d-shape  
power-extraction  
rudder-3d-geometry  
vertical-3d-shape  
vertical-ac  
nacelle-pylon-structural-weight  
pylon-attach-point-loads-turn  
pylon-attach-point-loads-pull-up  
pylon-attach-point-loads-cruise  
elevator-3d-geometry  
horizontal-3d-shape  
cruise-3d-shape  
rudder-actuator-rate  
aileron-actuator-rate  
elevator-actuator-rate

Input Parameters To Subproblem 5-06

cruise-3d-shape  
static-margin

Input Parameters To Subproblem 5-15

horizontal-location

Input Parameters To Subproblem 5-13

vertical-location

Input Parameters To Subproblem 5-05

installation-losses

Input Parameters To Subproblem 5-17

i-x-x  
i-y-y  
i-z-z  
i-x-z

Table 65. Subproblem 4-08 Interfaces, cont.

Output Parameters To Subproblem 5-17

i-x-x  
i-y-y  
i-z-z  
i-x-z

Input Parameters To Subproblem 5-09

cruise-3d-shape

Input Parameters To Subproblem 5-10

cruise-3d-shape

Input Parameters To Subproblem 5-11

cruise-3d-shape

Input Parameters To Subproblem 5-02

high-lift-device-3d-geometry  
cruise-3d-shape

Output Parameters To Subproblem 5-02

high-lift-device-3d-geometry  
cruise-3d-shape

Input Parameters To Subproblem 5-08

pylon-3d-shape  
nacelle-pylon-aerodynamic-loads  
nacelle-3d-shape

Input Parameters To Subproblem 5-18

elevator-3d-geometry  
horizontal-3d-shape

Input Parameters To Subproblem 5-12

elevator-3d-geometry

Table 65. Subproblem 4-08 Interfaces, cont.

Input Parameters To Subproblem 5-16

elevator-3d-geometry

Table 66. Design Relationships in Subproblem 4-09

fuselage-cg is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-weight  
fuselage-skin-3d-geometry  
fuselage-skin-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-weight

Table 67. Subproblem 4-09 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-12

fuselage-cg

SUCCESSORS

Input Parameters To Subproblem 5-17

fuselage-cg

Output Parameters To Subproblem 5-17

fuselage-cg

Table 67. Subproblem 4-09 Interfaces, cont.

Input Parameters To Subproblem 5-14

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Output Parameters To Subproblem 5-14

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Table 68. Design Relationships in Subproblem 4-10

horizontal-cg is a function of:

horizontal-structural-arrangement  
horizontal-rib-3d-geometry  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-weight  
horizontal-skin-3d-geometry  
horizontal-skin-weight

Table 69. Subproblem 4-10 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-12

horizontal-cg

SUCCESSORS

Input Parameters To Subproblem 5-17

horizontal-cg

Output Parameters To Subproblem 5-17

horizontal-cg

Input Parameters To Subproblem 5-14

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Output Parameters To Subproblem 5-14

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Table 70. Design Relationships in Subproblem 4-11

vertical-cg is a function of:

vertical-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-weight  
vertical-skin-3d-geometry  
vertical-skin-weight

Table 71. Subproblem 4-11 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-12

vertical-cg

SUCCESSORS

Input Parameters To Subproblem 5-17

vertical-cg

Output Parameters To Subproblem 5-17

vertical-cg



Table 71. Subproblem 4-11 Interfaces, cont.

Input Parameters To Subproblem 5-14

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Output Parameters To Subproblem 5-14

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 72. Design Relationships in Subproblem 4-12

wing-cg is a function of:

wing-structural-arrangement  
wing-rib-3d-geometry  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-weight  
wing-stiffener-3d-geometry  
wing-stiffener-weight  
wing-skin-3d-geometry  
wing-skin-weight

Table 73. Subproblem 4-12 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-12

wing-cg

SUCCESSORS

Input Parameters To Subproblem 5-17

wing-cg

Output Parameters To Subproblem 5-17

wing-cg

Input Parameters To Subproblem 5-14

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Output Parameters To Subproblem 5-14

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Table 74. Design Relationships in Subproblem 4-13

**main-landing-gear-cg** is a function of:

**main-landing-gear-3d-geometry**

Table 75. Subproblem 4-13 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-12

**main-landing-gear-cg**

SUCCESSORS

Input Parameters To Subproblem 5-17

**main-landing-gear-cg**

Output Parameters To Subproblem 5-17

**main-landing-gear-cg**

Input Parameters To Subproblem 5-14

**main-landing-gear-3d-geometry**

Output Parameters To Subproblem 5-14

**main-landing-gear-3d-geometry**

Table 76. Design Relationships in Subproblem 4-14

nose-landing-gear-cg is a function of:

nose-landing-gear-3d-geometry

Table 77. Subproblem 4-14 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-12

nose-landing-gear-cg

SUCCESSORS

Input Parameters To Subproblem 5-17

nose-landing-gear-cg

Output Parameters To Subproblem 5-17

nose-landing-gear-cg

Input Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry

Output Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry

Table 78. Design Relationships in Subproblem 4-15

fuselage-structural-weight is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-weight  
fuselage-skin-3d-geometry  
fuselage-skin-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-weight

Table 79. Subproblem 4-15 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-16

fuselage-structural-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Table 80. Design Relationships in Subproblem 4-16

main-landing-gear-structural-weight is a function of:  
main-landing-gear-3d-geometry

Table 81. Subproblem 4-16 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-16

main-landing-gear-structural-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

main-landing-gear-structural-weight  
main-landing-gear-3d-geometry

Table 82. Design Relationships in Subproblem 4-17

wing-structural-weight is a function of:

wing-structural-arrangement  
wing-rib-3d-geometry  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-weight  
wing-stiffener-3d-geometry  
wing-stiffener-weight  
wing-skin-3d-geometry  
wing-skin-weight

Table 83. Subproblem 4-17 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-16

wing-structural-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Table 84. Design Relationships in Subproblem 4-18

rudder-actuator-weight is a function of:

rudder-actuator-geometry

Table 85. Subproblem 4-18 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-17

rudder-actuator-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

rudder-actuator-geometry

Table 86. Design Relationships in Subproblem 4-19

horizontal-structural-weight is a function of:

horizontal-structural-arrangement  
horizontal-rib-3d-geometry  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-weight  
horizontal-skin-3d-geometry  
horizontal-skin-weight



Table 87. Subproblem 4-19 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-16

horizontal-structural-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Table 88. Design Relationships in Subproblem 4-20

aileron-actuator-weight is a function of:

aileron-actuator-geometry

Table 89. Subproblem 4-20 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-17

aileron-actuator-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

aileron-actuator-geometry

Table 90. Design Relationships in Subproblem 4-21

elevator-actuator-weight is a function of:

elevator-actuator-geometry

Table 91. Subproblem 4-21 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-17

elevator-actuator-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

elevator-actuator-geometry

Table 92. Design Relationships in Subproblem 4-22

vertical-structural-weight is a function of:

vertical-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-weight  
vertical-skin-3d-geometry  
vertical-skin-weight

Table 93. Subproblem 4-22 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-16

vertical-structural-weight

SUCCESSORS

Output Parameters To Subproblem 5-14

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 94. Design Relationships in Subproblem 4-23

nose-landing-gear-structural-weight is a function of:  
nose-landing-gear-3d-geometry

Table 95. Subproblem 4-23 Interfaces

PREDECESSORS

Output Parameters To Subproblem 3-16

nose-landing-gear-structural-weight

SUCCESSORS

Output Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry

Table 96. Design Relationships in Subproblem 5-01

v-approach is a function of:

v-stall-landing

landing-sink-rate is a function of:

v-approach  
landing-descent-gradient

Table 96. Design Relationships in Subproblem 5-01, cont.

v-touchdown is a function of:

v-approach  
landing-descent-gradient  
flare-load-factor

landing-distance-from-screen-to-touchdown is a function of:

v-approach  
v-touchdown  
landing-descent-gradient

landing-distance-from-touchdown is a function of:

v-touchdown  
landing-brake-deceleration  
landing-equivalent-inertia-time

flare-load-factor is an independent design parameter

Table 97. Subproblem 5-01 Interfaces

PREDECESSORS

Input Parameters To Subproblem 4-05

v-approach  
landing-brake-deceleration

Input Parameters To Subproblem 4-01

v-stall-landing

Output Parameters To Subproblem 4-01

v-stall-landing

Table 97. Subproblem 5-01 Interfaces, cont.

Input Parameters To Subproblem 4-07

landing-sink-rate

Output Parameters To Subproblem 4-07

landing-sink-rate

Input Parameters To Subproblem 4-02

landing-descent-gradient

Input Parameters To Subproblem 4-06

landing-equivalent-inertia-time  
v-touchdown

Input Parameters To Subproblem 4-03

v-touchdown

Output Parameters To Subproblem 4-03

v-touchdown

#### SUCCESSORS

Input Parameters To Subproblem 6-01

landing-distance-from-touchdown  
landing-distance-from-screen-to-touchdown

Table 98. Design Relationships in Subproblem 5-02

landing-3d-shape is a function of:

cruise-3d-shape  
high-lift-device-3d-geometry  
landing-flap-setting

landing-c-l-max is a function of:

landing-3d-shape

landing-flap-setting is an independent design parameter

Table 99. Subproblem 5-02 Interfaces

PREDECESSORS

Input Parameters To Subproblem 4-03

landing-3d-shape

Output Parameters To Subproblem 4-03

landing-3d-shape

Input Parameters To Subproblem 4-08

high-lift-device-3d-geometry  
cruise-3d-shape

Output Parameters To Subproblem 4-08

high-lift-device-3d-geometry  
cruise-3d-shape

Input Parameters To Subproblem 4-01

landing-c-l-max

Table 99. Subproblem 5-02 Interfaces, cont.

Output Parameters To Subproblem 4-01

landing-c-1-max

Table 100. Design Relationships in Subproblem 5-03

nose-landing-gear-attach-point-loads is a function of:

max-braking-nose-landing-gear-load  
nose-landing-gear-design-concept

Table 101. Subproblem 5-03 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-03

max-braking-nose-landing-gear-load

SUCCESSORS

Output Parameters To Subproblem 6-10

nose-landing-gear-design-concept



Table 102. Design Relationships in Subproblem 5-04

wing-body-c-l-alpha is a function of:

wing-fuselage-3d-shape

Table 103. Subproblem 5-04 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

wing-body-c-l-alpha  
wing-fuselage-3d-shape

Table 104. Design Relationships in Subproblem 5-05

installation-losses is a function of:

inlet-pressure-recovery  
inlet-distortion  
ram-drag  
boattail-drag

Table 105. Subproblem 5-05 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

installation-losses

Table 105. Subproblem 5-05 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 6-02

inlet-pressure-recovery

Input Parameters To Subproblem 6-03

inlet-distortion

Input Parameters To Subproblem 6-04

ram-drag

Output Parameters To Subproblem 6-04

ram-drag

Input Parameters To Subproblem 6-05

boattail-drag

Table 106. Design Relationships in Subproblem 5-06

airplane-c-l-alpha is a function of:

cruise-3d-shape

airplane-c-m-alpha is a function of:

airplane-c-l-alpha  
static-margin

Table 107. Subproblem 5-06 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

cruise-3d-shape  
static-margin

Table 108. Design Relationships in Subproblem 5-07

horizontal-c-1-alpha is a function of:

horizontal-3d-shape

Table 109. Subproblem 5-07 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

horizontal-c-1-alpha  
horizontal-3d-shape

Table 110. Design Relationships in Subproblem 5-08

nacelle-3d-shape is an independent design parameter

nacelle-pylon-aerodynamic-loads is a function of:

nacelle-3d-shape  
pylon-3d-shape

Table 110. Design Relationships in Subproblem 5-08, cont.

pylon-3d-shape is an independent design parameter

Table 111. Subproblem 5-08 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

pylon-3d-shape  
nacelle-pylon-aerodynamic-loads  
nacelle-3d-shape

SUCCESSORS

Output Parameters To Subproblem 6-04

nacelle-3d-shape

Table 112. Design Relationships in Subproblem 5-09

fuselage-aerodynamic-loads-cruise is a function of:

cruise-3d-shape

Table 113. Subproblem 5-09 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

**cruise-3d-shape**

SUCCESSORS

Output Parameters To Subproblem 6-06

**fuselage-aerodynamic-loads-cruise**

Table 114. Design Relationships in Subproblem 5-10

**horizontal-aerodynamic-loads-cruise** is a function of:

**cruise-3d-shape**

Table 115. Subproblem 5-10 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

**cruise-3d-shape**

SUCCESSORS

Output Parameters To Subproblem 6-06

**horizontal-aerodynamic-loads-cruise**

Table 116. Design Relationships in Subproblem 5-11

vertical-aerodynamic-loads-cruise is a function of:

cruise-3d-shape

Table 117. Subproblem 5-11 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

cruise-3d-shape

SUCCESSORS

Output Parameters To Subproblem 6-06

vertical-aerodynamic-loads-cruise

Table 118. Design Relationships in Subproblem 5-12

alpha-pull-up is a function of:

load-factor

elevator-3d-geometry

maneuvering-3d-shape-pull-up

Table 119. Subproblem 5-12 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

elevator-3d-geometry

SUCCESSORS

Input Parameters To Subproblem 6-18

load-factor

Output Parameters To Subproblem 6-18

load-factor

Input Parameters To Subproblem 6-06

maneuvering-3d-shape-pull-up

Output Parameters To Subproblem 6-06

maneuvering-3d-shape-pull-up

Table 120. Design Relationships in Subproblem 5-13

vertical-location is an independent design parameter

Table 121. Subproblem 5-13 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

vertical-location

SUCCESSORS

Output Parameters To Subproblem 6-06

vertical-location

Table 122. Design Relationships in Subproblem 5-14

vertical-ac is a function of:

vertical-3d-shape

vertical-3d-shape is a function of:

vertical-airfoil-section  
vertical-area  
vertical-sweep-angle  
vertical-taper-ratio  
vertical-aspect-ratio

vertical-skin-3d-geometry is a function of:

vertical-3d-shape



Table 122. Design Relationships in Subproblem 5-14, cont.

rudder-actuator-geometry is a function of:

hydraulic-system-pressure  
rudder-max-hinge-moment  
vertical-structural-arrangement  
rudder-3d-geometry  
vertical-3d-shape

vertical-skin-weight is a function of:

vertical-skin-3d-geometry

aircraft-normal-mode-shapes-flight is a function of:

vertical-structural-arrangement  
horizontal-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-rib-weight  
vertical-spar-weight  
vertical-stiffener-weight  
vertical-skin-weight  
vertical-rib-moments-of-inertia  
vertical-spar-moments-of-inertia  
vertical-stiffener-moments-of-inertia  
vertical-skin-moments-of-inertia  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-shapes-flight is a function of: (cont.)

horizontal-rib-weight  
horizontal-spar-weight  
horizontal-stiffener-weight  
horizontal-skin-weight  
horizontal-rib-moments-of-inertia  
horizontal-spar-moments-of-inertia  
horizontal-stiffener-moments-of-inertia  
horizontal-skin-moments-of-inertia  
wing-structural-arrangement  
nacelle-pylon-structural-weight  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-rib-weight  
wing-spar-weight  
wing-stiffener-weight  
wing-skin-weight  
wing-rib-moments-of-inertia  
wing-spar-moments-of-inertia  
wing-stiffener-moments-of-inertia  
wing-skin-moments-of-inertia

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-shapes-flight is a function of: (cont.)

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-frequencies-flight is a function of:

vertical-structural-arrangement  
horizontal-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-rib-weight  
vertical-spar-weight  
vertical-stiffener-weight  
vertical-skin-weight  
vertical-rib-moments-of-inertia  
vertical-spar-moments-of-inertia  
vertical-stiffener-moments-of-inertia  
vertical-skin-moments-of-inertia  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties

aircraft-normal-mode-frequencies-flight is a function of: (cont.)

horizontal-rib-weight  
horizontal-spar-weight  
horizontal-stiffener-weight  
horizontal-skin-weight  
horizontal-rib-moments-of-inertia  
horizontal-spar-moments-of-inertia  
horizontal-stiffener-moments-of-inertia  
horizontal-skin-moments-of-inertia  
wing-structural-arrangement  
nacelle-pylon-structural-weight  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-rib-weight  
wing-spar-weight  
wing-stiffener-weight  
wing-skin-weight  
wing-rib-moments-of-inertia  
wing-spar-moments-of-inertia  
wing-stiffener-moments-of-inertia  
wing-skin-moments-of-inertia

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-frequencies-flight is a function of: (cont.)

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-shapes-landing is a function of:

vertical-structural-arrangement  
horizontal-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-rib-weight  
vertical-spar-weight  
vertical-stiffener-weight  
vertical-skin-weight  
vertical-rib-moments-of-inertia  
vertical-spar-moments-of-inertia  
vertical-stiffener-moments-of-inertia  
vertical-skin-moments-of-inertia  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-shapes-landing is a function of: (cont.)

horizontal-rib-weight  
horizontal-spar-weight  
horizontal-stiffener-weight  
horizontal-skin-weight  
horizontal-rib-moments-of-inertia  
horizontal-spar-moments-of-inertia  
horizontal-stiffener-moments-of-inertia  
horizontal-skin-moments-of-inertia  
wing-structural-arrangement  
nacelle-pylon-structural-weight  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-rib-weight  
wing-spar-weight  
wing-stiffener-weight  
wing-skin-weight  
wing-rib-moments-of-inertia  
wing-spar-moments-of-inertia  
wing-stiffener-moments-of-inertia  
wing-skin-moments-of-inertia



Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-shapes-landing is a function of: (cont.)

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
main-landing-gear-moments-of-inertia  
main-landing-gear-3d-geometry  
main-landing-gear-structural-weight  
main-landing-gear-design-concept

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-frequencies-landing is a function of:

vertical-structural-arrangement  
horizontal-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-rib-weight  
vertical-spar-weight  
vertical-stiffener-weight  
vertical-skin-weight  
vertical-rib-moments-of-inertia  
vertical-spar-moments-of-inertia  
vertical-stiffener-moments-of-inertia  
vertical-skin-moments-of-inertia  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties

aircraft-normal-mode-frequencies-landing is a function of: (cont.)

horizontal-rib-weight  
horizontal-spar-weight  
horizontal-stiffener-weight  
horizontal-skin-weight  
horizontal-rib-moments-of-inertia  
horizontal-spar-moments-of-inertia  
horizontal-stiffener-moments-of-inertia  
horizontal-skin-moments-of-inertia  
wing-structural-arrangement  
nacelle-pylon-structural-weight  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-rib-weight  
wing-spar-weight  
wing-stiffener-weight  
wing-skin-weight  
wing-rib-moments-of-inertia  
wing-spar-moments-of-inertia  
wing-stiffener-moments-of-inertia  
wing-skin-moments-of-inertia

Table 122. Design Relationships in Subproblem 5-14, cont.

aircraft-normal-mode-frequencies-landing is a function of: (cont.)

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
main-landing-gear-moments-of-inertia  
main-landing-gear-3d-geometry  
main-landing-gear-structural-weight  
main-landing-gear-design-concept

control-system-power-requirement is a function of:

elevator-actuator-geometry  
aileron-actuator-geometry  
rudder-actuator-geometry  
elevator-actuator-rate  
aileron-actuator-rate  
rudder-actuator-rate  
hydraulic-system-pressure

vertical-structural-arrangement is an independent design parameter

rudder-3d-geometry is an independent design parameter

horizontal-structural-arrangement is an independent design parameter

vertical-rib-3d-geometry is an independent design parameter

Table 122. Design Relationships in Subproblem 5-14, cont.

vertical-spar-3d-geometry is an independent design parameter

vertical-stiffener-3d-geometry is an independent design parameter

vertical-rib-weight is a function of:

vertical-rib-3d-geometry

vertical-spar-weight is a function of:

vertical-spar-3d-geometry

vertical-stiffener-weight is a function of:

vertical-stiffener-3d-geometry

horizontal-rib-3d-geometry is an independent design parameter

horizontal-spar-3d-geometry is an independent design parameter

horizontal-stiffener-3d-geometry is an independent design parameter

horizontal-skin-3d-geometry is a function of:

horizontal-3d-shape

horizontal-rib-weight is a function of:

horizontal-rib-3d-geometry

horizontal-spar-weight is a function of:

horizontal-spar-3d-geometry

Table 122. Design Relationships in Subproblem 5-14, cont.

horizontal-stiffener-weight is a function of:

horizontal-stiffener-3d-geometry

horizontal-skin-weight is a function of:

horizontal-skin-3d-geometry

wing-structural-arrangement is an independent design parameter

wing-rib-3d-geometry is an independent design parameter

wing-spar-3d-geometry is an independent design parameter

wing-stiffener-3d-geometry is an independent design parameter

wing-skin-3d-geometry is a function of:

wing-3d-shape

wing-rib-weight is a function of:

wing-rib-3d-geometry

wing-spar-weight is a function of:

wing-spar-3d-geometry

wing-stiffener-weight is a function of:

wing-stiffener-3d-geometry

wing-skin-weight is a function of:

wing-skin-3d-geometry

Table 122. Design Relationships in Subproblem 5-14, cont.

fuselage-structural-arrangement is an independent design parameter

fuselage-frame-3d-geometry is an independent design parameter

fuselage-frame-weight is a function of:

fuselage-frame-3d-geometry

fuselage-stiffener-3d-geometry is an independent design parameter

fuselage-stiffener-weight is a function of:

fuselage-stiffener-3d-geometry

fuselage-skin-3d-geometry is a function of:

fuselage-3d-shape

fuselage-skin-weight is a function of:

fuselage-skin-3d-geometry

wing-skin-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

wing-spar-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-rib-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

wing-stiffener-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

fuselage-skin-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

fuselage-frame-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

fuselage-stiffener-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

horizontal-skin-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing



horizontal-spar-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

horizontal-rib-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

horizontal-stiffener-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

vertical-skin-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

vertical-spar-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

vertical-rib-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

Table 122. Design Relationships in Subproblem 5-14, cont.

vertical-stiffener-deformations-landing is a function of:

main-landing-gear-attach-point-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-shapes-landing  
aircraft-normal-mode-frequencies-landing

main-landing-gear-3d-geometry is a function of:

main-landing-gear-design-concept

main-landing-gear-design-concept is an independent design parameter

power-extraction is a function of:

control-system-power-requirement

elevator-actuator-geometry is a function of:

hydraulic-system-pressure  
elevator-max-hinge-moment  
horizontal-structural-arrangement  
elevator-3d-geometry  
horizontal-3d-shape

aileron-actuator-geometry is a function of:

hydraulic-system-pressure  
aileron-max-hinge-moment  
wing-structural-arrangement  
aileron-3d-geometry  
wing-3d-shape

rudder-quasi-steady-aerodynamic-loads is a function of:

rudder-3d-geometry  
horizontal-3d-shape  
rudder-actuator-normal-mode-shapes

wing-attach-point-loads-cruise is a function of:

- wing-aerodynamic-loads-cruise
- wing-structural-arrangement
- pylon-attach-point-loads-cruise
- wing-rib-3d-geometry
- wing-rib-elastic-properties
- wing-rib-weight
- wing-rib-moments-of-inertia
- wing-spar-3d-geometry
- wing-spar-elastic-properties
- wing-spar-weight
- wing-spar-moments-of-inertia
- wing-skin-3d-geometry
- wing-skin-elastic-properties
- wing-skin-moments-of-inertia
- wing-skin-weight
- wing-stiffener-3d-geometry
- wing-stiffener-elastic-properties
- wing-stiffener-weight
- wing-stiffener-moments-of-inertia

wing-rib-deformations-cruise is a function of:

- wing-aerodynamic-loads-cruise
- wing-structural-arrangement
- pylon-attach-point-loads-cruise
- wing-rib-3d-geometry
- wing-rib-elastic-properties
- wing-rib-weight
- wing-rib-moments-of-inertia
- wing-spar-3d-geometry
- wing-spar-elastic-properties
- wing-spar-weight
- wing-spar-moments-of-inertia
- wing-skin-3d-geometry
- wing-skin-elastic-properties
- wing-skin-weight
- wing-skin-moments-of-inertia

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-rib-deformations-cruise is a function of: (cont.)

wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-stiffener-deformations-cruise is a function of:

wing-aerodynamic-loads-cruise  
wing-structural-arrangement  
pylon-attach-point-loads-cruise  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-weight  
wing-rib-moments-of-inertia  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-weight  
wing-spar-moments-of-inertia  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia .

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-spar-deformations-cruise is a function of:

wing-aerodynamic-loads-cruise  
wing-structural-arrangement  
pylon-attach-point-loads-cruise  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-weight  
wing-rib-moments-of-inertia  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-weight  
wing-spar-moments-of-inertia  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-skin-deformations-cruise is a function of:

wing-aerodynamic-loads-cruise  
wing-structural-arrangement  
pylon-attach-point-loads-cruise  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-weight  
wing-rib-moments-of-inertia  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-weight  
wing-spar-moments-of-inertia  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-skin-deformations-cruise is a function of: (cont.)

wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-attach-point-loads-pull-up is a function of:

wing-aerodynamic-loads-pull-up  
wing-structural-arrangement  
pylon-attach-point-loads-pull-up  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-rib-deformations-pull-up is a function of:

wing-aerodynamic-loads-pull-up  
wing-structural-arrangement  
pylon-attach-point-loads-pull-up  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-stiffener-deformations-pull-up is a function of:

wing-aerodynamic-loads-pull-up  
wing-structural-arrangement  
pylon-attach-point-loads-pull-up  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-stiffener-deformations-pull-up is a function of: (cont.)

wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-spar-deformations-pull-up is a function of:

wing-aerodynamic-loads-pull-up  
wing-structural-arrangement  
pylon-attach-point-loads-pull-up  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia



wing-skin-deformations-pull-up is a function of:

wing-aerodynamic-loads-pull-up  
wing-structural-arrangement  
pylon-attach-point-loads-pull-up  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-maneuvering-shape-pull-up is a function of:

wing-aerodynamic-loads-pull-up  
wing-structural-arrangement  
pylon-attach-point-loads-pull-up  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-maneuvering-shape-pull-up is a function of: (cont.)

wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-attach-point-loads-turn is a function of:

wing-aerodynamic-loads-turn  
wing-structural-arrangement  
pylon-attach-point-loads-turn  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-rib-deformations-turn is a function of:

wing-aerodynamic-loads-turn  
wing-structural-arrangement  
pylon-attach-point-loads-turn  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-stiffener-deformations-turn is a function of:

wing-aerodynamic-loads-turn  
wing-structural-arrangement  
pylon-attach-point-loads-turn  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-stiffener-deformations-turn is a function of: (cont.)

wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-spar-deformations-turn is a function of:

wing-aerodynamic-loads-turn  
wing-structural-arrangement  
pylon-attach-point-loads-turn  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-skin-deformations-turn is a function of:

wing-aerodynamic-loads-turn  
wing-structural-arrangement  
pylon-attach-point-loads-turn  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight  
wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-maneuvering-shape-turn is a function of:

wing-aerodynamic-loads-turn  
wing-structural-arrangement  
pylon-attach-point-loads-turn  
wing-rib-3d-geometry  
wing-rib-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-weight  
wing-skin-3d-geometry  
wing-skin-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-weight

Table 122. Design Relationships in Subproblem 5-14, cont.

wing-maneuvering-shape-turn is a function of: (cont.)

wing-stiffener-3d-geometry  
wing-stiffener-elastic-properties  
wing-stiffener-weight  
wing-stiffener-moments-of-inertia

wing-3d-shape is a function of:

wing-airfoil-section  
wing-dihedral  
wing-aspect-ratio  
wing-sweep-angle  
wing-taper-ratio  
wing-planform-area

fuselage-3d-shape is an independent design parameter

elevator-max-hinge-moment is a function of:

max-horizontal-alpha  
max-elevator-delta-e  
elevator-3d-geometry

aileron-3d-geometry is an independent design parameter

wing-aerodynamic-loads-cruise is a function of:

cruise-3d-shape

downwash-alpha is a function of:

wing-3d-shape

wing-planform-area is an independent design parameter

Table 122. Design Relationships in Subproblem 5-14, cont.

aileron-quasi-steady-aerodynamic-loads is a function of:

aileron-3d-geometry  
horizontal-3d-shape  
aileron-actuator-normal-mode-shapes

vertical-airfoil-section is an independent design parameter

vertical-area is an independent design parameter

vertical-sweep-angle is an independent design parameter

vertical-taper-ratio is an independent design parameter

vertical-aspect-ratio is an independent design parameter

wing-airfoil-section is an independent design parameter

wing-dihedral is an independent design parameter

wing-aspect-ratio is an independent design parameter

wing-sweep-angle is an independent design parameter

wing-taper-ratio is an independent design parameter

max-horizontal-alpha is an independent design parameter

max-elevator-delta-e is an independent design parameter

hydraulic-system-pressure is an independent design parameter

Table 123. Subproblem 5-14 Interfaces

PREDECESSORS

Input Parameters To Subproblem 4-08

wing-planform-area  
downwash-alpha  
aileron-3d-geometry  
fuselage-3d-shape  
wing-3d-shape  
power-extraction  
rudder-3d-geometry  
vertical-3d-shape  
vertical-ac  
nacelle-pylon-structural-weight  
pylon-attach-point-loads-turn  
pylon-attach-point-loads-pull-up  
pylon-attach-point-loads-cruise  
elevator-3d-geometry  
horizontal-3d-shape  
cruise-3d-shape  
rudder-actuator-rate  
aileron-actuator-rate  
elevator-actuator-rate



Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 4-08

wing-planform-area  
downwash-alpha  
aileron-3d-geometry  
fuselage-3d-shape  
wing-3d-shape  
power-extraction  
rudder-3d-geometry  
vertical-3d-shape  
vertical-ac  
nacelle-pylon-structural-weight  
pylon-attach-point-loads-turn  
pylon-attach-point-loads-pull-up  
pylon-attach-point-loads-cruise  
elevator-3d-geometry  
horizontal-3d-shape  
cruise-3d-shape  
rudder-actuator-rate  
aileron-actuator-rate  
elevator-actuator-rate

Input Parameters To Subproblem 4-22

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Input Parameters To Subproblem 4-11

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 4-11

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Input Parameters To Subproblem 4-18

rudder-actuator-geometry

Input Parameters To Subproblem 4-16

main-landing-gear-structural-weight  
main-landing-gear-3d-geometry

Input Parameters To Subproblem 4-19

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Input Parameters To Subproblem 4-10

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 4-10

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Input Parameters To Subproblem 4-17

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Input Parameters To Subproblem 4-12

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 4-12

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Input Parameters To Subproblem 4-15

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Input Parameters To Subproblem 4-09

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Output Parameters To Subproblem 4-09

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Input Parameters To Subproblem 4-07

main-landing-gear-attach-point-dynamic-loads  
main-landing-gear-design-concept

Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 4-07

main-landing-gear-attach-point-dynamic-loads  
main-landing-gear-design-concept

Input Parameters To Subproblem 4-13

main-landing-gear-3d-geometry

Output Parameters To Subproblem 4-13

main-landing-gear-3d-geometry

Input Parameters To Subproblem 4-21

elevator-actuator-geometry

Input Parameters To Subproblem 4-20

aileron-actuator-geometry

Table 123. Subproblem 5-14 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 6-06

wing-aerodynamic-loads-turn  
horizontal-stiffener-moments-of-inertia  
horizontal-stiffener-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-elastic-properties  
vertical-stiffener-moments-of-inertia  
vertical-stiffener-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-elastic-properties  
wing-aerodynamic-loads-pull-up

Table 123. Subproblem 5-14 Interfaces, cont.

Input Parameters To Subproblem 6-06 (cont.)

aileron-3d-geometry  
wing-maneuvering-shape-turn  
wing-attach-point-loads-turn  
wing-maneuvering-shape-pull-up  
wing-attach-point-loads-pull-up  
wing-attach-point-loads-cruise  
vertical-stiffener-deformations-landing  
vertical-rib-deformations-landing  
vertical-spar-deformations-landing  
vertical-skin-deformations-landing  
horizontal-stiffener-deformations-landing  
horizontal-rib-deformations-landing  
horizontal-spar-deformations-landing  
horizontal-skin-deformations-landing  
fuselage-stiffener-deformations-landing  
fuselage-frame-deformations-landing  
fuselage-skin-deformations-landing  
fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement  
horizontal-skin-weight  
horizontal-stiffener-weight

Table 123. Subproblem 5-14 Interfaces, cont.

Input Parameters To Subproblem 6-06 (cont.)

horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
horizontal-structural-arrangement  
rudder-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry



Output Parameters To Subproblem 6-06

wing-aerodynamic-loads-turn  
horizontal-stiffener-moments-of-inertia  
horizontal-stiffener-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-elastic-properties  
vertical-stiffener-moments-of-inertia  
vertical-stiffener-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-elastic-properties  
wing-aerodynamic-loads-pull-up  
aileron-3d-geometry  
wing-maneuvering-shape-turn

Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 6-06 (cont.)

wing-attach-point-loads-turn  
wing-maneuvering-shape-pull-up  
wing-attach-point-loads-pull-up  
wing-attach-point-loads-cruise  
vertical-stiffener-deformations-landing  
vertical-rib-deformations-landing  
vertical-spar-deformations-landing  
vertical-skin-deformations-landing  
horizontal-stiffener-deformations-landing  
horizontal-rib-deformations-landing  
horizontal-spar-deformations-landing  
horizontal-skin-deformations-landing  
fuselage-stiffener-deformations-landing  
fuselage-frame-deformations-landing  
fuselage-skin-deformations-landing  
fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement  
horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight

Table 123. Subproblem 5-14 Interfaces, cont.

Output Parameters To Subproblem 6-06 (cont.)

horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
horizontal-structural-arrangement  
rudder-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Input Parameters To Subproblem 6-12

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Output Parameters To Subproblem 6-12

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 123. Subproblem 5-14 Interfaces, cont.

Input Parameters To Subproblem 6-07

rudder-actuator-normal-mode-shapes  
rudder-quasi-steady-aerodynamic-loads  
rudder-actuator-geometry

Input Parameters To Subproblem 6-08

rudder-max-hinge-moment  
rudder-3d-geometry

Input Parameters To Subproblem 6-09

aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-frequencies-flight  
aircraft-normal-mode-shapes-flight

Input Parameters To Subproblem 6-11

wing-stiffener-moments-of-inertia  
wing-stiffener-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-elastic-properties  
wing-skin-deformations-turn  
wing-spar-deformations-turn  
wing-stiffener-deformations-turn  
wing-rib-deformations-turn  
wing-skin-deformations-pull-up  
wing-spar-deformations-pull-up  
wing-stiffener-deformations-pull-up  
wing-rib-deformations-pull-up  
wing-skin-deformations-cruise  
wing-spar-deformations-cruise  
wing-stiffener-deformations-cruise  
wing-rib-deformations-cruise  
wing-stiffener-deformations-landing  
wing-rib-deformations-landing  
wing-spar-deformations-landing  
wing-skin-deformations-landing  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry

Table 123. Subproblem 5-14 Interfaces, cont.

Input Parameters To Subproblem 6-11 (cont.)

wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Input Parameters To Subproblem 6-23

aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-frequencies-landing  
aircraft-normal-mode-shapes-landing

Input Parameters To Subproblem 6-13

main-landing-gear-moments-of-inertia  
main-landing-gear-3d-geometry

Output Parameters To Subproblem 6-13

main-landing-gear-moments-of-inertia  
main-landing-gear-3d-geometry

Input Parameters To Subproblem 6-16

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Output Parameters To Subproblem 6-16

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Table 123. Subproblem 5-14 Interfaces, cont.

Input Parameters To Subproblem 6-15

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Output Parameters To Subproblem 6-15

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Input Parameters To Subproblem 6-14

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Output Parameters To Subproblem 6-14

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Table 123. Subproblem 5-14 Interfaces, cont.

Input Parameters To Subproblem 6-19

main-landing-gear-design-concept  
main-landing-gear-3d-geometry

Input Parameters To Subproblem 6-20

elevator-actuator-geometry

Output Parameters To Subproblem 6-20

elevator-actuator-geometry

Input Parameters To Subproblem 6-21

aileron-actuator-normal-mode-shapes  
aileron-quasi-steady-aerodynamic-loads  
aileron-actuator-geometry

Input Parameters To Subproblem 6-22

aileron-max-hinge-moment  
aileron-3d-geometry

Input Parameters To Subproblem 6-24

wing-3d-shape

Table 124. Design Relationships in Subproblem 5-15

horizontal-location is an independent design parameter



Table 125. Subproblem 5-15 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08  
horizontal-location

SUCCESSORS

Output Parameters To Subproblem 6-06  
horizontal-location

Table 126. Design Relationships in Subproblem 5-16

delta-e-pull-up is a function of:

maneuvering-3d-shape-pull-up  
load-factor  
elevator-3d-geometry

Table 127. Subproblem 5-16 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08  
elevator-3d-geometry

Table 127. Subproblem 5-16 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 6-06

maneuvering-3d-shape-pull-up

Output Parameters To Subproblem 6-06

maneuvering-3d-shape-pull-up

Input Parameters To Subproblem 6-18

load-factor

Output Parameters To Subproblem 6-18

load-factor

Table 128. Design Relationships in Subproblem 5-17

i-x-x is a function of:

fuselage-moments-of-inertia

fuselage-cg

wing-moments-of-inertia

wing-cg

vertical-moments-of-inertia

vertical-cg

horizontal-moments-of-inertia

horizontal-cg

main-landing-gear-moments-of-inertia

main-landing-gear-cg

nose-landing-gear-moments-of-inertia

nose-landing-gear-cg

Table 128. Design Relationships in Subproblem 5-17, cont.

i-y-y is a function of:

fuselage-moments-of-inertia  
fuselage-cg  
wing-moments-of-inertia  
wing-cg  
vertical-moments-of-inertia  
vertical-cg  
horizontal-moments-of-inertia  
horizontal-cg  
main-landing-gear-moments-of-inertia  
main-landing-gear-cg  
nose-landing-gear-moments-of-inertia  
nose-landing-gear-cg

i-z-z is a function of:

fuselage-moments-of-inertia  
fuselage-cg  
wing-moments-of-inertia  
wing-cg  
vertical-moments-of-inertia  
vertical-cg  
horizontal-moments-of-inertia  
horizontal-cg  
main-landing-gear-moments-of-inertia  
main-landing-gear-cg  
nose-landing-gear-moments-of-inertia  
nose-landing-gear-cg

i-z-y is a function of:

fuselage-moments-of-inertia  
fuselage-cg  
wing-moments-of-inertia  
wing-cg  
vertical-moments-of-inertia  
vertical-cg  
horizontal-moments-of-inertia  
horizontal-cg  
main-landing-gear-moments-of-inertia  
main-landing-gear-cg

Table 128. Design Relationships in Subproblem 5-17, cont.

i-z-y is a function of: (cont.)

nose-landing-gear-moments-of-inertia  
nose-landing-gear-cg

i-x-z is a function of:

fuselage-moments-of-inertia  
fuselage-cg  
wing-moments-of-inertia  
wing-cg  
vertical-moments-of-inertia  
vertical-cg  
horizontal-moments-of-inertia  
horizontal-cg  
main-landing-gear-moments-of-inertia  
main-landing-gear-cg  
nose-landing-gear-moments-of-inertia  
nose-landing-gear-cg

Table 129. Subproblem 5-17 Interfaces

PREDECESSORS

Input Parameters To Subproblem 4-08

i-x-z  
i-z-z  
i-y-y  
i-x-x

Output Parameters To Subproblem 4-08

i-x-z  
i-z-z  
i-y-y  
i-x-x

Table 129. Subproblem 5-17 Interfaces, cont.

Input Parameters To Subproblem 4-09

fuselage-cg

Output Parameters To Subproblem 4-09

fuselage-cg

Input Parameters To Subproblem 4-12

wing-cg

Output Parameters To Subproblem 4-12

wing-cg

Input Parameters To Subproblem 4-11

vertical-cg

Output Parameters To Subproblem 4-11

vertical-cg

Input Parameters To Subproblem 4-10

horizontal-cg

Output Parameters To Subproblem 4-10

horizontal-cg

Input Parameters To Subproblem 4-13

main-landing-gear-cg

Output Parameters To Subproblem 4-13

main-landing-gear-cg

Input Parameters To Subproblem 4-14

nose-landing-gear-cg

Table 129. Subproblem 5-17 Interfaces, cont.

Output Parameters To Subproblem 4-14

nose-landing-gear-cg

SUCCESSORS

Input Parameters To Subproblem 6-14

fuselage-moments-of-inertia

Output Parameters To Subproblem 6-14

fuselage-moments-of-inertia

Input Parameters To Subproblem 6-15

wing-moments-of-inertia

Output Parameters To Subproblem 6-15

wing-moments-of-inertia

Input Parameters To Subproblem 6-12

vertical-moments-of-inertia

Output Parameters To Subproblem 6-12

vertical-moments-of-inertia

Input Parameters To Subproblem 6-16

horizontal-moments-of-inertia

Output Parameters To Subproblem 6-16

horizontal-moments-of-inertia

Input Parameters To Subproblem 6-13

main-landing-gear-moments-of-inertia

Table 129. Subproblem 5-17 Interfaces, cont.

Output Parameters To Subproblem 6-13

main-landing-gear-moments-of-inertia

Input Parameters To Subproblem 6-17

nose-landing-gear-moments-of-inertia

Output Parameters To Subproblem 6-17

nose-landing-gear-moments-of-inertia

Input Parameters To Subproblem 6-06

i-x-z

i-z-y

i-z-z

Output Parameters To Subproblem 6-06

i-x-z

i-z-y

i-z-z

Table 130. Design Relationships in Subproblem 5-18

elevator-quasi-steady-aerodynamic-loads is a function of:

elevator-3d-geometry

horizontal-3d-shape

elevator-actuator-normal-mode-shapes

Table 131. Subproblem 5-18 Interfaces

PREDECESSORS

Output Parameters To Subproblem 4-08

elevator-3d-geometry  
horizontal-3d-shape

SUCCESSORS

Output Parameters To Subproblem 6-20

elevator-quasi-steady-aerodynamic-loads  
elevator-actuator-normal-mode-shapes

Table 132. Design Relationships in Subproblem 5-19

nose-landing-gear-3d-geometry is a function of:  
nose-landing-gear-design-concept

Table 133. Subproblem 5-19 Interfaces

PREDECESSORS

Input Parameters To Subproblem 4-23

nose-landing-gear-3d-geometry

Input Parameters To Subproblem 4-14

nose-landing-gear-3d-geometry

Output Parameters To Subproblem 4-14

nose-landing-gear-3d-geometry



Table 133. Subproblem 5-19 Interfaces, cont.

SUCCESSORS

Input Parameters To Subproblem 6-17

nose-landing-gear-3d-geometry

Output Parameters To Subproblem 6-17

nose-landing-gear-3d-geometry

Input Parameters To Subproblem 6-10

nose-landing-gear-3d-geometry  
nose-landing-gear-design-concept

Output Parameters To Subproblem 6-10

nose-landing-gear-3d-geometry  
nose-landing-gear-design-concept

Table 134. Design Relationships in Subproblem 6-01

landing-distance is a function of:

landing-distance-from-screen-to-touchdown  
landing-distance-from-touchdown

Table 135. Subproblem 6-01 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-01

landing-distance-from-touchdown  
landing-distance-from-screen-to-touchdown

Table 136. Design Relationships in Subproblem 6-02

inlet-pressure-recovery is a function of:

inlet-3d-geometry

Table 137. Subproblem 6-02 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-05

inlet-pressure-recovery

SUCCESSORS

Output Parameters To Subproblem 7-01

inlet-3d-geometry

Table 138. Design Relationships in Subproblem 6-03

inlet-distortion is a function of:

inlet-3d-geometry

Table 139. Subproblem 6-03 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-05

inlet-distortion

SUCCESSORS

Output Parameters To Subproblem 7-01

inlet-3d-geometry

Table 140. Design Relationships in Subproblem 6-04

ram-drag is a function of:

engine-massflow  
inlet-3d-geometry  
nacelle-3d-shape

engine-massflow is an independent design parameter

Table 141. Subproblem 6-04 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-05

ram-drag

Output Parameters To Subproblem 5-05

ram-drag

Table 141. Subproblem 6-04 Interfaces, cont.

Input Parameters To Subproblem 5-08

nacelle-3d-shape

SUCCESSORS

Input Parameters To Subproblem 7-01

inlet-3d-geometry

Output Parameters To Subproblem 7-01

inlet-3d-geometry

Table 142. Design Relationships in Subproblem 6-05

boattail-drag is a function of:

nozzle-3d-geometry

nozzle-3d-geometry is an independent design parameter

Table 143. Subproblem 6-05 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-05

boattail-drag

maneuvering-3d-shape-pull-up is a function of:

wing-maneuvering-shape-pull-up  
fuselage-maneuvering-shape-pull-up  
vertical-maneuvering-shape-pull-up  
vertical-location  
horizontal-location  
horizontal-maneuvering-shape-pull-up

wing-aerodynamic-loads-pull-up is a function of:

maneuvering-3d-shape-pull-up

fuselage-maneuvering-shape-pull-up is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-pull-up  
wing-attach-point-loads-pull-up  
empennage-attach-point-loads-pull-up

Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-maneuvering-shape-pull-up is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-pull-up  
vertical-aerodynamic-loads-pull-up  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

horizontal-maneuvering-shape-pull-up is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-pull-up  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-maneuvering-shape-pull-up is a function of: (cont.)

horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

fuselage-frame-elastic-properties is an independent  
design parameter

fuselage-frame-moments-of-inertia is an independent  
design parameter

fuselage-stiffener-elastic-properties is an independent  
design parameter

fuselage-stiffener-moments-of-inertia is an independent  
design parameter

fuselage-skin-elastic-properties is an independent  
design parameter

fuselage-skin-moments-of-inertia is an independent  
design parameter

Table 144. Design Relationships in Subproblem 6-06, cont.

empennage-attach-point-loads-pull-up is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-pull-up  
vertical-aerodynamic-loads-pull-up  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

horizontal-attach-point-loads-pull-up is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-pull-up  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry



Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-attach-point-loads-pull-up is a function of: (cont.)

horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

vertical-rib-elastic-properties is an independent  
design parameter

vertical-rib-moments-of-inertia is an independent  
design parameter

vertical-spar-elastic-properties is an independent  
design parameter

vertical-spar-moments-of-inertia is an independent  
design parameter

vertical-skin-elastic-properties is an independent  
design parameter

vertical-skin-moments-of-inertia is an independent  
design parameter

vertical-stiffener-elastic-properties is an independent  
design parameter

vertical-stiffener-moments-of-inertia is an independent  
design parameter

horizontal-rib-elastic-properties is an independent  
design parameter

horizontal-rib-moments-of-inertia is an independent  
design parameter

horizontal-spar-elastic-properties is an independent  
design parameter

horizontal-spar-moments-of-inertia is an independent  
design parameter

horizontal-skin-elastic-properties is an independent  
design parameter

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-skin-moments-of-inertia is an independent  
design parameter

horizontal-stiffener-elastic-properties is an independent  
design parameter

horizontal-stiffener-moments-of-inertia is an independent  
design parameter

fuselage-frame-deformations-cruise is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-cruise  
wing-attach-point-loads-cruise  
empennage-attach-point-loads-cruise

Table 144. Design Relationships in Subproblem 6-06, cont.

fuselage-stiffener-deformations-cruise is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-cruise  
wing-attach-point-loads-cruise  
empennage-attach-point-loads-cruise

fuselage-skin-deformations-cruise is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-cruise  
wing-attach-point-loads-cruise  
empennage-attach-point-loads-cruise

Table 144. Design Relationships in Subproblem 6-06, cont.

fuselage-jig-shape is a function of:

- fuselage-structural-arrangement
- fuselage-frame-3d-geometry
- fuselage-frame-elastic-properties
- fuselage-frame-moments-of-inertia
- fuselage-stiffener-3d-geometry
- fuselage-stiffener-elastic-properties
- fuselage-stiffener-moments-of-inertia
- fuselage-skin-3d-geometry
- fuselage-skin-elastic-properties
- fuselage-skin-moments-of-inertia

fuselage-frame-deformations-pull-up is a function of:

- fuselage-structural-arrangement
- fuselage-frame-3d-geometry
- fuselage-frame-elastic-properties
- fuselage-frame-moments-of-inertia
- fuselage-frame-weight
- fuselage-stiffener-3d-geometry
- fuselage-stiffener-elastic-properties
- fuselage-stiffener-moments-of-inertia
- fuselage-stiffener-weight
- fuselage-skin-3d-geometry
- fuselage-skin-elastic-properties
- fuselage-skin-moments-of-inertia
- fuselage-skin-weight
- fuselage-aerodynamic-loads-pull-up
- wing-attach-point-loads-pull-up
- empennage-attach-point-loads-pull-up

fuselage-stiffener-deformations-pull-up is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-pull-up  
wing-attach-point-loads-pull-up  
empennage-attach-point-loads-pull-up

fuselage-skin-deformations-pull-up is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-pull-up  
wing-attach-point-loads-pull-up  
empennage-attach-point-loads-pull-up

Table 144. Design Relationships in Subproblem 6-06, cont.

fuselage-frame-deformations-turn is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-turn  
wing-attach-point-loads-turn  
empennage-attach-point-loads-turn

fuselage-stiffener-deformations-turn is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-turn  
wing-attach-point-loads-turn  
empennage-attach-point-loads-turn

Table 144. Design Relationships in Subproblem 6-06, cont.

fuselage-skin-deformations-turn is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-turn  
wing-attach-point-loads-turn  
empennage-attach-point-loads-turn

fuselage-maneuvering-shape-turn is a function of:

fuselage-structural-arrangement  
fuselage-frame-3d-geometry  
fuselage-frame-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-weight  
fuselage-stiffener-3d-geometry  
fuselage-stiffener-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-weight  
fuselage-skin-3d-geometry  
fuselage-skin-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-weight  
fuselage-aerodynamic-loads-turn  
wing-attach-point-loads-turn  
empennage-attach-point-loads-turn

fuselage-frame-stresses-landing is a function of:

fuselage-frame-deformations-landing  
fuselage-frame-elastic-properties

Table 144. Design Relationships in Subproblem 6-06, cont.

fuselage-stiffener-stresses-landing is a function of:

fuselage-stiffener-deformations-landing  
fuselage-stiffener-elastic-properties

fuselage-skin-stresses-landing is a function of:

fuselage-skin-deformations-landing  
fuselage-skin-elastic-properties

vertical-rib-deformations-pull-up is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-pull-up  
vertical-aerodynamic-loads-pull-up  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia



Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-stiffener-deformations-pull-up is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-pull-up  
vertical-aerodynamic-loads-pull-up  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-spar-deformations-pull-up is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-pull-up  
vertical-aerodynamic-loads-pull-up  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight

vertical-spar-deformations-pull-up is a function of: (cont.)

vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-skin-deformations-pull-up is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-pull-up  
vertical-aerodynamic-loads-pull-up  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

empennage-attach-point-loads-cruise is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-cruise  
vertical-aerodynamic-loads-cruise  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-rib-deformations-cruise is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-cruise  
vertical-aerodynamic-loads-cruise  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight

vertical-rib-deformations-cruise is a function of: (cont.)

vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-stiffener-deformations-cruise is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-cruise  
vertical-aerodynamic-loads-cruise  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-spar-deformations-cruise is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-cruise  
vertical-aerodynamic-loads-cruise  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-skin-deformations-cruise is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-cruise  
vertical-aerodynamic-loads-cruise  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight

Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-skin-deformations-cruise is a function of: (cont.)

vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-jig-shape is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-cruise  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-moments-of-inertia

empennage-attach-point-loads-turn is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-turn  
vertical-aerodynamic-loads-turn  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-rib-deformations-turn is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-turn  
vertical-aerodynamic-loads-turn  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight

Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-rib-deformations-turn is a function of: (cont.)

vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-stiffener-deformations-turn is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-turn  
vertical-aerodynamic-loads-turn  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia



Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-spar-deformations-turn is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-turn  
vertical-aerodynamic-loads-turn  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-skin-deformations-turn is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-turn  
vertical-aerodynamic-loads-turn  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight

Table 144. Design Relationships in Subproblem 6-06, cont.

vertical-skin-deformations-turn is a function of: (cont.)

vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-maneuvering-shape-turn is a function of:

vertical-structural-arrangement  
horizontal-attach-point-loads-turn  
vertical-aerodynamic-loads-turn  
vertical-rib-3d-geometry  
vertical-rib-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-weight  
vertical-skin-3d-geometry  
vertical-skin-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-elastic-properties  
vertical-stiffener-weight  
vertical-stiffener-moments-of-inertia

vertical-rib-stresses-landing is a function of:

vertical-rib-deformations-landing  
vertical-rib-elastic-properties

vertical-spar-stresses-landing is a function of:

vertical-spar-deformations-landing  
vertical-spar-elastic-properties

vertical-skin-stresses-landing is a function of:

vertical-skin-deformations-landing  
vertical-skin-elastic-properties

vertical-stiffener-stresses-landing is a function of:

vertical-stiffener-deformations-landing  
vertical-stiffener-elastic-properties

horizontal-attach-point-loads-cruise is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-cruise  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-rib-deformations-cruise is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-cruise  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-stiffener-deformations-cruise is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-cruise  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-stiffener-deformations-cruise is a function of: (cont.)

horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-spar-deformations-cruise is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-cruise  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-skin-deformations-cruise is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-cruise  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-jig-shape is a function of:

horizontal-structural-arrangement  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-rib-deformations-pull-up is a function of:

- horizontal-structural-arrangement
- horizontal-aerodynamic-loads-pull-up
- horizontal-rib-3d-geometry
- horizontal-rib-elastic-properties
- horizontal-rib-moments-of-inertia
- horizontal-rib-weight
- horizontal-spar-3d-geometry
- horizontal-spar-elastic-properties
- horizontal-spar-moments-of-inertia
- horizontal-spar-weight
- horizontal-skin-3d-geometry
- horizontal-skin-elastic-properties
- horizontal-skin-moments-of-inertia
- horizontal-skin-weight
- horizontal-stiffener-3d-geometry
- horizontal-stiffener-elastic-properties
- horizontal-stiffener-weight
- horizontal-stiffener-moments-of-inertia

horizontal-stiffener-deformations-pull-up is a function of:

- horizontal-structural-arrangement
- horizontal-aerodynamic-loads-pull-up
- horizontal-rib-3d-geometry
- horizontal-rib-elastic-properties
- horizontal-rib-moments-of-inertia
- horizontal-rib-weight
- horizontal-spar-3d-geometry
- horizontal-spar-elastic-properties
- horizontal-spar-moments-of-inertia
- horizontal-spar-weight
- horizontal-skin-3d-geometry
- horizontal-skin-elastic-properties
- horizontal-skin-moments-of-inertia
- horizontal-skin-weight
- horizontal-stiffener-3d-geometry

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-stiffener-deformations-pull-up is a function of: (cont.)

horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-spar-deformations-pull-up is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-pull-up  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia



Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-skin-deformations-pull-up is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-pull-up  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-attach-point-loads-turn is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-turn  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-attach-point-loads-turn is a function of: (cont.)

horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-rib-deformations-turn is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-turn  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-stiffener-deformations-turn is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-turn  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-spar-deformations-turn is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-turn  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-spar-deformations-turn is a function of: (cont.)

horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

horizontal-skin-deformations-turn is a function of:

horizontal-structural-arrangement  
horizontal-aerodynamic-loads-turn  
horizontal-rib-3d-geometry  
horizontal-rib-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-weight  
horizontal-skin-3d-geometry  
horizontal-skin-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-elastic-properties  
horizontal-stiffener-weight  
horizontal-stiffener-moments-of-inertia

Table 144. Design Relationships in Subproblem 6-06, cont.

horizontal-maneuvering-shape-turn is a function of:

- horizontal-structural-arrangement
- horizontal-aerodynamic-loads-turn
- horizontal-rib-3d-geometry
- horizontal-rib-elastic-properties
- horizontal-rib-moments-of-inertia
- horizontal-rib-weight
- horizontal-spar-3d-geometry
- horizontal-spar-elastic-properties
- horizontal-spar-moments-of-inertia
- horizontal-spar-weight
- horizontal-skin-3d-geometry
- horizontal-skin-elastic-properties
- horizontal-skin-moments-of-inertia
- horizontal-skin-weight
- horizontal-stiffener-3d-geometry
- horizontal-stiffener-elastic-properties
- horizontal-stiffener-weight
- horizontal-stiffener-moments-of-inertia

horizontal-rib-stresses-landing is a function of:

- horizontal-rib-deformations-landing
- horizontal-rib-elastic-properties

horizontal-spar-stresses-landing is a function of:

- horizontal-spar-deformations-landing
- horizontal-spar-elastic-properties

horizontal-skin-stresses-landing is a function of:

- horizontal-skin-deformations-landing
- horizontal-skin-elastic-properties

horizontal-stiffener-stresses-landing is a function of:

- horizontal-stiffener-deformations-landing
- horizontal-stiffener-elastic-properties

Table 144. Design Relationships in Subproblem 6-06, cont.

maneuvering-3d-shape-turn is a function of:

wing-maneuvering-shape-turn  
fuselage-maneuvering-shape-turn  
vertical-maneuvering-shape-turn  
vertical-location  
horizontal-location  
horizontal-maneuvering-shape-turn

wing-aerodynamic-loads-turn is a function of:

maneuvering-3d-shape-turn

beta-turn is a function of:

aileron-3d-geometry  
rudder-3d-geometry  
i-z-z  
i-z-y  
maneuvering-3d-shape-turn  
i-x-z

delta-a-turn is a function of:

aileron-3d-geometry  
rudder-3d-geometry  
i-z-z  
i-z-y  
maneuvering-3d-shape-turn  
i-x-z

delta-r-turn is a function of:

aileron-3d-geometry  
rudder-3d-geometry  
i-z-z  
i-z-y  
maneuvering-3d-shape-turn  
i-x-z

Table 145. Subproblem 6-06 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-12

maneuvering-3d-shape-pull-up

Output Parameters To Subproblem 5-12

maneuvering-3d-shape-pull-up

Input Parameters To Subproblem 5-16

maneuvering-3d-shape-pull-up

Output Parameters To Subproblem 5-16

maneuvering-3d-shape-pull-up

Input Parameters To Subproblem 5-14

wing-aerodynamic-loads-turn  
horizontal-stiffener-moments-of-inertia  
horizontal-stiffener-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-elastic-properties  
vertical-stiffener-moments-of-inertia  
vertical-stiffener-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-elastic-properties  
wing-aerodynamic-loads-pull-up  
aileron-3d-geometry  
wing-maneuvering-shape-turn

Table 145. Subproblem 6-06 Interfaces, cont.

Input Parameters To Subproblem 5-14 (cont.)

wing-attach-point-loads-turn  
wing-maneuvering-shape-pull-up  
wing-attach-point-loads-pull-up  
wing-attach-point-loads-cruise  
vertical-stiffener-deformations-landing  
vertical-rib-deformations-landing  
vertical-spar-deformations-landing  
vertical-skin-deformations-landing  
horizontal-stiffener-deformations-landing  
horizontal-rib-deformations-landing  
horizontal-spar-deformations-landing  
horizontal-skin-deformations-landing  
fuselage-stiffener-deformations-landing  
fuselage-frame-deformations-landing  
fuselage-skin-deformations-landing  
fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement  
horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight



Table 145. Subproblem 6-06 Interfaces, cont.

Input Parameters To Subproblem 5-14 (cont.)

horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
horizontal-structural-arrangement  
rudder-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 5-14

wing-aerodynamic-loads-turn  
horizontal-stiffener-moments-of-inertia  
horizontal-stiffener-elastic-properties  
horizontal-skin-moments-of-inertia  
horizontal-skin-elastic-properties  
horizontal-spar-moments-of-inertia  
horizontal-spar-elastic-properties  
horizontal-rib-moments-of-inertia  
horizontal-rib-elastic-properties  
vertical-stiffener-moments-of-inertia  
vertical-stiffener-elastic-properties  
vertical-skin-moments-of-inertia  
vertical-skin-elastic-properties  
vertical-spar-moments-of-inertia  
vertical-spar-elastic-properties  
vertical-rib-moments-of-inertia  
vertical-rib-elastic-properties  
fuselage-skin-moments-of-inertia  
fuselage-skin-elastic-properties  
fuselage-stiffener-moments-of-inertia  
fuselage-stiffener-elastic-properties  
fuselage-frame-moments-of-inertia  
fuselage-frame-elastic-properties  
wing-aerodynamic-loads-pull-up  
aileron-3d-geometry  
wing-maneuvering-shape-turn

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 5-14 (cont.)

wing-attach-point-loads-turn  
wing-maneuvering-shape-pull-up  
wing-attach-point-loads-pull-up  
wing-attach-point-loads-cruise  
vertical-stiffener-deformations-landing  
vertical-rib-deformations-landing  
vertical-spar-deformations-landing  
vertical-skin-deformations-landing  
horizontal-stiffener-deformations-landing  
horizontal-rib-deformations-landing  
horizontal-spar-deformations-landing  
horizontal-skin-deformations-landing  
fuselage-stiffener-deformations-landing  
fuselage-frame-deformations-landing  
fuselage-skin-deformations-landing  
fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement  
horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 5-14 (cont.)

horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
horizontal-structural-arrangement  
rudder-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Input Parameters To Subproblem 5-13

vertical-location

Input Parameters To Subproblem 5-15

horizontal-location

Input Parameters To Subproblem 5-09

fuselage-aerodynamic-loads-cruise

Input Parameters To Subproblem 5-11

vertical-aerodynamic-loads-cruise

Input Parameters To Subproblem 5-10

horizontal-aerodynamic-loads-cruise

Input Parameters To Subproblem 5-17

i-z-z  
i-z-y  
i-x-z

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 5-17

i-z-z  
i-z-y  
i-x-z

SUCCESSORS

Input Parameters To Subproblem 7-02

fuselage-aerodynamic-loads-pull-up  
maneuvering-3d-shape-pull-up

Input Parameters To Subproblem 7-03

horizontal-aerodynamic-loads-pull-up  
maneuvering-3d-shape-pull-up

Input Parameters To Subproblem 7-04

vertical-aerodynamic-loads-pull-up  
maneuvering-3d-shape-pull-up

Input Parameters To Subproblem 7-05

fuselage-frame-deformations-cruise  
fuselage-frame-elastic-properties

Input Parameters To Subproblem 7-08

fuselage-frame-deformations-pull-up  
fuselage-frame-elastic-properties

Input Parameters To Subproblem 7-11

fuselage-frame-deformations-turn  
fuselage-frame-elastic-properties

Input Parameters To Subproblem 7-43

fuselage-frame-elastic-properties

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 7-43

**fuselage-frame-elastic-properties**

Input Parameters To Subproblem 7-06

**fuselage-stiffener-deformations-cruise  
fuselage-stiffener-elastic-properties**

Input Parameters To Subproblem 7-09

**fuselage-stiffener-deformations-pull-up  
fuselage-stiffener-elastic-properties**

Input Parameters To Subproblem 7-12

**fuselage-stiffener-deformations-turn  
fuselage-stiffener-elastic-properties**

Input Parameters To Subproblem 7-44

**fuselage-stiffener-elastic-properties**

Output Parameters To Subproblem 7-44

**fuselage-stiffener-elastic-properties**

Input Parameters To Subproblem 7-07

**fuselage-skin-deformations-cruise  
fuselage-skin-elastic-properties**

Input Parameters To Subproblem 7-10

**fuselage-skin-deformations-pull-up  
fuselage-skin-elastic-properties**

Input Parameters To Subproblem 7-13

**fuselage-skin-deformations-turn  
fuselage-skin-elastic-properties**

Input Parameters To Subproblem 7-42

**fuselage-skin-elastic-properties**

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 7-42

fuselage-skin-elastic-properties

Input Parameters To Subproblem 7-26

vertical-rib-deformations-cruise  
vertical-rib-elastic-properties

Input Parameters To Subproblem 7-30

vertical-rib-deformations-pull-up  
vertical-rib-elastic-properties

Input Parameters To Subproblem 7-34

vertical-rib-deformations-turn  
vertical-rib-elastic-properties

Input Parameters To Subproblem 7-51

vertical-rib-elastic-properties

Output Parameters To Subproblem 7-51

vertical-rib-elastic-properties

Input Parameters To Subproblem 7-28

vertical-spar-deformations-cruise  
vertical-spar-elastic-properties

Input Parameters To Subproblem 7-32

vertical-spar-deformations-pull-up  
vertical-spar-elastic-properties

Input Parameters To Subproblem 7-36

vertical-spar-deformations-turn  
vertical-spar-elastic-properties

Input Parameters To Subproblem 7-50

vertical-spar-elastic-properties

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 7-50

vertical-spar-elastic-properties

Input Parameters To Subproblem 7-29

vertical-skin-deformations-cruise

vertical-skin-elastic-properties

Input Parameters To Subproblem 7-33

vertical-skin-deformations-pull-up

vertical-skin-elastic-properties

Input Parameters To Subproblem 7-37

vertical-skin-deformations-turn

vertical-skin-elastic-properties

Input Parameters To Subproblem 7-49

vertical-skin-elastic-properties

Output Parameters To Subproblem 7-49

vertical-skin-elastic-properties

Input Parameters To Subproblem 7-27

vertical-stiffener-deformations-cruise

vertical-stiffener-elastic-properties

Input Parameters To Subproblem 7-31

vertical-stiffener-deformations-pull-up

vertical-stiffener-elastic-properties

Input Parameters To Subproblem 7-35

vertical-stiffener-deformations-turn

vertical-stiffener-elastic-properties

Input Parameters To Subproblem 7-52

vertical-stiffener-elastic-properties



Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 7-52

vertical-stiffener-elastic-properties

Input Parameters To Subproblem 7-14

horizontal-rib-deformations-cruise  
horizontal-rib-elastic-properties

Input Parameters To Subproblem 7-18

horizontal-rib-deformations-pull-up  
horizontal-rib-elastic-properties

Input Parameters To Subproblem 7-22

horizontal-rib-deformations-turn  
horizontal-rib-elastic-properties

Input Parameters To Subproblem 7-47

horizontal-rib-elastic-properties

Output Parameters To Subproblem 7-47

horizontal-rib-elastic-properties

Input Parameters To Subproblem 7-16

horizontal-spar-deformations-cruise  
horizontal-spar-elastic-properties

Input Parameters To Subproblem 7-20

horizontal-spar-deformations-pull-up  
horizontal-spar-elastic-properties

Input Parameters To Subproblem 7-24

horizontal-spar-deformations-turn  
horizontal-spar-elastic-properties

Input Parameters To Subproblem 7-46

horizontal-spar-elastic-properties

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 7-46

horizontal-spar-elastic-properties

Input Parameters To Subproblem 7-17

horizontal-skin-deformations-cruise  
horizontal-skin-elastic-properties

Input Parameters To Subproblem 7-21

horizontal-skin-deformations-pull-up  
horizontal-skin-elastic-properties

Input Parameters To Subproblem 7-25

horizontal-skin-deformations-turn  
horizontal-skin-elastic-properties

Input Parameters To Subproblem 7-45

horizontal-skin-elastic-properties

Output Parameters To Subproblem 7-45

horizontal-skin-elastic-properties

Input Parameters To Subproblem 7-15

horizontal-stiffener-deformations-cruise  
horizontal-stiffener-elastic-properties

Input Parameters To Subproblem 7-19

horizontal-stiffener-deformations-pull-up  
horizontal-stiffener-elastic-properties

Input Parameters To Subproblem 7-23

horizontal-stiffener-deformations-turn  
horizontal-stiffener-elastic-properties

Input Parameters To Subproblem 7-48

horizontal-stiffener-elastic-properties

Table 145. Subproblem 6-06 Interfaces, cont.

Output Parameters To Subproblem 7-48

horizontal-stiffener-elastic-properties

Input Parameters To Subproblem 7-53

fuselage-aerodynamic-loads-turn  
maneuvering-3d-shape-turn

Input Parameters To Subproblem 7-55

vertical-aerodynamic-loads-turn  
maneuvering-3d-shape-turn

Input Parameters To Subproblem 7-54

horizontal-aerodynamic-loads-turn  
maneuvering-3d-shape-turn

Table 146. Design Relationships in Subproblem 6-07

rudder-actuator-moments-of-inertia is a function of:

rudder-actuator-geometry

rudder-actuator-normal-mode-shapes is a function of:

rudder-actuator-geometry  
rudder-actuator-moments-of-inertia  
rudder-actuator-elastic-properties

rudder-actuator-normal-mode-frequencies is a function of:

rudder-actuator-geometry  
rudder-actuator-moments-of-inertia  
rudder-actuator-elastic-properties

Table 146. Design Relationships in Subproblem 6-07, cont.

rudder-flutter-speed is a function of:

rudder-actuator-normal-mode-frequencies  
rudder-quasi-steady-aerodynamic-loads

rudder-actuator-elastic-properties is an independent design parameter

Table 147. Subproblem 6-07 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

rudder-actuator-normal-mode-shapes  
rudder-quasi-steady-aerodynamic-loads  
rudder-actuator-geometry

Table 148. Design Relationships in Subproblem 6-08

rudder-max-hinge-moment is a function of:

max-airplane-beta  
max-rudder-delta-r  
rudder-3d-geometry

max-airplane-beta is an independent design parameter

max-rudder-delta-r is an independent design parameter

Table 149. Subproblem 6-08 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

rudder-max-hinge-moment  
rudder-3d-geometry

Table 150. Design Relationships in Subproblem 6-09

wing-flutter-speed is a function of:

aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

aircraft-quasi-steady-aerodynamic-loads-flight is a function of:

aircraft-normal-mode-frequencies-flight  
aircraft-normal-mode-shapes-flight

empennage-flutter-speed is a function of:

aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

wing-skin-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

Table 150. Design Relationships in Subproblem 6-09, cont.

wing-spar-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

wing-rib-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

wing-stiffener-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

fuselage-skin-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

fuselage-frame-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

fuselage-stiffener-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

Table 150. Design Relationships in Subproblem 6-09, cont.

horizontal-skin-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

horizontal-spar-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

horizontal-rib-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

horizontal-stiffener-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

vertical-skin-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

vertical-spar-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

Table 150. Design Relationships in Subproblem 6-09, cont.

vertical-rib-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

vertical-stiffener-deformations-gust is a function of:

gust-dynamic-loads  
aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-shapes-flight  
aircraft-normal-mode-frequencies-flight

gust-dynamic-loads is an independent design parameter

Table 151. Subproblem 6-09 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

aircraft-quasi-steady-aerodynamic-loads-flight  
aircraft-normal-mode-frequencies-flight  
aircraft-normal-mode-shapes-flight

SUCCESSORS

Input Parameters To Subproblem 7-38

wing-skin-deformations-gust

Output Parameters To Subproblem 7-38

wing-skin-deformations-gust



Table 151. Subproblem 6-09 Interfaces, cont.

Input Parameters To Subproblem 7-39  
wing-spar-deformations-gust

Output Parameters To Subproblem 7-39  
wing-spar-deformations-gust

Input Parameters To Subproblem 7-40  
wing-rib-deformations-gust

Output Parameters To Subproblem 7-40  
wing-rib-deformations-gust

Input Parameters To Subproblem 7-41  
wing-stiffener-deformations-gust

Output Parameters To Subproblem 7-41  
wing-stiffener-deformations-gust

Input Parameters To Subproblem 7-42  
fuselage-skin-deformations-gust

Output Parameters To Subproblem 7-42  
fuselage-skin-deformations-gust

Input Parameters To Subproblem 7-43  
fuselage-frame-deformations-gust

Output Parameters To Subproblem 7-43  
fuselage-frame-deformations-gust

Input Parameters To Subproblem 7-44  
fuselage-stiffener-deformations-gust

Table 151. Subproblem 6-09 Interfaces, cont.

Output Parameters To Subproblem 7-44  
fuselage-stiffener-deformations-gust

Input Parameters To Subproblem 7-45  
horizontal-skin-deformations-gust

Output Parameters To Subproblem 7-45  
horizontal-skin-deformations-gust

Input Parameters To Subproblem 7-46  
horizontal-spar-deformations-gust

Output Parameters To Subproblem 7-46  
horizontal-spar-deformations-gust

Input Parameters To Subproblem 7-47  
horizontal-rib-deformations-gust

Output Parameters To Subproblem 7-47  
horizontal-rib-deformations-gust

Input Parameters To Subproblem 7-48  
horizontal-stiffener-deformations-gust

Output Parameters To Subproblem 7-48  
horizontal-stiffener-deformations-gust

Input Parameters To Subproblem 7-49  
vertical-skin-deformations-gust

Output Parameters To Subproblem 7-49  
vertical-skin-deformations-gust

Table 151. Subproblem 6-09 Interfaces, cont.

Input Parameters To Subproblem 7-50  
vertical-spar-deformations-gust

Output Parameters To Subproblem 7-50  
vertical-spar-deformations-gust

Input Parameters To Subproblem 7-51  
vertical-rib-deformations-gust

Output Parameters To Subproblem 7-51  
vertical-rib-deformations-gust

Input Parameters To Subproblem 7-52  
vertical-stiffener-deformations-gust

Output Parameters To Subproblem 7-52  
vertical-stiffener-deformations-gust

Table 152. Design Relationships in Subproblem 6-10

nose-landing-gear-design-concept is an independent design parameter

nose-landing-gear-kinematics is a function of:

nose-landing-gear-design-concept  
nose-landing-gear-3d-geometry

Table 153. Subproblem 6-10 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry  
nose-landing-gear-design-concept

Output Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry  
nose-landing-gear-design-concept

Input Parameters To Subproblem 5-03

nose-landing-gear-design-concept

Table 154. Design Relationships in Subproblem 6-11

wing-rib-stresses-cruise is a function of:

wing-rib-deformations-cruise  
wing-rib-elastic-properties

wing-rib-elastic-properties is an independent design parameter

Table 154. Design Relationships in Subproblem 6-11, cont.

wing-jig-shape is a function of:

- wing-structural-arrangement
- wing-rib-3d-geometry
- wing-rib-elastic-properties
- wing-rib-moments-of-inertia
- wing-spar-3d-geometry
- wing-spar-elastic-properties
- wing-spar-moments-of-inertia
- wing-skin-3d-geometry
- wing-skin-elastic-properties
- wing-skin-moments-of-inertia
- wing-stiffener-3d-geometry
- wing-stiffener-elastic-properties
- wing-stiffener-moments-of-inertia

wing-rib-stresses-pull-up is a function of:

- wing-rib-deformations-pull-up
- wing-rib-elastic-properties

wing-rib-stresses-turn is a function of:

- wing-rib-deformations-turn
- wing-rib-elastic-properties

wing-rib-stresses-landing is a function of:

- wing-rib-deformations-landing
- wing-rib-elastic-properties

wing-rib-moments-of-inertia is an independent design parameter

wing-spar-elastic-properties is an independent design parameter

wing-spar-moments-of-inertia is an independent design parameter

wing-skin-elastic-properties is an independent design parameter

Table 154. Design Relationships in Subproblem 6-11, cont.

wing-skin-moments-of-inertia is an independent design parameter

wing-stiffener-elastic-properties is an independent design parameter

wing-stiffener-moments-of-inertia is an independent design parameter

wing-spar-stresses-cruise is a function of:

wing-spar-deformations-cruise  
wing-spar-elastic-properties

wing-spar-stresses-pull-up is a function of:

wing-spar-deformations-pull-up  
wing-spar-elastic-properties

wing-spar-stresses-turn is a function of:

wing-spar-deformations-turn  
wing-spar-elastic-properties

wing-spar-stresses-landing is a function of:

wing-spar-deformations-landing  
wing-spar-elastic-properties

wing-skin-stresses-cruise is a function of:

wing-skin-deformations-cruise  
wing-skin-elastic-properties

wing-skin-stresses-pull-up is a function of:

wing-skin-deformations-pull-up  
wing-skin-elastic-properties

wing-skin-stresses-turn is a function of:

wing-skin-deformations-turn  
wing-skin-elastic-properties

wing-skin-stresses-landing is a function of:

wing-skin-deformations-landing  
wing-skin-elastic-properties

wing-stiffener-stresses-cruise is a function of:

wing-stiffener-deformations-cruise  
wing-stiffener-elastic-properties

wing-stiffener-stresses-pull-up is a function of:

wing-stiffener-deformations-pull-up  
wing-stiffener-elastic-properties

wing-stiffener-stresses-turn is a function of:

wing-stiffener-deformations-turn  
wing-stiffener-elastic-properties

wing-stiffener-stresses-landing is a function of:

wing-stiffener-deformations-landing  
wing-stiffener-elastic-properties

Table 155. Subproblem 6-11 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

wing-stiffener-moments-of-inertia  
wing-stiffener-elastic-properties  
wing-skin-moments-of-inertia  
wing-skin-elastic-properties  
wing-spar-moments-of-inertia  
wing-spar-elastic-properties  
wing-rib-moments-of-inertia  
wing-rib-elastic-properties  
wing-skin-deformations-turn  
wing-spar-deformations-turn  
wing-stiffener-deformations-turn  
wing-rib-deformations-turn  
wing-skin-deformations-pull-up  
wing-spar-deformations-pull-up  
wing-stiffener-deformations-pull-up  
wing-rib-deformations-pull-up  
wing-skin-deformations-cruise  
wing-spar-deformations-cruise  
wing-stiffener-deformations-cruise  
wing-rib-deformations-cruise  
wing-stiffener-deformations-landing  
wing-rib-deformations-landing  
wing-spar-deformations-landing  
wing-skin-deformations-landing



Table 155. Subproblem 6-11 Interfaces, cont.

Output Parameters To Subproblem 5-14 (cont.)

wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

SUCCESSORS

Input Parameters To Subproblem 7-40

wing-rib-elastic-properties

Output Parameters To Subproblem 7-40

wing-rib-elastic-properties

Input Parameters To Subproblem 7-39

wing-spar-elastic-properties

Output Parameters To Subproblem 7-39

wing-spar-elastic-properties

Input Parameters To Subproblem 7-38

wing-skin-elastic-properties

Output Parameters To Subproblem 7-38

wing-skin-elastic-properties

Input Parameters To Subproblem 7-41

wing-stiffener-elastic-properties

Output Parameters To Subproblem 7-41

wing-stiffener-elastic-properties

Table 156. Design Relationships in Subproblem 6-12

vertical-moments-of-inertia is a function of:

vertical-structural-arrangement  
vertical-rib-3d-geometry  
vertical-rib-weight  
vertical-spar-3d-geometry  
vertical-spar-weight  
vertical-stiffener-3d-geometry  
vertical-stiffener-weight  
vertical-skin-3d-geometry  
vertical-skin-weight

Table 157. Subproblem 6-12 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-17

vertical-moments-of-inertia

Output Parameters To Subproblem 5-17

vertical-moments-of-inertia

Input Parameters To Subproblem 5-14

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 157. Subproblem 6-12 Interfaces, cont.

Output Parameters To Subproblem 5-14

vertical-stiffener-weight  
vertical-spar-weight  
vertical-rib-weight  
vertical-stiffener-3d-geometry  
vertical-spar-3d-geometry  
vertical-rib-3d-geometry  
vertical-structural-arrangement  
vertical-skin-weight  
vertical-skin-3d-geometry

Table 158. Design Relationships in Subproblem 6-13

main-landing-gear-moments-of-inertia is a function of:  
main-landing-gear-3d-geometry

Table 159. Subproblem 6-13 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-17

main-landing-gear-moments-of-inertia

Output Parameters To Subproblem 5-17

main-landing-gear-moments-of-inertia

Input Parameters To Subproblem 5-14

main-landing-gear-moments-of-inertia  
main-landing-gear-3d-geometry

Output Parameters To Subproblem 5-14

main-landing-gear-moments-of-inertia  
main-landing-gear-3d-geometry

Table 160. Design Relationships in Subproblem 6-14

**fuselage-moments-of-inertia** is a function of:

**fuselage-structural-arrangement**  
**fuselage-frame-3d-geometry**  
**fuselage-frame-weight**  
**fuselage-skin-3d-geometry**  
**fuselage-skin-weight**  
**fuselage-stiffener-3d-geometry**  
**fuselage-stiffener-weight**

Table 161. Subproblem 6-14 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-17

**fuselage-moments-of-inertia**

Output Parameters To Subproblem 5-17

**fuselage-moments-of-inertia**

Input Parameters To Subproblem 5-14

**fuselage-skin-weight**  
**fuselage-skin-3d-geometry**  
**fuselage-stiffener-weight**  
**fuselage-stiffener-3d-geometry**  
**fuselage-frame-weight**  
**fuselage-frame-3d-geometry**  
**fuselage-structural-arrangement**

Table 161. Subproblem 6-14 Interfaces, cont.

Output Parameters To Subproblem 5-14

fuselage-skin-weight  
fuselage-skin-3d-geometry  
fuselage-stiffener-weight  
fuselage-stiffener-3d-geometry  
fuselage-frame-weight  
fuselage-frame-3d-geometry  
fuselage-structural-arrangement

Table 162. Design Relationships in Subproblem 6-15

wing-moments-of-inertia is a function of:

wing-structural-arrangement  
wing-rib-3d-geometry  
wing-rib-weight  
wing-spar-3d-geometry  
wing-spar-weight  
wing-stiffener-3d-geometry  
wing-stiffener-weight  
wing-skin-3d-geometry  
wing-skin-weight

Table 163. Subproblem 6-15 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-17

wing-moments-of-inertia

Output Parameters To Subproblem 5-17

wing-moments-of-inertia

Table 163. Subproblem 6-15 Interfaces, cont.

Input Parameters To Subproblem 5-14

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Output Parameters To Subproblem 5-14

wing-skin-weight  
wing-stiffener-weight  
wing-spar-weight  
wing-rib-weight  
wing-skin-3d-geometry  
wing-stiffener-3d-geometry  
wing-spar-3d-geometry  
wing-rib-3d-geometry  
wing-structural-arrangement

Table 164. Design Relationships in Subproblem 6-16

horizontal-moments-of-inertia is a function of:

horizontal-structural-arrangement  
horizontal-rib-3d-geometry  
horizontal-rib-weight  
horizontal-spar-3d-geometry  
horizontal-spar-weight  
horizontal-stiffener-3d-geometry  
horizontal-stiffener-weight  
horizontal-skin-3d-geometry  
horizontal-skin-weight

Table 165. Subproblem 6-16 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-17

horizontal-moments-of-inertia

Output Parameters To Subproblem 5-17

horizontal-moments-of-inertia

Input Parameters To Subproblem 5-14

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Output Parameters To Subproblem 5-14

horizontal-skin-weight  
horizontal-stiffener-weight  
horizontal-spar-weight  
horizontal-rib-weight  
horizontal-skin-3d-geometry  
horizontal-stiffener-3d-geometry  
horizontal-spar-3d-geometry  
horizontal-rib-3d-geometry  
horizontal-structural-arrangement

Table 166. Design Relationships in Subproblem 6-17

nose-landing-gear-moments-of-inertia is a function of:  
nose-landing-gear-3d-geometry

Table 167. Subproblem 6-17 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-17

nose-landing-gear-moments-of-inertia

Output Parameters To Subproblem 5-17

nose-landing-gear-moments-of-inertia

Input Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry

Output Parameters To Subproblem 5-19

nose-landing-gear-3d-geometry

Table 168. Design Relationships in Subproblem 6-18

load-factor is an independent design parameter



Table 169. Subproblem 6-18 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-12

load-factor

Output Parameters To Subproblem 5-12

load-factor

Input Parameters To Subproblem 5-16

load-factor

Output Parameters To Subproblem 5-16

load-factor

Table 170. Design Relationships in Subproblem 6-19

main-landing-gear-kinematics is a function of:

main-landing-gear-design-concept

main-landing-gear-3d-geometry

Table 171. Subproblem 6-19 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

main-landing-gear-design-concept

main-landing-gear-3d-geometry

Table 172. Design Relationships in Subproblem 6-20

elevator-actuator-moments-of-inertia is a function of:

elevator-actuator-geometry

elevator-actuator-normal-mode-shapes is a function of:

elevator-actuator-geometry  
elevator-actuator-moments-of-inertia  
elevator-actuator-elastic-properties

elevator-actuator-normal-mode-frequencies is a function of:

elevator-actuator-geometry  
elevator-actuator-moments-of-inertia  
elevator-actuator-elastic-properties

elevator-flutter-speed is a function of:

elevator-actuator-normal-mode-frequencies  
elevator-quasi-steady-aerodynamic-loads

elevator-actuator-elastic-properties is an independent  
design parameter

Table 173. Subproblem 6-20 Interfaces

PREDECESSORS

Input Parameters To Subproblem 5-14

elevator-actuator-geometry

Output Parameters To Subproblem 5-14

elevator-actuator-geometry

Table 173. Subproblem 6-20 Interfaces, cont.

Input Parameters To Subproblem 5-18

elevator-quasi-steady-aerodynamic-loads  
elevator-actuator-normal-mode-shapes

Table 174. Design Relationships in Subproblem 6-21

aileron-actuator-moments-of-inertia is a function of:

aileron-actuator-geometry

aileron-actuator-normal-mode-shapes is a function of:

aileron-actuator-geometry  
aileron-actuator-moments-of-inertia  
aileron-actuator-elastic-properties

aileron-actuator-normal-mode-frequencies is a function of:

aileron-actuator-geometry  
aileron-actuator-moments-of-inertia  
aileron-actuator-elastic-properties

aileron-flutter-speed is a function of:

aileron-actuator-normal-mode-frequencies  
aileron-quasi-steady-aerodynamic-loads

aileron-actuator-elastic-properties is an independent  
design parameter

Table 175. Subproblem 6-21 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

aileron-actuator-normal-mode-shapes  
aileron-quasi-steady-aerodynamic-loads  
aileron-actuator-geometry

Table 176. Design Relationships in Subproblem 6-22

aileron-max-hinge-moment is a function of:

max-wing-alpha  
max-aileron-delta-e  
aileron-3d-geometry

max-wing-alpha is an independent design parameter

max-aileron-delta-e is an independent design parameter

Table 177. Subproblem 6-22 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

aileron-max-hinge-moment  
aileron-3d-geometry

Table 178. Design Relationships in Subproblem 6-23

aircraft-quasi-steady-aerodynamic-loads-landing is a function of:

aircraft-normal-mode-frequencies-landing  
aircraft-normal-mode-shapes-landing

Table 179. Subproblem 6-23 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

aircraft-quasi-steady-aerodynamic-loads-landing  
aircraft-normal-mode-frequencies-landing  
aircraft-normal-mode-shapes-landing

Table 180. Design Relationships in Subproblem 6-24

wing-cp-distribution is a function of:

wing-3d-shape

Table 181. Subproblem 6-24 Interfaces

PREDECESSORS

Output Parameters To Subproblem 5-14

wing-3d-shape

Table 182. Design Relationships in Subproblem 7-01

inlet-3d-geometry is an independent design parameter

Table 183. Subproblem 7-01 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-02

inlet-3d-geometry

Input Parameters To Subproblem 6-03

inlet-3d-geometry

Input Parameters To Subproblem 6-04

inlet-3d-geometry

Output Parameters To Subproblem 6-04

inlet-3d-geometry

Table 184. Design Relationships in Subproblem 7-02

fuselage-aerodynamic-loads-pull-up is a function of:

maneuvering-3d-shape-pull-up

Table 185. Subproblem 7-02 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-aerodynamic-loads-pull-up  
maneuvering-3d-shape-pull-up

Table 186. Design Relationships in Subproblem 7-03

horizontal-aerodynamic-loads-pull-up is a function of:

maneuvering-3d-shape-pull-up

Table 187. Subproblem 7-03 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-aerodynamic-loads-pull-up  
maneuvering-3d-shape-pull-up

Table 188. Design Relationships in Subproblem 7-04

vertical-aerodynamic-loads-pull-up is a function of:

maneuvering-3d-shape-pull-up

Table 189. Subproblem 7-04 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-aerodynamic-loads-pull-up  
maneuvering-3d-shape-pull-up

Table 190. Design Relationships in Subproblem 7-05

fuselage-frame-stresses-cruise is a function of:

fuselage-frame-deformations-cruise  
fuselage-frame-elastic-properties

Table 191. Subproblem 7-05 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-frame-deformations-cruise  
fuselage-frame-elastic-properties

Table 192. Design Relationships in Subproblem 7-06

fuselage-stiffener-stresses-cruise is a function of:

fuselage-stiffener-deformations-cruise  
fuselage-stiffener-elastic-properties



Table 193. Subproblem 7-06 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-stiffener-deformations-cruise  
fuselage-stiffener-elastic-properties

Table 194. Design Relationships in Subproblem 7-07

fuselage-skin-stresses-cruise is a function of:

fuselage-skin-deformations-cruise  
fuselage-skin-elastic-properties

Table 195. Subproblem 7-07 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-skin-deformations-cruise  
fuselage-skin-elastic-properties

Table 196. Design Relationships in Subproblem 7-08

fuselage-frame-stresses-pull-up is a function of:

fuselage-frame-deformations-pull-up  
fuselage-frame-elastic-properties

Table 197. Subproblem 7-08 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-frame-deformations-pull-up  
fuselage-frame-elastic-properties

Table 198. Design Relationships in Subproblem 7-09

fuselage-stiffener-stresses-pull-up is a function of:

fuselage-stiffener-deformations-pull-up  
fuselage-stiffener-elastic-properties

Table 199. Subproblem 7-09 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-stiffener-deformations-pull-up  
fuselage-stiffener-elastic-properties

Table 200. Design Relationships in Subproblem 7-10

fuselage-skin-stresses-pull-up is a function of:

fuselage-skin-deformations-pull-up  
fuselage-skin-elastic-properties

Table 201. Subproblem 7-10 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-skin-deformations-pull-up  
fuselage-skin-elastic-properties

Table 202. Design Relationships in Subproblem 7-11

fuselage-frame-stresses-turn is a function of:

fuselage-frame-deformations-turn  
fuselage-frame-elastic-properties

Table 203. Subproblem 7-11 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-frame-deformations-turn  
fuselage-frame-elastic-properties

Table 204. Design Relationships in Subproblem 7-12

fuselage-stiffener-stresses-turn is a function of:

fuselage-stiffener-deformations-turn  
fuselage-stiffener-elastic-properties

Table 205. Subproblem 7-12 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-stiffener-deformations-turn  
fuselage-stiffener-elastic-properties

Table 206. Design Relationships in Subproblem 7-13

fuselage-skin-stresses-turn is a function of:

fuselage-skin-deformations-turn  
fuselage-skin-elastic-properties

Table 207. Subproblem 7-13 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

fuselage-skin-deformations-turn  
fuselage-skin-elastic-properties

Table 208. Design Relationships in Subproblem 7-14

horizontal-rib-stresses-cruise is a function of:

horizontal-rib-deformations-cruise  
horizontal-rib-elastic-properties

Table 209. Subproblem 7-14 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-rib-deformations-cruise  
horizontal-rib-elastic-properties

Table 210. Design Relationships in Subproblem 7-15

horizontal-stiffener-stresses-cruise is a function of:

horizontal-stiffener-deformations-cruise  
horizontal-stiffener-elastic-properties

Table 211. Subproblem 7-15 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-stiffener-deformations-cruise  
horizontal-stiffener-elastic-properties

Table 212. Design Relationships in Subproblem 7-16

horizontal-spar-stresses-cruise is a function of:

horizontal-spar-deformations-cruise  
horizontal-spar-elastic-properties

Table 213. Subproblem 7-16 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-spar-deformations-cruise  
horizontal-spar-elastic-properties

Table 214. Design Relationships in Subproblem 7-17

horizontal-skin-stresses-cruise is a function of:

horizontal-skin-deformations-cruise  
horizontal-skin-elastic-properties

Table 215. Subproblem 7-17 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-skin-deformations-cruise  
horizontal-skin-elastic-properties

Table 216. Design Relationships in Subproblem 7-18

horizontal-rib-stresses-pull-up is a function of:

horizontal-rib-deformations-pull-up  
horizontal-rib-elastic-properties

Table 217. Subproblem 7-18 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-rib-deformations-pull-up  
horizontal-rib-elastic-properties

Table 218. Design Relationships in Subproblem 7-19

horizontal-stiffener-stresses-pull-up is a function of:

horizontal-stiffener-deformations-pull-up  
horizontal-stiffener-elastic-properties

Table 219. Subproblem 7-19 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-stiffener-deformations-pull-up  
horizontal-stiffener-elastic-properties

Table 220. Design Relationships in Subproblem 7-20

horizontal-spar-stresses-pull-up is a function of:

horizontal-spar-deformations-pull-up  
horizontal-spar-elastic-properties

Table 221. Subproblem 7-20 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-spar-deformations-pull-up  
horizontal-spar-elastic-properties

Table 222. Design Relationships in Subproblem 7-21

horizontal-skin-stresses-pull-up is a function of:

horizontal-skin-deformations-pull-up  
horizontal-skin-elastic-properties

Table 223. Subproblem 7-21 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-skin-deformations-pull-up  
horizontal-skin-elastic-properties

Table 224. Design Relationships in Subproblem 7-22

horizontal-rib-stresses-turn is a function of:

horizontal-rib-deformations-turn  
horizontal-rib-elastic-properties



Table 225. Subproblem 7-22 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-rib-deformations-turn  
horizontal-rib-elastic-properties

Table 226. Design Relationships in Subproblem 7-23

horizontal-stiffener-stresses-turn is a function of:

horizontal-stiffener-deformations-turn  
horizontal-stiffener-elastic-properties

Table 227. Subproblem 7-23 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-stiffener-deformations-turn  
horizontal-stiffener-elastic-properties

Table 228. Design Relationships in Subproblem 7-24

horizontal-spar-stresses-turn is a function of:

horizontal-spar-deformations-turn  
horizontal-spar-elastic-properties

Table 229. Subproblem 7-24 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-spar-deformations-turn  
horizontal-spar-elastic-properties

Table 230. Design Relationships in Subproblem 7-25

horizontal-skin-stresses-turn is a function of:

horizontal-skin-deformations-turn  
horizontal-skin-elastic-properties

Table 231. Subproblem 7-25 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

horizontal-skin-deformations-turn  
horizontal-skin-elastic-properties

Table 232. Design Relationships in Subproblem 7-26

vertical-rib-stresses-cruise is a function of:

vertical-rib-deformations-cruise  
vertical-rib-elastic-properties

Table 233. Subproblem 7-26 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-rib-deformations-cruise  
vertical-rib-elastic-properties

Table 234. Design Relationships in Subproblem 7-27

vertical-stiffener-stresses-cruise is a function of:

vertical-stiffener-deformations-cruise  
vertical-stiffener-elastic-properties

Table 235. Subproblem 7-27 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-stiffener-deformations-cruise  
vertical-stiffener-elastic-properties

Table 236. Design Relationships in Subproblem 7-28

vertical-spar-stresses-cruise is a function of:

vertical-spar-deformations-cruise  
vertical-spar-elastic-properties

Table 237. Subproblem 7-28 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-spar-deformations-cruise  
vertical-spar-elastic-properties

Table 238. Design Relationships in Subproblem 7-29

vertical-skin-stresses-cruise is a function of:

vertical-skin-deformations-cruise  
vertical-skin-elastic-properties

Table 239. Subproblem 7-29 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-skin-deformations-cruise  
vertical-skin-elastic-properties

Table 240. Design Relationships in Subproblem 7-30

vertical-rib-stresses-pull-up is a function of:

vertical-rib-deformations-pull-up  
vertical-rib-elastic-properties

Table 241. Subproblem 7-30 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-rib-deformations-pull-up  
vertical-rib-elastic-properties

Table 242. Design Relationships in Subproblem 7-31

vertical-stiffener-stresses-pull-up is a function of:

vertical-stiffener-deformations-pull-up  
vertical-stiffener-elastic-properties

Table 243. Subproblem 7-31 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-stiffener-deformations-pull-up  
vertical-stiffener-elastic-properties

Table 244. Design Relationships in Subproblem 7-32

vertical-spar-stresses-pull-up is a function of:

vertical-spar-deformations-pull-up  
vertical-spar-elastic-properties

Table 245. Subproblem 7-32 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-spar-deformations-pull-up  
vertical-spar-elastic-properties

Table 246. Design Relationships in Subproblem 7-33

vertical-skin-stresses-pull-up is a function of:

vertical-skin-deformations-pull-up  
vertical-skin-elastic-properties

Table 247. Subproblem 7-33 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-skin-deformations-pull-up  
vertical-skin-elastic-properties

Table 248. Design Relationships in Subproblem 7-34

vertical-rib-stresses-turn is a function of:

vertical-rib-deformations-turn  
vertical-rib-elastic-properties

Table 249. Subproblem 7-34 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-rib-deformations-turn  
vertical-rib-elastic-properties

Table 250. Design Relationships in Subproblem 7-35

vertical-stiffener-stresses-turn is a function of:

vertical-stiffener-deformations-turn  
vertical-stiffener-elastic-properties

Table 251. Subproblem 7-35 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-stiffener-deformations-turn  
vertical-stiffener-elastic-properties

Table 252. Design Relationships in Subproblem 7-36

vertical-spar-stresses-turn is a function of:

vertical-spar-deformations-turn  
vertical-spar-elastic-properties

Table 253. Subproblem 7-36 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-spar-deformations-turn  
vertical-spar-elastic-properties

Table 254. Design Relationships in Subproblem 7-37

vertical-skin-stresses-turn is a function of:

vertical-skin-deformations-turn  
vertical-skin-elastic-properties

Table 255. Subproblem 7-37 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-skin-deformations-turn  
vertical-skin-elastic-properties

Table 256. Design Relationships in Subproblem 7-38

wing-skin-stresses-gust is a function of:

wing-skin-deformations-gust  
wing-skin-elastic-properties



Table 257. Subproblem 7-38 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

wing-skin-deformations-gust

Output Parameters To Subproblem 6-09

wing-skin-deformations-gust

Input Parameters To Subproblem 6-11

wing-skin-elastic-properties

Output Parameters To Subproblem 6-11

wing-skin-elastic-properties

Table 258. Design Relationships in Subproblem 7-39

wing-spar-stresses-gust is a function of:

wing-spar-deformations-gust

wing-spar-elastic-properties

Table 259. Subproblem 7-39 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

wing-spar-deformations-gust

Output Parameters To Subproblem 6-09

wing-spar-deformations-gust

Table 259. Subproblem 7-39 Interfaces, cont.

Input Parameters To Subproblem 6-11

wing-spar-elastic-properties

Output Parameters To Subproblem 6-11

wing-spar-elastic-properties

Table 260. Design Relationships in Subproblem 7-40

wing-rib-stresses-gust is a function of:

wing-rib-deformations-gust

wing-rib-elastic-properties

Table 261. Subproblem 7-40 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

wing-rib-deformations-gust

Output Parameters To Subproblem 6-09

wing-rib-deformations-gust

Input Parameters To Subproblem 6-11

wing-rib-elastic-properties

Output Parameters To Subproblem 6-11

wing-rib-elastic-properties

Table 262. Design Relationships in Subproblem 7-41

wing-stiffener-stresses-gust is a function of:

wing-stiffener-deformations-gust  
wing-stiffener-elastic-properties

Table 263. Subproblem 7-41 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

wing-stiffener-deformations-gust

Output Parameters To Subproblem 6-09

wing-stiffener-deformations-gust

Input Parameters To Subproblem 6-11

wing-stiffener-elastic-properties

Output Parameters To Subproblem 6-11

wing-stiffener-elastic-properties

Table 264. Design Relationships in Subproblem 7-42

fuselage-skin-stresses-gust is a function of:

fuselage-skin-deformations-gust  
fuselage-skin-elastic-properties

Table 265. Subproblem 7-42 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

fuselage-skin-deformations-gust

Output Parameters To Subproblem 6-09

fuselage-skin-deformations-gust

Input Parameters To Subproblem 6-06

fuselage-skin-elastic-properties

Output Parameters To Subproblem 6-06

fuselage-skin-elastic-properties

Table 266. Design Relationships in Subproblem 7-43

fuselage-frame-stresses-gust is a function of:

fuselage-frame-deformations-gust

fuselage-frame-elastic-properties

Table 267. Subproblem 7-43 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

fuselage-frame-deformations-gust

Output Parameters To Subproblem 6-09

fuselage-frame-deformations-gust

Table 267. Subproblem 7-43 Interfaces, cont.

Input Parameters To Subproblem 6-06

**fuselage-frame-elastic-properties**

Output Parameters To Subproblem 6-06

**fuselage-frame-elastic-properties**

Table 268. Design Relationships in Subproblem 7-44

**fuselage-stiffener-stresses-gust** is a function of:

**fuselage-stiffener-deformations-gust**  
**fuselage-stiffener-elastic-properties**

Table 269. Subproblem 7-44 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

**fuselage-stiffener-deformations-gust**

Output Parameters To Subproblem 6-09

**fuselage-stiffener-deformations-gust**

Input Parameters To Subproblem 6-06

**fuselage-stiffener-elastic-properties**

Output Parameters To Subproblem 6-06

**fuselage-stiffener-elastic-properties**

Table 270. Design Relationships in Subproblem 7-45

horizontal-skin-stresses-gust is a function of:

horizontal-skin-deformations-gust  
horizontal-skin-elastic-properties

Table 271. Subproblem 7-45 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

horizontal-skin-deformations-gust

Output Parameters To Subproblem 6-09

horizontal-skin-deformations-gust

Input Parameters To Subproblem 6-06

horizontal-skin-elastic-properties

Output Parameters To Subproblem 6-06

horizontal-skin-elastic-properties

Table 272. Design Relationships in Subproblem 7-46

horizontal-spar-stresses-gust is a function of:

horizontal-spar-deformations-gust  
horizontal-spar-elastic-properties

Table 273. Subproblem 7-46 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

horizontal-spar-deformations-gust

Output Parameters To Subproblem 6-09

horizontal-spar-deformations-gust

Input Parameters To Subproblem 6-06

horizontal-spar-elastic-properties

Output Parameters To Subproblem 6-06

horizontal-spar-elastic-properties

Table 274. Design Relationships in Subproblem 7-47

horizontal-rib-stresses-gust is a function of:

horizontal-rib-deformations-gust

horizontal-rib-elastic-properties

Table 275. Subproblem 7-47 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

horizontal-rib-deformations-gust

Output Parameters To Subproblem 6-09

horizontal-rib-deformations-gust

Table 275. Subproblem 7-47 Interfaces, cont.

Input Parameters To Subproblem 6-06

horizontal-rib-elastic-properties

Output Parameters To Subproblem 6-06

horizontal-rib-elastic-properties

Table 276. Design Relationships in Subproblem 7-48

horizontal-stiffener-stresses-gust is a function of:

horizontal-stiffener-deformations-gust

horizontal-stiffener-elastic-properties

Table 277. Subproblem 7-48 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

horizontal-stiffener-deformations-gust

Output Parameters To Subproblem 6-09

horizontal-stiffener-deformations-gust

Input Parameters To Subproblem 6-06

horizontal-stiffener-elastic-properties

Output Parameters To Subproblem 6-06

horizontal-stiffener-elastic-properties



Table 278. Design Relationships in Subproblem 7-49

vertical-skin-stresses-gust is a function of:

vertical-skin-deformations-gust  
vertical-skin-elastic-properties

Table 279. Subproblem 7-49 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09

vertical-skin-deformations-gust

Output Parameters To Subproblem 6-09

vertical-skin-deformations-gust

Input Parameters To Subproblem 6-06

vertical-skin-elastic-properties

Output Parameters To Subproblem 6-06

vertical-skin-elastic-properties

Table 280. Design Relationships in Subproblem 7-50

vertical-spar-stresses-gust is a function of:

vertical-spar-deformations-gust  
vertical-spar-elastic-properties

Table 281. Subproblem 7-50 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09  
vertical-spar-deformations-gust  
Output Parameters To Subproblem 6-09  
vertical-spar-deformations-gust  
Input Parameters To Subproblem 6-06  
vertical-spar-elastic-properties  
Output Parameters To Subproblem 6-06  
vertical-spar-elastic-properties

Table 282. Design Relationships in Subproblem 7-51

vertical-rib-stresses-gust is a function of:  
vertical-rib-deformations-gust  
vertical-rib-elastic-properties

Table 283. Subproblem 7-51 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09  
vertical-rib-deformations-gust  
Output Parameters To Subproblem 6-09  
vertical-rib-deformations-gust

Table 283. Subproblem 7-51 Interfaces, cont.

Input Parameters To Subproblem 6-06  
vertical-rib-elastic-properties  
Output Parameters To Subproblem 6-06  
vertical-rib-elastic-properties

Table 284. Design Relationships in Subproblem 7-52

vertical-stiffener-stresses-gust is a function of:  
vertical-stiffener-deformations-gust  
vertical-stiffener-elastic-properties

Table 285. Subproblem 7-52 Interfaces

PREDECESSORS

Input Parameters To Subproblem 6-09  
vertical-stiffener-deformations-gust  
Output Parameters To Subproblem 6-09  
vertical-stiffener-deformations-gust  
Input Parameters To Subproblem 6-06  
vertical-stiffener-elastic-properties  
Output Parameters To Subproblem 6-06  
vertical-stiffener-elastic-properties

Table 286. Design Relationships in Subproblem 7-53

**fuselage-aerodynamic-loads-turn** is a function of:  
**maneuvering-3d-shape-turn**

Table 287. Subproblem 7-53 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

**fuselage-aerodynamic-loads-turn**  
**maneuvering-3d-shape-turn**

Table 288. Design Relationships in Subproblem 7-54

**horizontal-aerodynamic-loads-turn** is a function of:  
**maneuvering-3d-shape-turn**

Table 289. Subproblem 7-54 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

**horizontal-aerodynamic-loads-turn**  
**maneuvering-3d-shape-turn**

Table 290. Design Relationships in Subproblem 7-55.

vertical-aerodynamic-loads-turn is a function of:  
maneuvering-3d-shape-turn

Table 291. Subproblem 7-55 Interfaces

PREDECESSORS

Output Parameters To Subproblem 6-06

vertical-aerodynamic-loads-turn  
maneuvering-3d-shape-turn

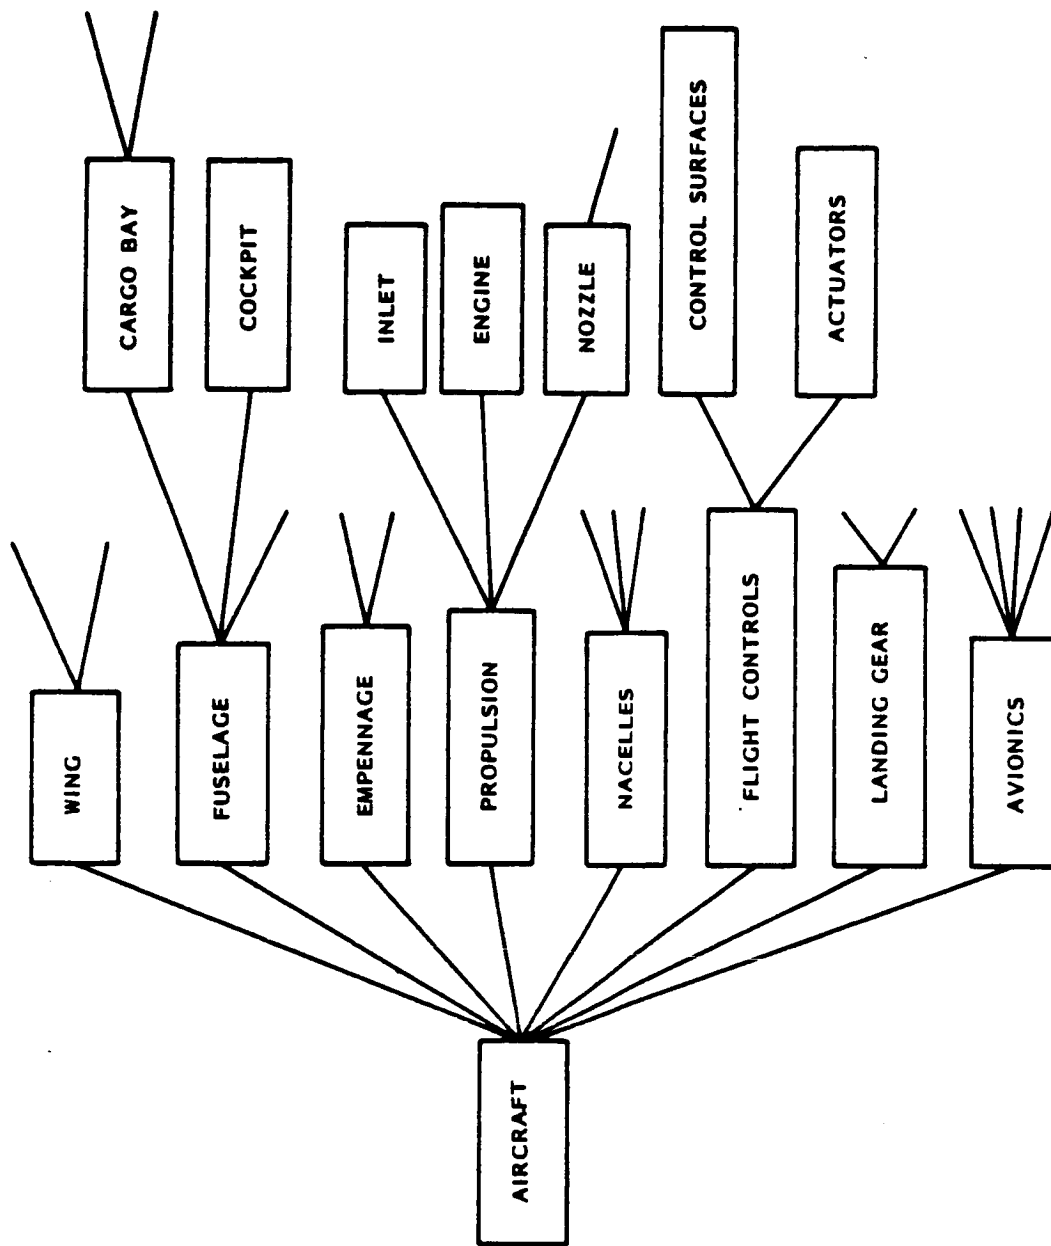


Figure 1. Part of the Aircraft Subsystem Decomposition.

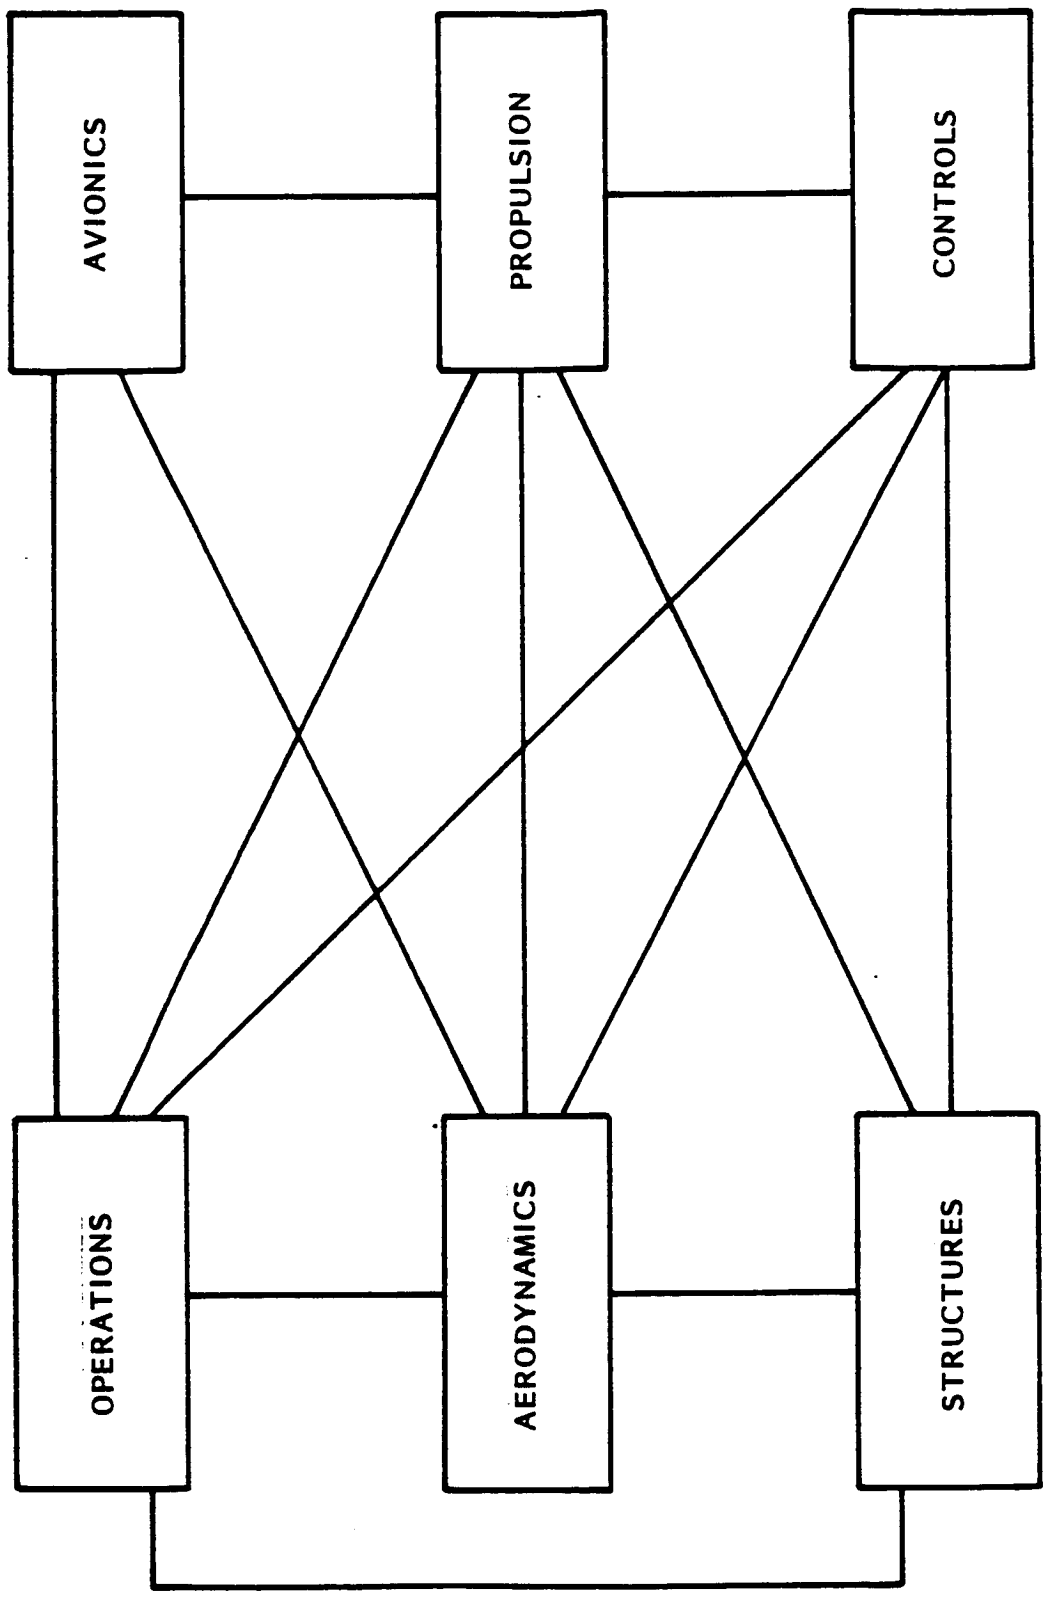



Figure 2. Part of the Aircraft Functional Decomposition.

FUNCTIONAL  
RELATIONSHIP

$$X3 = G1(X1, X2)$$

$$X2 = G2(X3)$$

DIRECTED  
GRAPH

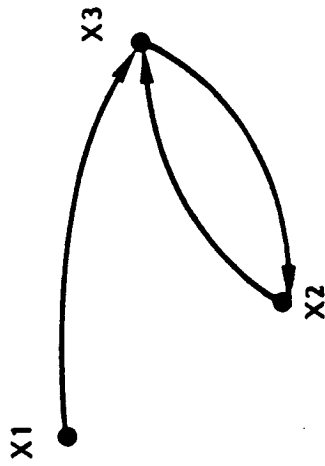

(A)

(B)

ADJACENCY  
MATRIX

	X1	X2	X3
X1	0	0	1
X2	0	0	1
X3	0	1	0

(C)

Figure 3. Representation of Functional Relationships.



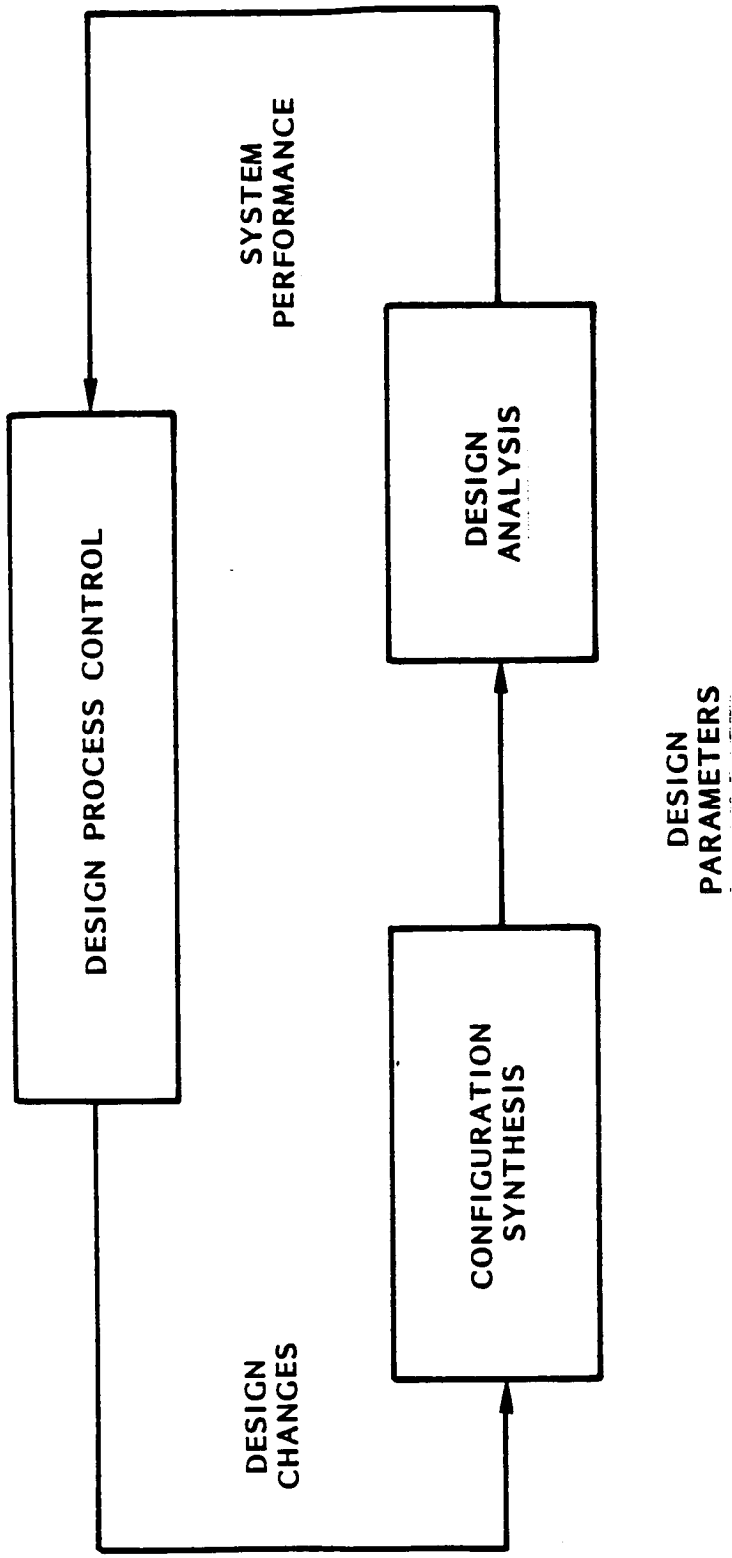


Figure 4. Design Optimization Model.

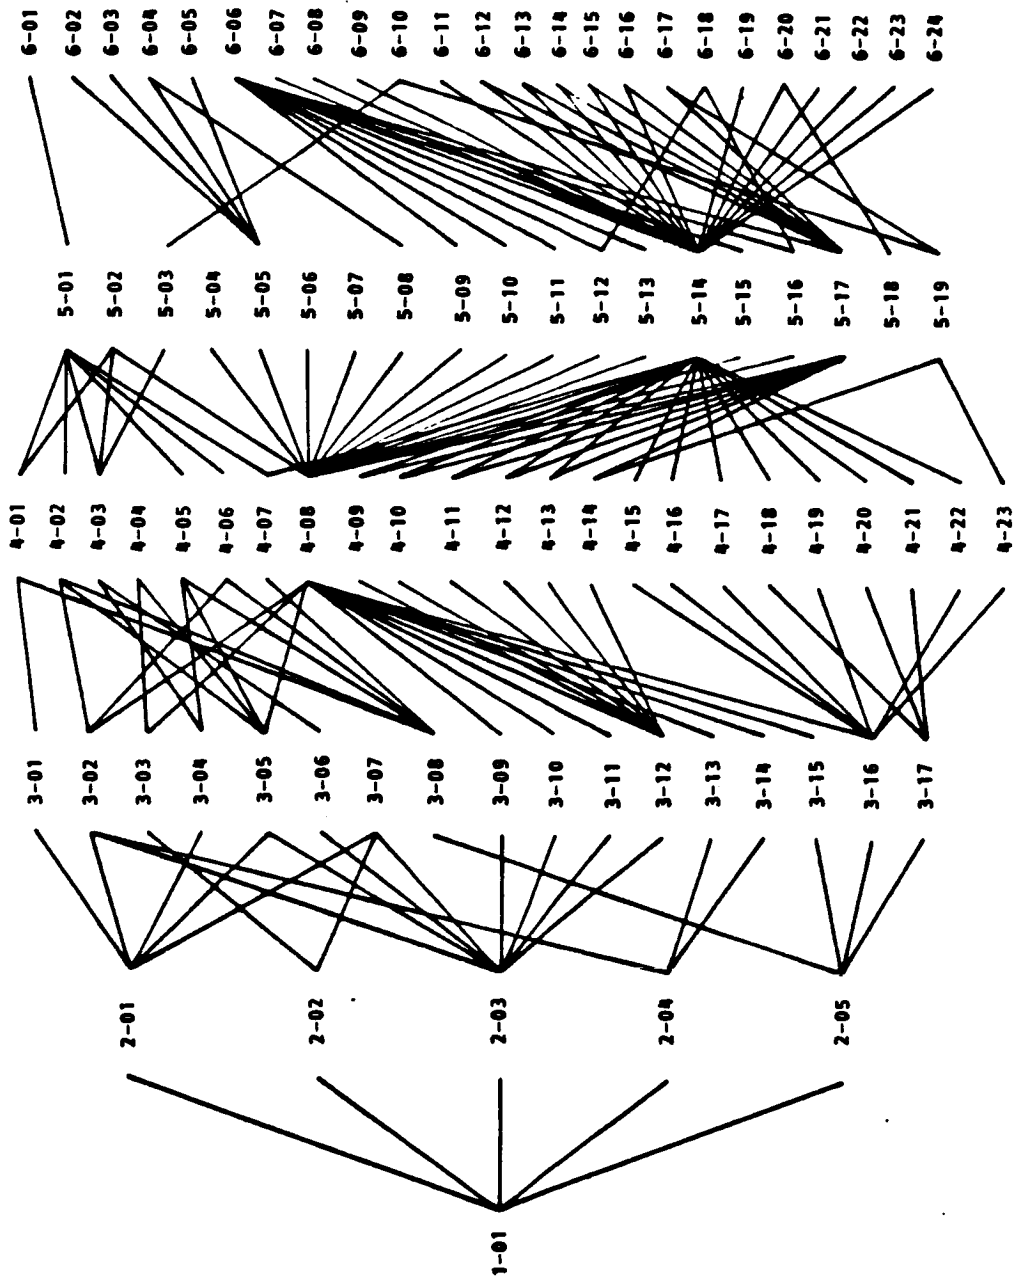


Figure 5 (a). Multifaceted Design Process Decomposition.


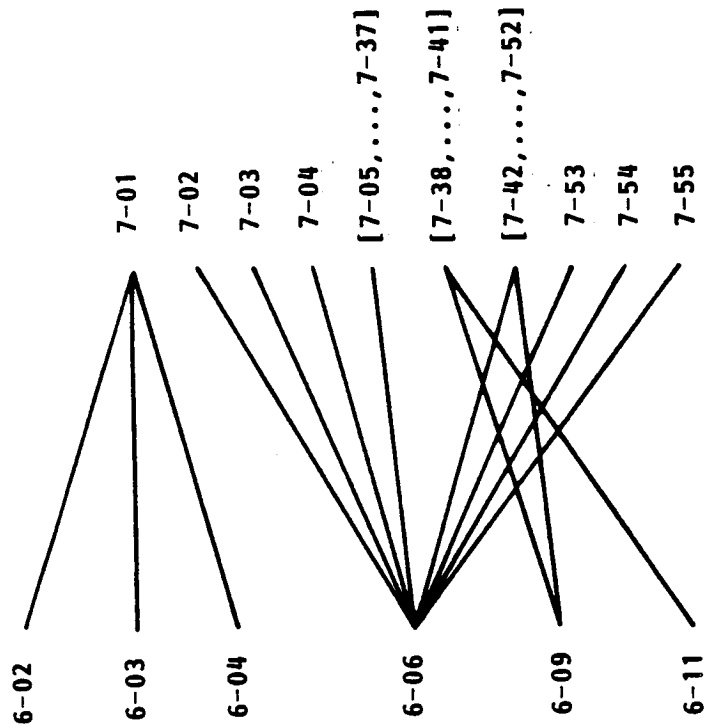


Figure 5 (b). Multifaceted Design Process Decomposition , (cont.).

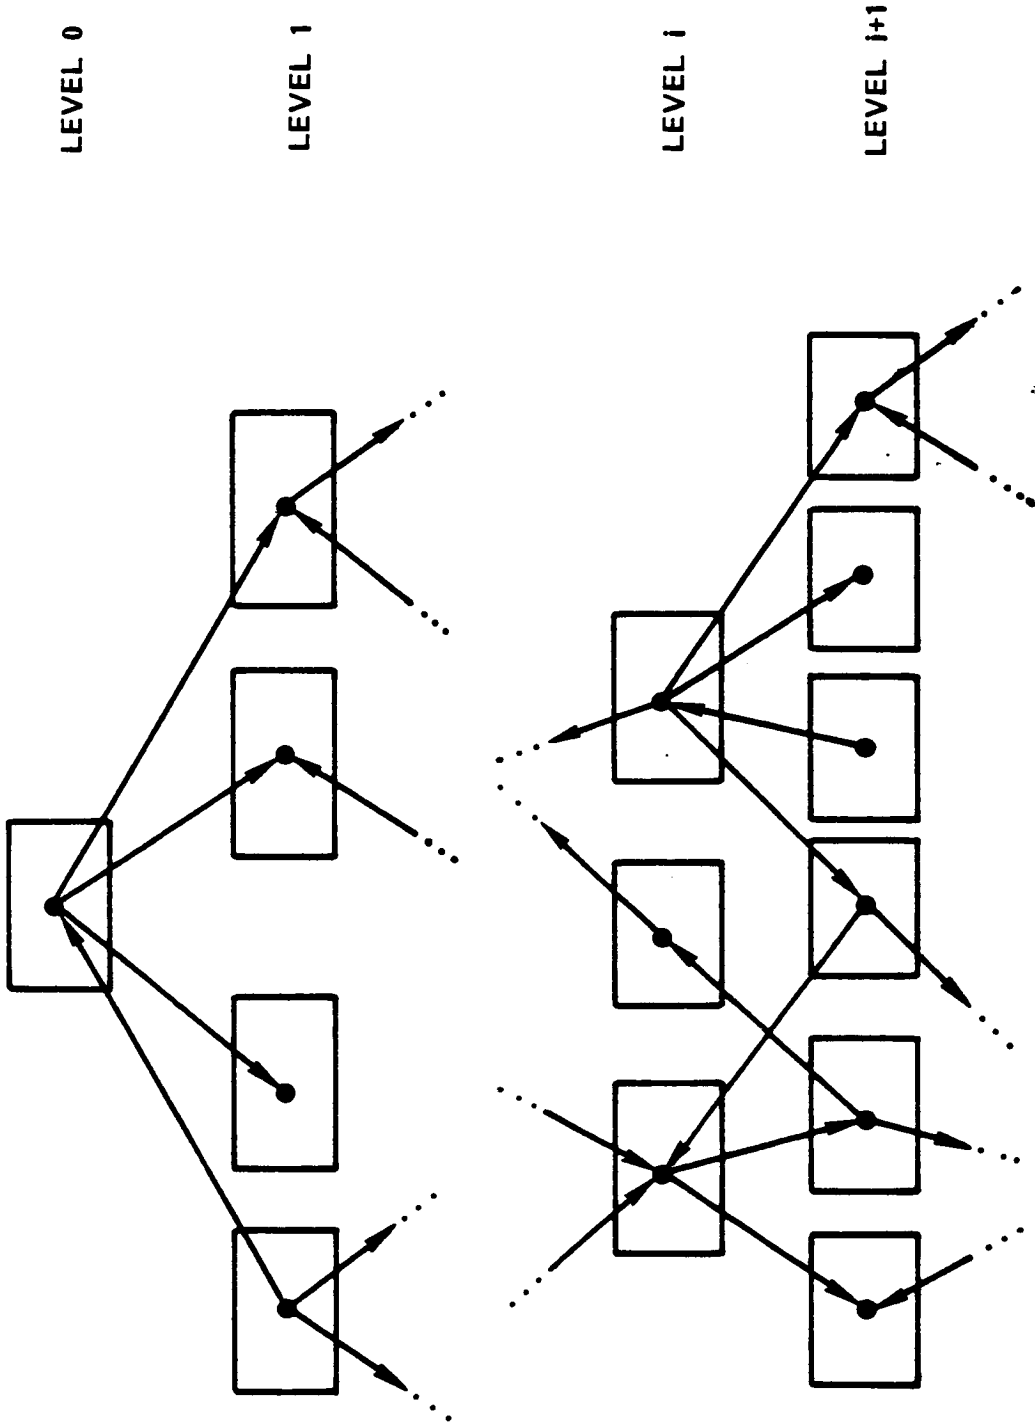

C-I

Figure 6. Heuristic for Finding Design Process Levels.

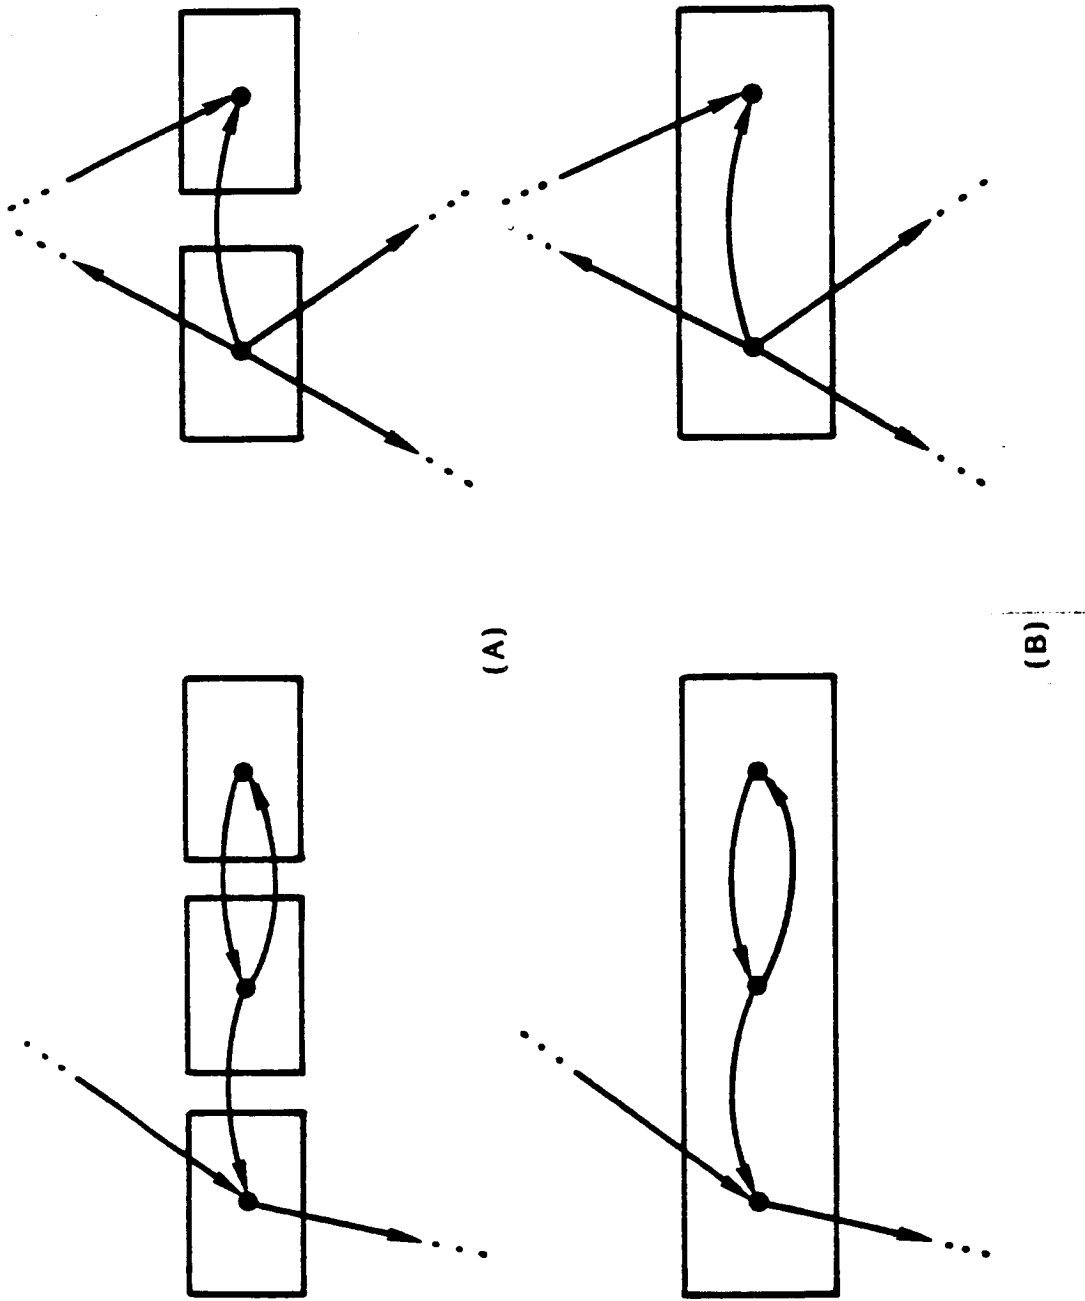


Figure 7. Heuristic for Eliminating Coupling within Levels.

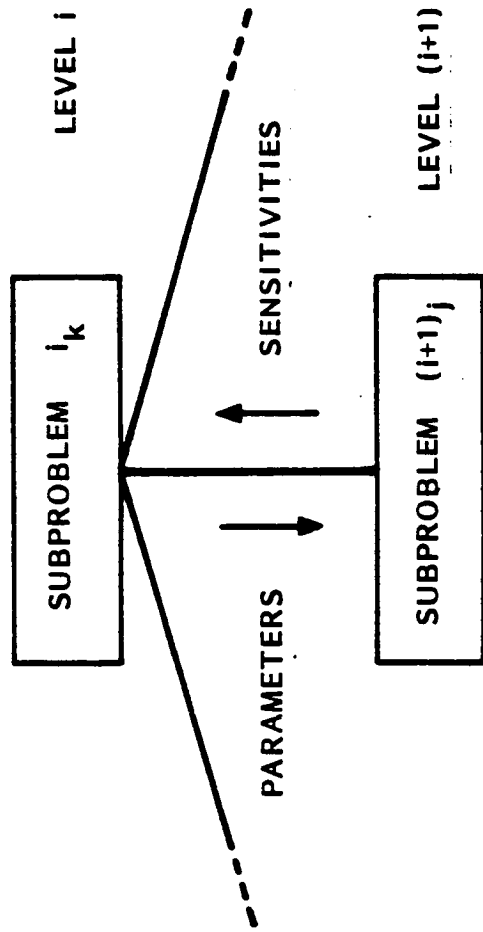


Figure 8. Iteration through the System Hierarchy.

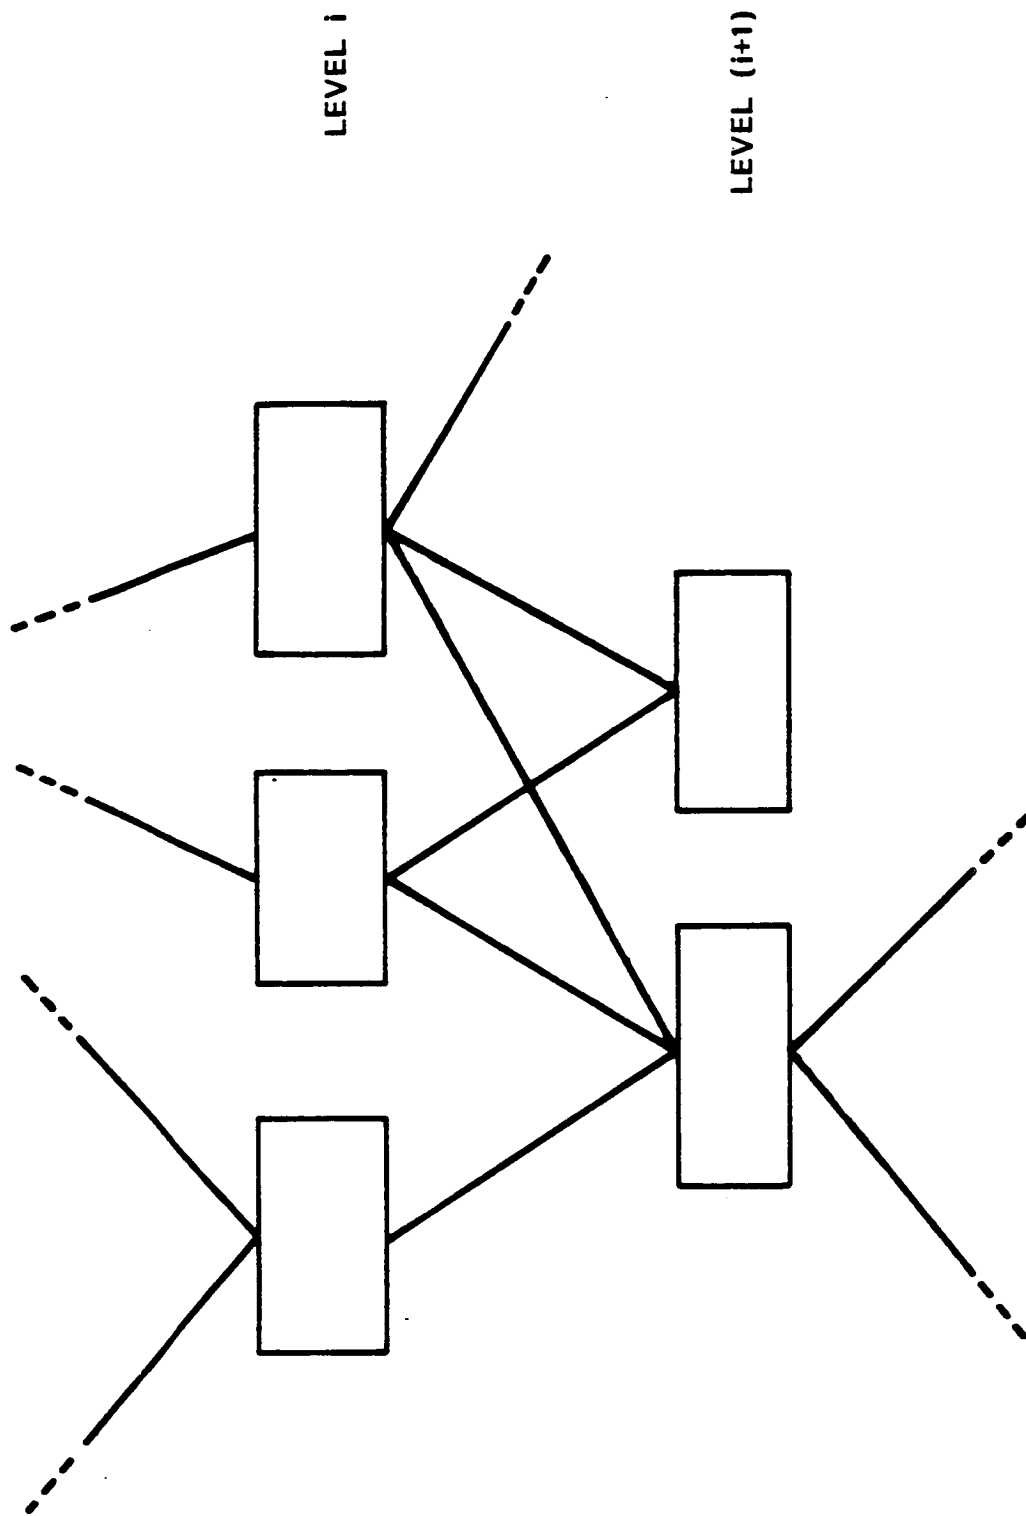


Figure 9. Form of the Multifaceted Decomposition.

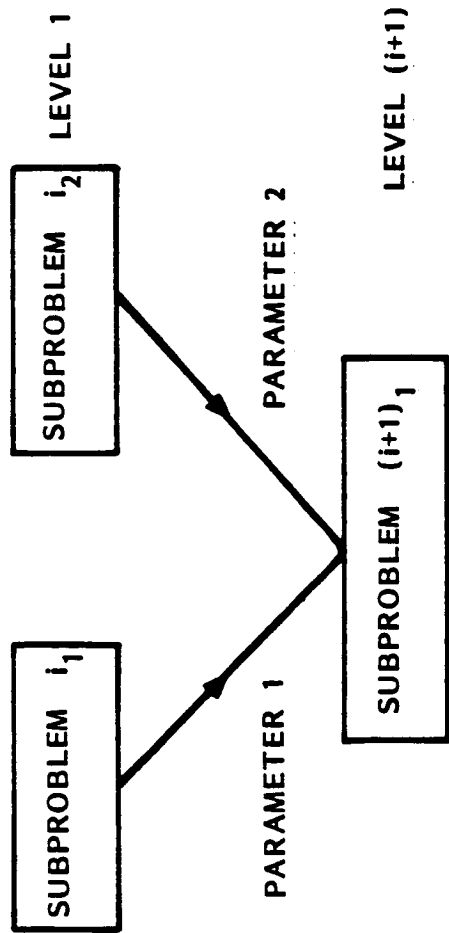


Figure 10. Subproblem with More than One Predecessor.



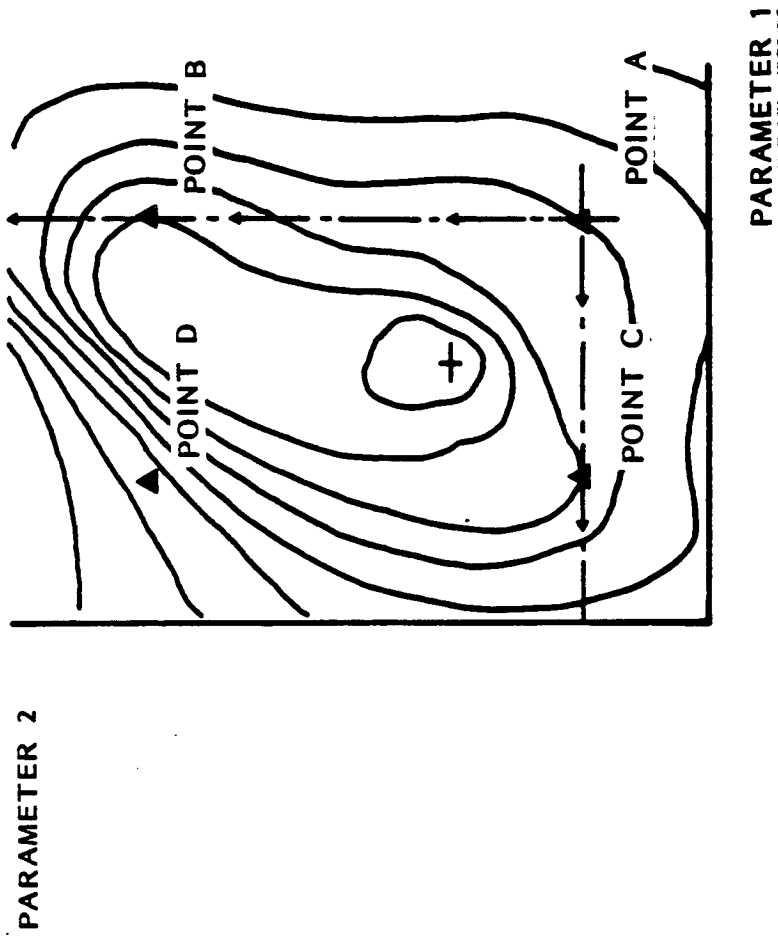


Figure 11. Divergence in the Multifaceted Decomposition.

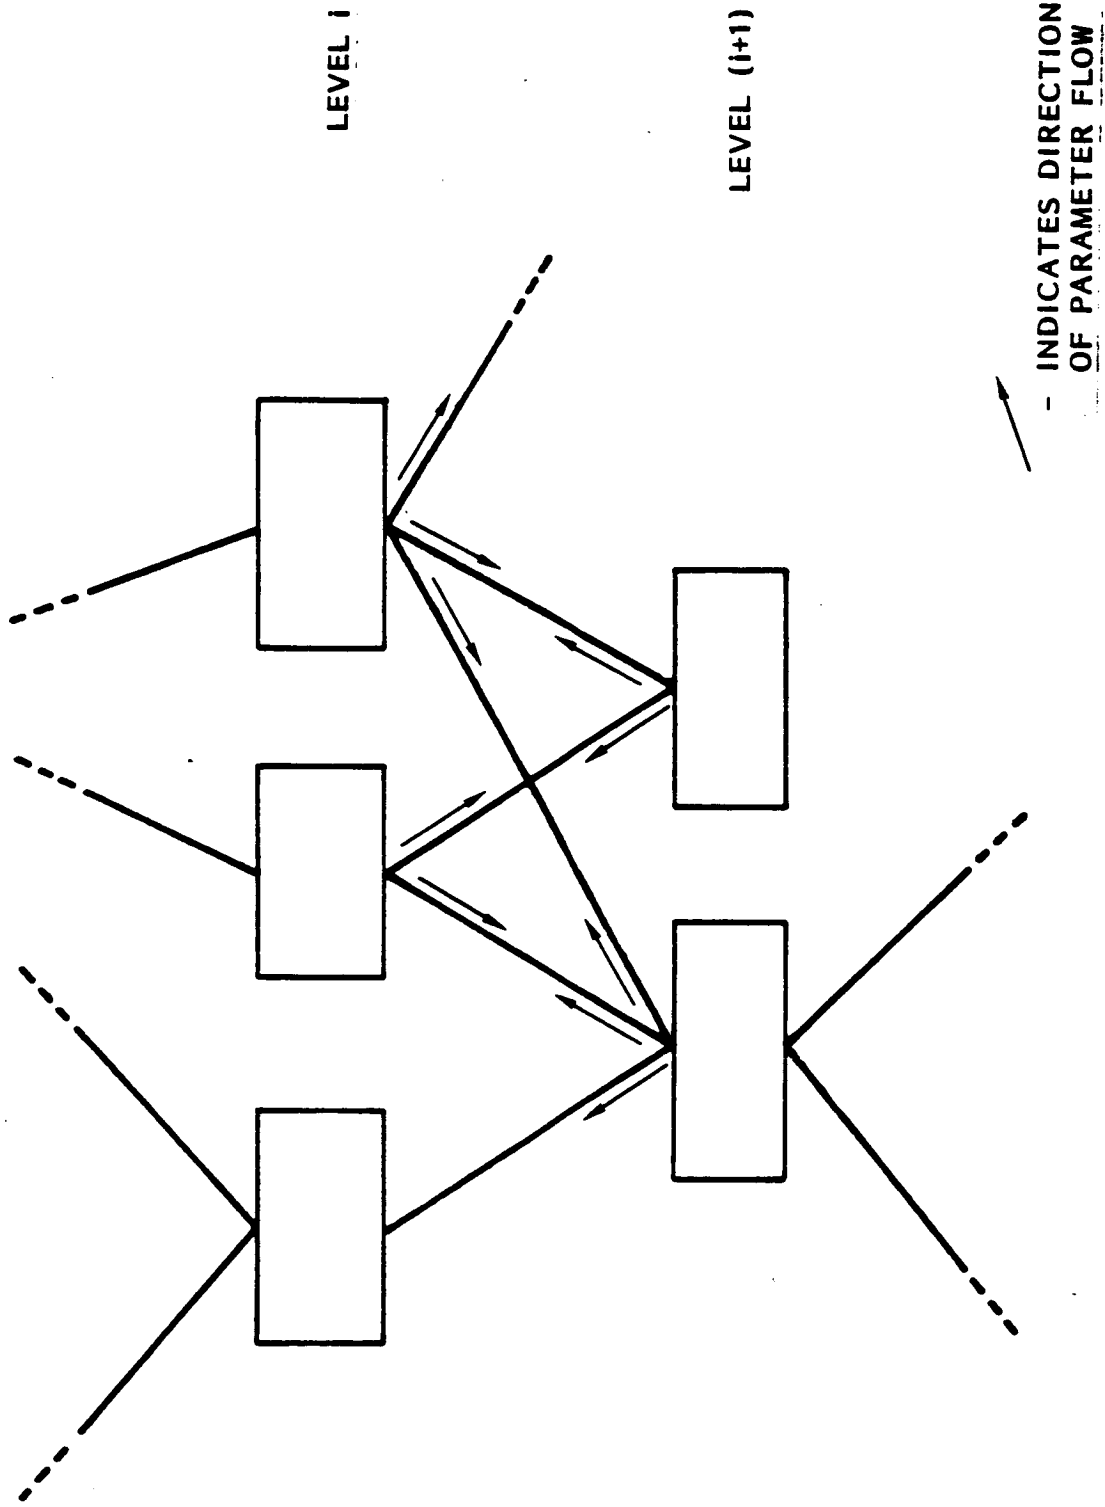


Figure 12. Proposed Iteration Procedure for the Multifaceted Decomposition.

## Standard Bibliographic Page

1. Report No. NASA CR-178239	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle APPLICATION OF DECOMPOSITION TECHNIQUES TO THE PRELIMINARY DESIGN OF A TRANSPORT AIRCRAFT	5. Report Date February 1987	6. Performing Organization Code
	7. Author(s) J. E. Rogan and M. A. Kolb	8. Performing Organization Report No. LG86ER0092
9. Performing Organization Name and Address Lockheed-Georgia Company 86 S. Cobb Dr. Marietta, GA 30063	10. Work Unit No.	11. Contract or Grant No. NAS1-18068
	12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, DC 20546	13. Type of Report and Period Covered  Contractor Report 14. Sponsoring Agency Code 505-63-11-01
15. Supplementary Notes  Langley Technical Monitor: Dr. J. Sobieski  Final Report		
16. Abstract  A nonlinear constrained optimization problem describing the preliminary design process for a transport aircraft has been formulated. A multifaceted decomposition of the optimization problem has been made. Flight dynamics, flexible aircraft loads and deformations, and preliminary structural design subproblems appear prominently in the decomposition. The use of design process decomposition for scheduling design projects, a new system integration approach to configuration control, and the application of object-centered programming to a new generation of design tools are discussed.		
17. Key Words (Suggested by Author(s)) Preliminary design, optimization, linear decomposition, object-centered programming, transport aircraft	18. Distribution Statement  Unclassified - Unlimited  Subject Category 05	
19. Security Classif.(of this report) Unclassified	20. Security Classif.(of this page) Unclassified	21. No. of Pages 299
22. Price		

For sale by the National Technical Information Service, Springfield, Virginia 22161