

# Can Motorway Traffic Incidents be detected by Mobile Phone Usage Data? An Empirical Application in the Netherlands

Research Memorandum 2015-6

John Steenbruggen  
Emmanouil Tranos  
Piet Rietveld<sup>†</sup>

# *Can motorway traffic incidents be detected by mobile phone usage data?*

## *An empirical application in the Netherlands*

John Steenbruggen  
VU University  
Department of Spatial Economics  
De Boelelaan 1105  
1081 HV Amsterdam, The Netherlands  
Phone: +31(0)152 75 7301  
[john.steenbruggen@rws.nl](mailto:john.steenbruggen@rws.nl)

Emmanouil Tranos  
Lecturer in Human Geography  
School of Geography, Earth and Environmental Sciences  
University of Birmingham B15 2TT UK  
Phone: +44(0)121 41 42680  
[e.tranos@bham.ac.uk](mailto:e.tranos@bham.ac.uk)

Piet Rietveld †<sup>1</sup>  
VU University  
Department of Spatial Economics  
De Boelelaan 1105  
1081 HV Amsterdam, The Netherlands  
Phone: +31(0)205 98 6090  
[p.rietveld@vu.nl](mailto:p.rietveld@vu.nl)

### **Abstract**

*This paper proves that mobile phone usage data is an easy to use, cheap and most importantly, reliable predictor of motorway incidents. Using econometric modelling, this paper provides a proof of concept of how mobile phone usage data can be utilised to detect motorway incidents. Greater Amsterdam is used here as a case study and the results suggest that mobile phone usage data can be utilised for the development of an early warning system to support road traffic incident management.*

**Keywords:** *Road traffic incident management, Mobile phone data, Data science, Collective sensing.*

### **1. Introduction**

Increased urbanisation does not come for free and car traffic related congestion and incidents are some of the most pronounced externalities. This paper aims to contribute to the management of these externalities by providing a proof of concept which can assist traffic Incident Management (IM). In brief, this paper proposes the use of mobile phone usage data within an IM system as a tool to detect motorway incidents. By adding a layer of information inferred by mobile phone usage data, which is easily accessible nowadays and free of charge, the efficiency of IM can be drastically increased.


---

<sup>1</sup> Piet Rietveld passed away on November 1, 2013.

IM involves the cooperation of many public and private actors. To support these tasks in an effective way, advanced information systems and the use of spatio-temporal data are becoming increasingly important (Steenbruggen *et al.*, 2014a). Along with the growing ubiquity of mobile technologies, the extensive data logs produced in the course of their usage have helped researchers to create and define new methods of observing, recording, and analysing environments and their human dynamics (O’Neill *et al.*, 2006). In effect, these personal devices create a vast, geographically-aware sensor web that accumulates tracks to reveal both individual and social behaviour in unprecedented detail (Goodchild, 2007). Steenbruggen *et al.* (2013a) have identified this phenomenon as *collective sensing*, or, in other words, the reconstruction of “collective human behaviour from individual anonymous digital traces”. These traces left by individuals are accumulating at an unprecedented scale (Zhang *et al.*, 2010) resulting in very large data sets known as ‘*Big Data*’. The usability of such data has been demonstrated in the relevant literature (Boyd and Crawford, 2012; Steenbruggen, 2014; Steenbruggen *et al.*, 2014b). In this paper we use various (Big) Data sets to explore the relationship between motorway traffic incidents and mobile phone usage. Taking into account both the spatial and the temporal dimension, we model the frequency-domain statistics of mobile phone activity, and how they relate to road traffic incidents.

Traffic incidents may be sensitive to different weather conditions. Therefore, we also include in our models other variables such as meteorological measurements to control for the weather effect on motorway incidents in the Greater Amsterdam area. Within the environmental monitoring domain, the amount and the availability of digital information, based on near real-time sensor measurements, have been rapidly increasing (e.g. see Akyildiz *et al.*, 2002; Hart and Martinez, 2006). Such sensor nodes include highly mobile and intelligent sensor pods (Resch *et al.*, 2010), as well as fixed sensor stations (Alesheikh *et al.*, 2005). Given the increasing accuracy of meteorological monitoring and forecasting, understanding the relationship between weather patterns and traffic incidents can potentially provide valuable insights into understanding and predicting mobility and traffic accidents (Sabir, 2011).

The main research question of this paper is to examine whether we can use mobile phone data to detect motorway traffic incidents (dashed line in Figure 1). The underlying goal is to explain which factors affect mobile phone usage in area  $i$  at time  $t$ , and in particular the role of incidents in area  $i$  at time  $t$  (straight line in Figure 1).

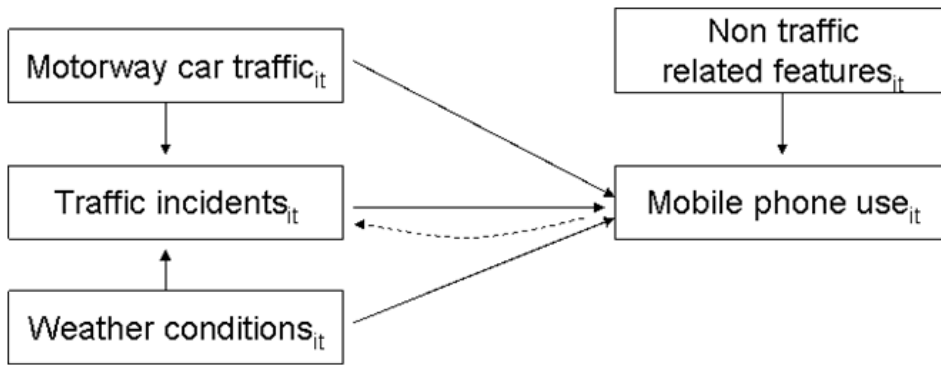

**Figure 1: Graphical representation of our research model**


More specifically, the communication volume of mobile phone use depends on the specific land use (e.g. business areas, shopping centres) and other non-traffic-related features, such as weather conditions. We focus on GSM zones which strongly overlap the motorway infrastructure, which means that motorway traffic intensity and traffic incidents potentially have a substantial influence on mobile phone usage.

The dashed arrow in the figure, pointing in the reverse direction (from mobile phone usage to traffic incidents) is also addressed in the paper. This arrow is not meant to represent a causal relationship, but it is introduced to represent the notion that data on telecom use can be employed to detect the occurrence of incidents, and therefore contribute to a rapid detection of incidents on motorways.

The structure of the paper is the following. The next section describes the data used and then the empirical application is presented. A three step modelling strategy has been designed, which starts by modelling the relation between traffic and mobile phone usage, followed by a model explaining the relationship between car incidents and motorway traffic and finally presenting the marginal effects of this relationship. The paper ends with a conclusion section.

## **2. Data**

The study area involves the city of Amsterdam and its surroundings, covering an area of about 1000 km<sup>2</sup> (see Figure 2). We used four different types of data sets for our research: mobile phone usage data; traffic incident data; motorway traffic flow data; and meteorological sensor data. These data sets are described below in more detail.

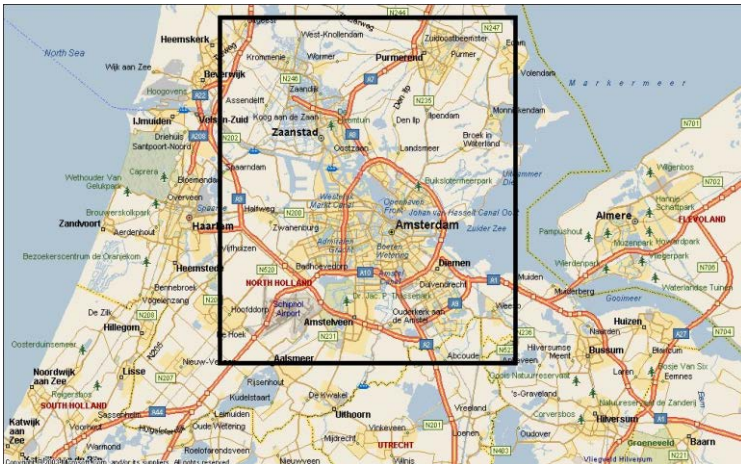

**Figure 2: Overview the Amsterdam test area**

**Note:** Owing to the irregular boundaries of the sectors, the network coverage of the study area does not exactly correspond to the above box.

## 2.1 Mobile phone usage data

The mobile phone usage data that we utilize for this paper was supplied by a major Dutch telecom operator, and provides aggregated information about mobile phone usage at the level of the GSM zones for the period 2007–2010. The most common format is the ‘*Call Data Record*’ (CDR), according to which subscribers’ mobile phone activities are recorded each time a user uses a service (Steenbruggen *et al.*, 2014b). The project uses anonymized data of the mobile network. The raw data contains aggregated CDR information with a temporal dimension of a 1-hour time interval in a certain GSM zone. In the study area, over 1200 GSM zones were provided by a Dutch telecom operator (see Figure 2). Based on our criteria, as described at the end of this section, only 109 GSM zones were used in our modelling exercise (see also Figure 3). The telecommunication operator applied special scripts to extract the necessary data for the project. For the purpose of this case study, we select data from 1 January 2010 (00.00 hr.) through to 20 November 2010 (07.00 hr.). See also Figure 3. The GSM cellular network is built on the basis of radio cells. They define the spatial dimensions of the two best serving cell maps generated by antennas with two different frequencies overlaid on each other: namely, 900 MHz coverage (the basic network with full area coverage), and 1800 MHz (capacity network only in densely populated areas). The size of a wireless cell can vary widely, and depends on many factors, such as land use and urban density. In order to obtain the real mobile phone use-pattern of a certain place in the city, the two *best serving area maps* (900 and 1800 MHz) have been merged.

In the literature, there are a number of different geographical approaches which can be used to handle the raw mobile phone network traffic data (Steenbruggen *et al.*, 2014b). Aggregated CDRs can be represented as: *Voronoi* diagrams (González *et al.*, 2008; Kuusik *et al.*, 2008; Song *et al.*, 2010; Traag *et al.*, 2011), and rasterization (Calabrese *et al.*, 2007; Reades *et al.*, 2009; Girardin *et al.*, 2009). We chose the original best-serving cell maps, because they represent a more realistic representation of the ground truth of the relationship between the original aggregated mobile phone use and the geographical area specified by the telecom operator. The main limitations of CDRs lie in their sparse temporal frequency (data are generated only when a transaction occurs), and on their rather coarse spatial granularity, as locations are based on the granularity of a cell tower (Becker *et al.* 2011). Apart from that, cell towers vary in density (urban vs. rural), which affects estimates, and there are also some concerns regarding the privacy of the use of such data (e.g. Ahas *et al.*, 2007).

The user-generated mobile phone traffic in such large-scale sensor networks reflects the spatio-temporal behavioural patterns of their users. Moreover, depending on a provider's market share and mobile penetration rate, these patterns reflect to some degree the dynamics of the larger population. The anonymized and aggregated volumes of mobile traffic data include indicators for population presence (*Erlang*, *new calls*, *total call lengths*, *SMS*) and an indicator for movements (*handovers*). The variable *total call length* is highly correlated with *Erlang* and therefore is excluded from the analysis. The used variables are defined in Table 1.

**Table 1: Description of the telecom counts used**

Type of Indicator	Variable	Description	Min.	Max.	Mean	St.dev.
Population presence	Erlang	A standard unit of measurement of traffic volumes, equivalent to 60 minutes of voice	0	73.30	3.38	4.92
	New calls	The total number of new speech calls initiated in the current GSM zone	0	2662	91.25	144.49
	Total call length	The sum of all call lengths	0	263866	12173.92	17696.82
	SMS	The total number of sent SMS	0	17415	106.68	216.59
Population movement	Handover	The sum of incoming and outgoing handovers	0	13548	434.33	583.85

**Note: The telecom data used in our case study represents a market share higher than 45 per cent**


In order to derive spatio-temporal information from the high volume of raw mobile network traffic data, a semi-automated (geo-)processing workflow was developed. To ensure that the selected cell zones represent mobile phone usage on highways and not mobile phone usage in other places, we selected only those cells with a maximum percentage of area coverage occupied by motorways. In addition, an important characteristic of the telecom network is that one unique cell zone can consist of multiple geographical polygons. Owing to radio coverage,

this can range from 1 to more than 100 polygons per cell zone id. In dense urban areas, the number of polygons is much smaller than in rural areas. In our case study area of Greater Amsterdam (the area within the black rectangle in Figure 3), the range of polygons from one unique cell varies from 1 to 6. For our analysis, we selected only those cells, where the sum of area coverage (m<sup>2</sup>) of the polygons intersected with the highway, which are related to one GSM zone, is larger than 70 per cent of the sum of all polygons belonging to the same GSM zone. Based on these criteria, we selected 109 from the original data sample including in total 790,865 hourly measurements, corresponding to 322 days and 7 hours, for each of the 109 selected cell zones belonging to the area chosen for the investigation.



**Figure 3: Selected cells covering the highways of Amsterdam and its surroundings**  
 Note 1: The Greater Amsterdam area within the black rectangle contains 122 GSM zones.  
 Note 2: 109 of these GSM zones have an area coverage of > 70% of the highways.

GSM zones are generally characterized by different land-use patterns and population presence. Each type of land use has its own specific spatial signature (see Steenbruggen *et al.*, 2013b). The spread of daily mobile phone patterns, over all weekdays from cells which are related to highways, can be seen in Figure 7. This helps us to understand the spatio-temporal variability of the mobile phone data for the road infrastructure. The diagram shows the average mobile phone intensity per hour for different indicators.

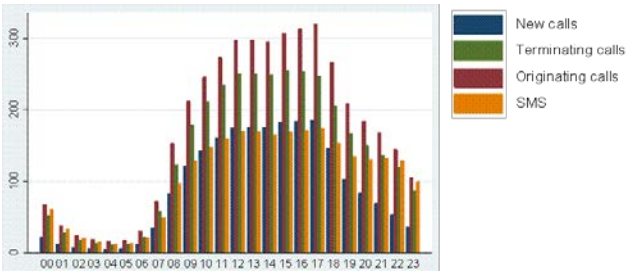

**Figure 4: Spatial distribution of cells covering the highways (the heartbeat of the road infrastructure)**  
 Note 1: ‘Terminating calls’ is the number of call attempts to a GSM zone (Mobile Terminated Calls – MTC).  
 Note 2: ‘Originating calls’ is the number of call attempts from a GSM zone (Mobile Originating Calls – MOC).

## 2.2 Traffic incident data


We use six different types of incident categories on the highways provided by the Dutch Ministry of Infrastructure and Environment: object on the highway; accident with injuries; driver is unwell; broken down vehicle; accident with only material damage; and accident with fire. The different types of incident categories are mutually exclusive, for example, if an incident with fire has injuries, it has been classified as an accident with injuries. Table 2 describes the number and relative share of the incident types in the GSM zones observed over the course of about one year. Incidents from the underlying network (local roads) were excluded from our analysis.

**Table 2: Descriptive statistics of hourly traffic incidents of all selected GSM zones in Greater Amsterdam during the observation period 2010**

Incident type	Description	Number	% Share	Avarage # incidents per hour per GSM zone	Mean incident duration
1	Object on the highway	261	0.110	0.00033	16 min.
2	Accident with injuries	59	0.025	0.0000746	71 min.
3	Driver is unwell	32	0.013	0.0000405	24 min.
4	Broken-down vehicle	1204	0.505	0.0015224	29 min.
5	Only material damage	809	0.340	0.0010229	42 min.
6	Fire	17	0.007	0.0000215	57 min.
	<b>Total</b>	<b>2382</b>	<b>100%</b>	<b>0.0030119</b>	

**Note:** Based on 790,865 hourly observations of 109 GSM zones.


The temporal variation of the incident occurrence is characterized by some significant temporal regularities. Figure 5 gives an overview of the hourly, daily, and monthly distribution of the incidents. During rush hours there are significantly more incidents, with the highest peak in the evening (Figure 3a). During working days there are substantially more incidents than during the weekend (Figure 3b). Figure 3c gives an overview of the monthly variation. It is important to note that, in our data set, we are missing data from 9 Jan.-25 Jan. and 21 Nov.-31 Dec. 2010. Since the mobile phone data have a high spatio-temporal (hourly and daily) regularity in terms of data volume, and we have 790, 865 hourly observations, this will not significantly influence the statistical outcomes of our results.

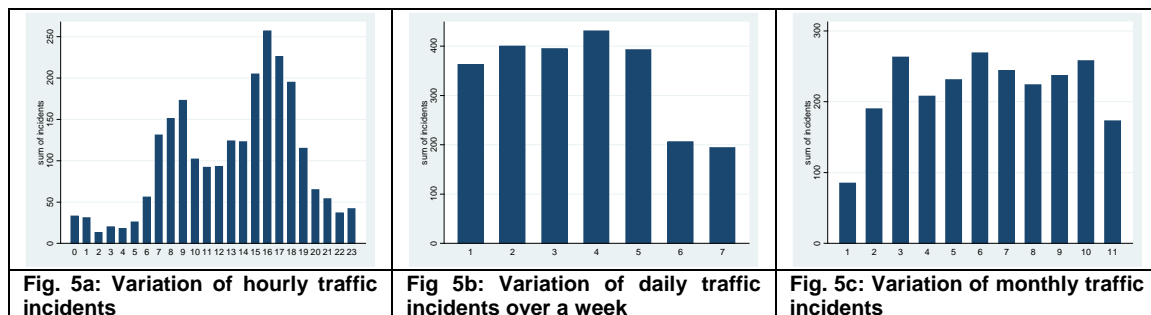

**Figure 5: Temporal distribution of road traffic incidents**




Traffic incidents may be sensitive to the different motorway characteristics. Therefore, we made a distinction between three categories: 1 = intersection point of highways; 2 = highway with exit and entry point; 3 = straight highway. From Figure 4, we can conclude that most motorway traffic incidents take place in categories 1 and 2.

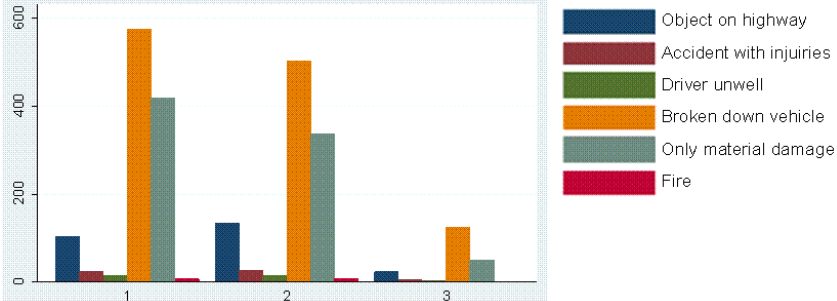

**Figure 4: Number of incidents on different types of infrastructure**  
**Note 1: See Table 1 for explanation types of incidents.**  
**Note 2: The Figures 1, 2, 3 denote infrastructure categories.**

It is important to realize that the six types of traffic incidents have a different impact on the smoothness of traffic flows. An important aspect is the time needed to handle an incident. Figure 5 gives an overview of the average time taken to handle the different types of incidents.

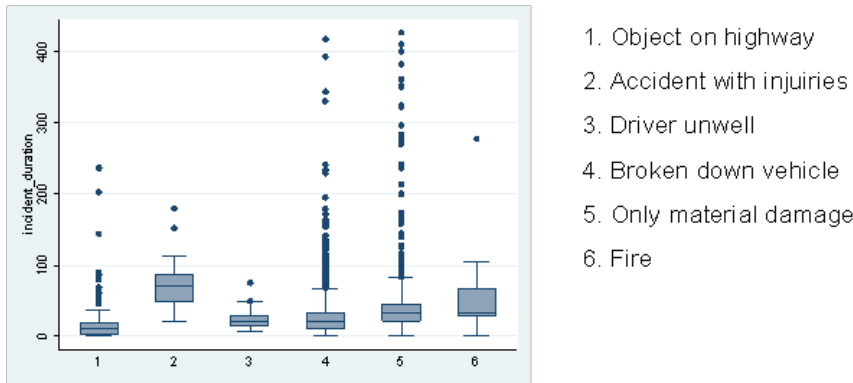

**Figure 5: Average time taken to handle the different types of traffic incidents (in minutes).**

The best serving cells (GSM zones) of the mobile phone data are used the basic measurement for data fusion. Therefore, the location of the road traffic incidents were related these GSM zones.

**2.3 Motorway traffic flow data**

Parts of the Dutch road network, especially in dense urban areas, are equipped with a comprehensive monitoring system based on detection loops with a distribution of between 300 and 500 metres apart. This system allows for the collection, processing, and transmission of dynamic and static traffic data. It contains accurate information about different data types

such as traffic flow, average speeds and traffic jam lengths. For the purpose of our case study, we use traffic flow, which is the total number of vehicles which pass per hour on a specific road segment. The accuracy of these measurements lies between 95 and 98 per cent. The data were extracted from the ‘MTR+’ detection loop application provided by the Dutch Ministry of Infrastructure and Environment (Rijkswaterstaat, 2002). Due to the complexity of the mobile phone best-serving cell maps (GSM zones), we decided to only use traffic measurements of 7 GSM zones which contains an area coverage of only one unique polygon. As the best serving cells of the mobile phone data are used the basic measurement for data fusion, motorway car traffic counts were also related to these GSM zones.

#### **2.4 In-situ meteorological sensor data**

There is a vast literature on the role of different weather variables in road traffic accidents. For an extensive historical literature review on weather information and road safety, see, for example, Andrey *et al.* (2001a, 2001b and 2003) and SWOV (2009). This literature can be classified in several ways: for instance, by statistical methodology, level of aggregation, time period, geographical location, and explanatory variables; and on the basis of the type of weather measurements (e.g. hourly, daily, or monthly), etc. In the literature, many researchers find that the total number of road accidents increases with different types of weather conditions. An important issue about measurements of weather conditions is the *number of weather factors*. Some studies focus on just one weather factor, while other studies focus on more than one. *Precipitation* is the most significant and most studied weather factor, followed by *snow*, *temperature*, *fog*, *wind*, etc. Examples of such studies are: *precipitation* (Satterthwaite 1976; Brodsky and Hakkert 1988; Andrey and Yagar 1993; Edwards 1996; Andrey *et al.* 2003; Keay and Simmonds 2006; Bijleveld and Churchill 2009); *snow* (Edwards, 1996; Nofal and Saeed, 1997; Brijs *et al.*, 2008); a combination of *snow* and *ice* (Kallberg, 1996); *temperature* (Stern and Zehavi, 1990; Wyon *et al.* 1996; Nofal and Saeed; 1997); and strong *wind* (Baker and Reynolds, 1992; Young and Liesman, 2007). Many researchers find that the total number of road accidents increases with precipitation. However, there is a range of variation in the empirical findings of the different weather conditions which makes it difficult to generalize the findings of these studies (Sabir, 2011). The *Meteorological* data used for this case study was obtained from the Royal Netherlands Meteorological Institute, KNMI ([www.knmi.nl](http://www.knmi.nl)). All measurements are hourly averages, and are measured by accurately calibrated weather stations used for regional weather forecasting. The

meteorological measurements are related to the best serving GSM zones. We consider three meteorological variables:

- T: Temperature in units of 0.1° C;
- R: Rainfall (0=no occurrence, 1=occurred during the time of observation);
- S: Snow (0=no occurrence, 1=occurred during the time of observation);

### 3. Empirical application

We adopt a three stage approach. In the first step, mobile phone usage will be regressed against motorway car traffic for those zones where data is available. Here we examine the effect of motorway traffic flow and traffic incidents on mobile phone usage, while controlling for different space-time variables and weather conditions. In the second step, we analyse whether an increase in motorway traffic flows affects the probability of different types of incidents. In the third and last step, the marginal effects different types of mobile phone usage on the probability of having a motorway incident will be estimated. The main objective of the modelling strategy is to test the *usability* of data derived from mobile phone operators as a detector of traffic incidents.

#### 3.1 Motorway traffic and mobile phone usage

In this section we estimate the effect of motorway traffic on mobile phone use, given the temporal and spatial dimension and resolution of the data from the mobile phone operator. In order to perform this analysis, different mobile phone usage variables (Erlang, new calls, SMS and handovers) are used here as the dependent variables. The main goal of this exercise is to see which mobile phone variable is significantly related to motorway traffic derived from the detection loop database. The first analysis is limited to 7 GSM zones for which motorway flow data (number of cars per hour) are available. The basic version of this model is:

$$\ln(mob_{it}) = b_1 \ln(car_{it}) + b_2 incident_{it} + B_1 X_i + B_2 T_t + B_3 W_t + B_4 X_i * H_t + \alpha_0 + \varepsilon_{it} . \quad (1)$$

According to Model 1, mobile phone activity ( $mob_{it}$ ) in GSM zone  $i$  and time  $t$  is affected by: a coefficient  $b_1$  of motorway traffic flow ( $car_{it}$ ) in GSM zone  $i$  and at time  $t$ ; a coefficient  $b_2$  of motorway incidents ( $incident_{it}$ ) in GSM zone  $i$  and at time  $t$ ; a vector  $B_1$  of fixed effects of GSM zones ( $X_i$ ); a vector  $B_2$  of time specific fixed effects ( $T$ ) including hourly, weekday and

monthly effects; and a vector  $B_3$  of various weather conditions variables ( $W_t$ ). In order to better understand how mobile phone use changes over time, we incorporate into the model the time variability of our observations by introducing hourly interaction terms ( $H_t$ ) for the GSM zones ( $X_i$ ). Note that the variables  $mob_{it}$  and  $car_{it}$  are introduced in the model via their natural logarithms because they are heavenly skewed.

**Table 3: Prais-Winsten regression of different mobile phone variables for 7 GSM zones using data on motorway traffic**

VARIABLES	(1) ln(erlang)	(2) ln(new_calls)	(3) ln(sms)	(4) ln(handovers)
ln(cars)	0.317 (11.30)***	0.196 (7.247)***	0.223 (7.626)***	0.547 (29.20)***
incidents	0.0493 (1.205)	0.0283 (0.788)	0.0803 (1.956)*	0.0183 (0.692)
temperature	0.000182 (1.193)	9.69e-05 (0.548)	0.000434 (2.550)**	0.000188 (1.743)*
rain	0.00665 (0.727)	0.00827 (0.946)	0.0149 (1.563)	-0.00279 (-0.459)
snow	-0.0485 (-1.864)*	0.00705 (0.289)	0.0155 (0.575)	-0.0102 (-0.593)
hour dummies	included	included	included	included
weekday dummies	included	included	included	included
month dummies	included	included	included	included
GSM zone dummies	included	included	included	included
hourly interaction terms (GSM zones)	included	included	included	included
constant	-1.210 (-4.900)***	2.971 (12.39)***	2.560 (9.897)***	1.617 (9.788)***
observations	40,609	40,609	40,609	40,609
R-squared	0.816	0.692	0.670	0.881
Durbin-Watson (original)	0.900	0.666	0.808	0.814
Durbin-Watson (transformed)	2.063	2.298	2.203	2.173

t-statistics in parentheses, \*\*\* p<0.01, \*\* p<0.05, \* p<0.1

Instead of reporting the simple OLS results (which can be obtained upon request), model (1) is estimated using the Prais-Winsten regression in order to address the presence of serial autocorrelation in our data. According to Durbin-Watson test presented in Table 3, our estimation strategy addresses this problem (transformed Durbin-Watson close to 2).

The most important finding is that mobile phone usage, measured in Erlang, new calls, and sms, is positively and significantly affected by motorway car traffic and traffic incidents. For example, an increase in traffic flow of 1 per cent leads to an increase in Erlang of 0.32 per cent because an increase in traffic flow will result to more cars and therefore more people present in an area. Similarly, an incident is related to an increase in Erlang of 4.9 per cent. Our interpretation is that if there is an incident on a motorway – especially if it results to

traffic disruptions – more drivers will use their phone while they are waiting. An interesting observation is that an incident has a lower impact on handovers (1.8 per cent) than on the other mobile phone uses, which is a signal that an incident makes traffic slower. In order to test whether these results still hold when data on car traffic is disregarded, we estimate model (1) without the motorway car traffic variable ( $car_{it}$ ) for the all the 109 GSM zones. Table 4 present this estimation, using again the Prais-Winsten estimator.

**Table 4: Durban-Watson regression of different mobile phone variables for all 109 GSM zones without using car data**

VARIABLES	(1) ln(erlang)	(2) ln(new_calls)	(3) ln(sms)	(4) ln(handovers)
incidents	0.0653 (6.043)***	0.0558 (6.433)***	0.0372 (3.984)***	0.0300 (3.572)***
temperature	0.000430 (8.866)***	0.000402 (8.312)***	0.000422 (9.362)***	0.000390 (9.396)***
rain	-0.0108 (-4.426)***	-0.00753 (-3.671)***	-0.00121 (-0.562)	-0.00755 (-3.897)***
snow	0.000673 (0.0953)	0.00845 (1.431)	0.0189 (3.056)***	-0.00947 (-1.693)*
hour dummies	included	included	included	included
weekday dummies	included	included	included	included
month dummies	included	included	included	included
GSM zone dummies	included	included	included	included
hourly interaction terms (GSM zones)	included	included	included	included
constant	0.255 (5.455)***	0.656 (14.91)***	0.426 (10.02)***	4.676 (120.3)***
observations	790,865	790,865	790,865	790,865
R-squared	0.622	0.568	0.618	0.675
Durbin-Watson (original)	0.688	0.517	0.626	0.607
Durbin-Watson (transformed)	2.099	2.215	2.189	2.101

t-statistics in parentheses

\*\*\* p<0.01, \*\* p<0.05, \* p<0.1

The effect of traffic incidents is positive and significant for all the different right hand-side variables. This analysis confirms that mobile phone activity in the selected GSM zones which intersect with the highway is affected by motorway traffic. The estimated effects of traffic incidents still have approximately the same values, both with and without using the car flow data (coefficients between 0.03 – 0.06), as because the hourly dummies capture the temporal variation of car traffic. Thus, the incident elasticity of about 0.03 to 0.06 (from Table 4) is not just a reflection of exposure. Regarding the weather variables, temperature and snow are both significant (with a positive effect), rain is significant (with a negative effect). In order to move

a step forward, the next section examines the factors affecting the occurrence of traffic incidents on the highway.

### 3.2 Motorway incidents and motorway traffic

The first step of the analysis provided hard evidence that after controlling for various spatial and temporal characteristics, mobile phone use is statistically related with the amount of traffic in a motorway segment and also with the existence of an incident. The next step is to reverse the direction of causality in order to test whether variables depicting mobile phone usage can be used as detectors of motorway traffic. Equation (2) below describes our logic. According to this model, the probability of having an incident in a motorways segment  $i$  at time  $t$  is a function of motorway traffic flow ( $car_{it}$ ), mobile phone usage ( $mob_{it}$ ) as well as a number of fixed spatial ( $X_i$ ) and temporal ( $T_t$ ) effects as in equation (1). Since the probability of having an accident is not observable, the left hand-side variable in (2) is a dummy variable ( $incident_{it}$ ) indicating the presence of motorway incident in GSM zone  $i$  at time  $t$ . The usability of this model lies on the fact that if we estimate a significant and positive  $b_2$  coefficient after controlling for space (GSM zone) and time (hour of the day, day of the week and month) as well as weather conditions ( $W_t$ ), then it will have been proved that an increase in (the observed) mobile phone use will be related to an increase in the probability of having a motorway incident. In simple English, this model can prove the concept that an IM system which focuses on the rapid identification of motorway incidents will be benefited by the use of a stream of data on mobile phone usage. Equation (2) is estimated for the 7 selected GSM zones for which data on motorway traffic is available. Because the different mobile phone variables are highly correlated, we only use *Erlangs* in this model.

$$Pr(incident_{it} = 1|x_{it}) = F[b_1 \ln(car_{it}) + b_2 \ln(mob_{it}) + B_1 X_i + B_2 T_t + B_3 W_t + \alpha_0], \quad (2)$$

where the link function  $F$  follows from the specification of the probit model.

The results are presented in Table 5, Column (1). We find a positive and significant effect of mobile phone usage on the probability that an incident occurs during the hour observed. This is a promising starting point for an analysis of the usefulness of telecom data as a proxy for the occurrence of an incident. To explore whether this model also yields meaningful results when data on car traffic intensity are not available, we estimate equation (2) for all the 109 GSM zones (Column 2, Table 5). The most important finding is that the coefficients for


mobile phone use, in terms of Erlangs, are positive and significant in all tested models. When the traffic flow data ( $car_{it}$ ) is excluded, the spatial and temporal fixed effects pick up the traffic variation in time and space and the decrease in pseudo R squared is only marginal. Thus, we conclude that, even when data on traffic flow are absent, a significant positive relation between the probability of a motorway incident and the volume of mobile phone use is found.

**Table 5: Probit model of the probability of an incident for the 7 (column 1) and the 109 (column 2) selected GSM zones**

VARIABLES	(1) incidents	(2) incidents
ln(cars)	-0.691 (-3.459)***	
ln(erlang)	0.121 (1.809)*	0.148 (12.34)***
temperature	0.000742 (0.796)	0.000191 (0.888)
rain	0.00968 (0.122)	0.0410 (2.286)**
snow	0.271 (1.392)	-0.0408 (-0.652)
hour dummies	included	included
weekday dummies	included	included
month dummies	included	included
GSM zone dummies	included	included
constant	0.672 (0.476)	-2.634 (-32.90)***
observations	38,921	790,865
Pseudo R2	0.111	0.104

z-statistics in parentheses, \*\*\* p<0.01, \*\* p<0.05, \* p<0.1

One would expect that there would be a positive relationship between the number of cars and the number of traffic incidents on motorways. The results from Table 5 shows, that there is a negative and significant relationship between the number of cars and the probability of a traffic incident. Thus, the impact of car traffic on incidents apparently varies strongly from hour to hour. This is indeed suggested by Figure 8a.

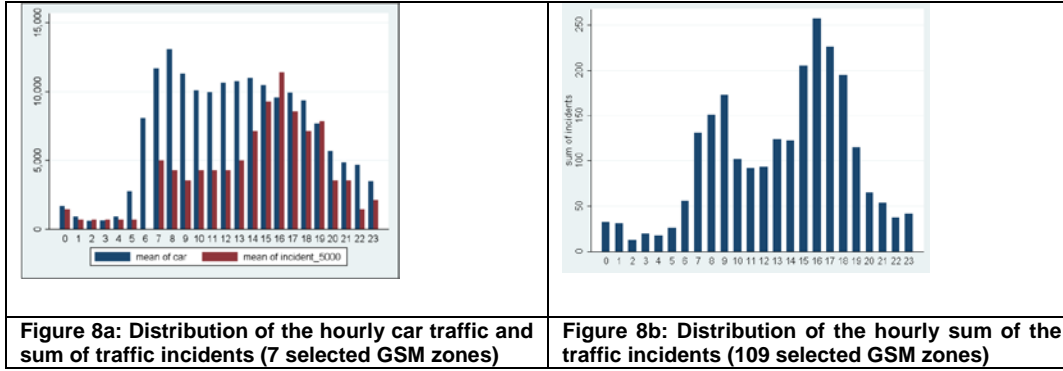

The morning rush hours (between 6:00 hr and 10:00 hr) show more motorway traffic flow than the evening rush hour (between 16:00 hr and 20:00 hr). There are clearly more incidents during the evening rush hours, with fewer cars, than in the morning rush hours, with more cars on the road. Although this analysis contains only 7 GSM zones, the spatial signature of hourly distribution of traffic incidents shows approximately the same pattern for all the 109 GSM zones (see Figure 8b).

### 3.3 Marginal effects for various telecom activity and types of incidents

In this section we go one step further to analyse more specifically whether mobile phone usage can be used as a detector of different types of traffic incidents for all 109 GSM zones. Furthermore, to present the estimation results in a way that is easy to understand, we make use of marginal effects (ME) based on probit models. It is important to note that these ME coefficients are not directly comparable to output generated by OLS regressions.

In OLS regressions the marginal effect can be directly obtained from the estimated coefficients. Since probit models are inherently non-linear, the marginal effects depend on the level of the independent variable, and also on the levels of other independent variables. Therefore, marginal effects have a ‘ceteris paribus’ interpretation. They tell what happens if a given variable varies, while all the other variables remain unchanged. Here, we confine ourselves to a presentation of the estimates by means of the marginal effects based on the mean value of all independent variables. Equation (3) presents the probit model presented above (2) without the car traffic flow variable, which is estimated for all the 109 selected GSM zones:

$$Pr(incident_{it} = 1|x_{it}) = F[b_1 \ln(mob_{it}) + B_1 X_i + B_2 T_t + B_3 W_t + \alpha_0] \quad (3)$$



The results are presented in Table 6 for the total number of accidents and various types of mobile phone measures (the result for Erlang corresponds with Column (2) in Table 5).

**Table 6: Marginal effects of mobile phone use on incident probability; based on data for 109 GSM zones.**

VARIABLES	(1) incidents	(2) incidents	(3) incidents	(4) incidents
ln(erlang)	0.000615 (12.34)***			
ln(new_calls)		0.000426 (9.445)***		
ln(sms)			0.000316 (6.846)***	
ln(handovers)				0.000474 (8.267)***
temperature	7.94e-07 (0.888)	8.66e-07 (0.942)	9.86e-07 (1.064)	9.09e-07 (0.987)
rain	0.000177 (2.286)**	0.000187 (2.355)**	0.000188 (2.344)**	0.000190 (2.386)**
snow	-0.000160 (-0.652)	-0.000158 (-0.625)	-0.000149 (-0.582)	-0.000126 (-0.493)
hour dummies	Included	Included	Included	Included
weekday dummies	Included	Included	Included	Included
month dummies	Included	Included	Included	Included
GSM zone dummies	included	Included	Included	Included
observations	790,865	790,865	790,865	790,865
Pseudo R2	0.104	0.102	0.101	0.102

z-statistics in parentheses, \*\*\* p<0.01, \*\* p<0.05, \* p<0.1

The main findings of this model can be summarized as follows. Even after controlling for hourly effects, coefficients for Erlang, new calls, and sms are still positive and significant for traffic incidents. The marginal effects can be interpreted as follows. A 1 per cent increase in new calls, increases the probability of an incident in a specific GSM zone by  $0.000426 \times (0.01) = 4.26 \times 10^{-6}$ . This is equal to  $4.26 \times 10^{-4}$  per cent. This is clearly a very low figure, but note that the average probability of an incident is 0.00301 (see Table 1). So the relative increase in the probability of an incident related to 1 per cent increase in new calls is about 0.142 per cent. Similarly, a  $0.1^\circ$  C. increase in temperature increases the probability by  $8.66 \times 10^{-7}$ , which is indeed a very small effect.

The last modelling step looks in more detail at the different types of incidents, as described earlier in Section 2.1, written as:

$$Pr(\text{incident\_type}_{it} = 1|x_{it}) = F[b_1 \ln(\text{mob}_{it}) + B_1 X_i + B_2 T_t + B_3 W_t + \alpha_0] \quad (4)$$


**Table 7: Marginal effects of mobile phone use on incident probability for various types of incidents; based on data for 109 GSM zones.**

	(1)	(2)	(3)	(4)	(5)	(6)
VARIABLES	Object on the highway	Accidents with Injuries	Driver unwell	Broken-down vehicle	Only material damage	Fire
ln(erlang)	-1.08e-05 (-0.482)	4.13e-05 (2.351)**	6.28e-05 (3.613)***	0.000328 (9.164)***	0.000301 (9.286)***	-4.79e-06 (-0.266)
temperature	4.18e-07 (0.918)	-2.87e-07 (-0.873)	-2.58e-08 (-0.0932)	1.08e-06 (1.745)*	-6.62e-07 (-1.149)	1.25e-07 (0.351)
rain	-4.32e-05 (-1.126)	-1.90e-05 (-0.717)	-4.66e-05 (-1.900)*	1.94e-06 (0.0358)	0.000256 (5.079)***	-2.57e-05 (-0.867)
snow	-0.000174 (-1.402)	0.00218 (1.594)		2.58e-05 (0.145)	-7.82e-05 (-0.530)	
hour dummies	Included	Included	Included	Included	Included	Included
weekday dummies	Included	Included	Included	Included	Included	Included
month dummies	Included	Included	Included	Included	Included	Included
GSM zone dummies	Included	Included	Included	Included	Included	Included
observations	579,431	204,089	139,232	739,833	717,952	42,270
Pseudo R2	0.0711	0.0700	0.0800	0.104	0.0939	0.0632

z-statistics in parentheses, \*\*\* p<0.01, \*\* p<0.05, \* p<0.1

The categories accidents with injuries, driver being unwell, broken-down vehicles and incidents with only material damage are all positive and significant as shown in Table 7. The marginal effects can be interpreted as follows. A 1 per cent increase in Erlang, increases the probability of an incident with only material damage in a specific GSM zone by  $0.000301 \times 0.01 = 3.01 \times 10^{-6}$ . This is equal to  $3.01 \times 10^{-4}$  per cent. We find rather higher effects for broken-down vehicles than for the other types of incident.

There are a number of reasons which may explain this outcome. The A10 Amsterdam ring road has the characteristic that the number of cars during the day is close to its maximum capacity. For safety reasons, before 2011, the Traffic Management Centre completely closed 1 driving lane so it could be used for emergency aid. This directly caused traffic jams, even just for broken-down vehicles compared with other types of accidents. Since 2011 (so after our study period), because of major congestion problems, this policy has been changed. Furthermore, our database has only 59 incidents with injuries. Only a part (approximately 40 per cent) of these incidents took place during rush hours (see Figure 9).

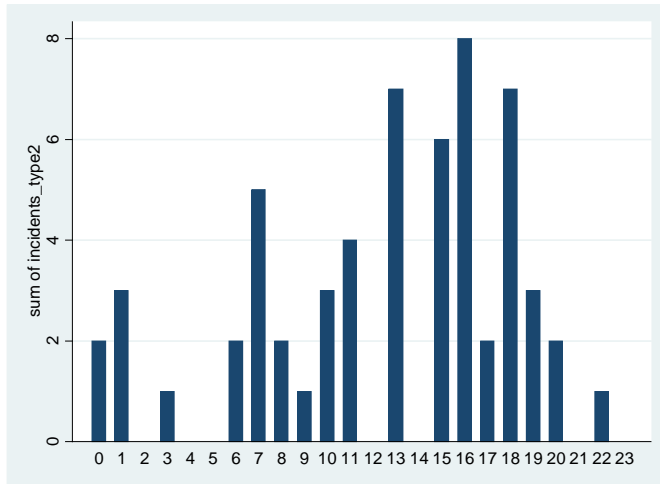

**Figure 9: Temporal distribution of road traffic incidents with injuries**

Another interesting finding is that temperature is only significant (and positive) for broken-down vehicles ( $p < 0.1$ ). One might expect that low temperatures would affect broken-down vehicles. The plausible explanation is that, in cold weather conditions, people are likely to have more problems with their batteries. This kind of problem occurs when drivers start their cars from their homes. Cars will need to be repaired before they can enter the highway.

Rain is only positive and significant for material damage (collisions between cars) ( $p < 0.01$ ). This means that wet weather conditions significantly influence the safety on the roads. They affect incidents with only material damage but not accidents with injuries. The explanation is that in the rain drivers reduce speed (see Sabir, 2011), so serious accidents are less probable, but still the probability of less-serious accidents does increase when it rains.

#### **4. Conclusions**

The above analysis provided a proof of concept, according to which data on mobile phone usage can be utilised within an IM system as a detector of traffic incidents and provide the basis of an early warning system. The new layer of information provided by mobile phone usage data as a means to detect motorway incidents can improve IM systems without adding any additional cost that other live traffic measurement systems may impose. Data on mobile phone use can be obtained free of charge as it is collected by mobile phone operators for billing purposes.

At a more detailed level, an important finding is that mobile phone usage in telecom GSM zones is strongly affected by motorway traffic flow, and also by the occurrence of traffic incidents. This makes mobile phone usage in GSM zones that are crossed by motorways a

promising proxy for traffic flow and the occurrence of incidents on these roads. The estimated effects of traffic incidents on mobile phone use still have approximately the same values both with and without using the car traffic flow variable. The high resolution of the mobile phone data enables us to extract vital information at a very fine-grained spatial scale.

The main limitation of our study is that the temporal resolution as the one hour interval is quite crude. A reduction to 5 or 10 minutes would enable us to provide information which answers the required timelines of the end-users in the traffic management centres. Nevertheless, even with such sparse temporal resolution the results of the analysis support our proposal. Moreover, the data quality of the mobile telecom network also deserves further attention. A telecom network consists of a complicated technical structure, where the mobile phone use data are extracted from. A valuable exercise would be to compare the different approaches which commonly found in the relevant literature, such as *rasterisation and Voronoi* diagrams. Other interesting themes would be to apply concepts such as ‘Dynamic Data Driven Application Systems’ (DDDAS), to handle real-time data flows from the telecom network, and to develop a simulation system for evacuation and the effect of different emergency scenarios and types of agent behaviour (e.g. Darema, 2004; Madey *et al.*, 2007).

Finally, the process of data fusion, which combines information originating from multiple sources, could be further explored. Overlapping information, such as detection loop data, estimation of traffic flow, weather conditions, and social media data, could be used to detect, identify, and track relevant objects in a region to support Situational Awareness for traffic incident management.

## REFERENCES

- Ahas, R., Aasa, A., Roosea, A., Mark, Ü., Silm, S. (2007). Evaluating passive mobile positioning data for tourism surveys: An Estonian case study. *Tourism Management* 29(3), pp. 469-486
- Akyildiz, I.F., Su, W., Sankarasubramaniam, Y. and Cayirci, E. (2002). A survey on sensor networks, *IEEE Communications Magazine*, 40, pp. 102-114.
- Alesheikh, A.A., Oskouei, A.K., Atabi, F. and Helali, H. (2005). Providing interoperability for air quality in-situ sensors observations using GML technology, *International Journal of Environment Science and Technology* 2, pp. 133-140.
- Andrey, J. and Yagar, S. (1993). A temporal analysis of rain-related crash risk, *Accident Analysis and Prevention* 25(4), pp. 465-472.
- Andrey, J., Mills, B. and Vandermolen, J. (2001a). Weather information and road safety. Department of Geography, University of Waterloo. Adaptation and Impacts Research Group, MSC Environment Canada. Paper Series – No. 15. August 2001.
- Andrey, J., Suggett, J., Mills, B. and Leahy, M. (2001b). Weather-related road accident risks in mid-sized Canadian cities, in: *Proceedings of Canadian Multidisciplinary Road Safety Conference XII*, June 11-13, London.
- Andrey, J., Mills, B., Leahy, M. and Suggett, J. (2003). Weather as a chronic hazard for road transportation in Canadian cities. *Natural Hazards* 28, pp. 319-343.

- Baker, C.J. and Reynolds, S. (1992). Wind-Induced accidents of road vehicles, *Accident Analysis and Prevention* 24(6), pp. 559-575.
- Barabási, A.-L. (2009). We are at the threshold of understanding complexity, *12 Scientists on the 21st Century*, World Science Forum, Budapest, 2009, pp. 19-26.
- Becker, R.A., Caceres, R., Hanson, K., Loh, J.M., Urbanek, S., Varshavsky, A., and Volinsky, C. (2011). A tale of one city: Using cellular network data for urban planning. *Pervasive Computing* 10(4), pp. 18-26.
- Bijleveld, F. and Churchill, T. (2009). The influence of weather conditions on road safety SWOV Institute for Road Safety Research, Report No. R-2009-9, The Netherlands.
- Boyd, D. and Crawford, K. (2012). Critical questions for big data: Provocations for a cultural, technological, and scholarly phenomenon. *Information, communication & society* 15(5), pp. 662-679.
- Brijs, T., Dimitris, K. and Greet, W. (2008). Studying the effect of weather conditions on daily crash counts using a discrete time-series model. *Accident Analysis and Prevention* 40(3), pp. 1180-1190.
- Brodsky, H. and Hakkert, A.S. (1988). Risk of a road accident in rainy weather, *Accident Analysis and Prevention* 3, pp. 161-176.
- Calabrese, F., Kloeckl, K. and Ratti, C. (2007). WIKICITY: Real-time urban environments. *Pervasive Computing, Mobile and Ubiquitous Systems* 6(3), pp 52-53. July - September 2007.
- Darema, F. (2004). Dynamic data driven applications systems: A new paradigm for application simulations and measurements. In *Computational Science-ICCS 2004*, pp. 662-669. Springer Berlin Heidelberg.
- Edwards, J.B. (1996). Weather-related road accidents in England and Wales: A spatial analysis, *Transport Geography* 4, pp. 201-212.
- Girardin, F., Vaccari, A., Gerber, A, Biderman, A. and Ratti, C. (2009). Quantifying urban attractiveness from the distribution and density of digital footprints, *International Journal of Spatial Data Infrastructures* 4, pp. 175-200.
- Goodchild, M.F. (2007). Citizens as voluntary sensors: Spatial data infrastructure in the world of web 2.0. *International Journal of Spatial Data Infrastructures Research* 2, pp. 24-32.
- González, M.C., Hidalgo, C.A. and Barabási, A.-L. (2008). Understanding individual human mobility patterns. *Nature* 453(5), pp.779-782, June 2008.
- Hart J.K. and K. Martinez (2006). Environmental Sensor Networks: A revolution in the earth system science? *Earth-Science Reviews* 78, pp. 177-191.
- Kallberg, V.-P. (1996). Experiment with reduced salting of rural main roads in Finland, *Transportation Research Record* 1533, pp. 32-43.
- Keay, K. and Simmonds, I. (2006). Road accidents and rainfall in a large Australian city, *Accident Analysis and Prevention* 38, pp. 445-454.
- Kuusik, A., Ahas, R. and Tiru, M. (2008). Analysing repeat visitation on country level with passive mobile positioning method: An Estonia case study, University of Tartu, Positium LBS.
- Madey, G., Barabási, A.-L., Chawla, N.V., Gonzalez, M., Hachen, D., Lantz, B., Pawling, A., Schoenharl, T., Szabó, G., Wang, P. and Yan, P. (2007). Enhanced situational awareness: Application of DDDAS concepts to emergency and disaster management, in: *International conference on computational science, serial lecture notes in computer science (LNCS 4487)*, Y. Shi, G. D. van Albada, J. Dongarra, and Sloot, P. M. A. (eds), May 2007, pp. 1090-1097.
- Nofal, F.H. and Saeed, A. (1997). Seasonal variation and weather effects on road traffic accidents in Riyadh City, *Public Health* 111, pp. 51-55.
- O'Neill, E., Kostakos, V., Kindberg, T., Schieck, A. F., Penn, A., Fraser, D. S., and Jones, T. (2006). Instrumenting the city: Developing methods for observing and understanding the digital cityscape, in *Ubicomp*, pp. 315-332.
- Reades, J., Calabrese, F. and Ratti, C. (2009). Eigenplaces: analysing cities using the space-time structure of the mobile phone network. *Environment and Planning B: Planning and Design* 36, pp. 824-836.
- Resch, B. Mittlboeck, M. and Lippautz, M. (2010), Pervasive monitoring - An intelligent sensor pod approach for standardised measurement infrastructures, *Sensors* 10, pp. 11440-11467.
- Rijkswaterstaat (2002). Productcatalogus basisinformatie. Adviesdienst Verkeer en Vervoer, hoofdafdeling basisgegevens.
- Sabir, M. (2011). Weather and Travel behaviour. Dissertation, research series Vrije Universiteit Amsterdam, March 2011.
- Satterthwaite, S.P. (1976). An Assessment of Seasonal and Weather Effects on the Frequency of Road Accidents in California *Accident Analysis and Prevention* 8, pp. 87-96.
- Song, C., Koren, T., Wang, P. and Barabási, A.-L. (2010). Modelling the scaling properties of human mobility. *Nature Physics* 6, pp. 818-823.
- Steenbruggen, J. (2014). Tourism geography: Emerging trends and initiatives to support tourism in Morocco. Vrije Universiteit Amsterdam, Faculty of Economics and Business Administration, Research Memorandum 2014-2, pp. 1-29.

- Steenbruggen, J., Nijkamp, P., Smits, J.M. and Grothe, M. (2011). Traffic incident management: A common operational picture to support situational awareness of sustainable mobility. Vrije Universiteit Amsterdam, Faculty of Economics and Business Administration, Research Memorandum 2011-33, pp. 1-35.
- Steenbruggen, J., Borzacchiello, M.T., Nijkamp, P. and Scholten, H. (2013a). Data from telecommunication networks for Incident Management: An exploratory review on transport safety and security, *Transport Policy* 28, pp. 86-102.
- Steenbruggen, J., Borzacchiello, M.T., Nijkamp, P. and Scholten, H. (2013b). Mobile phone data from GSM networks for traffic parameter and urban spatial pattern assessment: a review of applications and opportunities. *GeoJournal* 78(2), pp. 223-243.
- Steenbruggen, J., Nijkamp, P. and van der Vlist, M. (2014a). Urban traffic incident management in a digital society: An actor-network approach in information technology use in urban Europe. *Technological Forecasting and Social Change* 89, 245-261.
- Steenbruggen, J., Tranos, E. and Nijkamp, P. (2014b). Data from mobile phone operators: A tool for smarter cities. *Telecommunication Policies* 39(3-4), pp. 335-346.
- Stern, E. and Zehavi, Y. (1990). Road safety and hot weather: A Study in applied transport geography, *Transactions of the Institute of British Geographers* 15(1), pp. 102-111.
- SWOV (2009). Fact sheet: Influence of weather on road safety, Institute for Road Safety Research, The Netherlands.
- Traag, V.A., Browet, A., Calabrese, F. and Morlot, F. (2011). Social event detection in massive mobile phone data using probabilistic location inference, submitted to IEEE SocialCom'2011.
- Wyon, D. P., Wyon, I. and Norin, F. (1996). Effects of moderate heat stress on driver vigilance in a moving vehicle, *Ergonomics* 39(1), pp. 61-75.
- Young, R.K. and Liesman, J. (2007). Estimating the relationship between measured wind speed and overturning truck crashes using a binary logit model, *Accident Analysis and Prevention* 39, pp. 574-580.
- Zhang, D., Guo, B., Li, B. and Yu, Z. (2010). Extracting social and community intelligence from digital footprints: an emerging research area, in: *Proceedings of the 7th international conference on Ubiquitous Intelligence and Computing (UIC'10)*. Springer-Verlag Berlin, Heidelberg 2010 ISBN:3-642-16354-8 978-3-642-16354-8.

## Research Memoranda of the Faculty of Economics and Business Administration

### 2011

2011-1	Yoshifumi Takahashi Peter Nijkamp	Multifunctional agricultural land use in sustainable world, 25 p.
2011-2	Paulo A.L.D. Nunes Peter Nijkamp	Biodiversity: Economic perspectives, 37 p.
2011-3	Eric de Noronha Vaz Doan Nainggolan Peter Nijkamp Marco Painho	A complex spatial systems analysis of tourism and urban sprawl in the Algarve, 23 p.
2011-4	Karima Kourtit Peter Nijkamp	Strangers on the move. Ethnic entrepreneurs as urban change actors, 34 p.
2011-5	Manie Geyer Helen C. Coetzee Danie Du Plessis Ronnie Donaldson Peter Nijkamp	Recent business transformation in intermediate-sized cities in South Africa, 30 p.
2011-6	Aki Kangasharju Christophe Tavéra Peter Nijkamp	Regional growth and unemployment. The validity of Okun's law for the Finnish regions, 17 p.
2011-7	Amitrajeet A. Batabyal Peter Nijkamp	A Schumpeterian model of entrepreneurship, innovation, and regional economic growth, 30 p.
2011-8	Aliye Ahu Akgün Tüzin Baycan Levent Peter Nijkamp	The engine of sustainable rural development: Embeddedness of entrepreneurs in rural Turkey, 17 p.
2011-9	Aliye Ahu Akgün Eveline van Leeuwen Peter Nijkamp	A systemic perspective on multi-stakeholder sustainable development strategies, 26 p.
2011-10	Tibert Verhagen Jaap van Nes Frans Feldberg Willemijn van Dolen	Virtual customer service agents: Using social presence and personalization to shape online service encounters, 48 p.
2011-11	Henk J. Scholten Maarten van der Vlist	De inrichting van crisisbeheersing, de relatie tussen besluitvorming en informatievoorziening. Casus: Warroom project Netcentrisch werken bij Rijkswaterstaat, 23 p.
2011-12	Tüzin Baycan Peter Nijkamp	A socio-economic impact analysis of cultural diversity, 22 p.
2011-13	Aliye Ahu Akgün Tüzin Baycan Peter Nijkamp	Repositioning rural areas as promising future hot spots, 22 p.
2011-14	Selmar Meents	How sellers can stimulate purchasing in electronic marketplaces: Using

	Tibert Verhagen Paul Vlaar	information as a risk reduction signal, 29 p.
2011-15	Aliye Ahu Gülümser Tüzin Baycan-Levent Peter Nijkamp	Measuring regional creative capacity: A literature review for rural-specific approaches, 22 p.
2011-16	Frank Bruinsma Karima Kourtit Peter Nijkamp	Tourism, culture and e-services: Evaluation of e-services packages, 30 p.
2011-17	Peter Nijkamp Frank Bruinsma Karima Kourtit Eveline van Leeuwen	Supply of and demand for e-services in the cultural sector: Combining top-down and bottom-up perspectives, 16 p.
2011-18	Eveline van Leeuwen Peter Nijkamp Piet Rietveld	Climate change: From global concern to regional challenge, 17 p.
2011-19	Eveline van Leeuwen Peter Nijkamp	Operational advances in tourism research, 25 p.
2011-20	Aliye Ahu Akgün Tüzin Baycan Peter Nijkamp	Creative capacity for sustainable development: A comparative analysis of European and Turkish rural regions, 18 p.
2011-21	Aliye Ahu Gülümser Tüzin Baycan-Levent Peter Nijkamp	Business dynamics as the source of counterurbanisation: An empirical analysis of Turkey, 18 p.
2011-22	Jessie Bakens Peter Nijkamp	Lessons from migration impact analysis, 19 p.
2011-23	Peter Nijkamp Galit Cohen-blankshtain	Opportunities and pitfalls of local e-democracy, 17 p.
2011-24	Maura Soekijad Irene Skovgaard Smith	The 'lean people' in hospital change: Identity work as social differentiation, 30 p.
2011-25	Evgenia Motchenkova Olgerd Rus	Research joint ventures and price collusion: Joint analysis of the impact of R&D subsidies and antitrust fines, 30 p.
2011-26	Karima Kourtit Peter Nijkamp	Strategic choice analysis by expert panels for migration impact assessment, 41 p.
2011-27	Faroek Lazrak Peter Nijkamp Piet Rietveld Jan Rouwendal	The market value of listed heritage: An urban economic application of spatial hedonic pricing, 24 p.
2011-28	Peter Nijkamp	Socio-economic impacts of heterogeneity among foreign migrants: Research and policy challenges, 17 p.



2011-29	Masood Gheasi Peter Nijkamp	Migration, tourism and international trade: Evidence from the UK, 8 p.
2011-30	Karima Kourtit Peter Nijkamp Eveline van Leeuwen Frank Bruinsma	Evaluation of cyber-tools in cultural tourism, 24 p.
2011-31	Cathy Macharis Peter Nijkamp	Possible bias in multi-actor multi-criteria transportation evaluation: Issues and solutions, 16 p.
2011-32	John Steenbruggen Maria Teresa Borzacchiello Peter Nijkamp Henk Scholten	The use of GSM data for transport safety management: An exploratory review, 29 p.
2011-33	John Steenbruggen Peter Nijkamp Jan M. Smits Michel Grothe	Traffic incident management: A common operational picture to support situational awareness of sustainable mobility, 36 p.
2011-34	Tüzün Baycan Peter Nijkamp	Students' interest in an entrepreneurial career in a multicultural society, 25 p.
2011-35	Adele Finco Deborah Bentivoglio Peter Nijkamp	Integrated evaluation of biofuel production options in agriculture: An exploration of sustainable policy scenarios, 16 p.
2011-36	Eric de Noronha Vaz Pedro Cabral Mário Caetano Peter Nijkamp Marco Paíinho	Urban heritage endangerment at the interface of future cities and past heritage: A spatial vulnerability assessment, 25 p.
2011-37	Maria Giaoutzi Anastasia Stratigea Eveline van Leeuwen Peter Nijkamp	Scenario analysis in foresight: AG2020, 23 p.
2011-38	Peter Nijkamp Patricia van Hemert	Knowledge infrastructure and regional growth, 12 p.
2011-39	Patricia van Hemert Enno Masurel Peter Nijkamp	The role of knowledge sources of SME's for innovation perception and regional innovation policy, 27 p.
2011-40	Eric de Noronha Vaz Marco Painho Peter Nijkamp	Impacts of environmental law and regulations on agricultural land-use change and urban pressure: The Algarve case, 18 p.
2011-41	Karima Kourtit Peter Nijkamp Steeff Lowik Frans van Vught Paul Vulto	From islands of innovation to creative hotspots, 26 p.

2011-42	Alina Todiras Peter Nijkamp Saidas Rafijevas	Innovative marketing strategies for national industrial flagships: Brand repositioning for accessing upscale markets, 27 p.
2011-43	Eric de Noronha Vaz Mário Caetano Peter Nijkamp	A multi-level spatial urban pressure analysis of the Giza Pyramid Plateau in Egypt, 18 p.
2011-44	Andrea Caragliu Chiara Del Bo Peter Nijkamp	A map of human capital in European cities, 36 p.
2011-45	Patrizia Lombardi Silvia Giordano Andrea Caragliu Chiara Del Bo Mark Deakin Peter Nijkamp Karima Kourtit	An advanced triple-helix network model for smart cities performance, 22 p.
2011-46	Jessie Bakens Peter Nijkamp	Migrant heterogeneity and urban development: A conceptual analysis, 17 p.
2011-47	Irene Casas Maria Teresa Borzacchiello Biagio Ciuffo Peter Nijkamp	Short and long term effects of sustainable mobility policy: An exploratory case study, 20 p.
2011-48	Christian Bogmans	Can globalization outweigh free-riding? 27 p.
2011-49	Karim Abbas Bernd Heidergott Djamil Aïssani	A Taylor series expansion approach to the functional approximation of finite queues, 26 p.
2011-50	Eric Koomen	Indicators of rural vitality. A GIS-based analysis of socio-economic development of the rural Netherlands, 17 p.
2012-1	Aliye Ahu Gülümser Tüzin Baycan Levent Peter Nijkamp Jacques Poot	The role of local and newcomer entrepreneurs in rural development: A comparative meta-analytic study, 39 p.
<b>2012</b>		
2012-2	Joao Romao Bart Neuts Peter Nijkamp Eveline van Leeuwen	Urban tourist complexes as Multi-product companies: Market segmentation and product differentiation in Amsterdam, 18 p.
2012-3	Vincent A.C. van den Berg	Step tolling with price sensitive demand: Why more steps in the toll makes the consumer better off, 20 p.
2012-4	Vasco Diogo Eric Koomen Floor van der Hilst	Second generation biofuel production in the Netherlands. A spatially-explicit exploration of the economic viability of a perennial biofuel crop, 12 p.

2012-5	Thijs Dekker Paul Koster Roy Brouwer	Changing with the tide: Semi-parametric estimation of preference dynamics, 50 p.
2012-6	Daniel Arribas Karima Kourtit Peter Nijkamp	Benchmarking of world cities through self-organizing maps, 22 p.
2012-7	Karima Kourtit Peter Nijkamp Frans van Vught Paul Vulto	Supernova stars in knowledge-based regions, 24 p.
2012-8	Mediha Sahin Tüzin Baycan Peter Nijkamp	The economic importance of migrant entrepreneurship: An application of data envelopment analysis in the Netherlands, 16 p.
2012-9	Peter Nijkamp Jacques Poot	Migration impact assessment: A state of the art, 48 p.
2012-10	Tibert Verhagen Anniek Nauta Frans Feldberg	Negative online word-of-mouth: Behavioral indicator or emotional release? 29 p.

### 2013

2013-1	Tüzin Baycan Peter Nijkamp	The migration development nexus: New perspectives and challenges, 22 p.
2013-2	Haralambie Leahu	European Options Sensitivities via Monte Carlo Techniques, 28 p.
2013-3	Tibert Verhagen Charlotte Vonkeman Frans Feldberg Plon Verhagen	Making online products more tangible and likeable: The role of local presence as product presentation mechanism, 44 p.
2013-4	Aliye Ahu Akgün Eveline van Leeuwen Peter Nijkamp	A Multi-actor multi-criteria scenario analysis of regional sustainable resource policy, 24 p.
2013-5	John Steenbruggen Peter Nijkamp Maarten van der Vlist	Urban traffic incident management in a digital society. An actor-network approach in information technology use in urban Europe, 25 p.
2013-6	Jorge Ridderstaat Robertico Croes Peter Nijkamp	The force field of tourism, 19 p.
2013-7	Masood Gheasi Peter Nijkamp Piet Rietveld	Unknown diversity: A study on undocumented migrant workers in the Dutch household sector, 17 p.
2013-8	Mediha Sahin Peter Nijkamp Soushi Suzuki	Survival of the fittest among migrant entrepreneurs. A study on differences in the efficiency performance of migrant entrepreneurs in Amsterdam by means of data envelopment analysis, 25 p.

2013-9	Kostas Bithas Peter Nijkamp	Biological integrity as a prerequisite for sustainable development: A bioeconomic perspective, 24 p.
2013-10	Madalina-Stefania Dirzu Peter Nijkamp	The dynamics of agglomeration processes and their contribution to regional development across the EU, 19 p.
2013-11	Eric de Noronha Vaz Agnieszka Walczynska Peter Nijkamp	Regional challenges in tourist wetland systems: An integrated approach to the Ria Formosa area, 17 p.
2013-12	João Romão Eveline van Leeuwen Bart Neuts Peter Nijkamp	Tourist loyalty and urban e-services: A comparison of behavioural impacts in Leipzig and Amsterdam, 19 p.
2013-13	Jorge Ridderstaat Marck Oduber Robertico Croes Peter Nijkamp Pim Martens	Impacts of seasonal patterns of climate on recurrent fluctuations in tourism demand. Evidence from Aruba, 34 p.
2013-14	Emmanouil Tranos Peter Nijkamp	Urban and regional analysis and the digital revolution: Challenges and opportunities, 16 p.
2013-15	Masood Gheasi Peter Nijkamp Piet Rietveld	International financial transfer by foreign labour: An analysis of remittances from informal migrants, 11 p.
2013-16	Serenella Sala Biagio Ciuffo Peter Nijkamp	A meta-framework for sustainability assessment, 24 p.
2013-17	Eveline van Leeuwen Peter Nijkamp Aliye Ahu Akgün Masood Gheasi	Foresights, scenarios and sustainable development – a pluriformity perspective, 19 p.
2013-18	Aliye Ahu Akgün Eveline van Leeuwen Peter Nijkamp	Analytical support tools for sustainable futures, 19 p.
2013-19	Peter Nijkamp	Migration impact assessment: A review of evidence-based findings, 29 p.
2013-20	Aliye Ahu Akgün Eveline van Leeuwen Peter Nijkamp	Sustainability science as a basis for policy evaluation, 16 p.
2013-21	Vicky Katsoni Maria Giaoutzi Peter Nijkamp	Market segmentation in tourism – An operational assessment framework, 28 p.
2013-22	Jorge Ridderstaat Robertico Croes Peter Nijkamp	Tourism development, quality of life and exogenous shocks. A systemic analysis framework, 26 p.

2013-23	Feng Xu Nan Xiang Shanshan Wang Peter Nijkamp Yoshiro Higano	Dynamic simulation of China's carbon emission reduction potential by 2020, 12 p.
2013-24	John Steenbruggen Peter Nijkamp Jan M. Smits Ghatrie Mohabir	Traffic incident and disaster management in the Netherlands: Challenges and obstacles in information sharing, 30 p.
2013-25	Patricia van Hemert Peter Nijkamp Enno Masurel	From innovation to commercialization through networks and agglomerations: Analysis of sources of innovation, innovation capabilities and performance of Dutch SMEs, 24 p.
2013-26	Patricia van Hemert Peter Nijkamp Enno Masurel	How do SMEs learn in a systems-of-innovation context? The role of sources of innovation and absorptive capacity on the innovation performance of Dutch SMEs, 27 p.
2013-27	Mediha Sahin Alina Todiras Peter Nijkamp	Colourful entrepreneurship in Dutch cities: A review and analysis of business performance, 25 p.
2013-28	Tüzün Baycan Mediha Sahin Peter Nijkamp	The urban growth potential of second-generation migrant entrepreneurs. A sectoral study on Amsterdam, 31 p.
2013-29	Eric Vaz Teresa de Noronha Vaz Peter Nijkamp	The architecture of firms' innovative behaviors, 23 p.
2013-30	Eric Vaz Marco Painho Peter Nijkamp	Linking agricultural policies with decision making: A spatial approach, 21 p.
2013-31	Yueting Guo Hengwei Wang Peter Nijkamp Jiangang XU	Space-time changes in interdependent urban-environmental systems: A policy study on the Huai River Basin in China, 20 p.
2013-32	Maurice de Kleijn Niels van Manen Jan Kolen Henk Scholten	User-centric SDI framework applied to historical and heritage European landscape research, 31 p.
2013-33	Erik van der Zee Henk Scholten	Application of geographical concepts and spatial technology to the Internet of Things, 35 p.
2013-34	Mehmet Güney Celbiş Peter Nijkamp Jacques Poot	The lucrative impact of trade-related infrastructure: Meta-Analytic Evidence, 45 p.
2013-35	Marco Modica Aura Reggiani Peter Nijkamp	Are Gibrat and Zipf Monozygotic or Heterozygotic Twins? A Comparative Analysis of Means and Variances in Complex Urban Systems, 34 p.

2013-36	Bernd Heidergott Haralambie Leahu Warren Volk- Makarewicz	A Smoothed Perturbation Analysis Approach to Parisian Options, 14 p.
2013-37	Peter Nijkamp Waldemar Ratajczak	The Spatial Economy – A Holistic Perspective, 14 p.
2013-38	Karima Kourtit Peter Nijkamp Eveline van Leeuwen	New Entrepreneurship in Urban Diasporas in our Modern World, 22 p.
<b>2014</b>		
2014-1	John Steenbruggen Emmanouil Tranos Peter Nijkamp	Data from mobile phone operators: A tool for smarter cities? 22 p.
2014-2	John Steenbruggen	Tourism geography: Emerging trends and initiatives to support tourism in Morocco, 29 p.
<b>2015</b>		
2015-1	Maurice de Kleijn Rens de Hond Oscar Martinez-Rubi Pjotr Svetachov	A 3D Geographic Information System for ‘Mapping the Via Appia’, 11 p.
2015-2	Gilberto Mahumane Peter Mulder	Introducing MOZLEAP: an integrated long-run scenario model of the emerging energy sector of Mozambique, 35 p.
2015-3	Karim Abbas Joost Berkhout Bernd Heidergott	A Critical Account of Perturbation Analysis of Markovian Systems, 28 p.
2015-4	Nahom Ghebrihiwet Evgenia Motchenkova	Technology Transfer by Foreign Multinationals, Local Investment, and FDI Policy, 31 p.
2015-5	Yannis Katsoulacos Evgenia Motchenkova David Ulph	Penalizing Cartels: The Case for Basing Penalties on Price Overcharge, 43 p.
2015-6	John Steenbruggen Emmanouil Tranos Piet Rietveld <sup>†</sup>	Can Motorway Traffic Incidents be detected by Mobile Phone Usage Data? 21 p.