

# DEVELOPING 3D GEOSPATIAL DATABASE FROM TERRESTRIAL LASER SCANNED DATA

Alias Abdul Rahman<sup>1</sup>, and Gurcan Buyuksalih<sup>2</sup>

<sup>1</sup>Department of Geoinformatics,  
Faculty of Geoinformation Science and Engineering,  
Universiti Teknologi Malaysia,  
81310 UTM Skudai, Johor,  
Malaysia  
alias@utm.my

<sup>2</sup>Istanbul Greater Municipality (IBB, BIMTAS),  
Tophanelioglu cad. ISKI Binasi,  
No. 62, K:3-4, Altunizade,  
Istanbul, Turkey  
gbuyuksalih@yahoo.com

## ABSTRACT

Most major cities are being managed spatially by 2D geo-DBMS, however, unlike Istanbul city it is in the verge of 3D spatial information system especially for the historical peninsular region. Thousands of its 3D objects (mainly buildings – old and new) are in the process of 3D database development. Istanbul city municipality is currently busy with various GIS projects including an initiative towards a 3D database for the city. This paper describes the development of 3D database from terrestrial laser scanned data where a leading geo-DBMS, i.e. Oracle Spatial 10g were utilised. Useful 3D geoinformation could be generated from such 3D database, thus the initiative would provide an excellent tool for the city's decision making process e.g. for the city planning purposes, and etc. The 3D geo-database approach described in this paper is certainly would be very beneficial to the city and other GIS users since the current and commercial GIS software face some difficulties in providing such GIS operations and information to the relevant authorities. The paper also highlights new 3D spatial operations developed for possible spatial analysis of 3D objects (surface and underground objects).

## 1. INTRODUCTION

Three-dimensional (3D) spatial database will become one of the important components in any near future spatial information systems. The trend shows that more and more GIS users would like to incorporate 3D spatial objects in such systems, thus the more realistic

spatial database is inevitable. The problem is that current databases are still 2D in nature and very cumbersome for the 3D objects and still many issues need to be addressed before we could really be able to manipulate real world 3D objects as most users would like to have (Abdul-Rahman *et al*, 2006). The same sentiment on 3D geo-DBMS was also reported by Arens *et al* (2005) where the unavailability of 3D primitives in the existing geo-DBMS is the main drawback. This scenario motivates us to do some investigation works especially by make use of the available 3D datasets, e.g. buildings and other type of objects for the 3D geo-DBMS operations and analysis. Therefore, the aim of this paper is to review few recent research works especially on 3D spatial data modeling and describes our recent work on the management of 3D laser scanner data using geo-DBMS. In this paper, 3D data acquired from new acquisition technology, i.e. terrestrial laser scanned datasets will be investigated and experimented for the development of 3D spatial database. Initial results have been presented recently, see Abdul-Rahman *et al* (2008), however, more tests are needed to be carried out for a better understanding of the problem.

Section 2.0 describes the study area, the terrestrial laser scanning data acquisition in Section 3.0 3D spatial database development description is discussed in Section 4 and visualization of retrieved 3D objects in Section 5, and finally the conclusion in Section 6 with some issues that still need to be looked further.

## 2.0 STUDY AREA

Suleymaniye, Istanbul, Turkey is the study area. It is a place of historical objects and monuments, which

contains approximately 48,000 buildings, and an area of 1500 hectare. In this area, we assume the following scenario: the user has 3D data organized only in a database (a quite common case for real world data), i.e. no file with graphical information (e.g. DGN) exists. We have experimented with a set of buildings from the Suleymaniye area. Planar rectangular faces constitute each building. The data are built in CAD and further converted to the geometry representation of Oracle Spatial 10g. The conversion is completed with a topology-geometry of the 2D and 3D spatial object. Since the Oracle Spatial 10g geometry does not maintain a true 3D object, we represented every building as a set of faces (walls, flat roofs and foundations). The faces are stored as polygons with 3D coordinates. In this experiment table, namely LOT stored 2D object, table BUILDING represent 3D object stored face-by-face and table BODY\_BUILDING stored the whole 3D object as one object.



Figure 1 The Istanbul peninsula historical area

### 3.0 TERRESTRIAL LASER SCANNING

#### 3.1 Data acquisition

The 3D datasets were captured via Terrestrial Laser Scanning (TLS) system, Leica LS4500 (static and mobile). Initially, static system was used but then a more robust and quicker system was utilised, i.e. mobile laser scanning (MBL) system – due to project time constrained. The MBL consists of laser unit, IMU, and GPS and mounted on a vehicle. Huge amount of data were captured, it is the order of more than 50 Terra-byte and the data management system has been properly established by the laser-scanning unit at IMP (Istanbul Metropolitan Planning) and BIMTAS offices.

For this project a new production organisation was built up at BIMTAS using modern 3D mapping and computer technology. The terrestrial laser scanning group includes 24 staff, which uses the following technical equipment for data acquisition: five Leica

scanners (four HDS4500 and one HDS3000), four ILRIS-3D scanners from Optech (Figure 2), four Topcon total stations for geodetic control point measurements and pre-calibrated SLR cameras Nikon D70 with 14mm and 28mm lenses for digital photogrammetric documentation. The technical specification of the terrestrial laser scanning systems used for this project are summarised in Table 1.



Figure 2 The Optec laser scanning system

The three scanner types use two different principles of distance measurement: Leica HDS4500 uses phase shift method, while Leica HDS3000 and ILRIS-3D scan with the time-of-flight method. In general it can be stated that phase shift method is fast but the signal to noise ratio depends on distance range and lighting conditions. If one compares scan distance and scanning speed shown in Table 1, it is obvious, that the scanner using the time-of-flight method can measure longer distances but is relatively slow compared to the phase shift scanner.

The HDS4500 measures distances up to 53m, while the HDS3000 and the ILRIS can measure up to 100m and 1500m, respectively. Due to the limited speed of 1500 or 4000 points per second and due to the limited field of view it quickly became clear that the ILRIS scanners and the HDS 3000 are not useful for the busy and narrow streets of the project area. These scanners are more suitable for the documentation of landmarks. Thus, all buildings were scanned with a scan resolution of ~15mm at the object using four HDS4500. For data processing of the scanned point clouds, which includes registration, geo-referencing and segmentation of the point clouds, five licenses of Cyclone 5.2 and four licenses of Polyworks 4.1 were used in the office.

For the scanning of the buildings, targets were used as control points for registration and geo-referencing of

the scans from different scan stations as illustrated in Figure 3 (right). The targets have black-white quarters of a circle with a diameter of 126mm. To obtain centre positions of the targets, the targets were automatically fitted in the point cloud after manual pre-positioning using algorithms of the Leica Cyclone software.

### 3.2 Static terrestrial laser scanning

The data acquisition by static terrestrial laser scanning started in September 2006. During application in the Historic Peninsula streets it turned out that only the HDS4500 were able to scan in this special environment. As mentioned before the ILRIS-3D and HDS3000 scanner could not scan efficiently in the narrow streets due to the limitation in the field of view, distances that were too short and insufficient scanning speed. Furthermore, the registration of the point clouds of the ILRIS-3D caused problems with tilted scans from the same scan stations, and required matching with the Iterative Closest Point (ICP) algorithm and needed initial values for its computation. Consequently, the daily laser scanning was carried out with four, or sometimes with three, HDS4500. Figure 4 shows an example of a coloured point cloud of building facades at the Historic Peninsula.



Figure 3 Example of a coloured point cloud of building facades at the Historic Peninsula

In general, a satisfying spatial (geometrical) distribution of the targets on the object or around the object was guaranteed for the required description of the detailed object. The coordinates of all targets were determined by geodetic methods using total stations. The target-based registration and geo-referencing of the point clouds, which are acquired by the HDS4500 scanners, worked without any problems using five Cyclone software components as following: (a) registration of all scans and quality control of the result (check of residuals), and (b) geo-referencing using all control points including quality control by checking residuals.

80ha of the project area (of in total 1500ha) could be scanned within the first six months using the existing production capacity, which clearly indicated, that the scanning would need more than eight years for the entire area of the project, if this current scan rate of approximately 0.7ha per day could not be increased. It was obvious that the project deadline could not be met;

therefore it was decided to increase the production rate by the integration of a mobile system.

### 3.3 Mobile terrestrial laser scanning

As a consequence the scan progress was significantly increased by the introduction of a mobile mapping van (Gajdamowicz et al. 2001) from the Swedish company VISIMIND AB (Figure 4) in June 2007 using a hybrid sensor system on the vehicle consisting of a terrestrial laser scanning system HDS4500, supported by GPS/IMU and digital cameras. The sensor integration and the calibration of the system in the streets of Istanbul took some weeks, but the data acquisition in the field was working by the end of June 2007. The laser scanner's orientation was fixed in the horizontal direction, scanning only in the profile perpendicular to the direction of movement of the vehicle. It has been operated with 25 scan profiles/second, later improved to a speed of up to 40 profiles/second (possible maximum by instrument specification: 50 profiles/second). The distance between neighbouring profiles was 2-3cm in the beginning, corresponding to a van speed during scanning of 0.5m/sec up to 0.75m/sec or 1.8 km/h up to 2.7km/h.



Figure 4 Sensor configuration on the mobile mapping van of VISIMIND AB

Due to problems with the reception of the GPS signal in the narrow streets of the Historic Peninsula control points were marked on the buildings every five meters along each side of the street. Some targets were removed or destroyed before scanning and were replaced by natural points such as window corners. Some targets have been destroyed after scanning, but before the geodetic determination of the object coordinates, they also had to be replaced by natural points.

The sticking on of the targets was carried out by BIMTAS staff (4-5 people), while the determination of the target coordinates was performed by BIMTAS staff and additional subcontractors. BIMTAS staff measured additional natural ground control points, well distributed on the facades, in order to stabilise the in-house data processing of the mobile mapping system,

while the subcontractors only measured the targets. Not all control points have been identified correctly in the point clouds causing geometrical problems for the direct geo-referencing and some geometric deformation of the point clouds (Figure 5: misfit at block corners, swinging building façade, etc.). Nevertheless, the technical parameters of the hybrid systems were optimised on the job due to these problems with the quality of the pre-processed point clouds.



Figure 5 Geometric problems from direct geo-referencing of point clouds (from left to right: swinging façade, misfit at block corner, and deformation of a façade)

For problematic facades where control points were missing, VISIMIND recently developed with the so called ‘image tracking tool’ an automatic photogrammetric bundle adjustment enabling a bridging of longer distances without control points (Figure 6).



Figure 6 Image tracking tool for “problematic” facades without control points

The speed of data acquisition by terrestrial laser scanning with the mobile mapping system of VISIMIND could be increased significantly. 33 blocks could be scanned in 33 working days until the end of August 2007. Usually, scanning could be carried out five days per week (Mo-Fr, plus Sunday) starting at 6.30 am until 2 pm of each working day. Consequently, the laser scanning of the remaining 50 blocks could be completed with the mobile system with the improved total production rate of ~600m per hour, while post processing of the multiple sensor data took until early 2008. The production rate was mainly 1:10, i.e. for one hour scanning 10 hours post processing was needed. In total, 12 operators of the laser-scanning group were supporting the data post processing of the mobile mapping system during the major processing phase. Nevertheless, approximately 2% of the area (30ha) could not be scanned by mobile terrestrial laser scanning (TLS) due to traffic restrictions and environmental conditions. This remaining 2% of the total area must be scanned by static TLS at the end of

the project in order to complete the data acquisition. At least two months will be needed for scanning by static TLS using all available laser-scanning systems.

### 3.4 Digital photogrammetry

For photogrammetric documentation of the building facades as mentioned before, pre-calibrated SLR cameras Nikon D70 with 14mm and 28mm lenses were used. The acquired images were processed in combination with the static terrestrial laser scanning data. When the mobile system was used for data acquisition, only the images of the integrated oblique and horizontal cameras were used for mapping. The upper sideward looking camera is vertically rotated against the lower camera by approximately 34°, enlarging the vertical field of view of the camera system to approximately 86°, so that the camera system starts at an angle looking down to the street.

### 3.5 Mapping of facades

The geo-referenced point clouds from the laser scanning group were used for line mapping of the facades in a plot scale 1:200. The point clouds were segmented by two people using Cyclone software before mapping to eliminate unnecessary points and to reduce the data volume to the requested minimal portions for the mapping software.

In this project generation of façade maps with 1:200 plot scale is required. This extreme demand corresponds to a standard deviation of the positions with 0.2mm in the map and 4cm in the object space, but this extreme accuracy is required only as relative accuracy; for the absolute accuracy a standard deviation of 0.5mm in the map, corresponding to 10cm in object space should be sufficient. As a tolerance limit three times the standard deviation has been accepted. Therefore, the control point configuration and accuracy must always be checked to obtain this accuracy. While all problems of static and mobile scanning were solved, the delay in the control point determination was a bottleneck in the production.

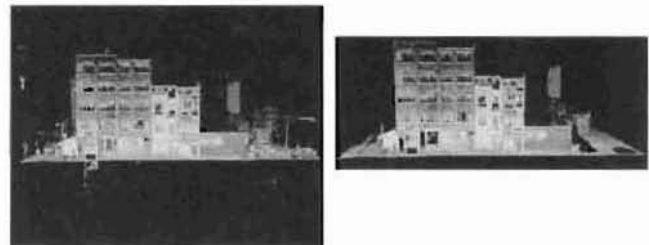


Figure 7 Segmentation of point clouds

The facade mapping group consists of 34 operators using 34 licences of the Menci-software Z-MAP Laser from Italy, which is able to process laser scan data and rectified photogrammetric images simultaneously for

line mapping with limited AutoCAD functionality. It was estimated that approximately 5 million m<sup>2</sup> of facades have to be mapped. The production rate was similar to the static laser scanning group: 80 ha with 32 operators in approximately 6 months. With regards the facade area, in total 81,000 m<sup>2</sup> could be finished in 39 days, which corresponds to 65 m<sup>2</sup> per person per day. The production rate could be increased from 60 m<sup>2</sup> of facade/day/operator (March 2007) on average to 140 m<sup>2</sup>/day (October 2007), which is more than a factor of a 2 time increase. If one assumes in total 5 million m<sup>2</sup> façade area for mapping of the Historic Peninsula, it corresponds to an estimated mapping time of approximately five years with 34 operators working on 210 days per year. This estimation indicated that the mapping could not be finished before the deadline of the project.

For data processing in Z-MAP all related data of the segmented part (point cloud, Nikon image(s), camera calibration file) was saved in one directory using the name of the block plus a suffix, e.g. 900\_01. This block name is defined in the cadastre map. The HP workstations xw8200 used are equipped with dual XEON Processors (3.6 GHZ), 4 GB RAM and nvidia Graphic Cards with 256 MB RAM. For facade mapping the point cloud and one oriented image of the façade were used. Thus, the orientation of the photogrammetric image (usually recorded with the 14 mm lens) had to be determined by resection in space using at least five well distributed corresponding points (usually corners of windows) in the point cloud and in the image. For the adjustment of the spatial resection the calibration data of the pre-calibrated NIKON D70s are used. Usually the residuals of the control points were in the range of some millimetres, which indicated that sufficient results have been achieved. To carry out mapping with Z-MAP the images had to be rectified to the main plane of the facade. Therefore, the plane was defined by more than three points, which were measured in the point cloud and in the image. Thus, the photos were rectified to the main plane of the facades and shifted to parallel planes based on the point clouds. Based on the dense point clouds from the Leica HDS4500 scanners, the mapping was often possible without support of the photos, using just the grey values of the point cloud. Nevertheless, the colour photos are a significant support particularly for the detailed mapping of bricks and stones. One major problem is the very detailed mapping of bricks and stones, which reduced the speed of mapping significantly. Unfortunately, the architects as the major clients could not be convinced to use digital orthophotos of the facades instead of the detailed maps in the scale of 1:200. Final product could be derived from 3D polylines as illustrated in Figure 9. Currently, the mapping of the building facades is still not finished.

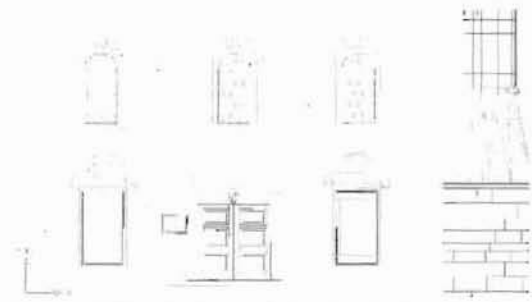


Figure 8 Detailed mapping of building facades based on laser scanning data and photogrammetric image

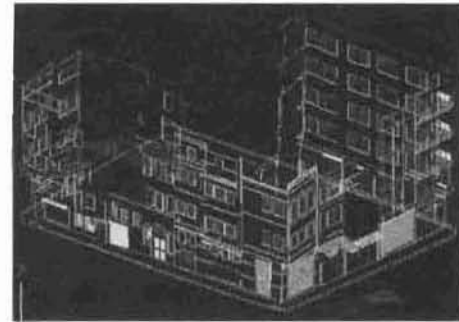


Figure 9 Mapped 3D polylines of facades of a building block

#### 4.0 3D SPATIAL DATABASE

Operational 3D GIS still require extensive efforts as revealed from the recent research output and workshop (see Abdul-Rahman, et al. 2006). It was interesting to note that works on fundamental aspects like 3D spatial database management still not much have been addressed up to the level where an operational 3D system could be realized. Recent research development shows that 3D spatial modeling is becoming very important for many advanced GIS applications and the scenario is being enhanced by the advancement in computer graphics (hardware and software), visualization, etc. and also influenced by development in OpenGIS consortium (OGC, 1999; OGC, 1999a; OGC, 2001). 3D visualization environments such as Google Earth (2008) or 3D navigation software have already made some contribution where more and more users could utilize such visualization tools. Until very recently, only very specialized applications were able to manage and analyse 3D spatial data. The third dimension has been mostly used for visualization and navigation. However, we have seen users are looking for applications that have one or more 3D GIS functionality. Due to the complexity of real-world spatial objects, various kinds of representations (e.g. vector, raster, constructive solid geometry, etc.), spatial data models (topology, and geometry) have been investigated and developed, including e.g. Pilouk, 1996; Zlatanova, 2000; and Kada et al, 2006. The management of 3D spatial objects has also been discussed in Orenstein (1986), Penninga (2005),

Penninga *et al.* (2006), Penninga, and van Oosterom (2007), Pu (2005), Pu, and Zlatanova (2006), and Rigaux *et al.* (2002).

A universal and practical spatial data model that capable of addressing more than one application are rather hardly available – a model normally serves well for an application. One of the reasons is due to the complexity of the real world objects and situations. On the other hand, different disciplines emphasize different aspects of information e.g. including different in requirements and output. Thus, a data model could be considered good for a certain application but not so appropriate for other tasks. Different aspects and characteristics of real objects have led to the existence of several variations in object definition. The solution for these problems has directly referred to GIS standardization.

Current 3D GIS offer predominantly 2D functionality with 3D visualization and navigation capability. However, promising developments were observed in the DBMS domain where more spatial data types, functions and indexing mechanism were supported (PostGIS, 2008; Oracle Spatial, 2008). In this respect, DBMS are expected to become a critical component in developing of an operational 3D GIS. However, extended research and developments are needed to achieve native 3D support at DBMS level.

#### 4.1 Existing GEO-DBMS for 3D Modeling

Existing DBMS provides a SQL schema and functions that facilitate the storage, retrieval, update, and query of collections of spatial features. Most of the existing spatial databases support the object-oriented model for representing geometries. The benefits of this model is that it support for many geometry types, including arcs, circles, and different kinds of compound objects. Therefore, geometries could be modelled in a single row and single column. The model also able to create and maintain indexes, and later on, perform spatial queries efficiently. In the next section, Oracle Spatial will be discussed, in term of their characteristics, capabilities and limitations in handling multi-dimensional datasets.

#### 4.2 Oracle Spatial

Oracle Spatial is designed to make spatial data management easier and more natural to users of location-enabled applications and geographic information system (GIS) applications. Once spatial data is stored in an Oracle database, it can be manipulated, retrieved, and related to all other data stored in the database. Types of spatial data (other than GIS data) that can be stored using Spatial include data from computer-aided design (CAD) and computer-aided manufacturing (CAM) systems. The Spatial also

stores, retrieves, updates, or queries some collection of features that have both nonspatial and spatial attributes. Examples of nonspatial attributes are name, soil\_type, landuse\_classification, and part\_number. The spatial attribute is a coordinate geometry, or vector-based representation of the shape of the feature.

Spatial supports the object-relational model for representing geometries. The object-relational model uses a table with a single column of SDO\_GEOMETRY and a single row per geometry instance. The object-relational model corresponds to a "SQL with Geometry Types" implementation of spatial feature tables in the Open GIS ODBC/SQL specification for geospatial features.

#### 4.3 Modeling 3D Solid Using MultiPolygon

In the Oracle Spatial object-relational model, a 3D solid object from 3D primitive is not possible. However, it could be done by implementing the MultiPolygon that bound a solid. The geometric description of a spatial object is stored in a single row and in a single column of object type SDO\_GEOMETRY in a user-defined table. Any tables that have a column of type SDO\_GEOMETRY must have another column, or set of columns, that defines a unique primary key for that table. Tables of this sort are sometimes referred to as geometry tables.

Oracle Spatial defines the object type SDO\_GEOMETRY as:

```
CREATE TYPE sdo_geometry AS OBJECT (  
  SDO_GTYPE NUMBER,  
  SDO_SRID NUMBER,  
  SDO_POINT SDO_POINT_TYPE,  
  SDO_ELEM_INFO  
  MDSYS.SDO_ELEM_INFO_ARRAY,  
  SDO_ORDINATES  
  MDSYS.SDO_ORDINATE_ARRAY);
```

The advantage of implementing the multipolygon in DBMS is that the integration between CAD and GIS is possible for 3D visualization, i.e. Oracle (or called Spatial) spatial schema is supported by Bentley MicroStation (2008) and Autodesk Map 3D (2009). This is due to the geometry column provided by Spatial is directly access to the 3D coordinates of the object, which allow the display tools retrieve spatial information from the geometry column.

#### 4.4 The Implementation of Geo-DBMS

The implementation of geo-DBMS approach for laser scanner data is the main objective for this study. Thus, the 3D spatial objects were stored within Oracle Spatial environment. A 3D data type, i.e. MULTIPOLYGON was implemented for the spatial object. Figure 10

denotes one of the buildings captured using the laser scanning system (TLS).

Although the complete coverage of the spatial data captured for the building could be obtained or acquired via the technique, the result of 3D point-clouds do not provide any semantic related to the building itself, in terms of spatial geometry, object's behaviour (e.g. door is open from inside the building), or related attribute information (e.g. year of construction). Thus, the laser scanner data need to be processed in order to create useful spatial information. The first stage of the process is related to feature extraction and the discussion on this aspect could be found in Oude Elberink and Vosselman (2006); Teunissen (1991); Vosselman (2003). The result from object extraction and reconstruction is shown in Figure 11.

The implementation of geo-DBMS approach for laser scanner data starts with the database creation. A geometry table was created in order to store the spatial object (see Figure 12). The GEOMETRY column stores the important coordinate structure of 3D spatial objects. For this paper, some of the important attributes, e.g. information related to historical building, material of building construction, etc. will also be stored within the database.

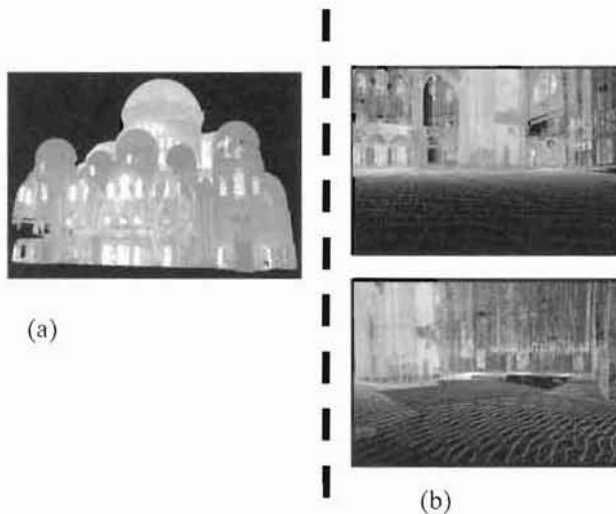


Figure 10 The raw dataset from laser scanner

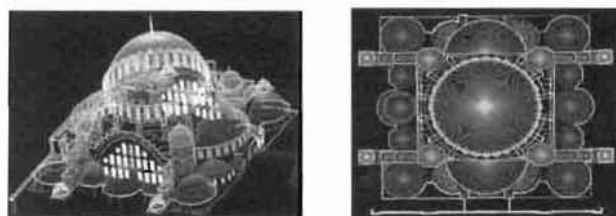


Figure 11 Feature extraction from laser scanned data (3D view and 2D planar view)

The geo-DBMS approach could provide spatial query related to the specific condition. For this research, the spatial could be performed using SQL language as shown in Figure 18. In the following spatial query, the experiment defined all related historical building, which is constructed before the year of 1920.

```
SQL> DESC BUILDING_3D:
Name          Null?      Type
-----
ID            NOT NULL  NUMBER(6)
OWNER        U          VARCHAR2(50)
YEAR         U          NUMBER(4)
HISTORICAL_BUILDING U        VARCHAR2(4)
MATERIAL     U          VARCHAR2(10)
BUILD_LEVEL  U          NUMBER(4)
PERIMETER    U          NUMBER(12,3)
AREA        U          NUMBER(12,3)
VOLUME      U          NUMBER(12,3)
GEOMETRY     U          MDSYS.SDO_GEOMETRY
              GEOME
              TRY
              column
```

Figure 12 A geometry table describes all related attribute columns

The methodology for the complete implementation is given in Figure 13.

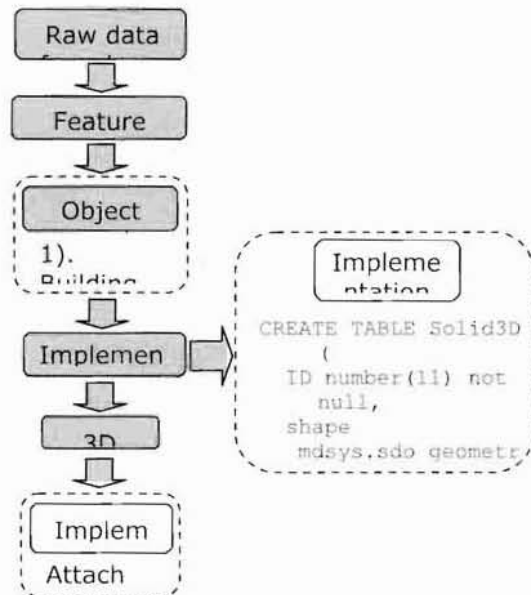


Figure 13 The workflow

## 5.0 THE VISUALIZATION OF RETRIEVED 3D SPATIAL OBJECTS

Any spatial queries from database would only provide geometric and semantic information if the visualization factor is not considered. DBMS only provides a medium for the management of data set, and it certainly requires a front-end tool for visualizing for that information, as one perceives in the real world. The data from DBMS needs to be integrated into visualization tool so that it could be viewed as graphic. The 3D spatial data stores in the spatial column (within DBMS), and a connection needs to be built so that a

display tool manages to access the spatial column and retrieve the data for 3D visualization.

It is also important to note that 3D objects need to be visualized in realism. With the benefit of the computer graphic technology, GIS could provide a good display with textures and colours. Some web application, e.g. Google Earth (GE) maintains the texture of spatial object over the Internet. Here, we used Autodesk Map 3D for displaying the 3D spatial object in this research.

### 5.1 Oracle Spatial and Map 3D schemas

In order to visualize Oracle spatial database successfully within the Map 3D environment, synchronization between Oracle spatial and Map 3D schema is required. However, sample spatial datasets within Oracle Spatial is given as follows:

```
SQL> SELECT GEOMETRY FROM BUILDING_3D
2 WHERE ID = 51929;

-----
GEOMETRY(SDO_GTYPE, SDO_SRID, SDO_POINT(X, Y, Z), SDO_ELEM_INFO, SDO_ORDINATES)

SDO_GEOMETRY(3007, NULL, NULL, SDO_ELEM_INFO_ARRAY(1, 1003, 1, 16, 1003, 1, 31,
1003, 1, 46, 1003, 1), SDO_ORDINATE_ARRAY(412626.14, 4543467.48, 8.7607, 412606.
02, 4543473.21, 8.7607, 412604.77, 4543466.1, 8.7607, 412623.98, 4543460.16, 8.7
```

Figure 14 The extraction of geometric datasets

After datasets are inserted into Oracle database, the first stage of integration is to login into Map 3D. The second stage of integration is to connect Oracle schema table into Map 3D's schema administration. The Map 3D will prompt user for Oracle database login name and password. From the Oracle database lists, select the appropriate database for visualization.

After the integration was included into the Map 3D, databases are imported from Oracle schema table to Map 3D. Features selection must be identified in order to display the appropriate dataset.

### 5.2 Real Texture Mapping

Real texture mapping provides good realism of the objects and able to enhance the aesthetic appearance and the understanding of the objects such as buildings, etc. Fritsch (2003) describes the concept of texturing of objects from terrestrial images, and basically it is a process of transforming distorted image to rectified image. We used the available tools, Adobe Photoshop Paint module to rectify the distorted images as illustrated in Figure 15.



Figure 15 Real texture mapping- rectification process

The initial 3D display of building block only manages to provide standard colours from Map 3D library. However, 3D textures could be attached into the spatial objects. This provides the realistic appearance of 3D building blocks as appeared in various city models. Figure 16 denotes the implementation of textures into the 3D spatial object (simple building without roof). Figure 17 denotes the similar implementation for complex building (with roof).



Figure 16 3D display of building blocks (without roof)



Figure 17 3D display of building (with roof)

### 6.0 CONCLUDING REMARKS

The paper had discussed the implementation of geo-DBMS approach pertaining to the 3D spatial data modelling and management using the data generated from the laser scanning system. The discussions cover the implementation of 3D geometry from Oracle Spatial. However, there are many issues still need to be addressed in order to improve the current situation of 3D spatial modeling of objects from laser scanner data. One of the issues is objects reconstruction from the laser scanning system. At the moment, most systems only provide primitive means for object creation (i.e. manual technique). Our research experience shows that a lot of efforts still need to be done in order to create the 3D objects automatically. The other issue is related to the 3D primitives for the spatial database, e.g.



polyhedron for building block, and tetrahedron for terrain modeling. This aspect can be solved by implementing the user-defined data type within the geo-DBMS environment. The most important issue for 3D spatial data modeling is the standardization and specification of GIS that related to the Open Geospatial Consortium (OGC standard), from feature extraction to final 3D display. The implementation of 3D spatial operations could also be done in geo-DBMS environment. The spatial operators should involve some procedures that able to use, query, create, modify, or delete spatial objects.

Other challenges and issues in the near future include the interoperability between different applications, data model, the integration between DBMS and visualization, and the real-time linkage between data model and data acquisition.

## ACKNOWLEDGMENT

Thanks to the Istanbul Metropolitan Planning Unit (IMP) and BIMTAS GIS division especially the data acquisition unit.

## REFERENCES

Abdul-Rahman A, Zlatanova S, Coors V (2006). *Lecture Note on geoinformation and cartography – Innovations in 3D Geo Information Systems*, Springer-Verlag.

Abdul-Rahman, A., S. R. Karas, I. Baz, and G. Buyuksalih (2008). Managing 3D Geospatial Objects – case study: Istanbul Historical Peninsula Region. Proceedings of International Conference on GIS for Developing Countries (GISDeco) 2008. 4 – 7<sup>th</sup>. June, Istanbul, Turkey.

Arens, C., J. Stoter, and P. v. Oosterom (2005). Modelling of 3D spatial objects in a geo-DBMS using a 3D primitive. Computers and Geosciences Journal, Vol. 31, No. 2, Elsevier, pp. 165-177

Autodesk Map 3D (2009). Available at <http://usa.autodesk.com/>.

Bentley MicroStation (2008). Available at <http://www.bentley.com/>.

Fritsch, D. (2003). Photogrammetric Week Workshop. Stuttgart, Germany

Google Earth (2008). Available at <http://earth.google.com/>.

Kada M, Haala N, Becker S (2006). *Improving the realism of existing 3D city model*. In: Abdul-Rahman A,

Zlatanova S, and Coors V (eds), *Lecture Note on geoinformation and cartography – innovations in 3D Geo information systems*, Springer-Verlag. pp. 405-415.

OGC (1999). *Abstract specifications overview*. Available at <http://www.opengis.org>.

OGC (1999a). *OpenGIS simple features specification for SQL*. Available at <http://www.opengis.org>.

OGC (2001). *The OpenGIS™ Abstract specification, topic 1: feature geometry (ISO 19107 Spatial Schema) Version 5*.

Oracle Spatial (2008). Available at <http://www.oracle.com/>.

Orenstein J (1986). *Spatial query processing in an object-oriented database system*. In: Proceedings of 1986 ACM SIGMOD International Conference on Management of Data, pp. 326-336.

Oude Elberink S., and Vosselman G., (2006). *Adding the third dimension to a topographic database using airborne laser scanner data*. Photogrammetric Computer Vision 2006. IAPRS, Bonn, Germany.

Penninga F (2005). *3D topographic data modelling: why rigidity is preferable to pragmatism*. In: Spatial Information Theory, Cosit'05, Vol. 3693 of Lecture Notes on Computer Science, Springer. pp 409-425.

Penninga F, van Oosterom PJM, Kazar BM (2006). *A TEN-based DBMS approach for 3D topographic data modelling*. In: Spatial Data Handling 2006.

Penninga F, van Oosterom PJM (2007). *A compact topological DBMS data structure for 3D topography*. In: Fabrikant S, Wachowicz M (eds.), *Lecture Notes in Geoinformation and Cartography*. ISBN: 978-3-540-72384-4.

Pilouk M (1996). *Integrated modelling for 3D GIS*. PhD Thesis, ITC, The Netherlands.

PostGIS (2008). Available at <http://postgis.refractor.net/>.

Pu S (2005). *Managing freeform curves and surfaces in a spatial DBMS*. Msc Thesis, TU Delft.

Pu S, Zlatanova S (2006). *Integration of GIS and CAD at DBMS level*. In: E. Fendel E, Rumor M (eds), *Proceedings of UDMS'06 Aalborg, Denmark*, TU Delft, pp 9.61-9.71.

Rigaux P., Scholl M, Voisard A (2002). *Spatial databases - with application to GIS*. Morgan Kaufmann Publishers, San Francisco.

Teunissen P.J.G. (1991). *An integrity and quality control procedure for use in multi sensor integration*. In: Proceedings of ION GPS-90, 19-21 September 1990, pp. 513-522, Colorado Springs, USA.

Vosselman G., (2003). *3D reconstruction of roads and trees for city modelling*. ISPRS working group III/3 workshop 3-D reconstruction from airborne laser scanner and InSAR data. IAPRS, Dresden, Germany, pp. 231-236.

Zlatanova S (2000). *3D GIS for urban development*. PhD thesis, ITC, The Netherlands.

## AUTHORS BIOGRAPHY



### **Alias Abdul Rahman**

currently is a UTM Professor of 3D GIS and academic staff member of the Faculty of Geoinformation Science and Engineering. He received his PhD and MSc from University of Glasgow, UK in 2000 and ITC the Netherlands in 1992 respectively. 3D GIS is his main research interest and has produced two books with Springer Verlag on the subject. Currently he is a Chair for ISPRS Commission II WG 5 on Multidimensional GIS and Mobile Data Model for 2008 to 2012.



### **Gurcan Buyuksalih**

is consultant for the Istanbul Greater Municipality. He was an academic member of Karaelmas University, Zonguldak, Turkey. He received his PhD from University of Glasgow in 1999 in Photogrammetry. He was a Secretary for ISPRS Commission I WG 2 from 2000 – 2004. His research interest is photogrammetric and laser based mapping.