

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.
Larsen

2009

Test 1957: John Deere 5075E Diesel

Nebraska Tractor Test Laboratory

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Energy Systems Commons](#), [History of Science, Technology, and Medicine Commons](#), [Other Mechanical Engineering Commons](#), [Physical Sciences and Mathematics Commons](#), [Science and Mathematics Education Commons](#), and the [United States History Commons](#)

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

NEBRASKA TRACTOR TEST 1957

JOHN DEERE 5075E DIESEL

9 SPEED

POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
MAXIMUM POWER AND FUEL CONSUMPTION					
Rated Engine Speed—(PTO speed—545 rpm)					
62.16 (46.35)	2401	4.08 (15.44)	0.462 (0.281)	15.24 (3.00)	
Standard Power Take-off Speed(540 rpm)					
62.81 (46.84)	2375	4.07 (15.42)	0.456 (0.277)	15.42 (3.04)	
Maximum Power (1 hour)					
64.42 (48.04)	2200	3.95 (14.98)	0.432 (0.263)	16.29 (3.21)	

VARYING POWER AND FUEL CONSUMPTION

62.16 (46.35)	2401	4.08 (15.44)	0.462 (0.281)	15.24 (3.00)	Air temperature
55.62 (41.48)	2523	3.89 (14.71)	0.492 (0.299)	14.31 (2.82)	75°F (24°C)
42.27 (31.52)	2557	3.18 (12.02)	0.529 (0.322)	13.31 (2.62)	Relative humidity
28.35 (21.14)	2578	2.43 (9.19)	0.602 (0.366)	11.68 (2.30)	36%
14.30 (10.67)	2602	1.47 (5.56)	0.723 (0.440)	9.73 (1.92)	Barometer
0.70 (0.52)	2611	0.88 (3.34)	8.853 (5.385)	0.79 (0.16)	28.52"Hg (96.58kPa)

Maximum torque 187 lb.-ft. (254 Nm) at 1749 rpm
 Maximum torque rise - 37.7%
 Torque rise at 1903 rpm - 30%
 Power increase at 2200 rpm - 3%

TRACTOR SOUND LEVEL WITHOUT CAB

	Front Wheel Drive	
	Engaged	Disengaged dB(A)
At no load in 5th(B2) gear	91.7	91.6
Transport speed - no load - 9th(C3) gear		92.9
Bystander in 9th(C3) gear		82.7

TIRES AND WEIGHT

Rear Tires—No., size, ply & psi (kPa)
Front Tires—No., size, ply & psi (kPa)
Height of Drawbar
Static Weight with operator—Rear
 — Front
 — Total

Tested without ballast
 Two 16.9-28; 6; 12 (85)
 Two 9.5-24; 6; 16 (110)
 16.5 in (420 mm)
 3390 lb (1538 kg)
 2260 lb (1025 kg)
 5650 lb (2563 kg)

Location of tests: Nebraska Tractor Test Laboratory, University of Nebraska, Lincoln Nebraska 68583-0832

Dates of tests: October 1 - 8, 2009

Manufacturer: John Deere Commercial Products Inc., 700 Horizon South Parkway, Grovetown Ga. USA, 30813

FUEL, OIL and TIME: Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.8450 Fuel weight 7.036 lbs/gal (0.843 kg/l) Oil SAE 15W40 API service classification CI-4 Transmission and hydraulic lubricant John Deere Hy-Gard Fluid Total time engine was operated 9.5 hours

ENGINE: Make John Deere Diesel **Type** three cylinder vertical with turbocharger **Serial No.** *PY3029T137672* **Crankshaft** lengthwise **Rated engine speed** 2400 **Bore and stroke** 4.19" x 4.33" (106.5 mm x 110.0 mm) **Compression ratio** 17.8 to 1 **Displacement** 179 cu in (2938 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil **Fuel filter** one paper element **Muffler** underhood **Exhaust** vertical **Cooling medium temperature control** one thermostat

ENGINE OPERATING PARAMETERS: Fuel rate: 27.8 - 30.6 lb/h (12.6 - 13.9 kg/h) **High idle:** 2575 - 2650 rpm **Turbo boost:** nominal 16.0 - 17.4 psi (110 - 120 kPa) as measured 16.5 psi (114 kPa)

CHASSIS: Type front wheel assist **Serial No.** *PY5075U000423* **Tread width** rear 55.8" (1417 mm) to 71.7" (1821 mm) front 52.8" (1340 mm) to 75.0" (1905 mm) **Wheelbase** 80.7" (2050 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio **Nominal travel speeds mph (km/h)** first 1.27 (2.05) second 1.84 (2.96) third 2.77 (4.45) fourth 3.57 (5.74) fifth 5.15 (8.28) sixth 7.75 (12.47) seventh 8.26 (13.29) eighth 11.92 (19.18) ninth 17.94 (28.87) reverse 2.14 (3.44), 5.99 (9.64), 13.85 (22.29) **Clutch** single dry disc operated by foot pedal **Brakes** single wet disc hydraulically actuated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2376 engine rpm **Unladen tractor mass** 5475 lb (2483 kg)

HYDRAULIC PERFORMANCE

CATEGORY: II

Quick attach: None

OECD Static test

Maximum force exerted through whole range:	3591 lbs	(16.0 kN)
i) Sustained pressure of the open relief valve:	2865 psi	(197 bar)
ii) Pump delivery rate at minimum pressure and rated engine speed:	11.9 GPM	(45.0 l/min)
iii) Pump delivery rate at maximum hydraulic power:	11.6 GPM	(43.9 l/min)
Delivery pressure:	2572 psi	(177 bar)
Power:	17.4 HHP	(13.0 kW)

THREE POINT HITCH PERFORMANCE


Observed maximum pressure psi. (bar)	2796 (193)
Location:	remote outlet
Hydraulic oil temperature: °F (°C)	185 (85)
Location:	hydraulic sump
Category:	II
Quick attach:	none

SAE Static Test—System pressure 2480 psi (171 Bar)

Hitch point distance to ground level in. (mm)	8.0 (203)	15.0 (381)	22.0 (559)	29.0 (737)	36.0 (914)
Lift force on frame lb	6633	5486	5067	4734	3978
" " " " " " (kN)	(29.5)	(24.4)	(22.5)	(21.1)	(17.7)

	SAE Test		OECD Test	
	inch	mm	inch	mm
A	23.3	590	23.5	597
B	11.0	280	11.0	280
C	14.0	355	14.0	355
D	12.2	310	12.2	310
E	11.1	282	11.1	282
F	6.5	166	6.5	166
G	26.4	670	26.4	670
H	0.2	4	0.2	4
I	15.1	384	15.1	384
J	19.9	504	19.9	504
K	16.1	409	16.1	409
L	38.8	985	38.8	985
M	22.0	559	22.0	559
N	32.5	825	32.5	825
O	8.0	203	8.0	203
P	38.9	987	43.9	1114
Q	32.5	825	32.5	825
R	21.2	540	21.2	540

HITCH DIMENSIONS AS TESTED - NO LOAD

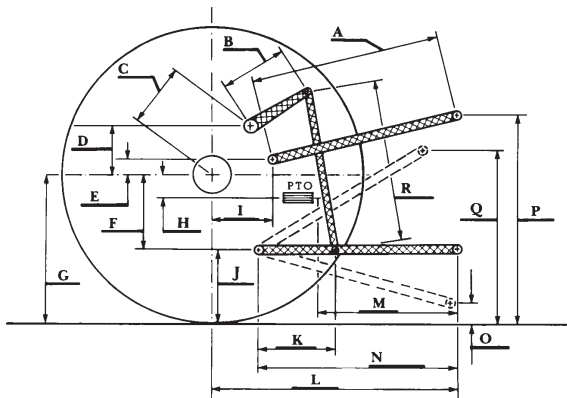

REPAIRS AND ADJUSTMENTS: No repairs or adjustments.

REMARKS: All test results were determined from observed data obtained in accordance with official OECD, SAE and Nebraska test procedures. For the maximum power tests the fuel temperature at the injection pump inlet was maintained at 136°F (58°C).

We, the undersigned, certify that this is a true and correct report of official Tractor Test No. 1957, December 14, 2009.

Roger M. Hoy
Director

M.F. Kocher
V.I. Adamchuk
J.A. Smith
Board of Tractor Test Engineers



John Deere 5075E Diesel