



Calhoun: The NPS Institutional Archive

DSpace Repository

Faculty and Researchers

Faculty and Researchers' Publications

1999-09

Scaling Near-surface Atmospheric and Surface Wave Influences On Radar Propagation Over the Sea

Davidson, Kenneth L.; Frederickson, Paul A.

Naval Postgraduate School

http://hdl.handle.net/10945/69385

This publication is a work of the U.S. Government as defined in Title 17, United States Code, Section 101. Copyright protection is not available for this work in the United States.

Downloaded from NPS Archive: Calhoun



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

> Dudley Knox Library / Naval Postgraduate School 411 Dyer Road / 1 University Circle Monterey, California USA 93943

http://www.nps.edu/library

Scaling Near-surface Atmospheric and Surface Wave Influences On Radar Propagation Over the Sea

Kenneth L. Davidson and Paul A. Frederickson Naval Postgraduate School Department of Meteorology 589 Dyer Road, Room 254 Monterey, CA 93943-5114 Phone: (831) 656-2309 fax: (831) 656-3061 e-mail: <u>davidson@nps.navy.mil</u> N0001498R30145 <u>http://www.met.nps.navy.mil/~jonesk/blsg.html</u>

LONG-TERM GOALS

To improve models for describing near-horizon radar propagation by proper specification of the nearsurface atmosphere refractivity gradients and wind influenced surface roughness.

OBJECTIVES

To evaluate Monin-Obukhov surface-layer scaling for describing near surface gradients of refractivity and on characterizing the surface roughness for radar backscatter and propagation within evaporation ducting.

APPROACH

The overall approach is to perform special joint analyses/interpretations on environmental measurements from buoys and vessels and near-shore radar data obtained during a coordinated EM propagation experiment conducted off Wallops Island, Virginia, in March-April 1998. Participants in the experiment were the Naval Surface Warfare Center, Dahlgren Division (NSWC-DD), SPAWAR Systems Center-San Diego (SSC-SD), the Johns Hopkins University, Applied Physics Laboratory (JHU/APL) and the Naval Postgraduate School (NPS). The defining feature of this experiment was the coordinated measurement of the marine surface layer environment and surface wave field, together with radar field strength (NSWC-DD) and backscatter inversion (SPANDAR, SSC-SD).

Approach: Formation of merged data set

There will be a formation of a data set for analysis/interpretation that consists of the atmospheric and radar data sets. The merged in situ data set will be used to document environmental conditions and to evaluate surface-layer scaling for the description of radar propagation. It will be based on both mean surface layer and wave measurements (from buoys and ships) and turbulence and near-surface profile measurements (from the instrumented vessel *Chessie* and the catamaran).

Approach: Estimating surface-layer refraction conditions

The near-surface refractivity profile is most frequently described in terms of the evaporation duct height. Existing Monin-Obukhov (MO) surface-layer scaling provides general empirical expressions

	Form Approved OMB No. 0704-0188								
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.									
1. REPORT DATE 30 SEP 1999		2. REPORT TYPE		3. DATES COVERED 00-00-1999 to 00-00-1999					
4. TITLE AND SUBTITLE	5a. CONTRACT NUMBER								
Scaling Near-surface Atmospheric and Surface Wave Influences On Radar Propagation Over the Sea					5b. GRANT NUMBER				
					5c. PROGRAM ELEMENT NUMBER				
6. AUTHOR(S)					5d. PROJECT NUMBER				
					5e. TASK NUMBER				
					5f. WORK UNIT NUMBER				
7. PERFORMING ORGANI Naval Postgraduat Room 254,Montere	8. PERFORMING ORGANIZATION REPORT NUMBER								
9. SPONSORING/MONITO	10. SPONSOR/MONITOR'S ACRONYM(S)								
	11. SPONSOR/MONITOR'S REPORT NUMBER(S)								
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited									
13. SUPPLEMENTARY NOTES									
14. ABSTRACT									
15. SUBJECT TERMS									
16. SECURITY CLASSIFIC	17. LIMITATION OF	18. NUMBER	19a. NAME OF						
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	ABSTRACT Same as Report (SAR)	OF PAGES 5	RESPONSIBLE PERSON				

Standard Form 298 (Rev. 8-98) Prescribed by ANSI Std Z39-18 for near-surface gradients (dX/dz) in terms of velocity, temperature, humidity, and buoyancy scaling parameters $(u_*, T_*, q_*, g/T)$. This enables the evaporation duct height to be estimated from single-level measurements of mean quantities using bulk methods. The NPS bulk model will be used to estimate evaporation duct heights for all data sets. The scaling parameters u_* and T_* estimated from the *Chessie* NPS sonic anemometer measurements will be analyzed to evaluate and verify the MO-based bulk model for the near-shore region in the presence of swell.

Approach: Characterizing atmospheric forcing and wave descriptions for clutter

This is particularly important for interpreting the SSC-San Diego obtained SPANDAR data. The wind stress is the mechanical forcing by the wind on the ocean surface. As such, the turbulence-controlled wind stress is an intermediate link between the atmosphere and the ocean for interpreting radarmeasured features. Interpretations will be based on spatial patterns within the SPANDAR fields and combined near-surface refractivity gradient and temporal/spatial wind stress estimated from ship and buoy in situ data. The relation between radar clutter and the wind stress and measured roughness elements may depend on swell. The swell dominated regime is not understood relative to influence of momentum flux on surface backscatter. The NPS wave-rider buoy provided two-dimensional wave statistics for wind waves and swell. These two-dimensional descriptions of surface waves will be merged with the wind stress scaled capillary waves for interpretations.

WORK COMPLETED

The combined collection of in situ environmental and remote (radar) data occurred off Wallops Island, Virginia, from 4 March to 3 April 1998. Table 1 is a summary of the Wallops '98 combined atmospheric and ocean surface data set. The measurements obtained by NPS are denoted by bold X's in this table.

NPS has completed the merging of the environmental measurements from all platforms (NPS buoys, NSWC-DD buoy and *Sealion*, JHU/APL *Chessie* and catamaran) into one combined data set available for analyses/interpretation by all experiment participants. The merged data set is useful not only because it facilitates inter-comparisons and joint analyses, but also because data 'gaps' from individual platforms are usually filled in with data from other available platforms. This data set includes evaporation duct height and scaling parameter estimates (u_* , T_* , q_*) for all measurement platforms computed using the NPS bulk model.

The merged data set provided by NPS is currently being used by NSWC-DD and SSC-SD for combined analysis with other data sources. NSWC-DD (Michael Young) has merged the environmental data with helicopter-measured refractivity profiles and radar propagation data and is currently leading a collaborative effort to investigate temporal and spatial variations in refractivity conditions in the littoral zone. SSC-SD (Ted Rogers) has compared the NPS bulk evaporation duct height estimates with inferred refractivity from clutter (RFC) duct heights using SPANDAR radar data, with promising results.

The Wallops '98 experiment has provided an excellent opportunity to test and validate the NPS bulk evaporation duct model. This model has been provided to NSWC-DD (Michael Young) and is currently being used to compare refractivity profiles from the bulk model with helicopter measurements. The NPS evaporation duct algorithm is also being incorporated into a meso-scale

forecast model (COAMPS) by The Pennsylvania State University, Applied Research Laboratory (Stephen Fast) to study propagation variations over a larger spatial and temporal time scale.

Inertial-dissipation wind speed and temperature scaling parameters (u_* and T_*) have been computed from the NPS sonic anemometer data obtained on the *Chessie*. A sample time series of *Chessie* data from 2 April 1998 presented in Fig. 1 shows good agreement between bulk estimates and inertialdissipation measurements of u_* , indicating that the bulk model is performing adequately in the coastal environment off Wallops Island.

Table 1. Wallops '98 Atmospheric Boundary Layer Merged Data Set							
Platform Type/	Buoys			Vessels			
Platform	NPS	NPS	NSWC-DD	JHU/APL	NSWC-DD		
	Mean Met	2-D wave	Endeco	Chessie	Sealion		
Mean Atmospheric							
Vector Wind	X		Х	X	Х		
Air Temperature	X		X	X	Х		
Humidity	X		Х	Х	Х		
Atmospheric Pressure	X		X	X	Х		
Turbulent Atmospheric							
Wind				X ¹			
Temperature				X ¹			
Atmospheric Profiles							
Near-surface (T,RH)				X^2			
Mixed-layer (T,RH,P)				X^3			
Surface Properties							
SST interfacial (IR)	X			X^2			
SST bulk (thermistor)	X		X		Х		
2-D wave/swell		X	X				

¹ NPS sonic

² JHU/APL catamaran

RESULTS

Merged time series data from the NPS met and wave buoys over the 4 March to 3 April 1998 period are presented in Figure 2. These results show the wide range of stratification conditions encountered during the experiment. Evaporation duct height estimates from the NPS bulk model are shown in the top panel. Focus days based on activities by the NSWC-DD, JHU/APL and SSC-SD groups are identified by color-coded marks in the top panel. The radar periods of interest are for daytime hours of these days. Adequate environmental data exists for most focus days from at least one measurement platform.

Measured temperature profiles from the *Chessie* and the catamaran have been compared with bulk model predictions based on MO scaling. These comparisons indicate that the near-surface scalar profiles predicted by traditional MO theory may over-estimate the profile steepness over ocean swell under stable stratification. A likely cause of this observation is that waves induce additional mixing in the stable surface layer, leading to smaller vertical scalar profiles.

IMPACT/APPLICATIONS

The potential future impact is for understanding the influence of waves on the overlying scalar profiles and applications include improved prediction of near-horizon radar propagation conditions.

TRANSITIONS

These results are being used to improve operational models now used in the fleet. The NPS bulk evaporation duct model is currently being incorporated into the MORIAH data acquisition and analysis system to provide real-time information on EM propagation conditions.

RELATED PROJECTS

The ONR Electro-Optical Processes and Coastal Environment is a closely related projects because it also requires improved models of near-surface gradients, affecting optical wavelengths.

PUBLICATIONS

Frederickson, P. A., K. L. Davidson, C. R. Zeisse, and C. S. Bendall, "Estimating the Refractive Index Structure Parameter (C_n^2) Over the Ocean Using Bulk Methods." Accepted by *Journal of Applied Meteorology*, September 1999.

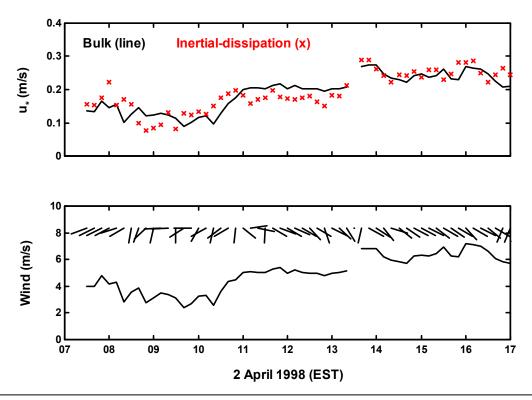


Figure 1. Time series of Chessie data for 2 April 1998. Top panel: bulk u* estimates indicated by solid line, inertial-dissipation u* values from NPS sonic anemometer indicated by red x's. Bottom panel: wind speed indicated by solid line, wind direction indicated by barbs.

