

A 3-D finite element model of blood perfused rat gastrocnemius medialis muscle

Citation for published version (APA):

Vankan, W. J., Huyghe, J. M. R. J., Janssen, J. D., & Huson, A. (1996). A 3-D finite element model of blood perfused rat gastrocnemius medialis muscle. *European Journal of Morphology*, 34(1), 19-24.

Document status and date:

Published: 01/01/1996

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

A 3-D FINITE ELEMENT MODEL OF BLOOD PERFUSED RAT GASTROCNEMIUS MEDIALIS MUSCLE

W.J. Vankan¹, J.M. Huyghe^{1,2}, J.D. Janssen^{1,2}, A. Huson^{1,2}

¹Eindhoven University of Technology, Department of Mechanical Engineering, P.O. Box 513, 5600 MB Eindhoven, The Netherlands, ²University of Limburg, Department of Movement Sciences, P.O. Box 616, 6200 MD Maastricht, The Netherlands

ABSTRACT

A finite element description of blood perfusion has been developed, and is applied to skeletal muscles. Three-dimensional distributions of blood pressures and flows in deforming muscles are calculated. The muscle tissue is considered as a fluid-saturated porous solid. The blood is modeled as a series of five intercommunicating compartmental fluids, representing arterial, arteriolar, capillary, venular and venous blood, that reside in the pores (blood vessels) of the muscle tissue. The blood vessels are modeled as distensible tubes, embedded in the muscle tissue.

A 3-D finite element mesh has been mapped on a reconstructed geometry of a gastrocnemius medialis muscle of the rat. Blood perfused linear elastic muscle material behaviour has been assigned to this mesh. A simulation of blood perfusion, resulting from a constant arterio-venous pressure difference, through the reconstructed muscle has been performed. Calculated blood pressure and flow distributions were within physiological range.

KEYWORDS: Skeletal muscle – porous media – geometry – perfusion

INTRODUCTION

In the past decades finite element modeling has become the most popular method for mechanical analysis of morphological structures in biology (Huyghe et al., 1992; Yin, 1985). This is because of its flexibility to combine realistic geometries and complex material behaviour. This study fits into a research program that aims at including micro-structural morphology of biological structures into special purpose finite element models, thereby intensifying the interaction between morphologists and biomechanists.

Blood flow through muscle tissue can be regarded as fluid flow through a porous solid. Thus, porous media theories can be employed to describe the me-

chanics of deforming, blood perfused muscle tissue. These theories are based on the concept of fluid flow due to pressure gradients through porous solid materials that are saturated by the fluid. As an illustration of this concept, the very early experiment of Darcy and Ritter (1840) clearly shows its essential aspects (Fig. 1). They investigated the relation between fluid flow and pressure gradient for soil specimens. Their results obeyed the following law (Darcy's law):

$$\frac{Q}{A} = K \frac{P_1 - P_2}{L} \quad (1)$$

where Q is the flow (m^3/s), A is the cross-sectional area of the soil specimen (m^2), K is the conductivity coefficient of the soil specimen ($m^2/(s Pa)$), P is pressure (Pa) and L is the length of the soil specimen (m). The conductivity coefficient of the soil specimen appeared to depend on the pore geometry (size, orientation) and the fluid viscosity. The one-

Correspondence to: W.J. Vankan, University of Limburg, Department of Movement Sciences, P.O. Box 616, 6200 MD Maastricht, The Netherlands, phone: +31-43-881386, fax: +31-43-670972, e-mail: josv@bw.rulimburg.nl

dimensional law of Darcy has been generalised to three-dimensional, steady state, Newtonian flow of an incompressible fluid through a saturated porous solid (e.g. (Neuman, 1977)):

$$\mathbf{q} = -\mathbf{K} \cdot \nabla p \quad (2)$$

where \mathbf{q} is the volume specific fluid flow (m/s), ∇p the 3-D gradient of the volume averaged pressure (Pa/m), and \mathbf{K} the 3-D conductivity tensor ($m^2/(s Pa)$), which relates fluid flow (size and direction) to fluid pressure gradient. Flow and pressure are now expressed as volume averaged quantities, representing fluid flow and pressure averaged over all the pores in an arbitrarily bounded local region (averaging volume; Fig. 2). Thus, instead of concentrating on micro-mechanical phenomena within pores (e.g. detailed description of capillary blood flow), a macro-mechanical description of fluid flow between different regions is obtained.

When comparing perfused muscle tissue with Darcy's soil specimen, two major complications concerning the description of the fluid flow arise. Firstly, blood flows through a vascular tree, which consists of a dense bed of arterial, capillary and venous vessels, in each of which blood pressure and flow are totally different. Secondly, the blood is surrounded by distensible vessel walls, which mechanically interfere between blood pressure and hydrostatic pres-

sure in the surrounding tissue. These complications have driven us to the development of an extended description of fluid flow through porous solids, in which 1 the hierarchical architecture of the vasculature, 2 the vessel wall elasticity, and 3 finite deformation of the porous solid are incorporated. The hierarchy is dealt with by subdividing the fluid into five intercommunicating fluid compartments, representing the arterial, arteriolar, capillary, venular and venous blood respectively. Each of these blood compartments is characterized by its own Darcy equation with a specific conductivity tensor, so that compartmental blood pressures and flows can be calculated. Moreover, the intercommunicating flow between the compartments, which corresponds with the physiological definition of regional capillary perfusion ($ml/(s 100g)$), is also described by a Darcy-like equation:

$$q_0 = -k_{00} \frac{\partial}{\partial x_0} p \quad (3)$$

where x_0 is a dimensionless parameter that quantifies the hierarchical position in the vascular tree from arteries to veins, and $\frac{\partial}{\partial x_0} p$ represents the hierarchical gradient of the (volume averaged) blood pressure (Pa). The vessel wall elasticity is modeled as a relation between the local compartmental blood volume fraction (local blood volume in a compartment

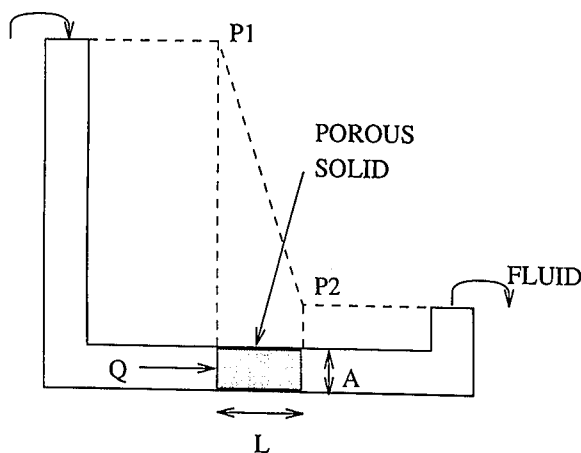


Fig. 1. DARCY AND RITTER'S EXPERIMENTAL SETUP: GLASS TUBE IN WHICH A SOIL SPECIMEN IS FIXED; DUE TO THE PRESSURE DIFFERENCE $P1 - P2$ FLUID FLOWS LEFT TO RIGHT THROUGH THE SPECIMEN.

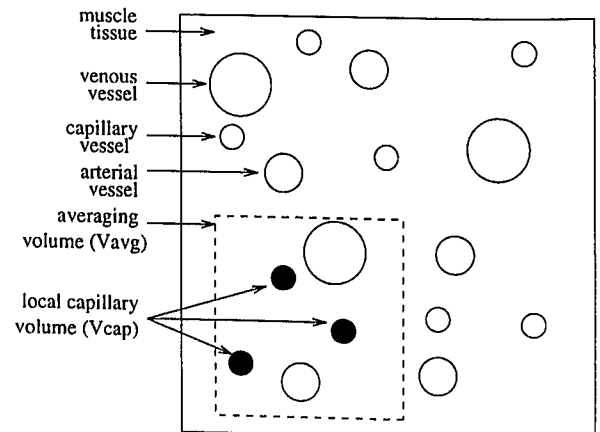


Fig. 2. ILLUSTRATION OF VOLUME AVERAGING PROCEDURE: CROSS-SECTION OF MUSCLE TISSUE IN WHICH SEVERAL TYPES OF BLOOD VESSELS ARE EMBEDDED; AN AVERAGING VOLUME IS DRAWN.

In porous media theory known as permeability.

divided by the local averaging volume, e.g. for the capillary blood: $n_{cap} = V_{cap}/V_{avg}$ (Fig. 2)) and the local transmural pressure difference (local compartmental blood pressure – local extravascular tissue pressure). Thus for each compartment a vessel compliance can be specified that relates the compartmental blood accumulation to the compartmental intra-extra-vascular pressure difference. Intra-extra-vascular exchange of fluid and solutes is not included in the model. Although this exchange is essential from a biological point of view, its influence on the fluid mechanics of blood perfusion is only minimal on the time scales (seconds) that we consider here.

The newly developed model has been implemented in the finite element software package DIANA (DIANA Analysis bv, P.O. Box 113, 2600 AC Delft, The Netherlands).

To perform finite element simulations of perfusion of skeletal muscles, many input data containing geometrical information, material behaviour, vessel wall elasticity and conductivity tensors for the blood perfusion, need to be obtained. In this paper we will focus on geometrical input information, which consists of muscle geometry and geometries of the tendinous structures. This information can be obtained from geometrical reconstruction of a muscle, which has been performed in our group on a rat gastrocnemius medialis muscle. In a companion paper (van Donkelaar et al., 1995) the actual reconstruction procedure is described in more detail. In this paper we illustrate the use of such a geometrical reconstruction in finite element perfusion analysis.

METHODS

A simulation of blood perfusion through rat gastrocnemius medialis muscle was performed. The geometry, which was obtained via precise reconstruction, and its element-division are given in Fig. 3. The mesh consists of 1170 tetrahedral elements that constitute the muscle tissue, and 130 triangular elements, attached to the muscle surface, representing the aponeuroses. The aponeuroses thicknesses range from circa 0.5 mm near the tendon to circa 0.01 mm at the other end. The muscle material was modeled linearly elastic, with a Young modulus of 5.0 K Pa (Heerkens et al., 1987). The linearly elastic tendinous material of the aponeuroses was modeled much

stiffer, with a Young modulus of 1.5 GPa (Trestik & Lieber, 1993). The vasculature was modeled by five intercommunicating blood compartments, representing arterial, arteriolar, capillary, venular and venous blood respectively. Blood conduction through the tissue was prescribed for each vascular compartment (i) by isotropic spatial conductivity tensors K_i (2), that were constant in the whole geometry. Vascular conductivity k_{00i} (3) was prescribed analogously. The values for K_i and k_{00i} that were used in the simulation are listed in table 1. These values were obtained under the assumption that K is isotropic, and were estimated by (Huyghe, 1986):

$$K = K I ; K = \frac{d^4}{a_m 128 \mu} \quad (4)$$

where I is the unity tensor, d is the vessel diameter, A_m is the muscle's cross-sectional area and μ the apparent blood viscosity. For the large, single supplying artery and draining vein, $d = 0.5$ mm, $A_m = 30$ mm² and $\mu = 3.5 \cdot 10^{-3}$ Pa s, by which $K = 5 \cdot 10^{-3}$ mm²/(Pa s). Because of the relatively small distances that blood travels through arteriolar, capillary and venular vessels, $K \approx 0$ for these compartments. Thus macroscopic spatial blood flow is only accounted for the arterial and venous compartments. Estimations of the hierarchical conductivity (i.e. vascular conductivity) k_{00i} are made by dividing the expected hierarchical flow ($q_0 = 2.5 \cdot 10^{-3}$ s⁻¹ (Hudlicka et al., 1984)) by the expected compartmental hierarchical pressure gradient $\frac{\partial}{\partial x_0} p$ (Fronek & Zweifach, 1975).

Table 1. Perfusion parameters.

	K ($\frac{mm^2}{Pa s}$)	k_{00} ($\frac{1}{Pa s}$)	c ($\frac{1}{Pa}$)
arterial	$5 \cdot 10^{-3}$	$5 \cdot 10^{-6}$	$1 \cdot 10^{-9}$
arteriolar	$1 \cdot 10^{-6}$	$325 \cdot 10^{-9}$	$1 \cdot 10^{-9}$
capillary	$1 \cdot 10^{-6}$	$5 \cdot 10^{-6}$	$1 \cdot 10^{-9}$
venular	$1 \cdot 10^{-6}$	$5 \cdot 10^{-6}$	$1 \cdot 10^{-9}$
venous	$5 \cdot 10^{-3}$	$5 \cdot 10^{-6}$	$1 \cdot 10^{-7}$

Table 1 also contains the values of the vessel compliances c_v , which were also constant in the whole geometry. Suppressing the displacements of the proximal and distal ends of the muscle ensured isometric deformation (Fig. 3). Furthermore 80 mmHg arterial blood pressure and 0 mmHg venous blood pressure were prescribed in one node at the muscle surface. This node represents the position where the supplying artery and draining vein penetrate into the muscle (Fig. 3). In the analysis the transient development of blood pressures and flows in each compartment in the whole muscle, resulting from the stepwisely applied blood pressure boundary conditions, was calculated. Already after circa 20 ms a steady state of blood perfusion was reached, of which some results will be presented.

RESULTS

The main objective of this study is to predict blood pressures and flows in a realistic model of the rat gastrocnemius medialis muscle. The driving force for this blood perfusion is the arterio-venous pressure difference, which is modeled as nodal arterial

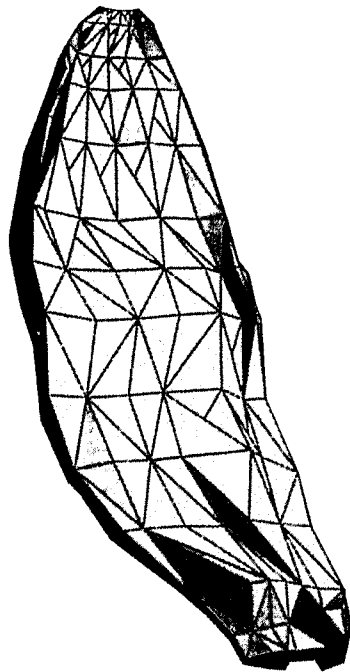


Fig. 3. SHADED VIEW OF THE FINITE ELEMENT MESH OF THE MUSCLE GEOMETRY. Top and bottom edges represent distal and proximal ends, respectively.

and venous blood pressure boundary conditions. The resulting blood pressure patterns in the muscle are given in Fig. 4.

Due to the isotropy and large value of the spatial conductivity K of the arterial compartment, the blood is distributed homogeneously and almost without loss of pressure throughout the muscle. The same holds for the venous blood that flows towards the draining vein. (Fig. 4a, c). From the arterial compartment, the blood flows via the arteriolar compartment towards the capillary compartment, between which a significant blood pressure difference exists due to the small hierarchical conductivity k_{00} of the arteriolar compartment (Fig. 4b). The arteriovenous decrease in blood pressure is comparable to experimentally measured blood pressures in resting skeletal muscles (Fronck & Zweifach, 1975). The calculated hierarchical flow q_0 at the capillary level (Fig. 4d) corresponds to the physiological regional capillary perfusion in resting skeletal muscles (Hudlicka et al., 1984).

DISCUSSION

In this paper an illustration of finite element analysis of blood perfusion in resting skeletal muscle has been given. The analysis was applied to a precise reconstruction of a muscle geometry. Roughly estimated input for material behaviour and blood perfusion have been used. Nevertheless reasonable approximations of physiological values of blood perfusion were calculated. Any given muscle geometry can be used in the simulation, which is an important feature of the finite element method.

Another essential feature of the employed finite element model is that contraction and finite deformation of the muscles can be included in the simulations (Vankan et al., 1995). Thus interaction between contraction and perfusion can be studied. Contraction is prescribed as an active stress component in the local fiber direction and the resulting deformation is calculated. The contraction stress is a function of activation, time, local strain and strain rate, dependent of the contraction model that is used. This, however, is beyond the scope of this paper.

Future work should focus on the acquisition of more realistic input parameters, such as muscle material behaviour (e.g. transverse isotropic, non-linearly elastic), more exact anisotropic conductivity ten-

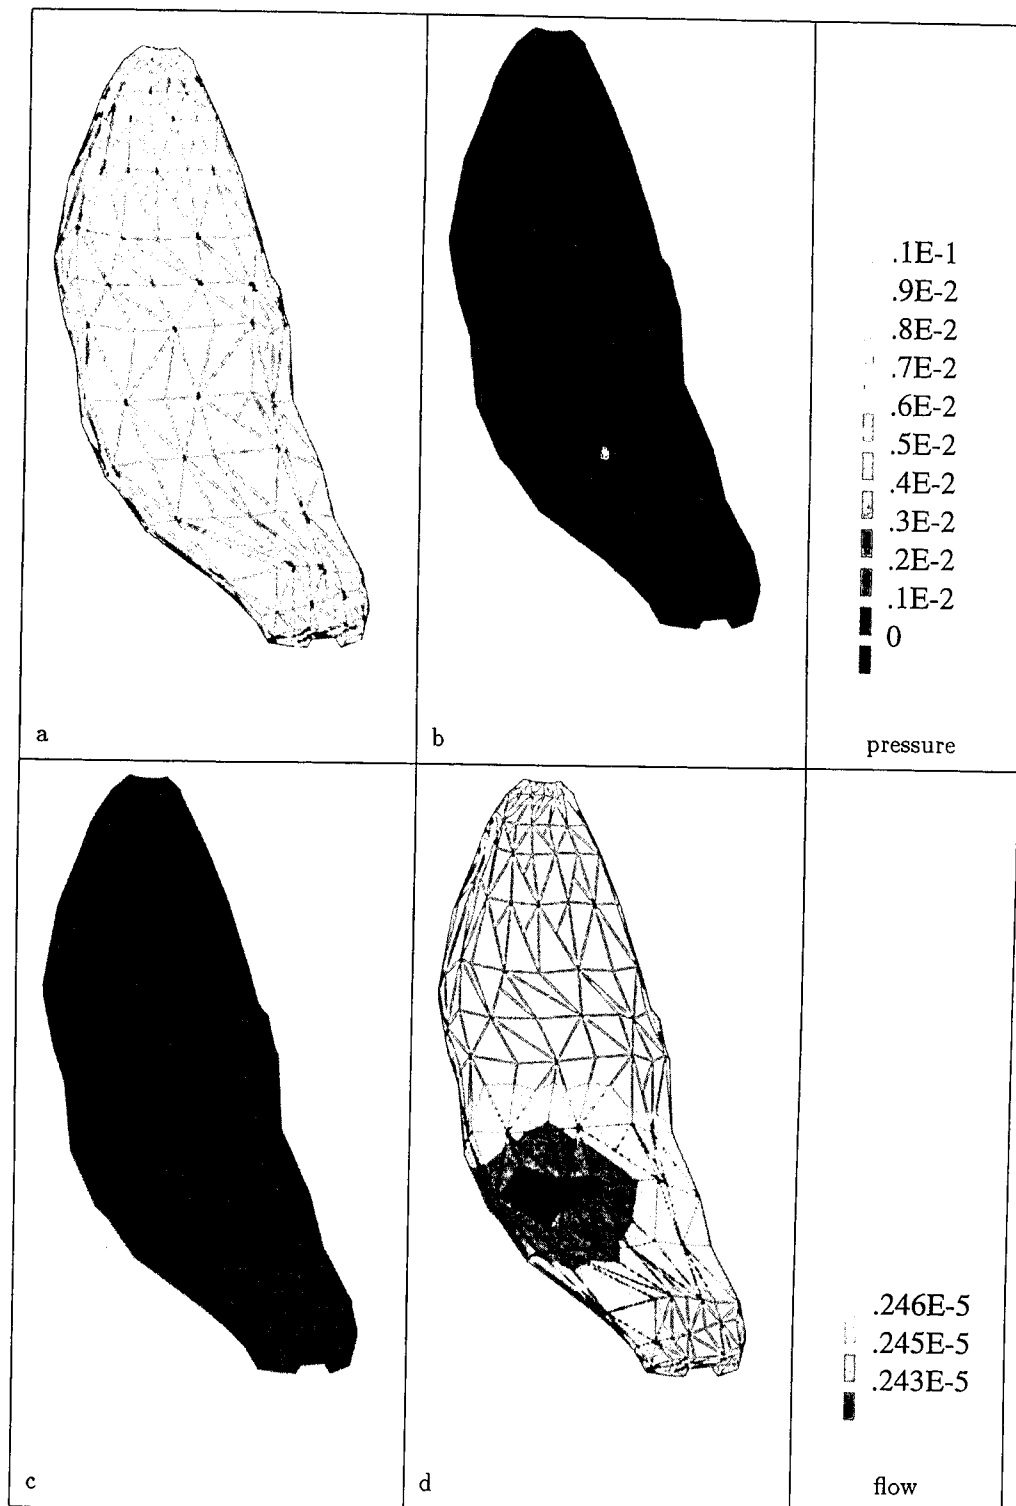


Fig. 4. (A) ARTERIAL, (B) CAPILLARY AND (C) VENOUS BLOOD PRESSURE VALUES (MPa), AND (D) CAPILLARY HIERARCHICAL BLOOD FLOW (l/ms) (I.E. REGIONAL CAPILLARY PERFUSION).

sors for blood perfusion and more realistic values for compartmental vessel compliances.

REFERENCES

- VAN DONKELAAR CC, DROST MR, VAN MAMEREN H, TUINENBURG CF, JANSSEN JD, HUSON A (1995) Three-dimensional reconstruction of the rat triceps surae muscle and finite element mesh generation of the rat gastrocnemius medialis muscle (submitted). *Eur J Morphol*
- FRONEK K, ZWEIFACH BW (1975) Microvascular pressure distribution in skeletal muscle and the effect of vasodilation. *Am J Physiol* 228, 791-796
- HEERKENS YF, WOITTIEZ RD, HUIJING PA, HUSON A, VAN INGEN SCHENAU GJ, ROZENDAL, RH (1987) Mechanical properties of passive rat muscle during sinusoidal stretching. *Eur J Physiol* 409, 438-47
- HUDLICKA O, TYLER KR, WRIGHT AJA, ZIADA AMAR (1984) Growth of capillaries in: skeletal muscles. In *Skeletal muscle microcirculation; Proceedings of the 3rd bodensee symposium on microcirculation* (F HAMMERSEN, K MESSMER, eds) Basel: Karger
- HUYGHE JM (1986) Non-linear finite element models of the beating left ventricle and the intramyocardial coronary circulation. PhD dissertation, Eindhoven University of Technology, Department of Mechanical Engineering
- HUYGHE JM, ARTS T, VAN CAMPEN DH, RENEMAN RS (1992) Porous medium finite element model of the beating left ventricle. *Am J Physiol* 262, H1256-H1267
- NEUMAN SP (1977) Theoretical derivation of darcy's law. *Acta mechanica* 25, 153-170.
- TRESTIK CL, LIEBER RL (1993) Relationship between achilles tendon mechanical properties and gastrocnemius muscle function. *J Biomech Eng* 115(3), 225-30
- VANKAN WJ, HUYGHE JM, JANSSEN JD, HUSON A (1995) A finite element mixture model of perfused skeletal muscle tissue. 1995 ASME/AICHe/ASCE Summer bioengineering conference
- YIN FCP (1985) Applications of the finite-element method to ventricular mechanics. *Crc Crit Rev Biomech Engng* 12, 319-342

Received: June 1995

Accepted after revision: August 8, 1995