

Cracking intervertebral disc herniation

Citation for published version (APA):

Kraaijeveld, F., Huyghe, J. M. R. J., & Baaijens, F. P. T. (2006). *Cracking intervertebral disc herniation*. Poster session presented at Mate Poster Award 2006 : 11th Annual Poster Contest.

Document status and date:

Published: 01/01/2006

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Cracking Intervertebral Disc Herniation

Famke Kraaijeveld, Jacques M. Huyghe and Frank P.T. Baaijens

Eindhoven University of Technology, Department of Biomedical Engineering

Introduction

During intervertebral disc (IVD) degeneration global (osmotic) pre-stress decreases, while chance of an injury increases. This is a paradox. Is it then genetically driven? No, mechanics must play a role.

Materials like tissues endure instability during swelling or shrinking [2]. This can lead to localization [6] and therefore fracturing. We believe this is the cause of intervertebral disc (IVD) herniation during degeneration and not just genetics or chance.

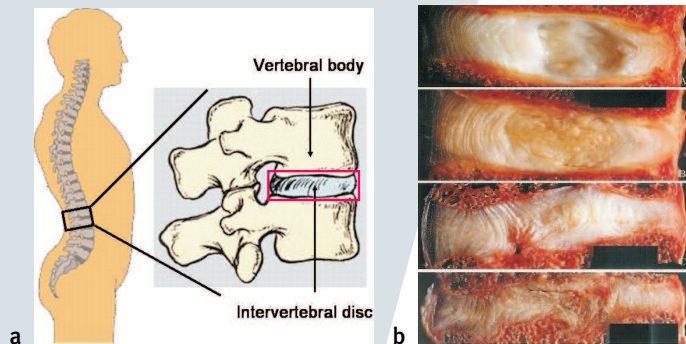


Figure 1: a) Schematic of IVD position. b) Different stages of IVD herniation: A: Grade I (15-40) years; B: Grade II (35-70) years; C: Grade III (Male 31) Annulus bulging into nucleus; D: Grade VI (Male 31) Internal collapse of annulus

Objective

We hypothesize that existing cracks open and propagate under decreasing osmotic pressure, i.e. global decrease of pre-stress. [3,4] This will be tested by FE simulations on a small piece of annulus (see figure 2).

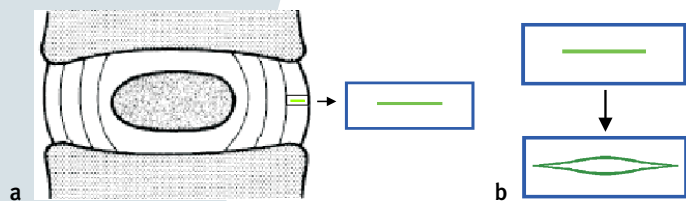


Figure 2: a) Schematic cross-section of IVD; calculation domain is a part of the annulus. b) Opening and growth of crack under decreasing osmotic pressure

Materials and Method

Materials

Lanir's theory [3] is used to represent the bulk behavior. Shear faulting (mode-II) causes high pressure gradients which are approximated by jumps $[\mu^f]$ (see also fig. 4).

References

- [1] De Borst et al., *Arch. Appl. Mech.*, 2006
- [2] J.M. Huyghe et al., *Int. J. of Eng. Sc.*, 35:8, 1997
- [3] F. Kraaijeveld et al., *in writing*
- [4] Y. Lanir, *Biorheology*, 24, 1987
- [5] Y. Schröder, *Eur. Spine J.*, 2006
- [6] S. Wognum et al., *Spine*, 31:16, 2006

Opening of the crack (mode-I) causes fluid flow into the crack (μ_T^f). This balance of mass can be derived from figure 3.




Figure 3: Schematic overview of forces (t) and fluid flow (f and q_T) at crack

In figure 4 the total distribution of chemical potential is given for arbitrary (mixed-mode) loading, so with both $[\mu^f]$ and μ_T^f .

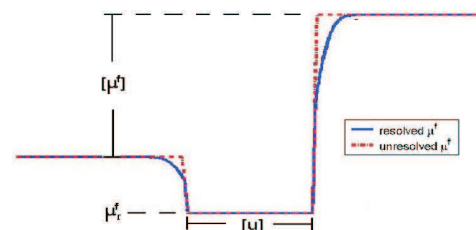


Figure 4: Chemical potential distribution: jumps approximate high gradients, fluid flow into the crack goes with.

Method

Partition of Unity (PU-FEM) is used.[1] This method is mesh-independent. Total behavior is separated into bulk behavior and crack behavior. The crack behavior is included by increasing the degrees of freedom of the nodes and not by additional (interface) elements.

Future Work

The FE formulation will be implemented at TU Delft for the MMCM cooperation. The FE formulation is validated partly by comparison with analytical solution [3]. Different damage laws will be compared. Having proof of principle, crack propagation through a disc will be investigated (see figure 5). Then IVD herniation is cracked.




Figure 5: Idea for simulation: a radial crack followed by delamination annulus.