


# Radiometric Characterization Results for the IKONOS Sensor

Kara Holekamp, Science Systems and Applications, Inc., Stennis Space Center, MS


David Aaron, South Dakota State University Satellite Calibration Group & Image Processing Laboratory, Brookings, SD

Kurtis Thome, University of Arizona Remote Sensing Group, Tucson, AZ

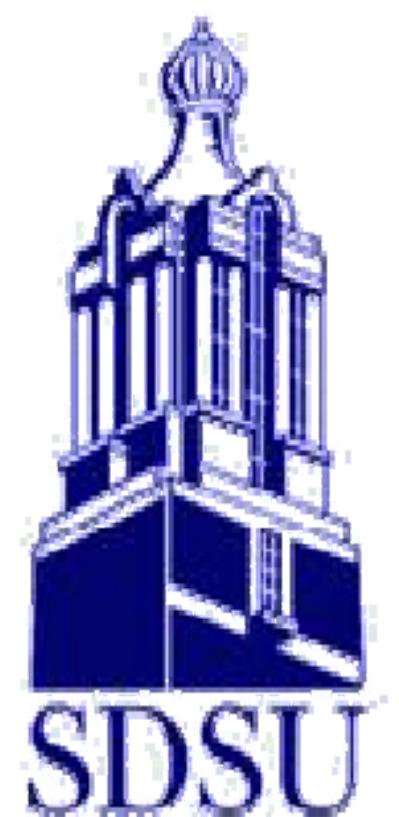


THE UNIVERSITY OF ARIZONA<sup>®</sup>

2004/2005 IKONOS Blue Band

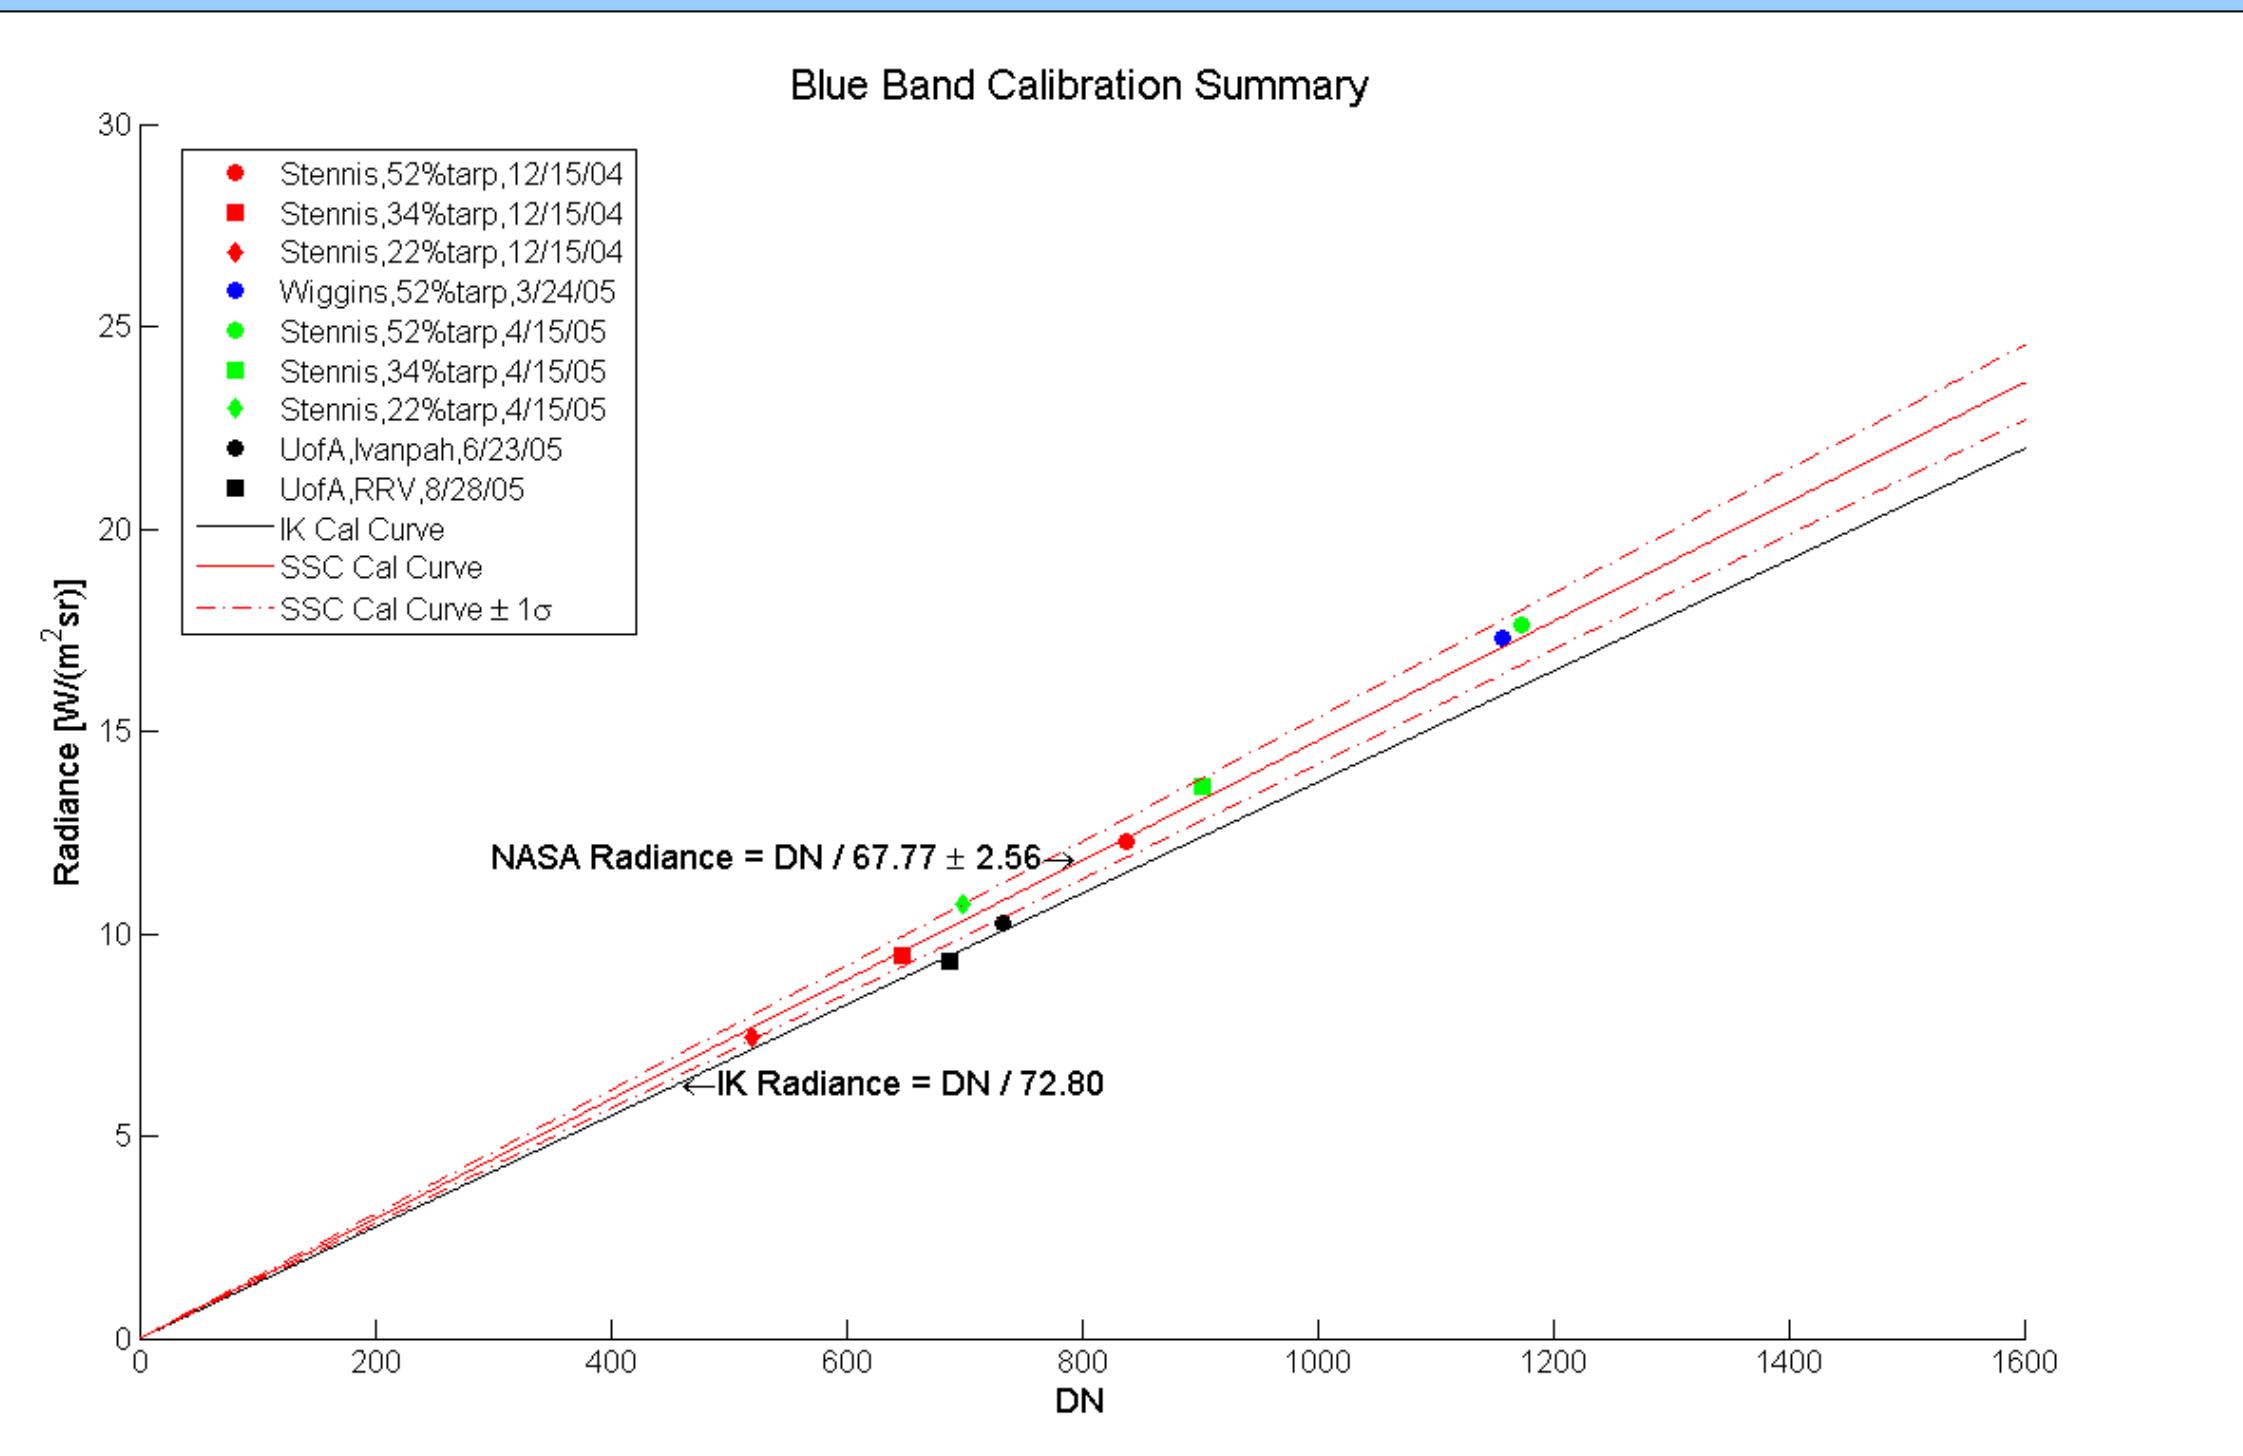

2004/2005 IKONOS Red Band

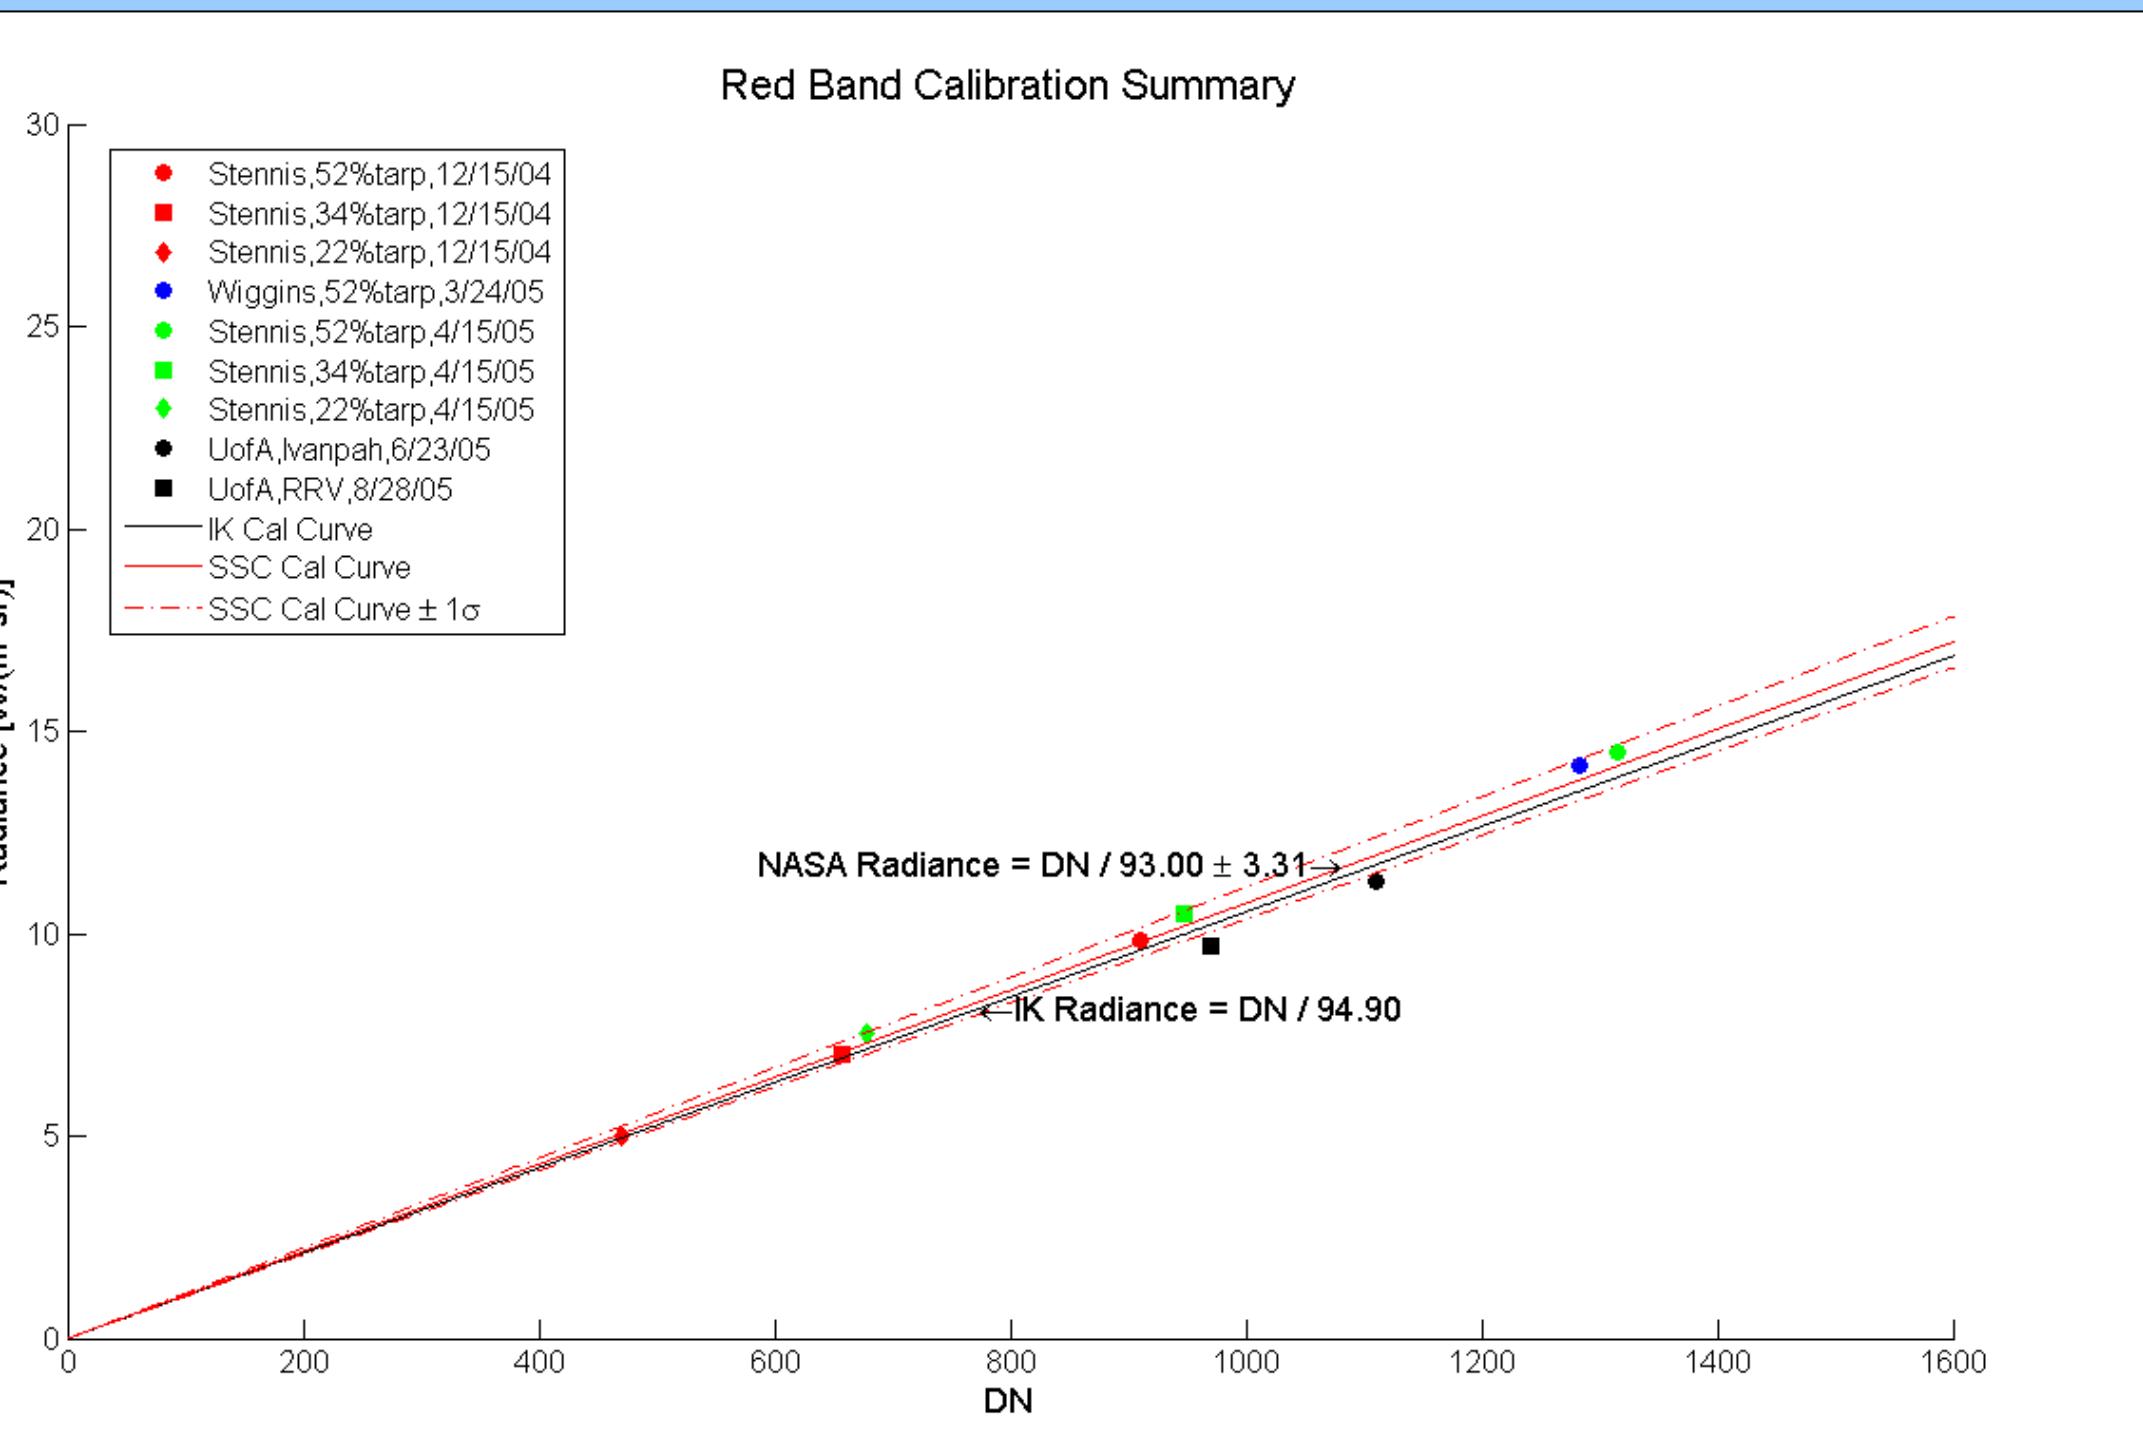


2004/2005 IKONOS Results


Bandwidth FWHM ( $\mu\text{m}$ )	NASA Team Estimate [ $\text{DN}/(\text{W}/\text{m}^2 \text{sr})$ ]	IKONOS Provided [ $\text{DN}/(\text{W}/\text{m}^2 \text{sr})$ ]	Percent Difference
1 0.450 - 0.520	$67.8 \pm 2.6$	72.8	-7.4%
2 0.510 - 0.600	$71.2 \pm 2.9$	72.7	-2.1%
3 0.630 - 0.700	$93.0 \pm 3.3$	94.9	-2.0%
4 0.760 - 0.850	$82.3 \pm 2.1$	84.3	-2.4%

Percent difference is calculated by  $(1 - \text{IKONOS}/\text{NASA Mean})$

2004/2005 IKONOS Green Band

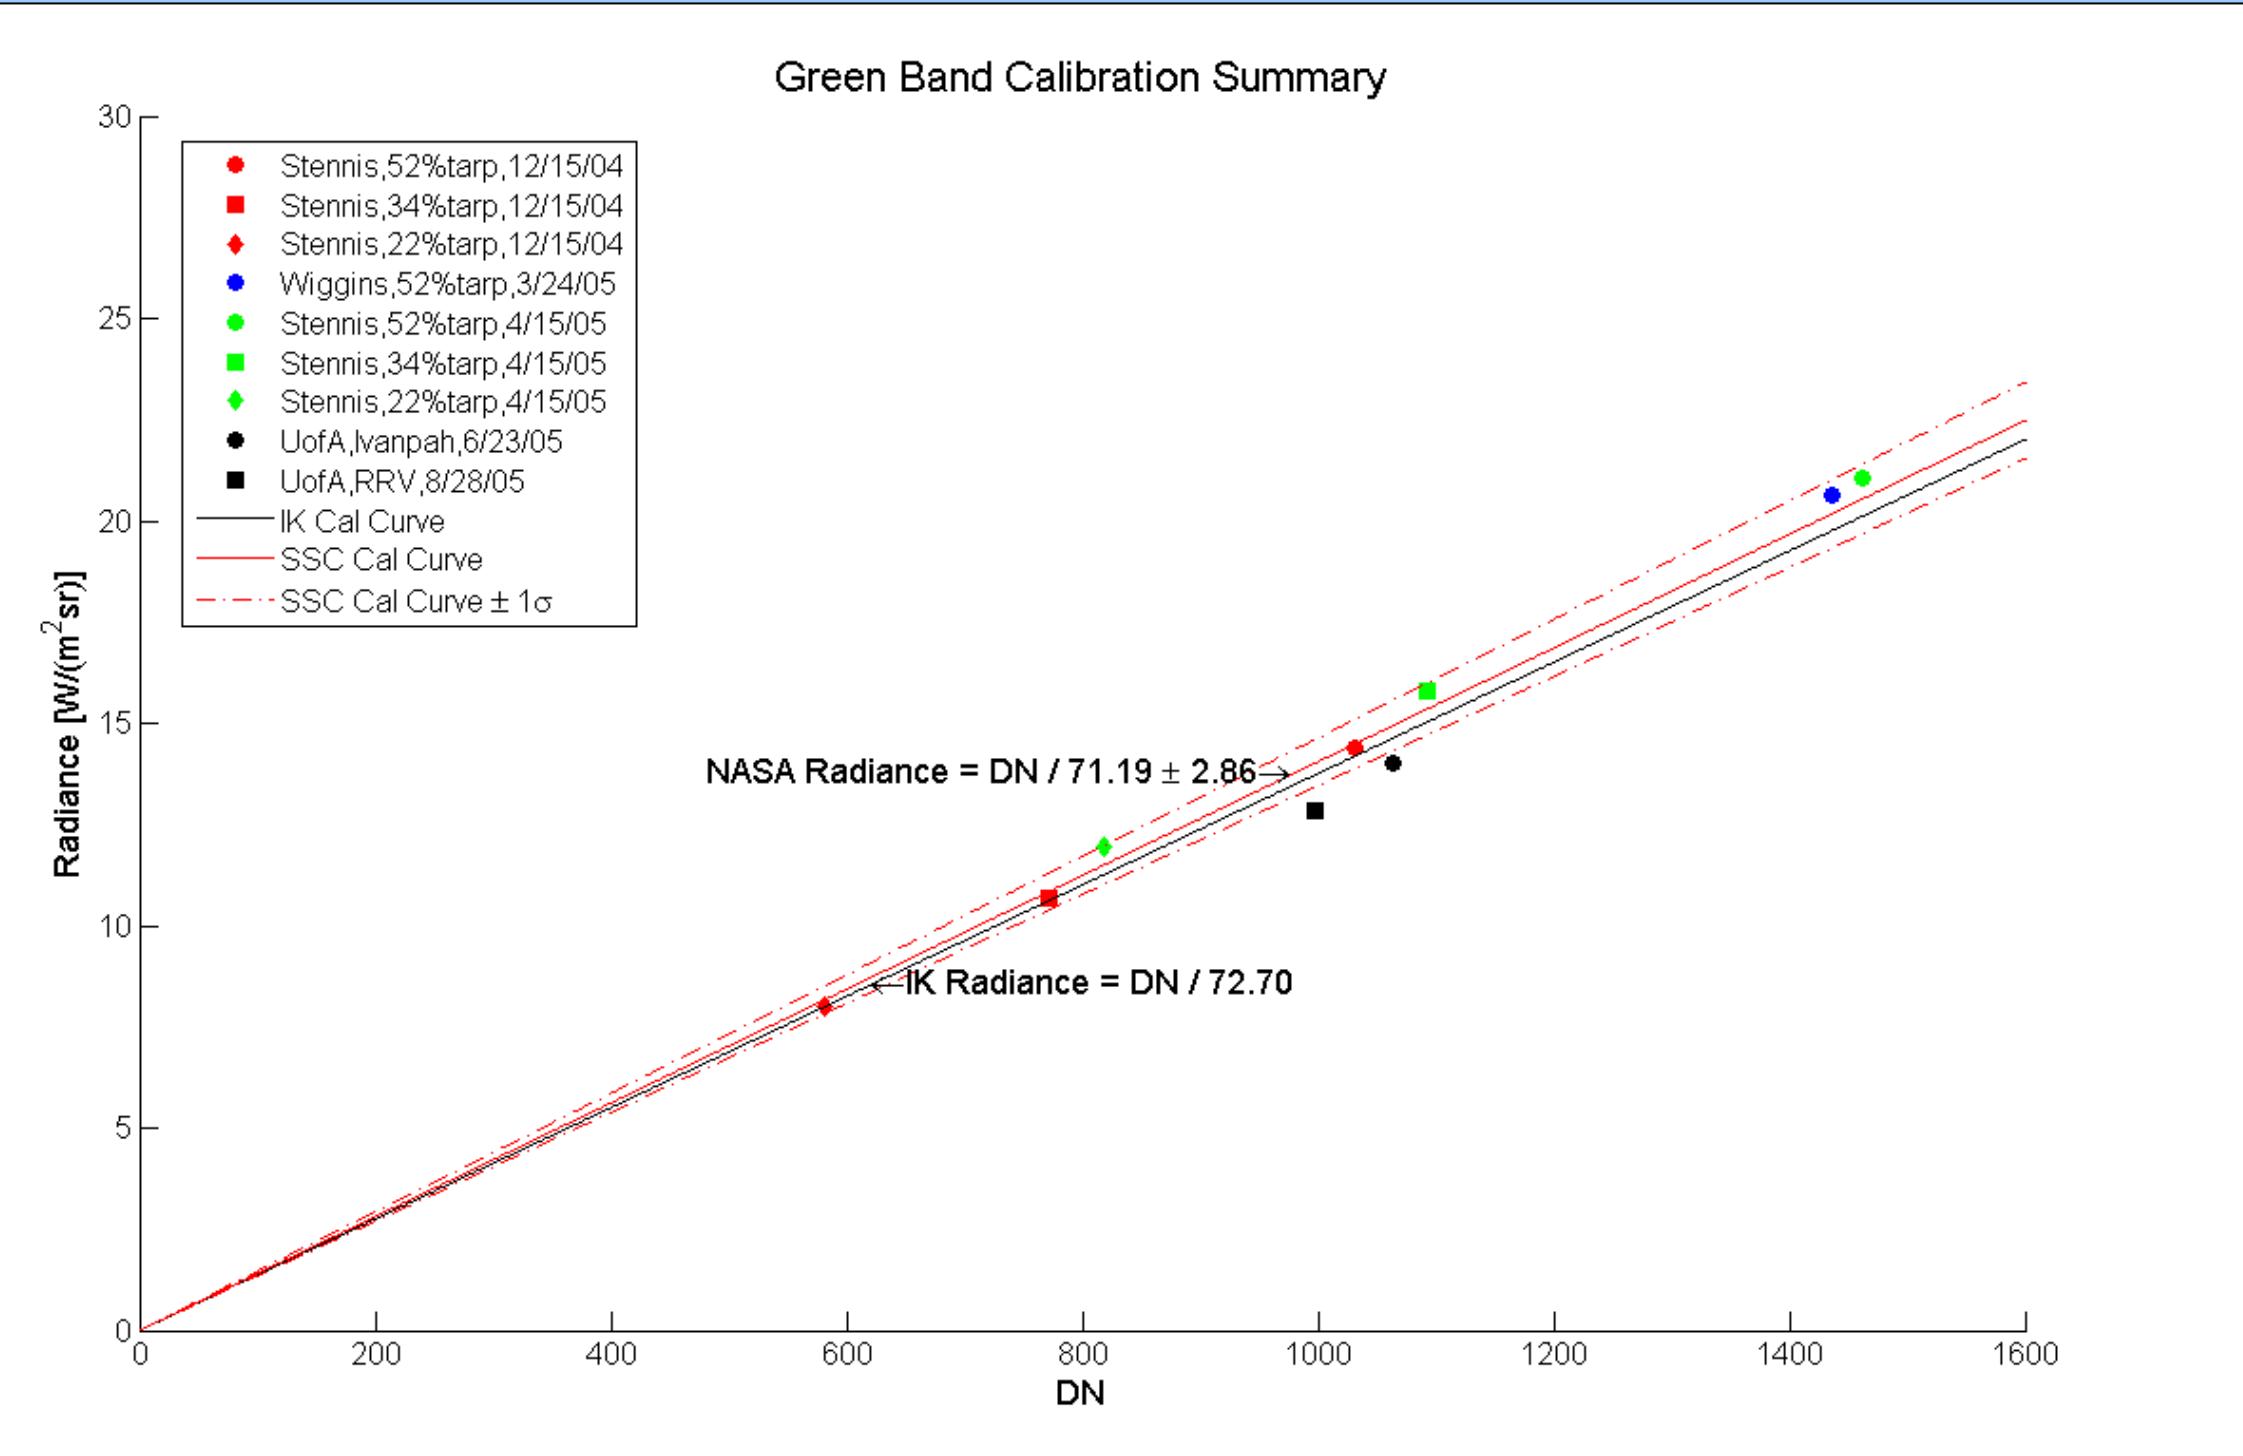


2004/2005 IKONOS NIR Band

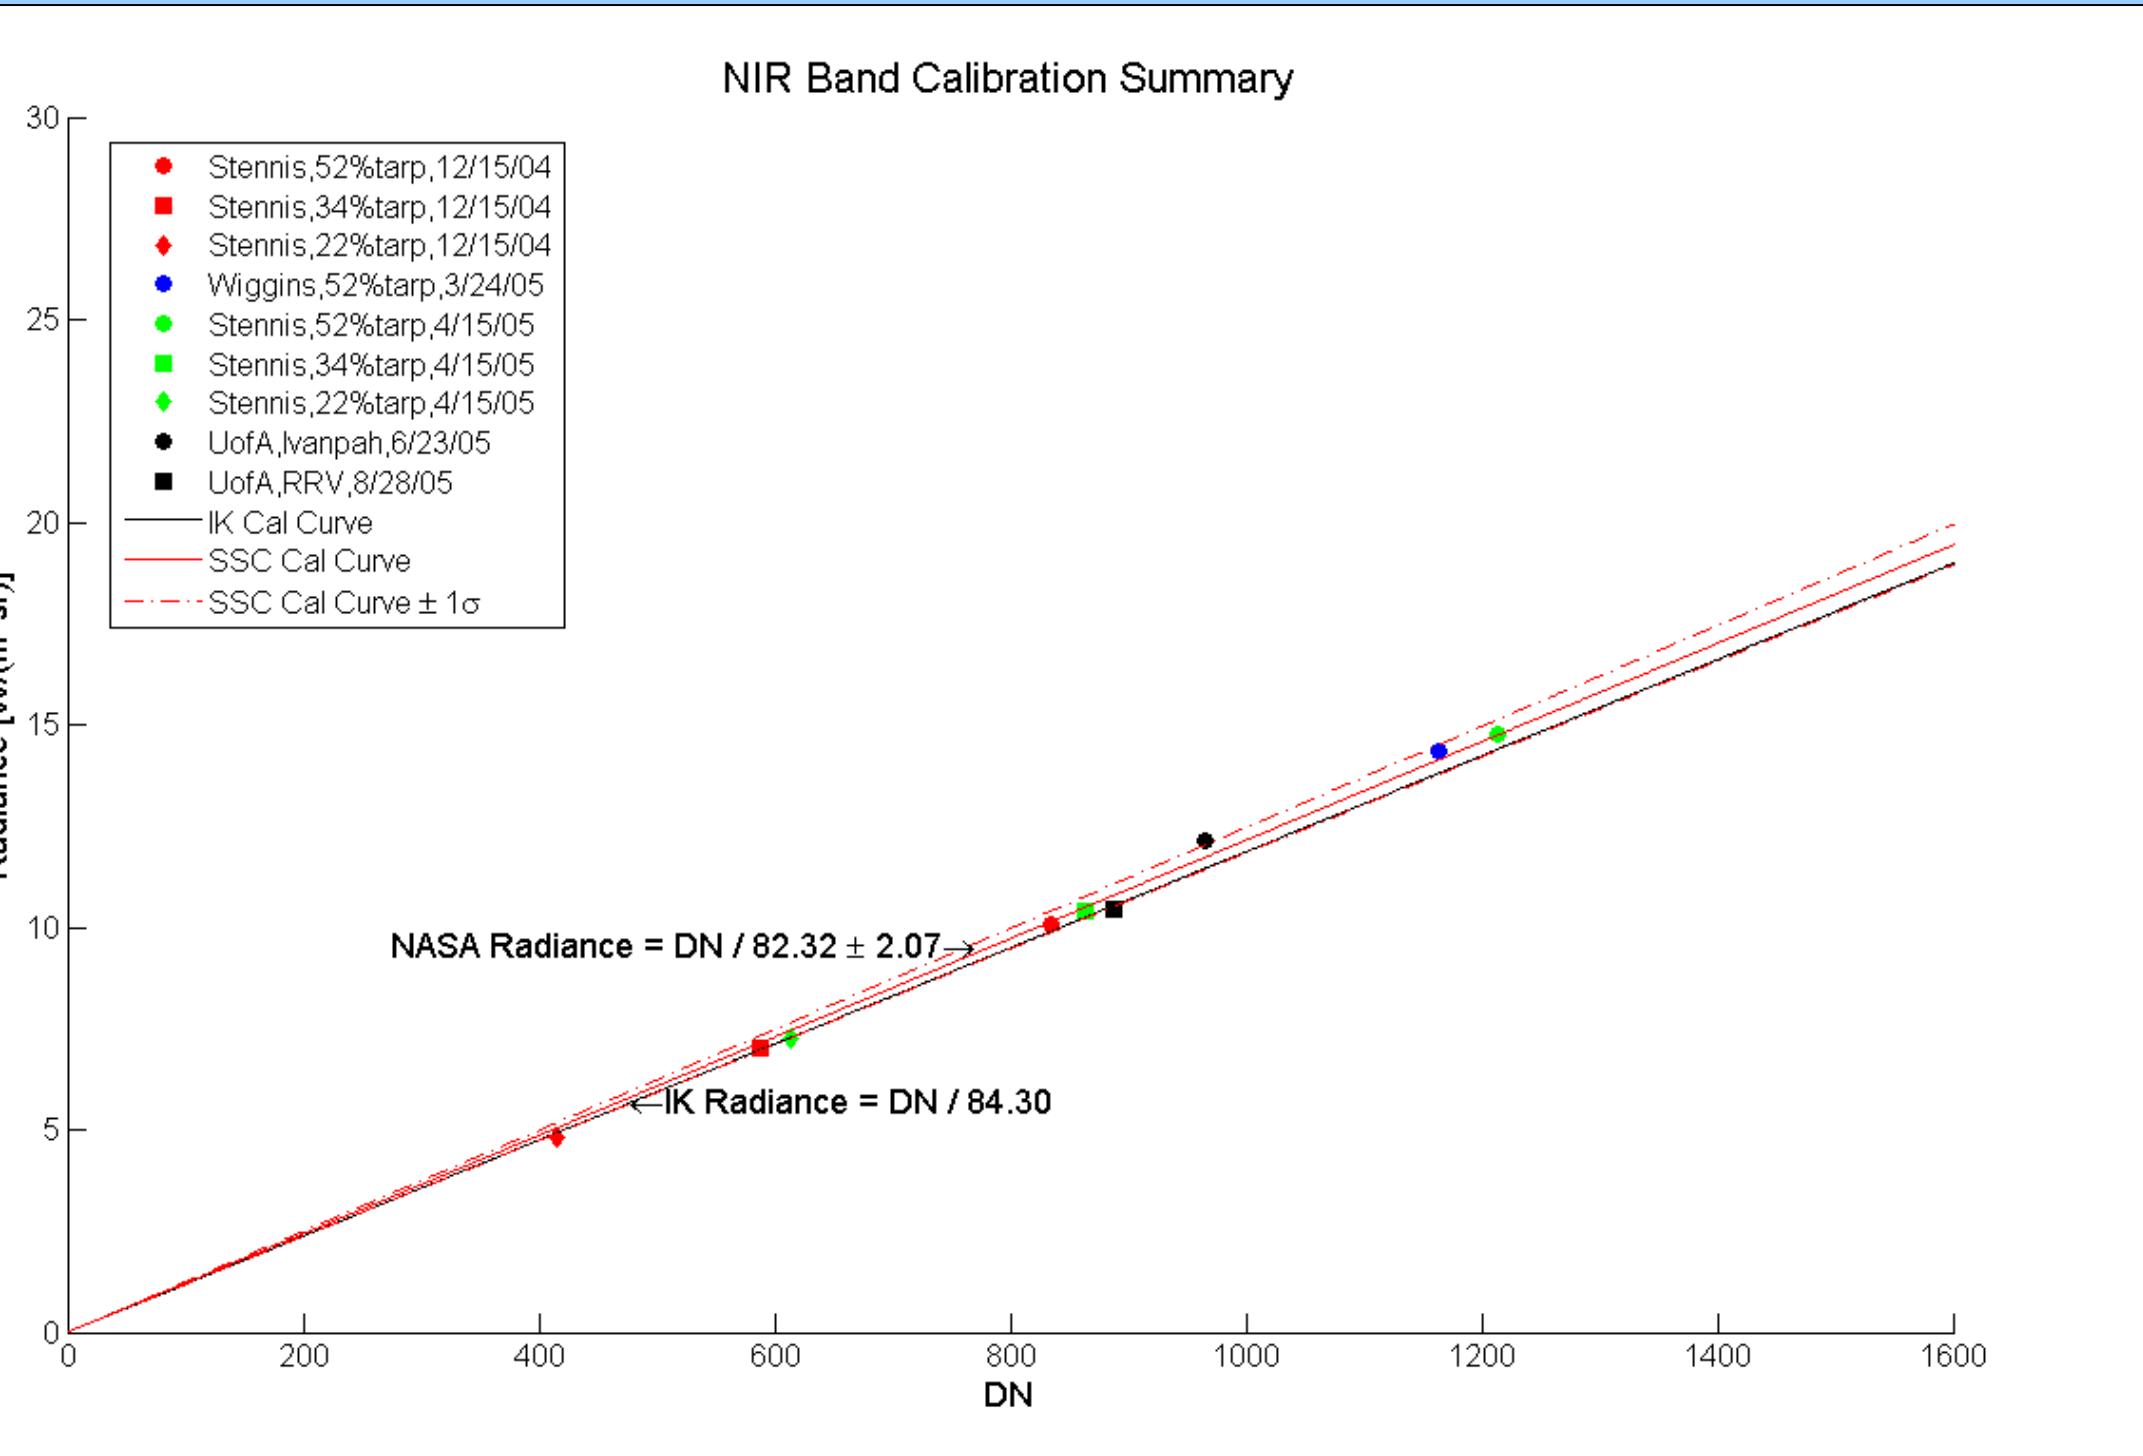

IKONOS Temporal Results

Band	NASA Estimate 2000*	NASA Estimate 2000 Scaled	NASA Estimate 2001	NASA Estimate 2002	NASA Estimate 2004/2005
Blue	$64.2 \pm 4.3$	$73.9 \pm 4.9$	$73.2 \pm 4.7$	$71.0 \pm 4.7$	$67.8 \pm 2.6$
Green	$65.4 \pm 4.2$	$73.3 \pm 4.7$	$76.6 \pm 3.8$	$73.4 \pm 5.0$	$71.2 \pm 2.9$
Red	$88.1 \pm 7.0$	$99.5 \pm 7.9$	$101.8 \pm 5.3$	$97.5 \pm 7.7$	$93.0 \pm 3.3$
NIR	$73.7 \pm 3.8$	$83.3 \pm 4.3$	$85.9 \pm 4.2$	$82.7 \pm 5.8$	$82.3 \pm 2.1$

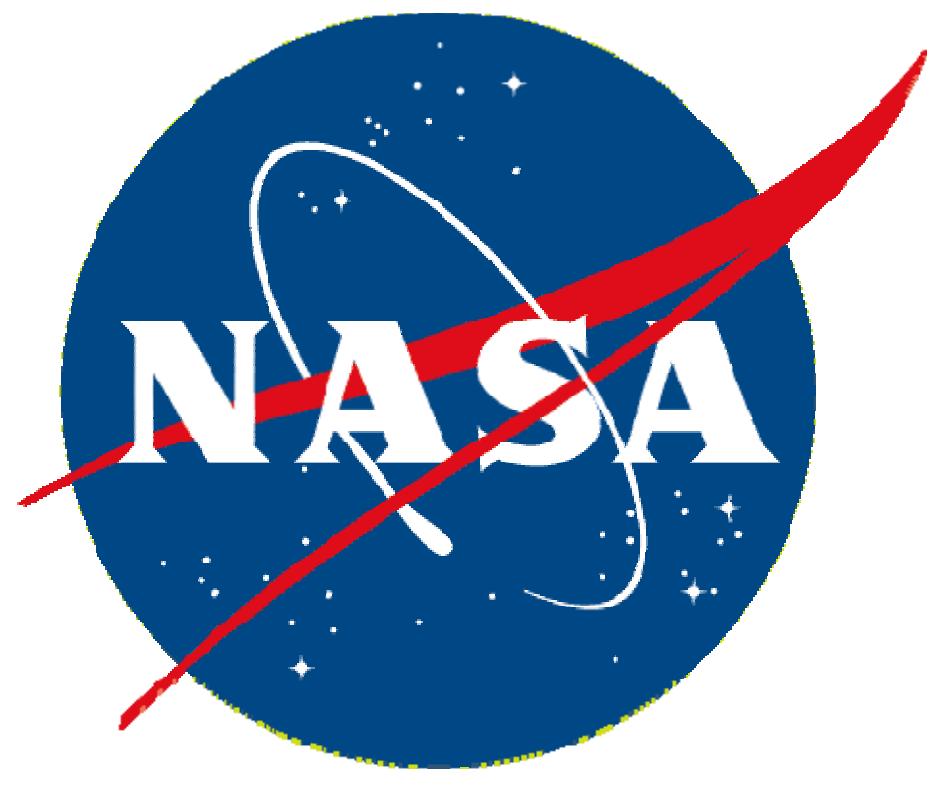


# Radiometric Characterization Results for the QuickBird Sensor

Kara Holekamp, Science Systems and Applications, Inc., Stennis Space Center, MS


David Aaron, South Dakota State University Satellite Calibration Group & Image Processing Laboratory, Brookings, SD

Kurtis Thome, University of Arizona Remote Sensing Group, Tucson, AZ

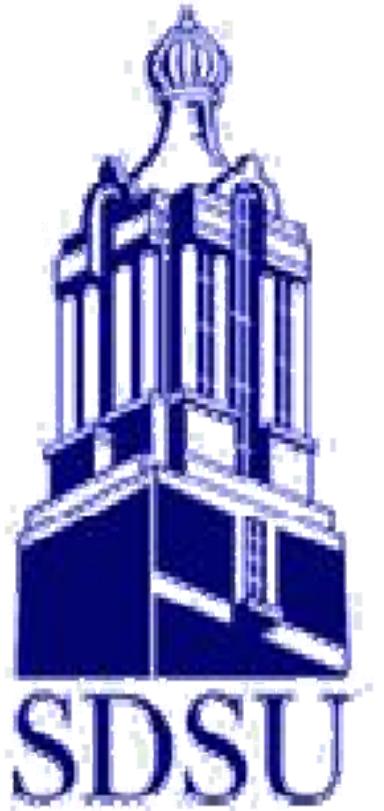


THE UNIVERSITY OF ARIZONA<sup>®</sup>

2004/2005 QuickBird Blue Band

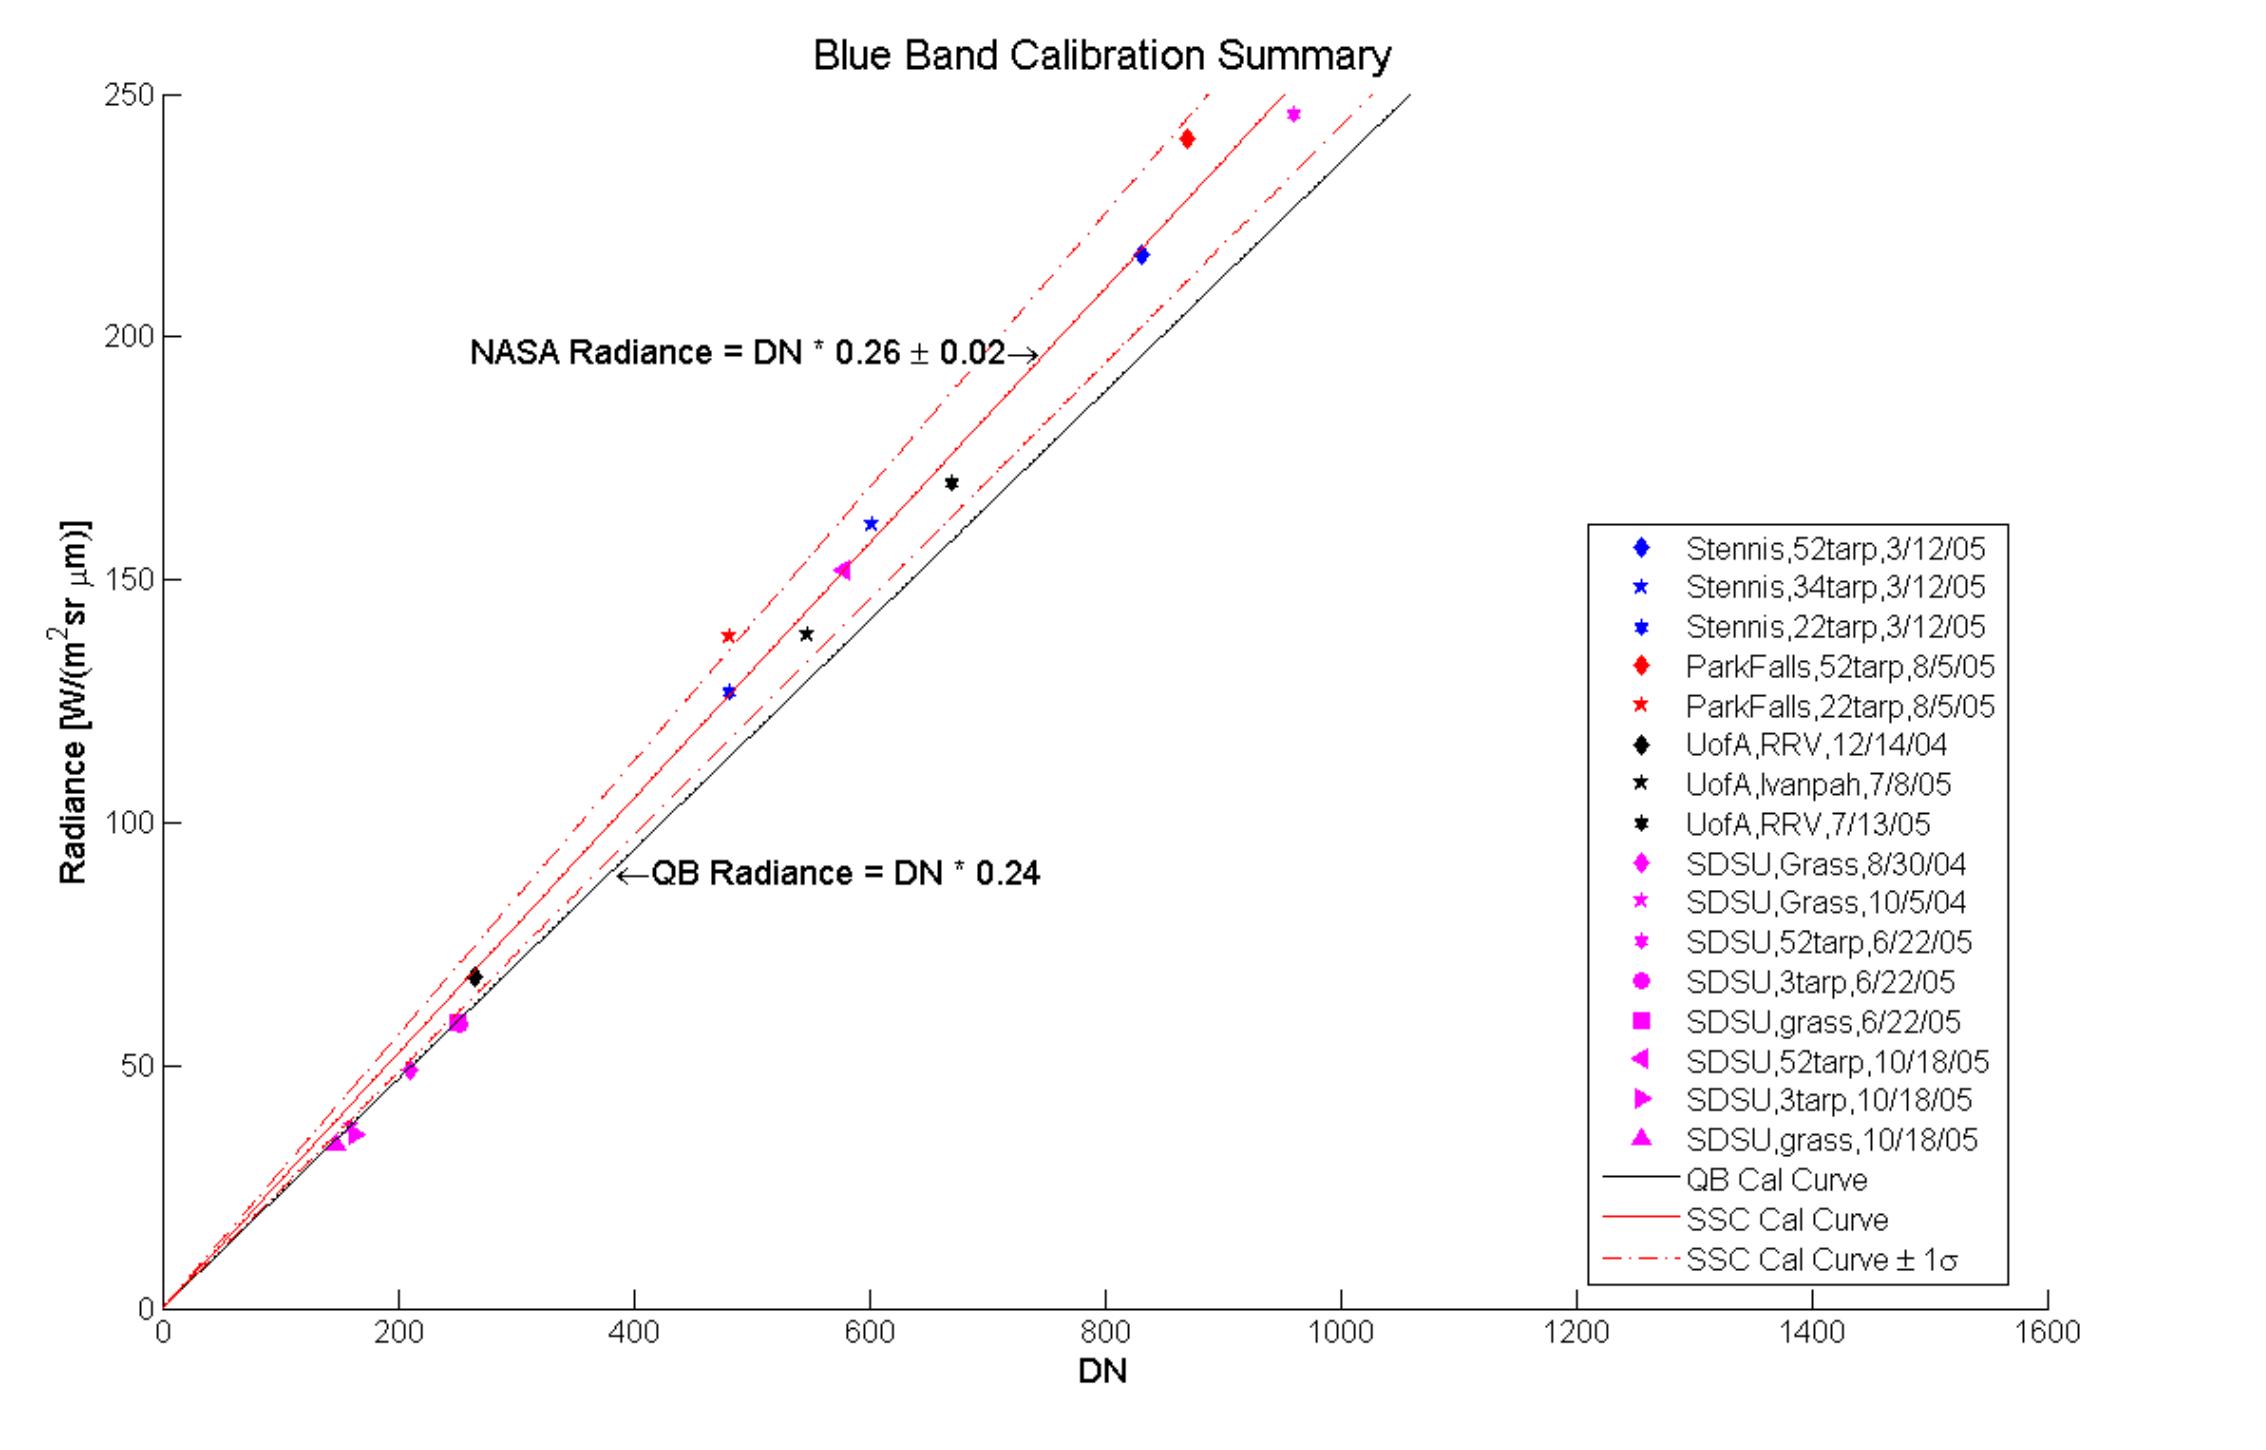

2004/2005 QuickBird Red Band

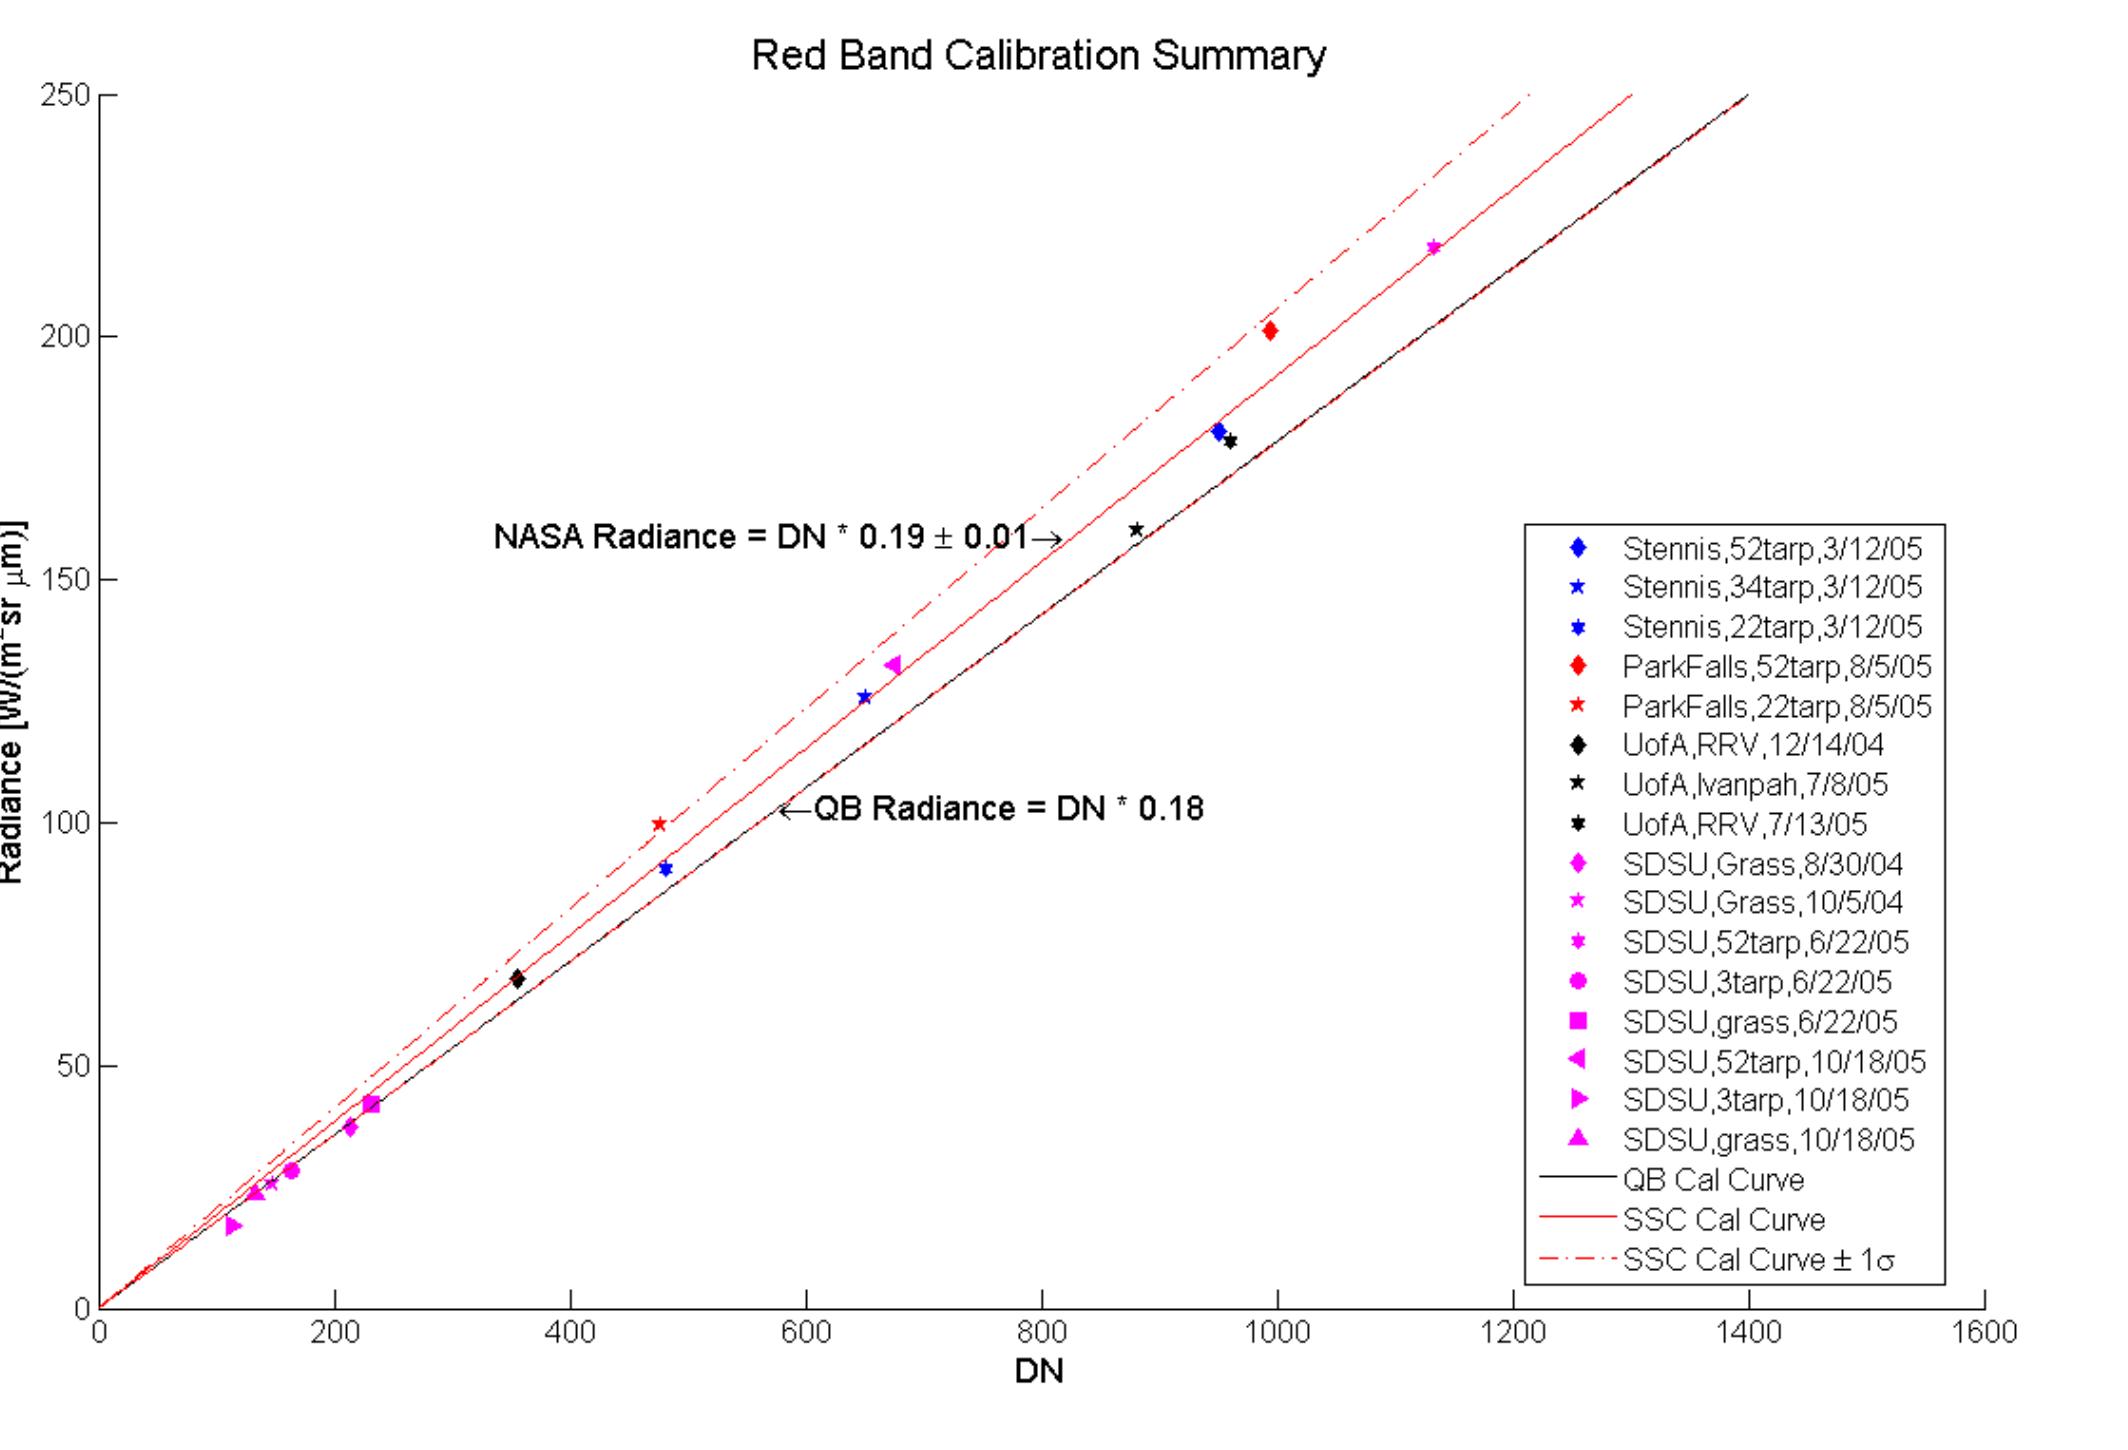


2004/2005 QuickBird Results


Bandwidth FWHM (μm)	NASA Team Estimate (W/m² sr μm DN)	QuickBird Provided (W/m² sr μm DN)	Percent Difference
1 0.445 - 0.510	0.26 ± 0.02	0.236	9.2%
2 0.500 - 0.595	0.16 ± 0.01	0.145	9.4%
3 0.620 - 0.690	0.19 ± 0.01	0.179	5.8%
4 0.755 - 0.875	0.14 ± 0.01	0.135	3.6%

Percent difference is calculated by  $(1 - \text{QuickBird}/\text{NASA Mean})$

2004/2005 QuickBird Green Band

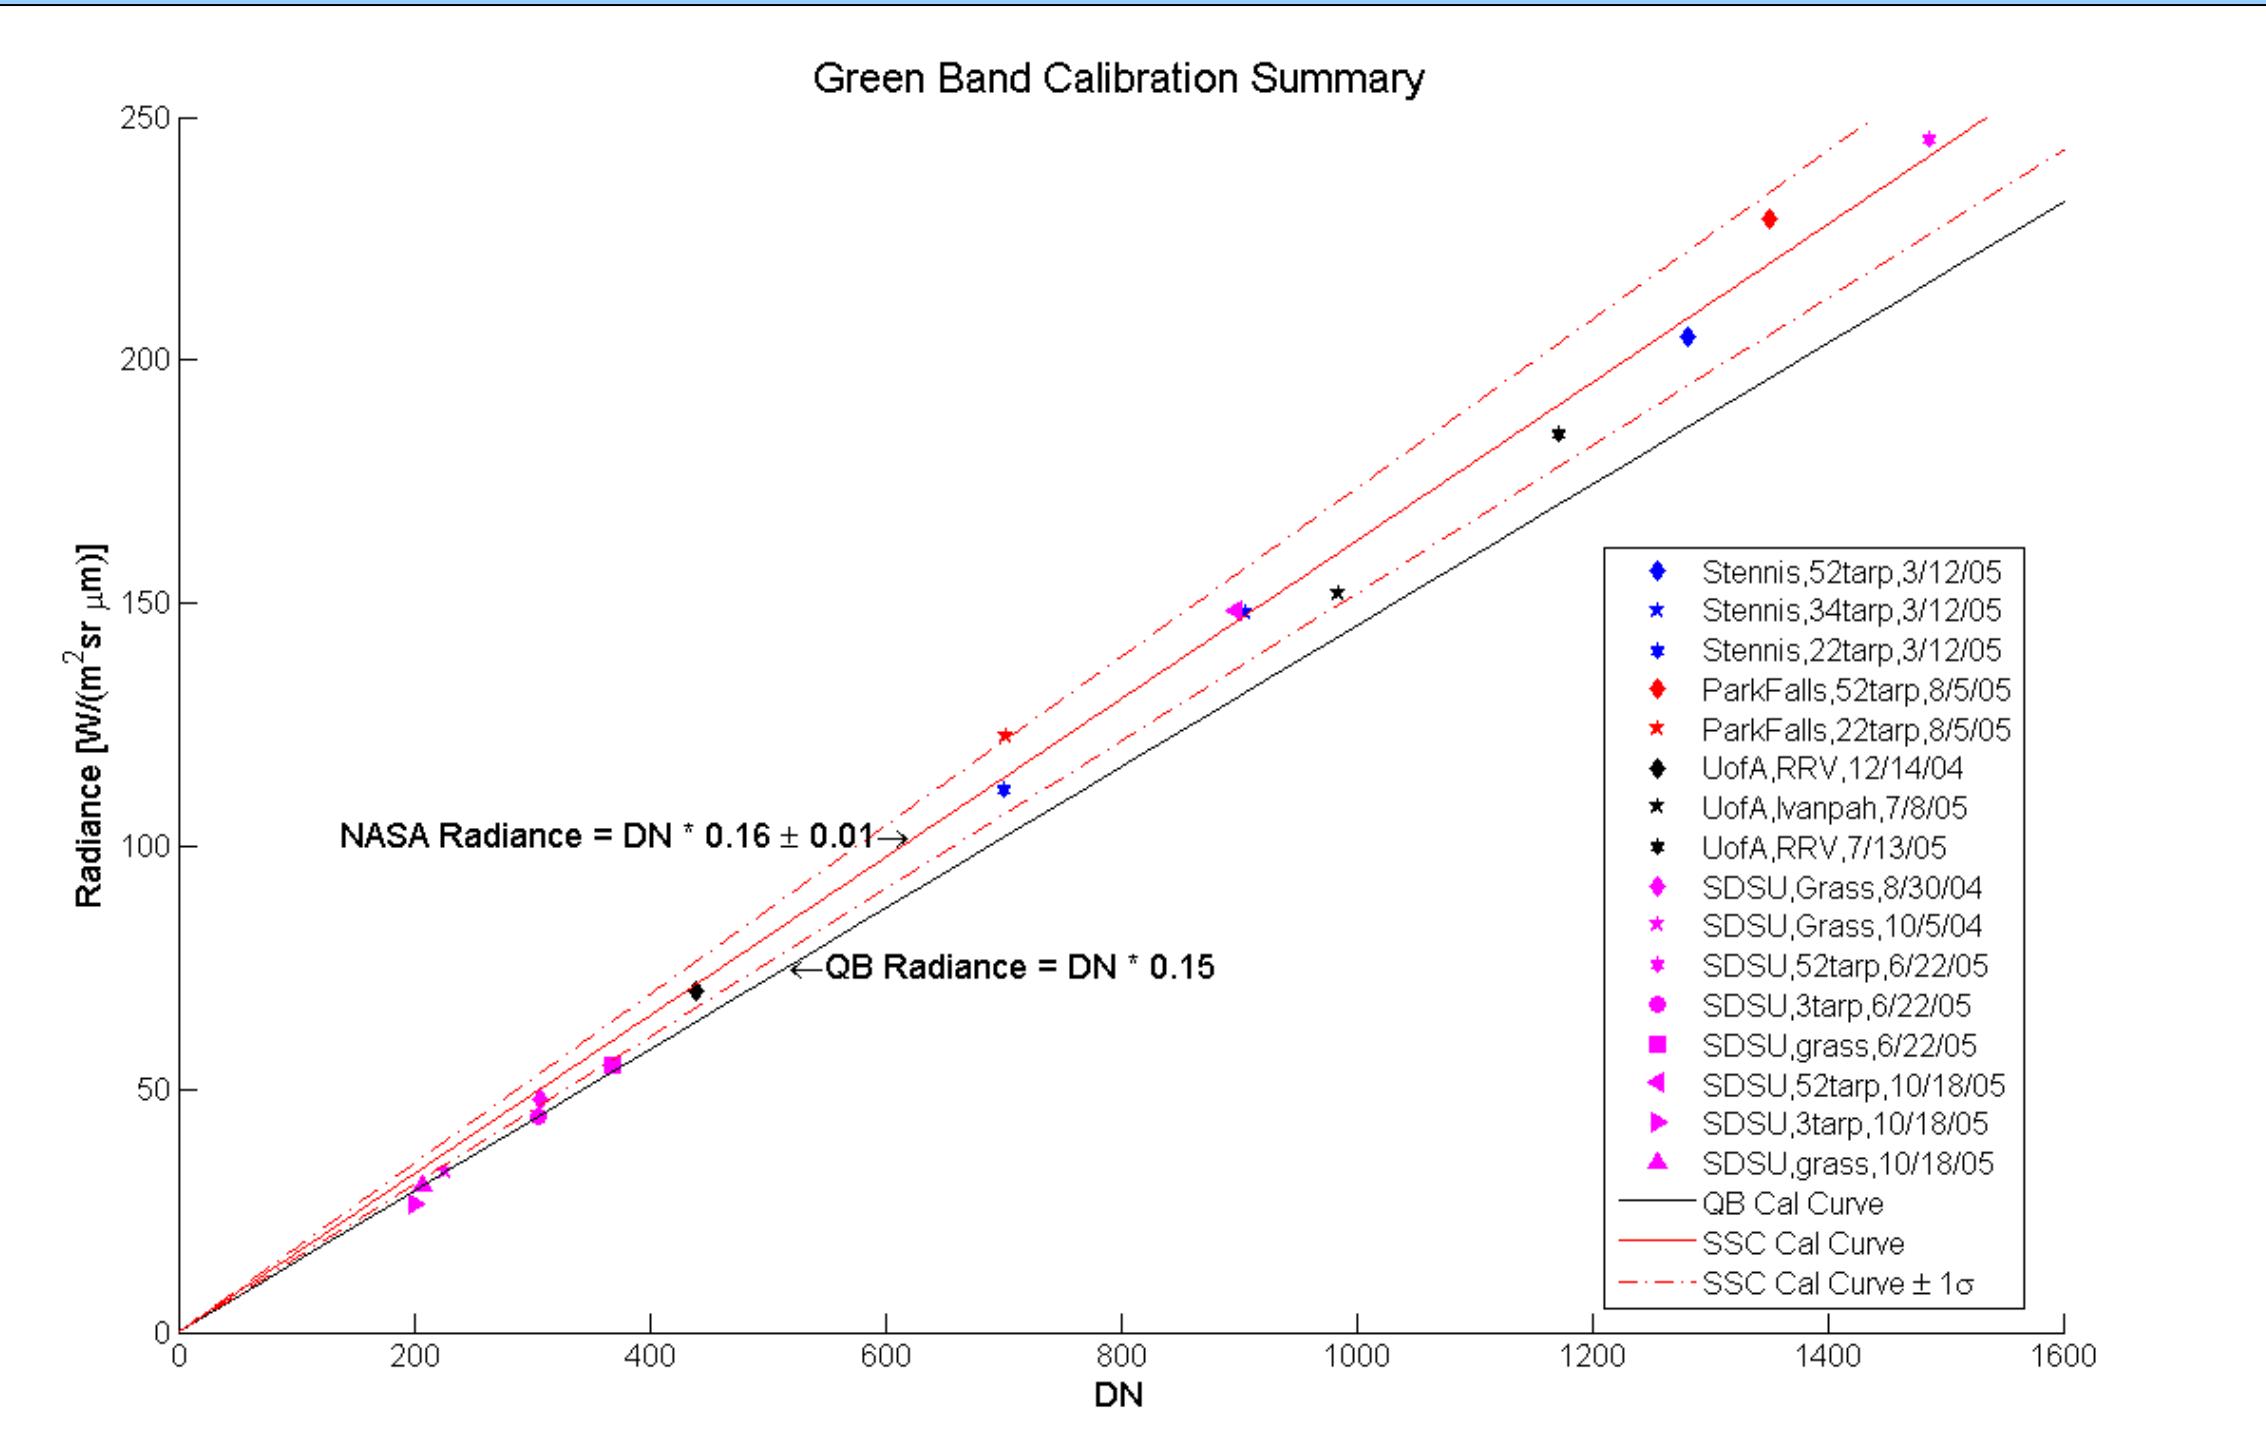


2004/2005 QuickBird NIR Band

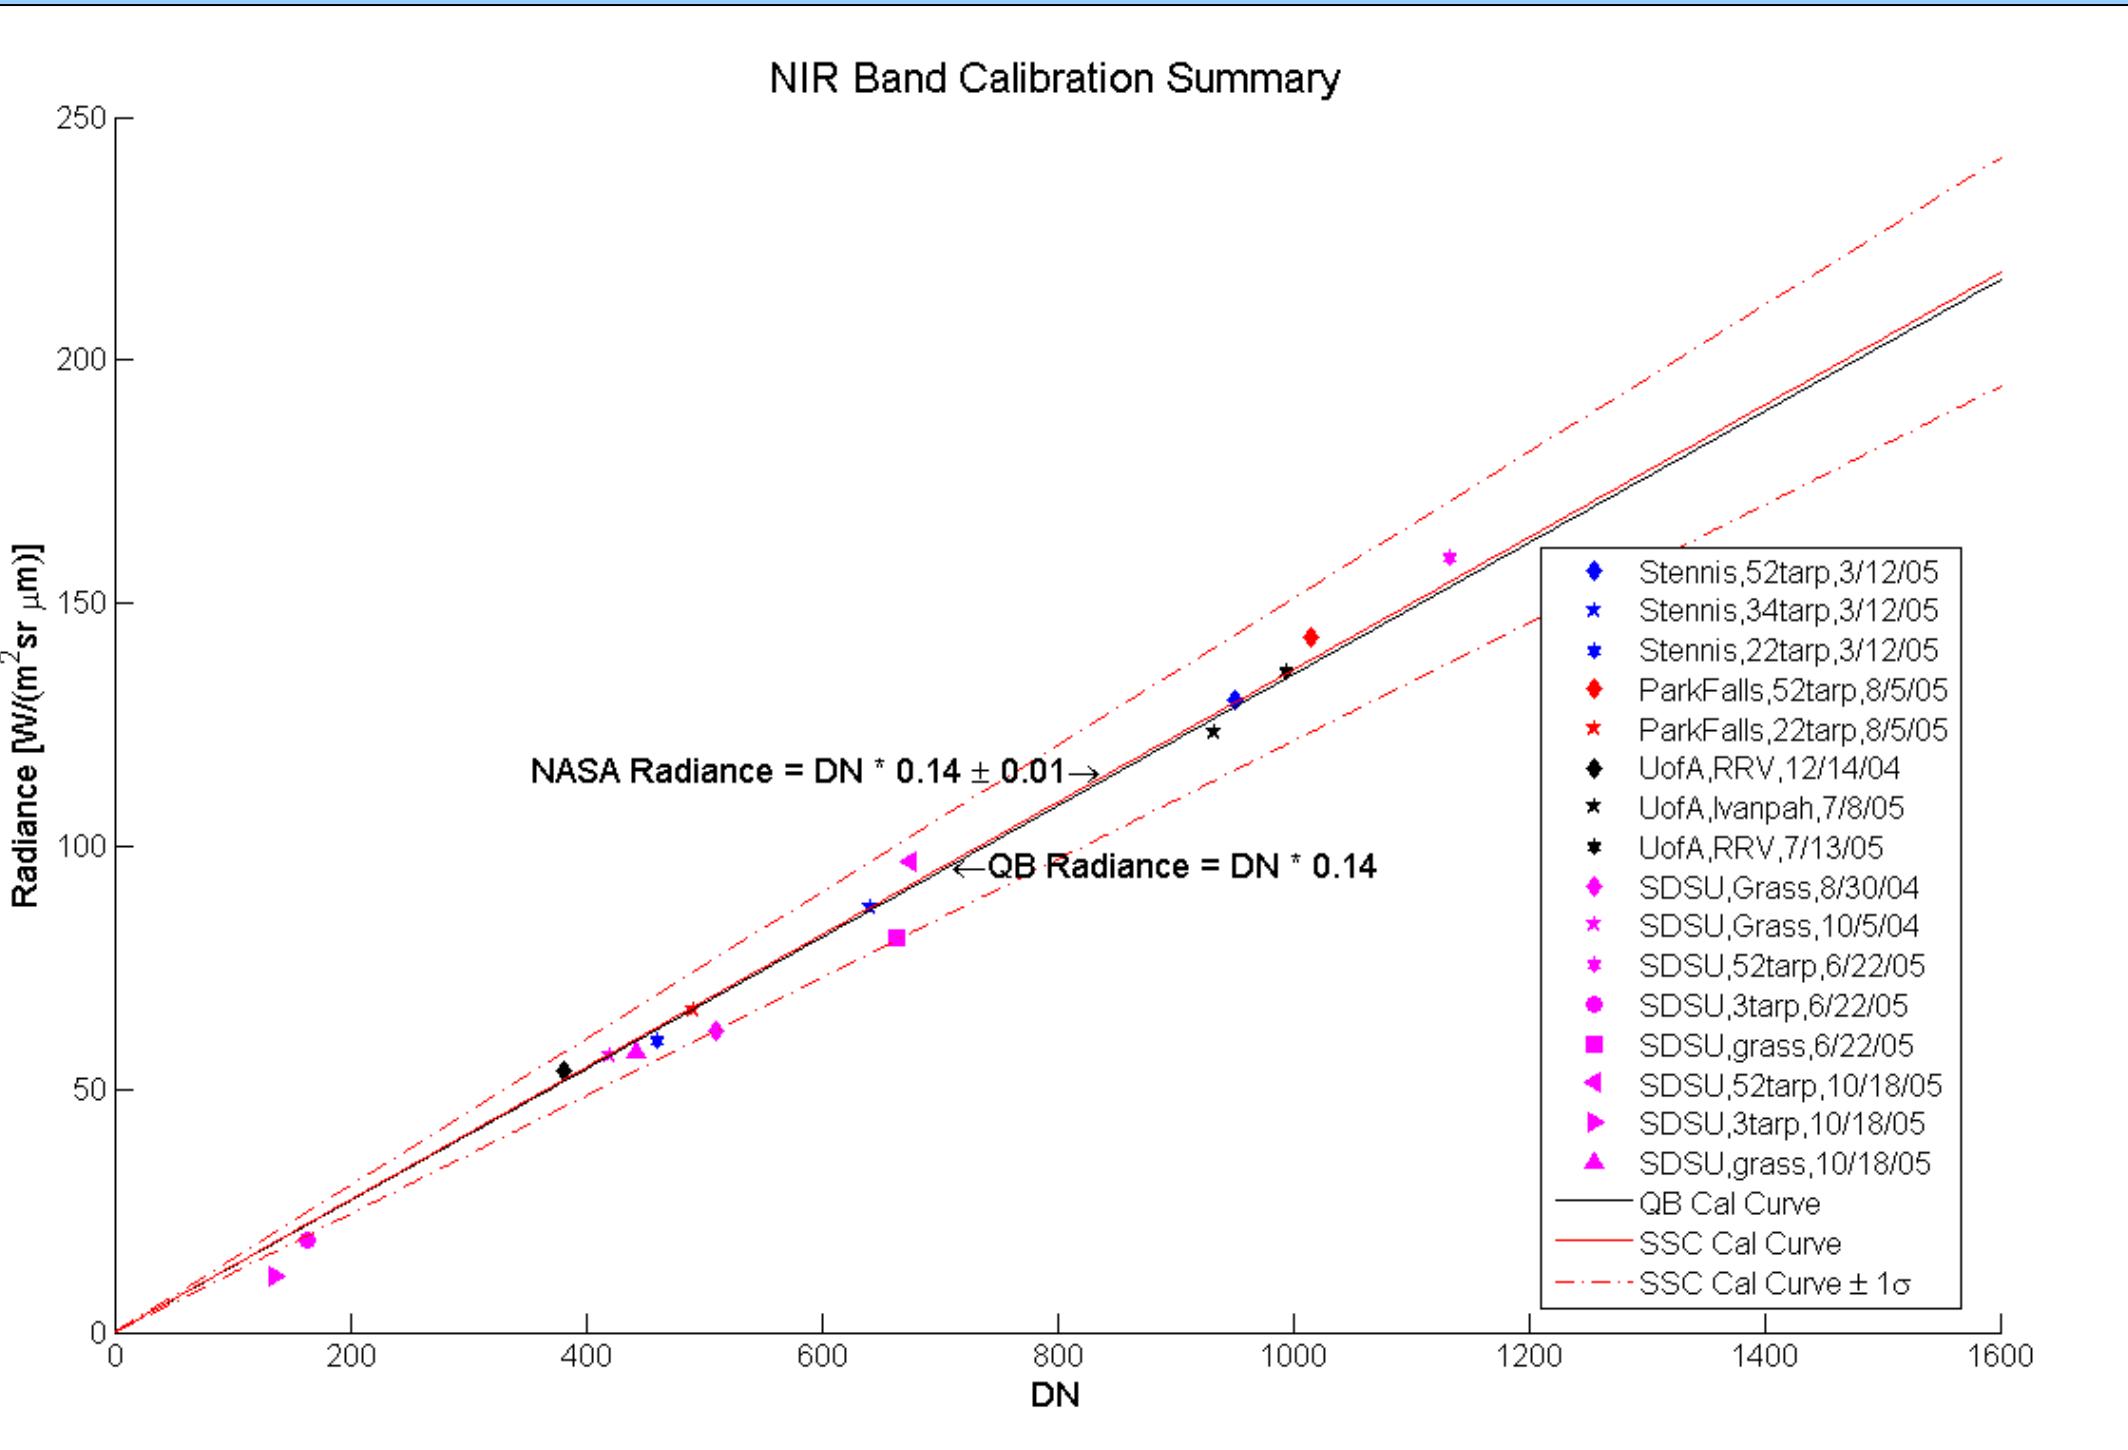

QuickBird Temporal Results

Band	NASA Estimate 2003	NASA Estimate 2004	NASA Estimate 2004/2005
Blue	$0.26 \pm 0.01$	$0.26 \pm 0.03$	$0.26 \pm 0.02$
Green	$0.16 \pm 0.01$	$0.16 \pm 0.02$	$0.16 \pm 0.01$
Red	$0.19 \pm 0.01$	$0.19 \pm 0.02$	$0.19 \pm 0.01$
NIR	$0.14 \pm 0.02$	$0.13 \pm 0.02$	$0.14 \pm 0.01$

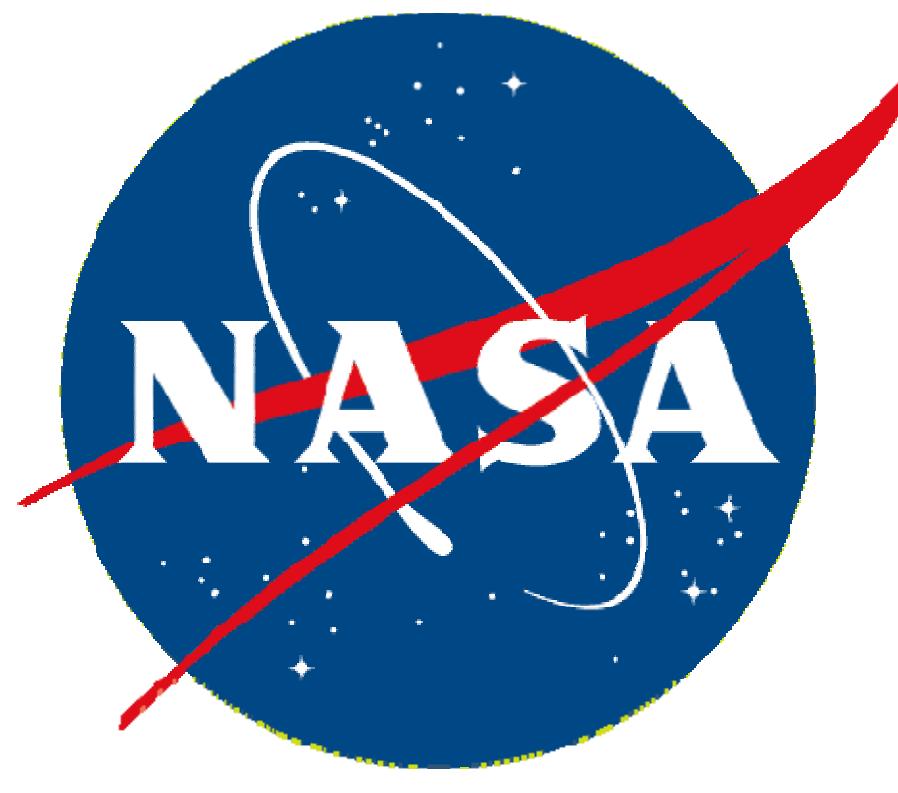


# Radiometric Characterization Results for the OrbView-3 Sensor

Kara Holekamp, Science Systems and Applications, Inc., Stennis Space Center, MS


David Aaron, South Dakota State University Satellite Calibration Group & Image Processing Laboratory, Brookings, SD

Kurtis Thome, University of Arizona Remote Sensing Group, Tucson, AZ

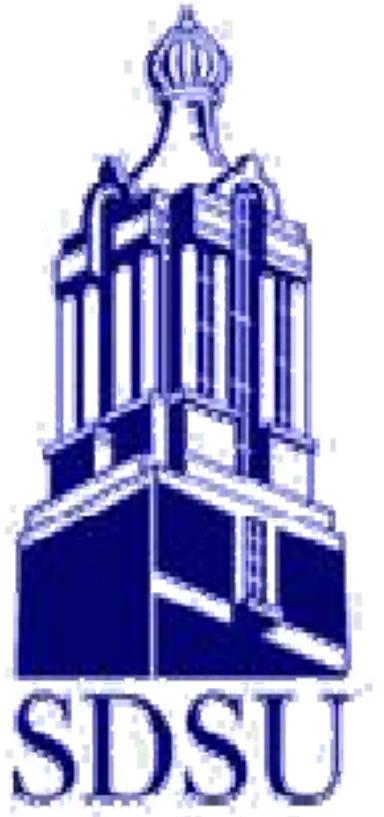


THE UNIVERSITY OF ARIZONA<sup>®</sup>

## Correction to the 2004 OrbView Calibration Summaries

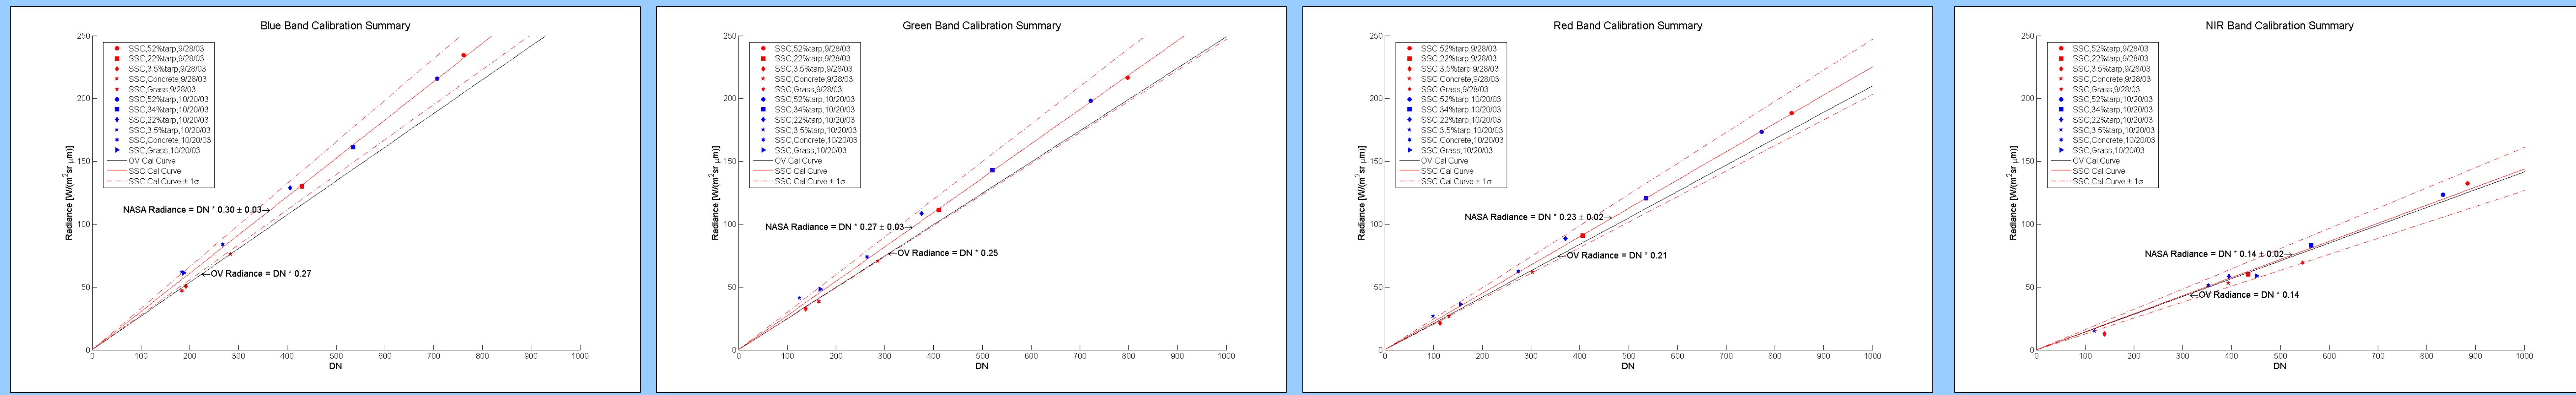

## 2004/2005 OrbView Calibration Summaries

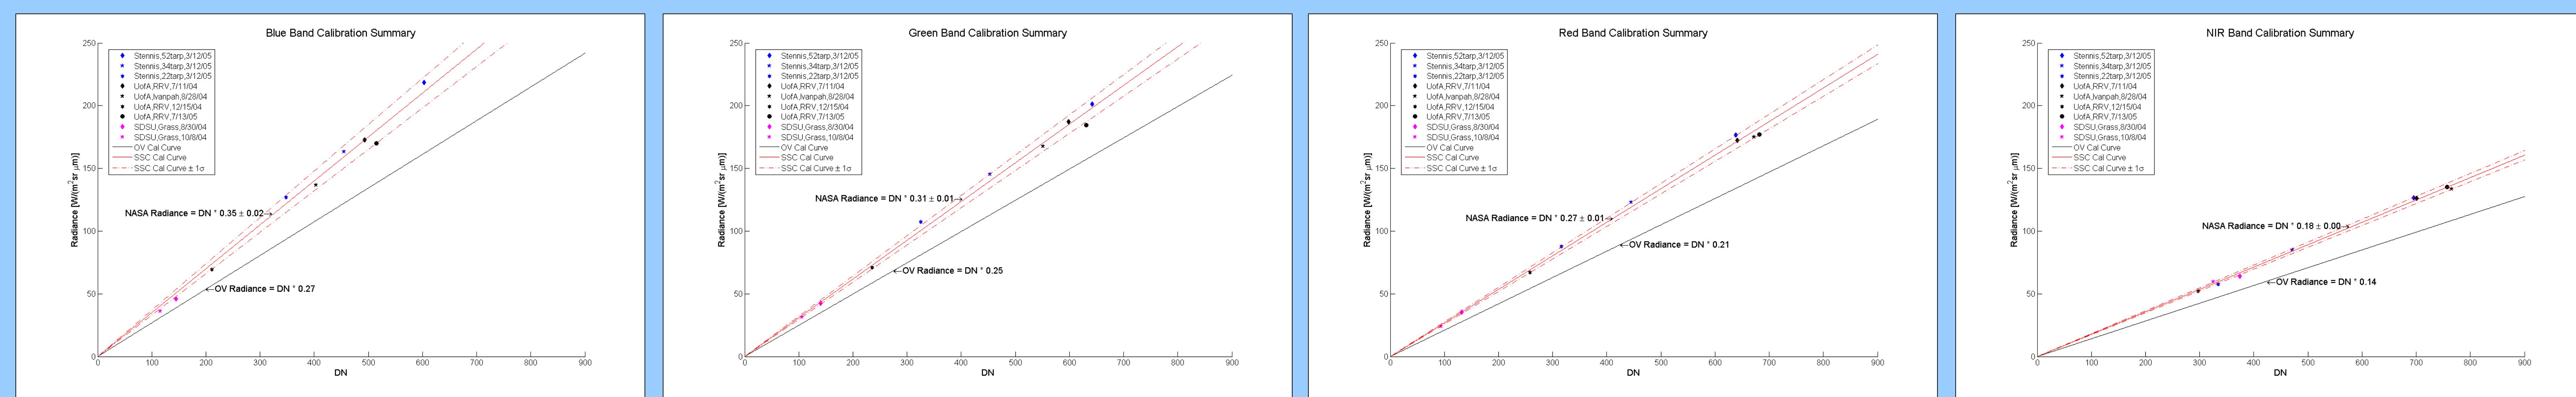

## 2004/2005 OrbView Results

Bandwidth FWHM ( $\mu\text{m}$ )	NASA Team Estimate ( $\text{W/m}^2 \text{sr } \mu\text{m DN}$ )	OrbView Provided ( $\text{W/m}^2 \text{sr } \mu\text{m DN}$ )	Percent Difference
1 0.450 - 0.520	$0.35 \pm 0.02$	0.269	23.1%
2 0.520 - 0.600	$0.31 \pm 0.01$	0.249	19.7%
3 0.625 - 0.695	$0.27 \pm 0.01$	0.210	22.2%
4 0.760 - 0.900	$0.18 \pm 0.00$	0.142	21.1%

Percent difference is calculated by  $(1 - \text{OrbView}/\text{NASA Mean})$

## OrbView Temporal Results

Band	NASA Estimate 2004/2005 and Percent Change
Blue	$0.35 \pm 0.02$ 14.3%
Green	$0.31 \pm 0.01$ 12.9%
Red	$0.27 \pm 0.01$ 14.8%
NIR	$0.18 \pm 0.01$ 22.2%

**REPORT DOCUMENTATION PAGE**
*Form Approved  
OMB No. 0704-0188*

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

**PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

<b>1. REPORT DATE (DD-MM-YYYY)</b> 15-03-2006			<b>2. REPORT TYPE</b> Conference Poster		<b>3. DATES COVERED (From - To)</b> Jan. 2005-March 2006	
<b>4. TITLE AND SUBTITLE</b> Radiometric Characterization Results for the IKONOS, QuickBird, and OrbView-3 Sensors			<b>5a. CONTRACT NUMBER</b> NASA Task Order NNS04AB54T			
			<b>5b. GRANT NUMBER</b>			
			<b>5c. PROGRAM ELEMENT NUMBER</b>			
<b>6. AUTHOR(S)</b> Kara Holekamp (1) David Aaron (2) Kurtis Thome (3)			<b>5d. PROJECT NUMBER</b> SWR C15C-JC15-00			
			<b>5e. TASK NUMBER</b>			
			<b>5f. WORK UNIT NUMBER</b>			
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> (1) Science Systems and Applications, Inc., Bldg. 1105, John C. Stennis Space Center, MS 39529 (2) South Dakota State University Satellite Calibration Group & Image Processing Lab Laboratory, 218 Harding Hall, PO Box 2220, Brookings, SD 57007 (3) University of Arizona Remote Sensing Group, 1630 E. University Blvd., Tucson, AZ 85721-0094					<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> Applied Research & Technology Project Office, Code PA30, John C. Stennis Space Center, MS 39529					<b>10. SPONSORING/MONITOR'S ACRONYM(S)</b>	
					<b>11. SPONSORING/MONITORING REPORT NUMBER</b> SSTI-2220-0073 (R)	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Unclassified/Publicly available STI per NASA Form 1676						
<b>13. SUPPLEMENTARY NOTES</b> JACIE Civil Commercial Imagery Evaluation Workshop, March 14-16, U.S. Fish and Wildlife Service National Wildlife Visitors Center, Laurel, Maryland						
<b>14. ABSTRACT</b> Radiometric calibration of commercial imaging satellite products is required to ensure that science and application communities can better understand commercial imaging satellite properties. Inaccurate radiometric calibrations can lead to erroneous decisions and invalid conclusions and can limit intercomparisons with other systems. To address this calibration need, the NASA Applied Sciences Directorate (ASD) at Stennis Space Center established a commercial satellite imaging radiometric calibration team consisting of three independent groups: NASA ASD, the University of Arizona Remote Sensing Group, and South Dakota State University. Each group independently determined the absolute radiometric calibration coefficients of available high-spatial-resolution commercial 4-band multispectral products, in the visible through near-infrared spectrum, from GeoEye™ (formerly Space Imaging®) IKONOS, DigitalGlobe® QuickBird, and GeoEye (formerly ORBIMAGE®) OrbView. Each team member employed some variant of a reflectance-based vicarious calibration approach, requiring ground-based measurements coincident with image acquisitions and radiative transfer calculations. Several study sites throughout the United States that covered a significant portion of the sensors' dynamic range were employed. Satellite at-sensor radiance values were compared to those estimated by each independent team member to evaluate the sensor's radiometric accuracy. The combined results of this evaluation provide the user community with an independent assessment of these sensors' absolute calibration values.						
<b>15. SUBJECT TERMS</b> radiometric accuracy, radiometric characterization, IKONOS						
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19b. NAME OF RESPONSIBLE PERSON</b>	
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U	UU	3	Thomas Stanley	
			<b>19b. TELEPHONE NUMBER (Include area code)</b> (228) 688-7779			