



Espacenet

Bibliographic data: US2012055449 (A1) — 2012-03-08

HYSTERESIS-TYPE ELECTRONIC CONTROLLING DEVICE FOR FUEL INJECTORS AND ASSOCIATED METHOD

Inventor(s): LUCANO MASSIMO [IT]; BOTTO GIANLUCA [IT]; CHIABERGE MARCELLO [IT]; DEGIUSEPPE MIRKO [IT] ±

Applicant(s): GM GLOBAL TECH OPERATIONS INC [US] ±

Classification: - **international:** **F02M51/00**
- **European:** F02D41/20

Application number: US201013320426 20100327

Priority number(s): GB20090008262 20090514; WO2010EP01956 20100327

Also published as: GB2470211 (A) WO2010130320 (A1) CN102422003 (A)

Abstract of US2012055449 (A1)

A hysteresis-type electronic controlling device is provided for fuel injectors that includes, but is not limited to a power driving unit for driving the fuel injectors with an electric signal, a control stage connected to the power driving unit and a sensing stage fed by the power driving unit and feeding the control stage, the device has a feedback frequency control stage for measuring a waveform period of the signal feeding the fuel injectors; the feedback frequency control stage is fed by the control stage with an electric signal. A fuel injector control method is also provided that includes, but is not limited to driving fuel injectors with an electric signal coming from a power driving unit fed by a control stage, sensing the signal with a sensing stage, and measuring a waveform period of the signal through the feedback frequency control stage.

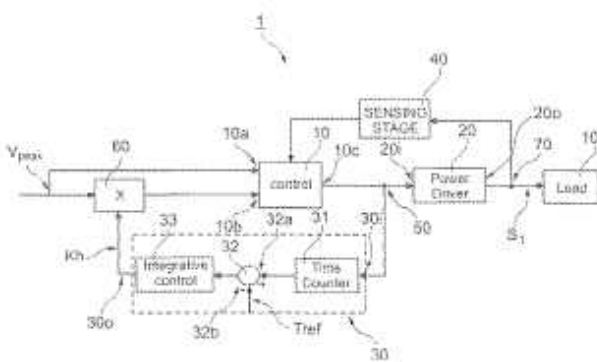


Fig. 1