

CLASSIFICATION CANCELED

JUL 27 1945

Library

MR No. L5G18a

*1135.5
Republic F-12/3*

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

UNCLASSIFIED
CONFIDENTIAL

*Added Dec. 1952
NACA Status for
Army Air Force
Aeronautical Laboratory
Langley Field, Va.*

MEMORANDUM REPORT

for the

Air Technical Service Command, Army Air Forces
WIND-TUNNEL TESTS OF A 1/6-SCALE MODEL OF REPUBLIC
XF-12 VERTICAL TAIL INCORPORATING A DE-ICING
AIR DUCT

By Robert MacLachlan and Sadie M. Miller

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

Secret. for Land

~~This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Act, U.S.C. 50: 31 and 32. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.
Information so classified may be reported only to personnel in the military and naval services of the United States, appropriate agencies of the United States, appropriate agencies of allied countries, or to those employees of the Federal Government who have a legitimate interest therein and whose duties require knowledge of known loyalty and discretion. Persons of necessity must be informed thereof.~~

NACA LIBRARY
LANGLEY MEMORIAL AERONAUTICAL
LABORATORY
Langley Field, Va.

JUL 30 1945

UNCLASSIFIED

UNCLASSIFIED

MR No. L5G18a

~~CONFIDENTIAL~~

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

MEMORANDUM REPORT

for the

Air Technical Service Command, Army Air Forces
WIND-TUNNEL TESTS OF A 1/6-SCALE MODEL OF REPUBLIC
XF-12 VERTICAL TAIL INCORPORATING A DE-ICING
AIR DUCT

By Robert MacLachlan and Sadie M. Miller

SUMMARY

A 1/6-scale model of the Republic XF-12 vertical tail with stub fuselage, stub horizontal tail, and a de-icing air duct was tested in the Langley stability tunnel. The investigation consisted of a study of the effects of the duct, with and without air flow, on the aerodynamic characteristics of the model.

The model tested was a revision of a model previously tested in the Langley stability tunnel. The revised model differed from the original model in that it incorporated a de-icing air duct, included a dorsal fin, and had a larger stub fuselage. A comparison of data obtained from tests of the original and revised models was made.

The results of the investigation indicated that the air duct had very little effect on the aerodynamic characteristics of the model. A small change occurred in the variation of rudder hinge-moment coefficient with angle of attack but it is believed that this change can be corrected by a properly applied spring tab.

INTRODUCTION

At the request of the Air Technical Service Command, Army Air Forces, the 1/6-scale model of the Republic XF-12

~~CONFIDENTIAL~~
UNCLASSIFIED

UNCLASSIFIED

2

~~CONFIDENTIAL~~

MR No. L5G18a

vertical tail previously tested in the Langley stability tunnel (see reference 1) has been retested in a revised form. The revised model differed from the original model in that it incorporated a de-icing air duct, included a dorsal fin, and had a larger stub fuselage. The rudder internal balance plates of the model, however, were still offset; and in this way, the model still differed from the portion of the airplane which it represented.

In the present report, data are included which show the effect of the air duct on the aerodynamic characteristics of the model. A comparison of data obtained from tests of the original and revised models is also included.

SYMBOLS

The coefficients and symbols used in this report are based on the same areas, spans, and chords as in reference 1 and are defined as follows:

- C_L lift coefficient $\left(\frac{L}{qS}\right)$
- C_{hr} rudder hinge-moment coefficient $\left(\frac{H_r}{q b_r \bar{c}_r^2}\right)$
- C_m pitching-moment coefficient $\left(\frac{M}{q c' S}\right)$
- C_D drag coefficient $\left(\frac{D}{qS}\right)$
- ΔP pressure coefficient across internal balance (pressure left of balance minus pressure right of balance divided by free-stream dynamic pressure).
- E leakage factor $\left(1 - \frac{P(b) - P(c)}{P(a) - P(d)}\right)$
- $P(b) - P(c)$ pressure difference across balance of internal balance
- $P(a) - P(d)$ applied pressure difference across vents of internal balance
- V air velocity, feet per second

~~CONFIDENTIAL~~

UNCLASSIFIED

UNCLASSIFIED

MR No. L5G18a

~~CONFIDENTIAL~~

3

L	lift of model, pounds
H_r	hinge moment of rudder; positive when tending to rotate the trailing edge to the left, foot-pounds
M	pitching moment of model about an axis parallel to and 9.125 inches ahead of rudder hinge line, foot-pounds
D	drag of model, pounds
S	area of vertical-tail model (above fuselage and excluding dorsal fin), square feet
c'	mean geometric chord of vertical-tail model (excluding dorsal fin), feet
\bar{c}_r	root mean square chord of rudder, feet
b_r	rudder span, feet
q	free-stream dynamic pressure, pounds per square foot
α	angle of attack of vertical tail (angle of yaw for airplane); positive when trailing edge is deflected to the left, degrees
δ_r	rudder angle relative to fin; positive when trailing edge is deflected to the left, degrees

APPARATUS AND MODEL

The 1/6-scale XF-12 vertical-tail model, which consists of the vertical tail, a stub fuselage, and a stub horizontal tail, was originally supplied and subsequently revised by the Republic Aviation Corporation. Figure 1 is a sketch in which the principle dimensions of the revised model are given. Two views of the revised model mounted horizontally in the 6- by 6-foot test section of the Langley stability tunnel are shown in figure 2.

With the exception of the de-icing air duct, the dorsal fin, and the increase in size of the stub fuselage, the

~~CONFIDENTIAL~~

UNCLASSIFIED

~~CONFIDENTIAL~~
UNCLASSIFIED

4

~~CONFIDENTIAL~~

MR No. L5G18a

revised model is the same as the original model which is described in detail in reference 1. The changes made in the model by the addition of the dorsal fin and the increase in size of the stub fuselage are shown in figure 1. Details of the air duct are also shown in figure 1. To measure the velocity of the flow through the air duct, three total head and two static tubes were located in a plane perpendicular to the duct air stream and about half-way through the duct.

For the tests made on the revised model, only that section of the rudder located above the stub horizontal tail was utilized. No roughness strips were attached to the model and the tab was not deflected.

The model was supported entirely by the floating frame of the balance, so that all forces and moments acting on the model could be measured. The model was mounted in the center of the tunnel by projecting the model support through an opening in the tunnel wall. A fairing was installed around that part of the model support located inside the tunnel. A flexible seal was installed between the model support and the tunnel wall to prevent flow of air into the tunnel.

TESTS AND MEASUREMENTS

The model was tested with air duct open, sealed at exits, and sealed at entrance and exits. The tests consisted of angle-of-attack runs (angle of sideslip for airplane) for which α ranged from approximately -18° to 18° , and rudder-angle runs for which δ_r ranged from approximately -25° to 6° .

All tests were made at a dynamic pressure of 39.7 pounds per square foot. The corresponding airspeed under standard sea-level atmospheric conditions was 125 miles per hour, and the Reynolds number based on the mean geometric chord of the model was about 1,760,000.

Measurements of the lift, drag, and pitching moment of the model were obtained from the tunnel balances. Rudder hinge moments were measured by means of a spring torque balance linked to the rudder. Readings of the pressure differences across the balance in each of the three upper rudder internal-balance chambers and readings

~~CONFIDENTIAL~~
UNCLASSIFIED

UNCLASSIFIED

MR No. L5G18a

~~CONFIDENTIAL~~

5

of the total head and static pressures in the air duct were taken. One of the static pressure tubes located in the air duct did not function properly; therefore, the air-duct velocity data presented herein were based on the static pressure reading of one static tube.

The leakage factor E was measured for each of the internal-balance chambers in the same manner as is described in reference 2.

Jet-boundary corrections to the lift, rudder hinge moment, pitching moment, drag, pressure difference across balance, and angle-of-attack readings were the same as those used in reference 1. No corrections were applied for the effects of the model support and fairing.

RESULTS AND DISCUSSION

The results of the present investigation are given in figures 3 to 6.

The average leakage factor E for all the balance chambers was about 0.08 during all tests. This value is greater than the value 0.01 found when the original model was tested. Therefore, the internal-balance leakage must have been slightly greater for the present tests. A more complete discussion on leakage factor, including its effect on flap hinge-moment coefficient, can be found in reference 2.

Tests were made to determine the aerodynamic characteristics of the vertical tail with the de-icing air duct open (fig. 3) and with the air-duct exits sealed (fig. 4). The velocity through the open air duct reached a maximum of about one-half free-stream velocity at $\alpha = 0^\circ$ and decreased to zero at about $\pm 12^\circ$ angle of attack. (See fig. 3(f).) The effect on the velocity through the duct when rudder angle is increased was equivalent to a slight decrease in angle of attack, the ratio being about 15° rudder angle to 1° angle of attack.

The entrance to the air duct was located a short distance above the stub fuselage in a section of the leading edge of the vertical tail having about 50° sweep-back. (See fig. 1.) It is likely, therefore, that the air flow at the duct entrance was inclined toward the tip

~~CONFIDENTIAL~~

UNCLASSIFIED

UNCLASSIFIED

6

~~CONFIDENTIAL~~

MR No. L5G18a

of the vertical tail surface. Indication of inclination of the air flow at the duct entrance was found in the duct-pressure measurements which showed that the difference at an angle of attack of zero between the total head in the duct, when the duct exits were sealed, and the free-stream static pressure was not equal to the free-stream dynamic pressure (as it would have been for straight flow) but to approximately 11/19 free-stream dynamic pressure. When the air duct was open and $\alpha = 0^\circ$, the static pressure inside the duct was slightly greater than free-stream static pressure. This difference was probably the result of the resistance of the duct to air flow. The inclination of the air flow and the resistance of the duct to air flow would account for the relatively low air velocity inside the air duct compared with free-stream velocity.

A comparison of the results obtained for the model with the air duct open and with the air duct sealed is given in figure 5. When the air duct was sealed only at the exits, the results obtained were very similar to those found for the model when the duct was open. Before the data for velocity through the air duct were computed, it was thought, erroneously, that there was some leakage at the duct exit allowing flow through the duct. Therefore, tests were made with the air duct sealed not only at its exits, but also at its entrance. By sealing the duct at both its entrance and exits, results were obtained which differed slightly from those found when the duct was open and when the duct exits were closed. These differences must have been the result of a change in flow originating at the duct entrance when the duct entrance was sealed with a strip of scotch tape.

The values of lift coefficient obtained for the revised model were greater than those obtained for the original model. (See fig. 6.) This increase in lift may be attributed to the dorsal fin and the increased size of the stub fuselage on the revised model.

As shown in figure 6, the value for the variation of rudder hinge-moment coefficient with α at small values of α was negative for the revised model and positive for the original model. The values for the two models, however, did not differ by more than 0.001, a difference which may be expected on any airplane and can be corrected by a spring tab. If a spring tab is to be used to correct for this difference, it is advised that a negative increase in the basic value for the variation of

~~CONFIDENTIAL~~

UNCLASSIFIED

UNCLASSIFIED

MR No. L5G18a

~~CONFIDENTIAL~~

7

rudder hinge-moment coefficient with rudder angle be effected (to at least -0.003 as explained in reference 3). The variation of rudder hinge-moment coefficient with δ_r at small angles of δ_r was about the same for both the original and revised models. At large rudder angles, the rudder hinge-moment coefficient was larger for the revised model than for the original. This increase in C_{hr} at large angles of δ_r would make more critical the attainment of desired pedal force and thus would affect the estimations made in reference 1 of the characteristics of the XF-12 airplane.

CONCLUSION

The results of the tests on the revised 1/6-scale model of the XF-12 vertical tail indicated that the air duct had very little effect on the aerodynamic characteristics of the model. A small change occurred in the variation of rudder hinge-moment coefficient with angle of attack but it is believed that this change can be corrected by a properly applied spring tab.

Langley Memorial Aeronautical Laboratory
National Advisory Committee for Aeronautics
Langley Field, Va.

Robert MacLachlan

Robert MacLachlan
Physicist

Sadie M. Miller

Sadie M. Miller
Computer

Approved:

Hartley A. Soule

Hartley A. Soule

Chief of Stability Research Division

dgb

~~CONFIDENTIAL~~

UNCLASSIFIED

UNCLASSIFIED

8

~~CONFIDENTIAL~~

MR No. L5G18a

REFERENCES


1. MacLachlan, Robert: Wind-Tunnel Tests of a 1/6-Scale Model of Republic XF-12 Vertical Tail with Stub Fuselage and Stub Horizontal Tail. NACA MR No. L5E21, Army Air Forces, 1945.
2. Denaci, H. G.: Wind-Tunnel Tests of a 1/5-Scale Semi-span Model of the Republic XF-12 Horizontal Tail Surface. NACA MR No. L5D12, Army Air Forces, 1945.
3. Morgan, B. M., Bethwaite, C. F., and Nivison, J.: Spring-Tab Controls - Notes on Development to Date with Special Reference to Design Aspects. Rep. No. Aero. 1972, British R.A.E., Dec. 1944.

~~CONFIDENTIAL~~




UNCLASSIFIED

UNCLASSIFIED

CONFIDENTIAL

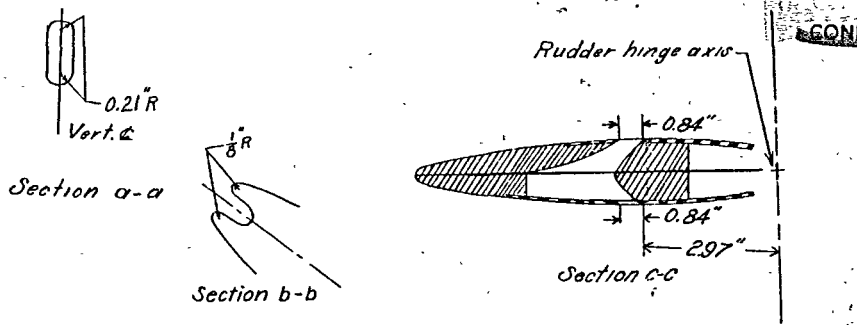

Sections enlarged

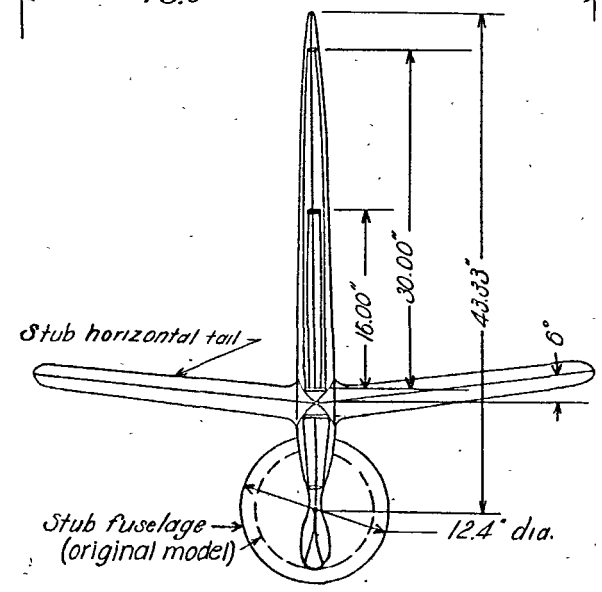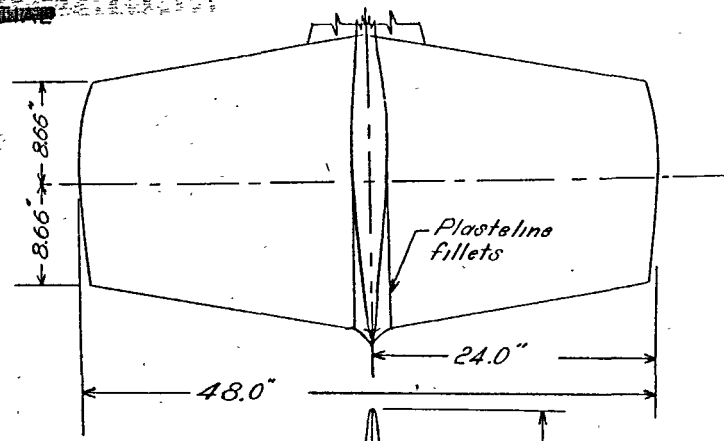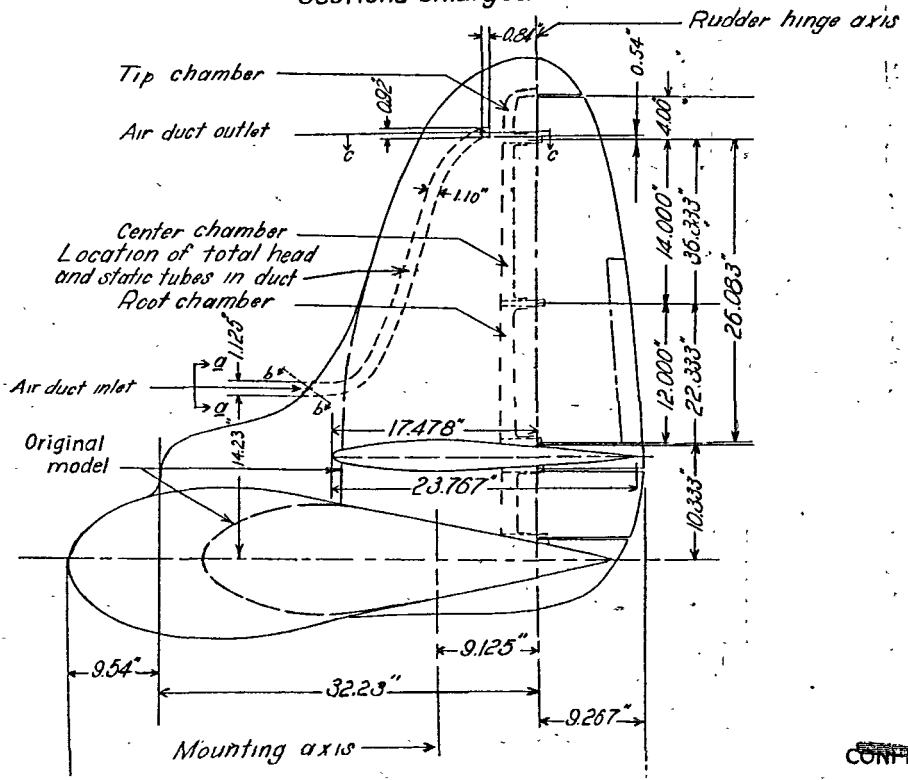


CONFIDENTIAL

Figure 1.- Details of the revised 1/6 - scale model of the XF-12 vertical tail surface.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

MR No. 15G18a

UNCLASSIFIED

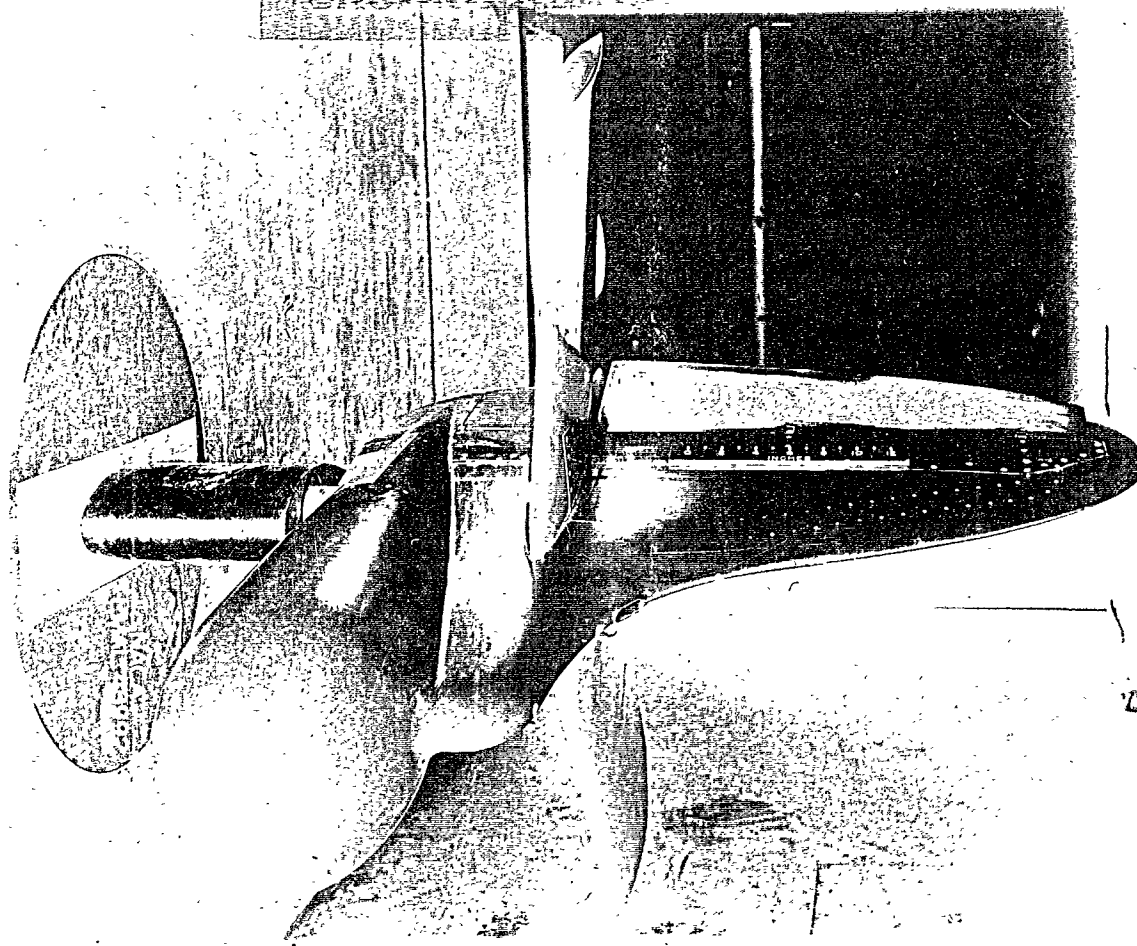


MR No. L5G18a

(a) Front view showing air duct entrance.

Figure 2.- The revised $\frac{1}{6}$ -scale model of the XF-12 vertical tail mounted in the 6- by 6-foot test section of the Langley stability tunnel.

UNCLASSIFIED
~~CONFIDENTIAL~~

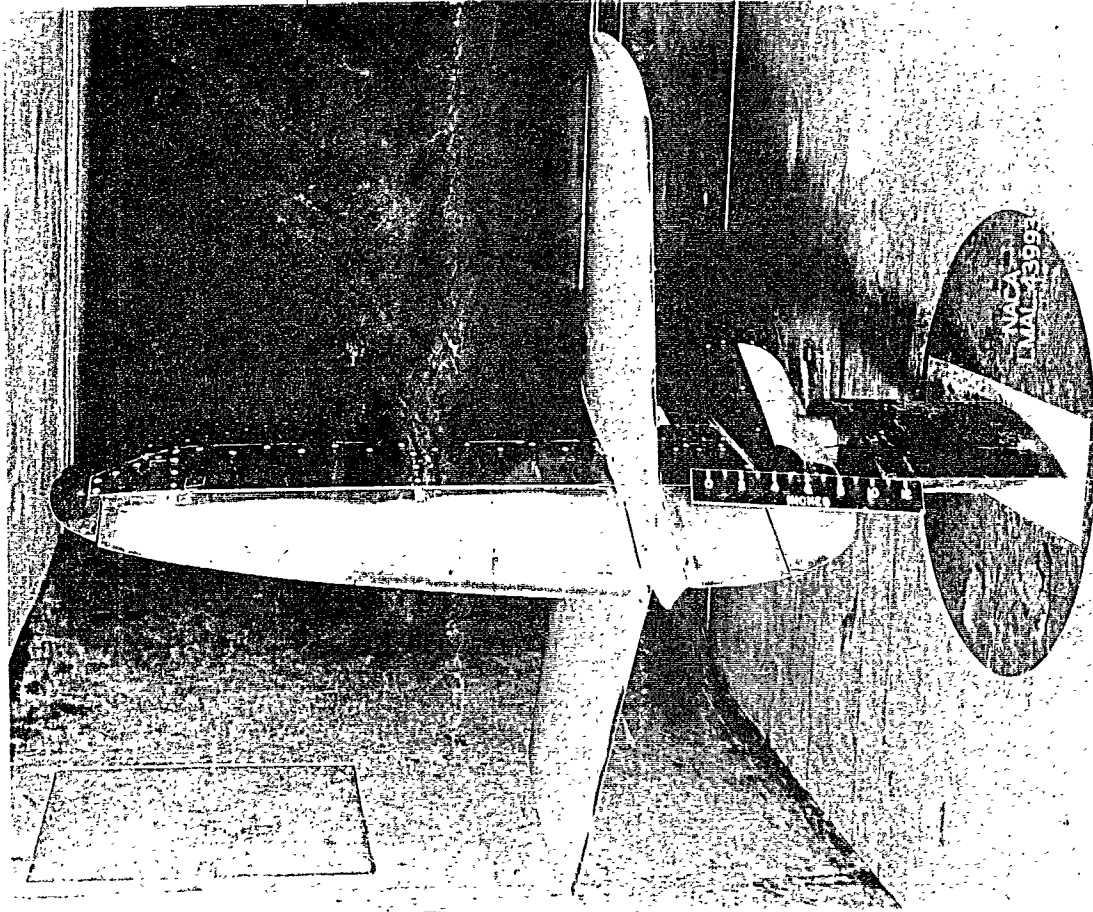


(b) Rear view showing one of two air duct exits.

Figure 2.- Concluded.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS
LANGLEY MEMORIAL AERONAUTICAL LABORATORY - LANGLEY FIELD, VA.


MR No. L5G18a

~~CONFIDENTIAL~~
UNCLASSIFIED

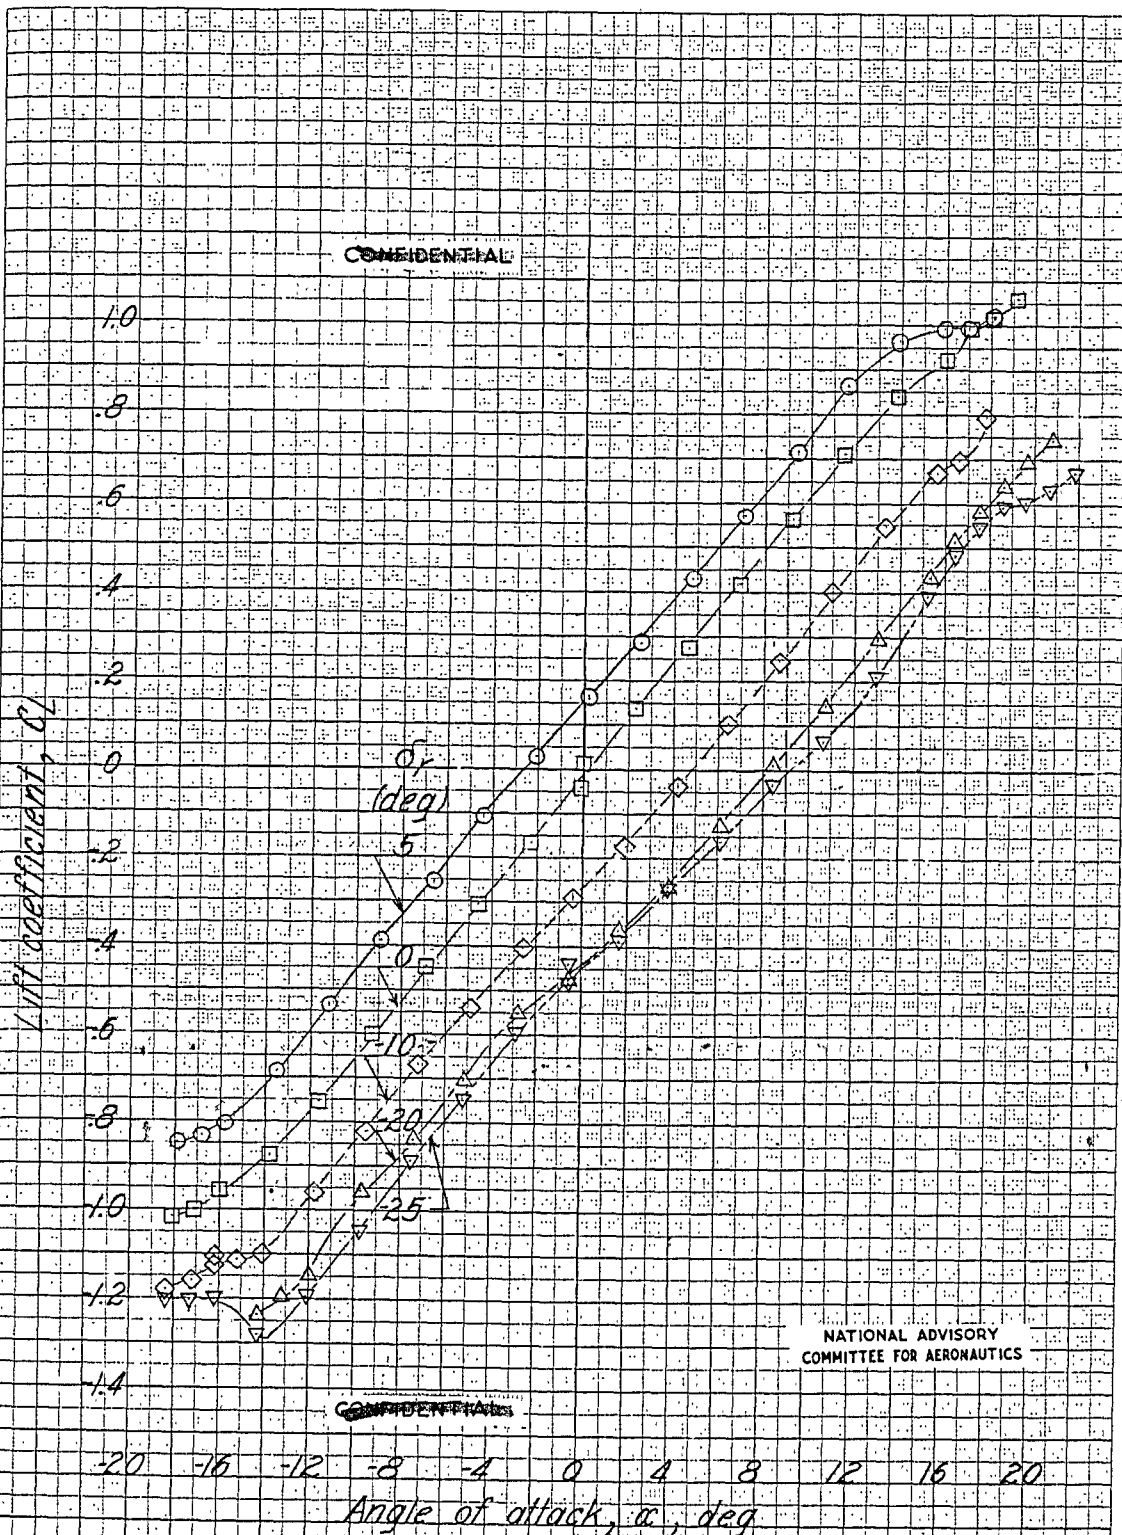


(a) Lift coefficient

Figure 3. - Aerodynamic characteristics of the XF-12 vertical tail model with de-icing air duct. Air duct open.

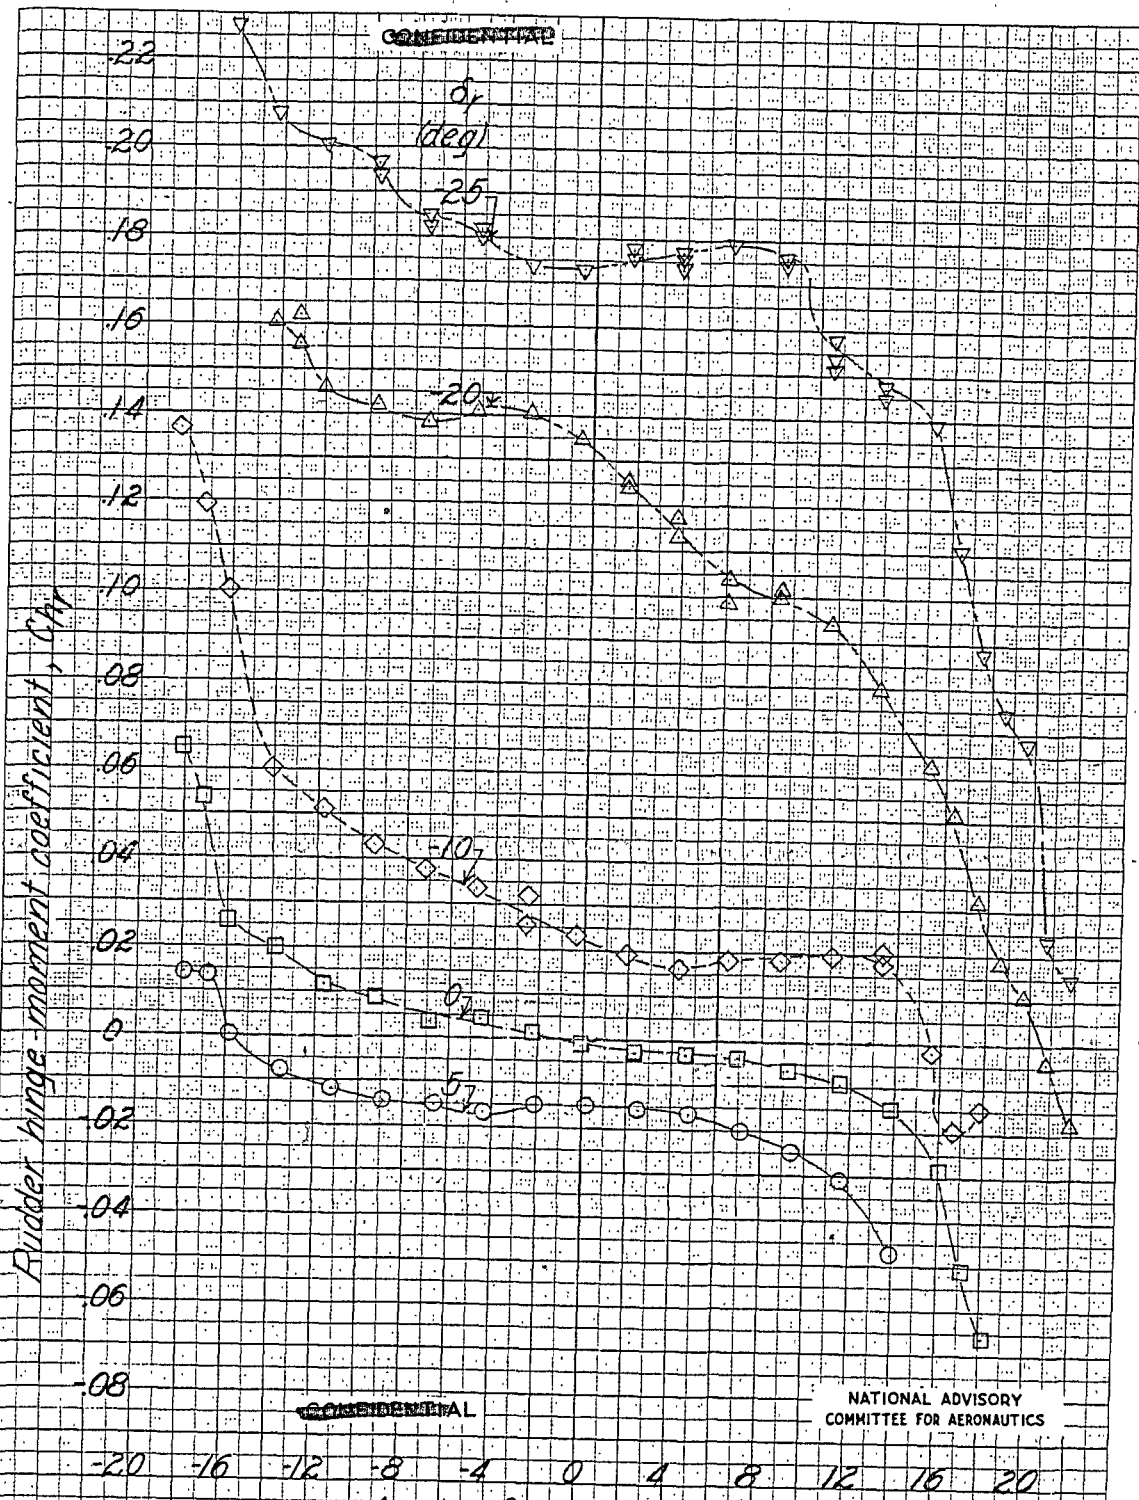

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

(b) Rudder hinge-moment coefficient
Figure 3.-Continued.

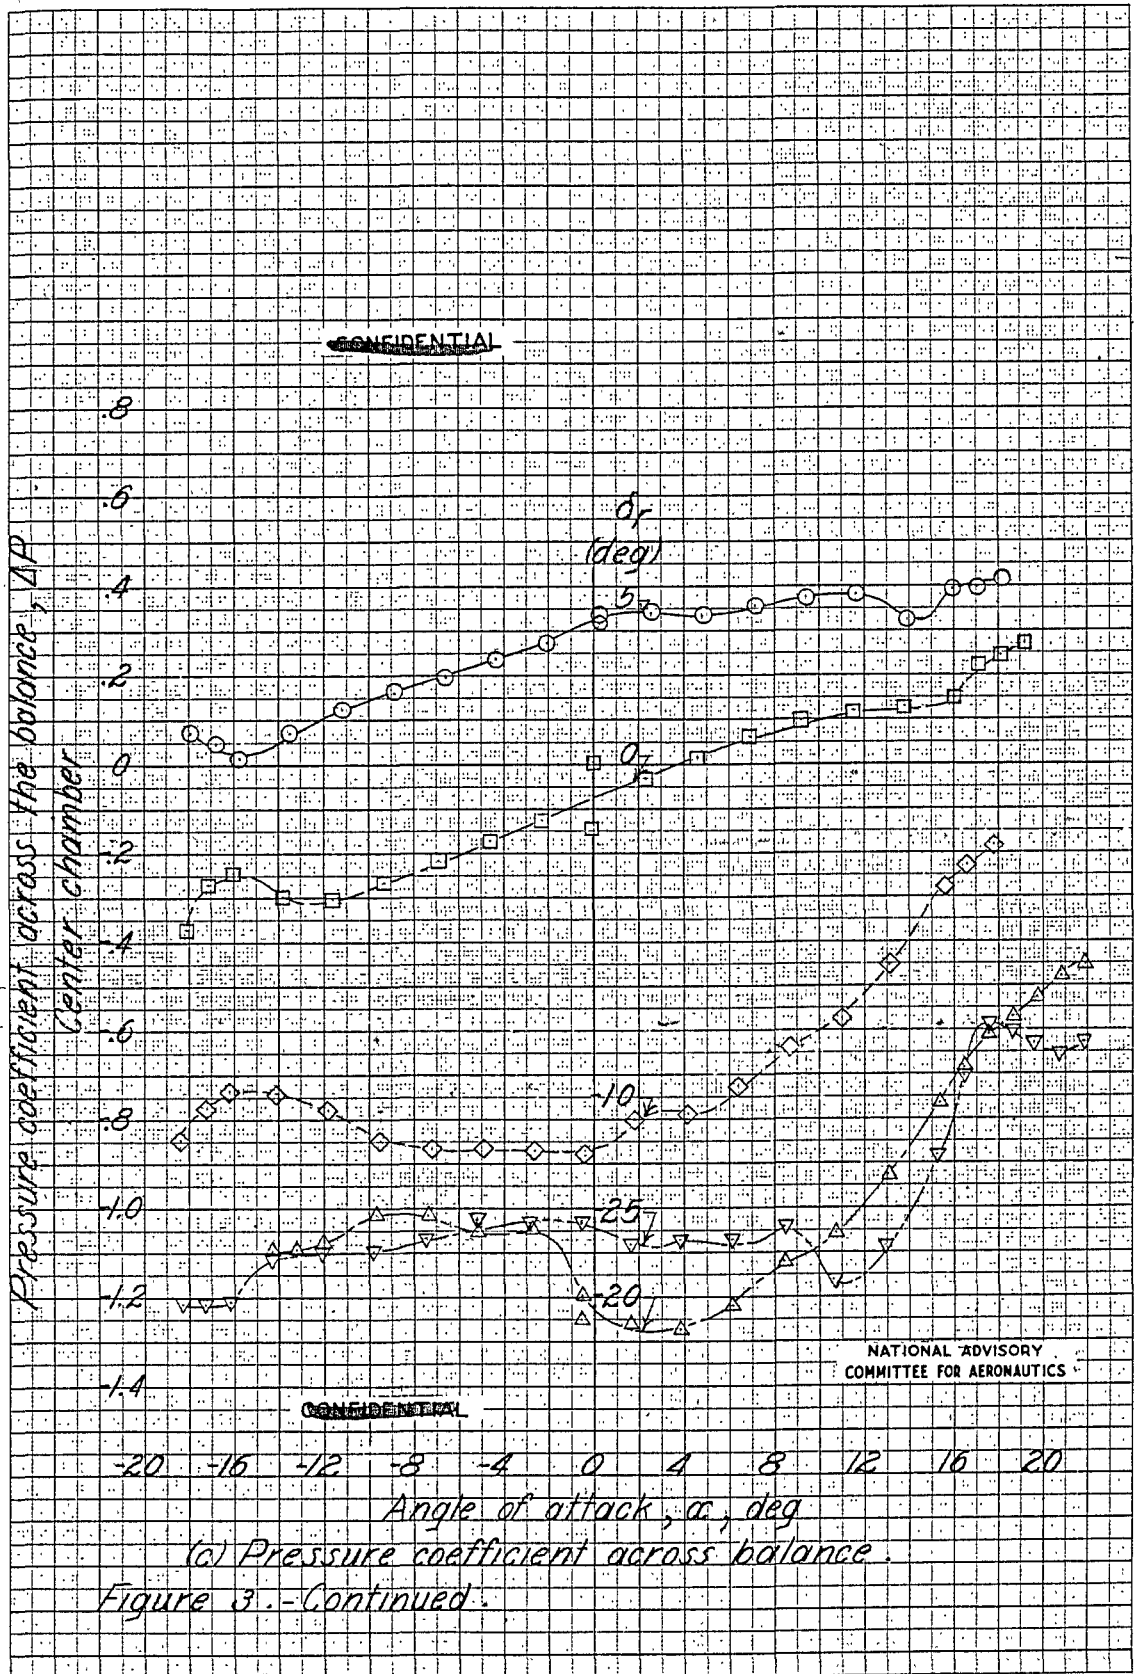

UNCLASSIFIED




(d) Drag coefficient.

Figure 3. - Continued.

UNCLASSIFIED


UNCLASSIFIED

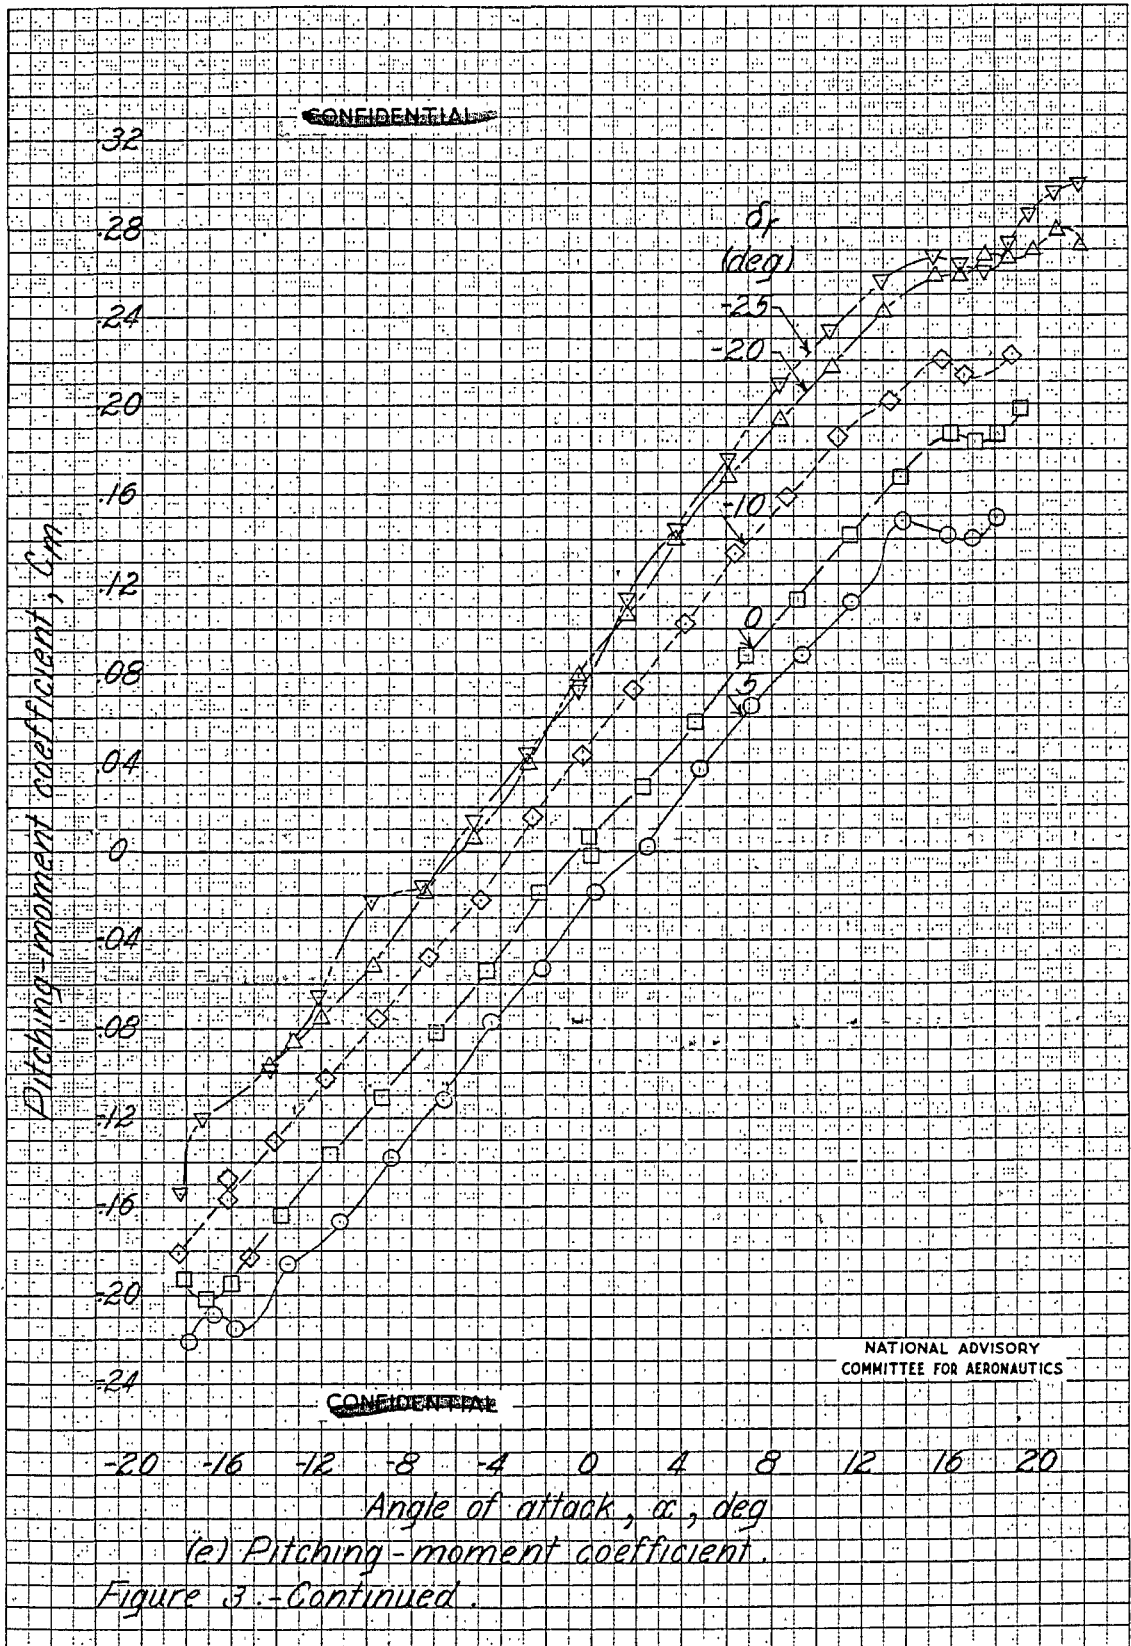

UNCLASSIFIED

UNCLASSIFIED

~~CONFIDENTIAL~~

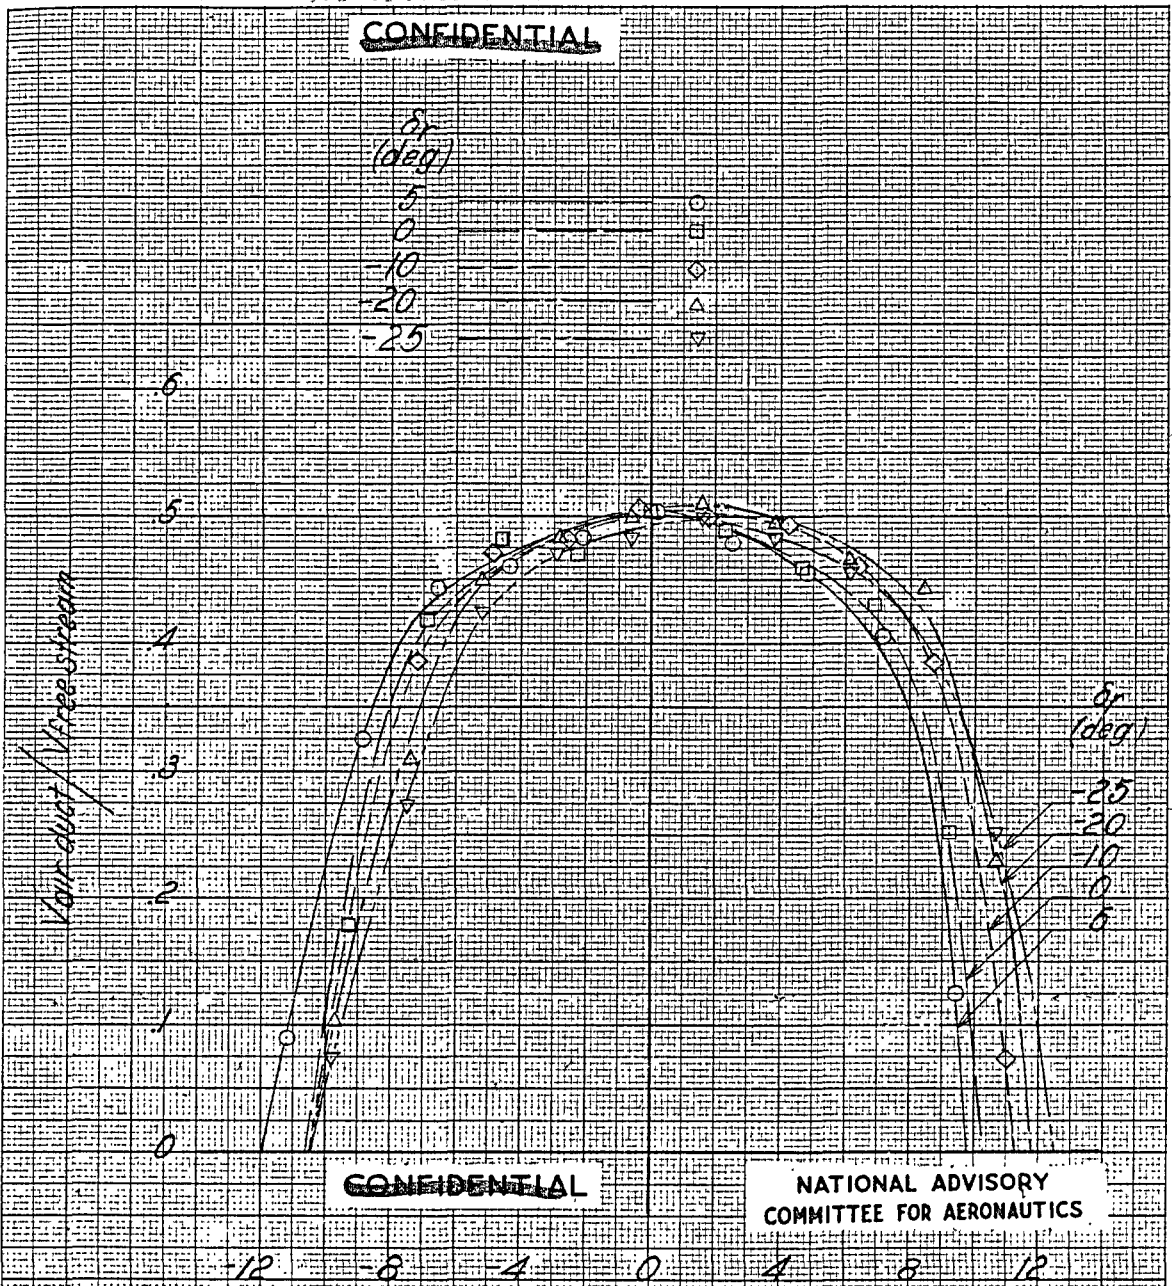


~~CONFIDENTIAL~~


NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Angle of attack, α , deg
(V) Ratio of velocity in air duct to free stream velocity.

Figure 3 - Concluded


UNCLASSIFIED

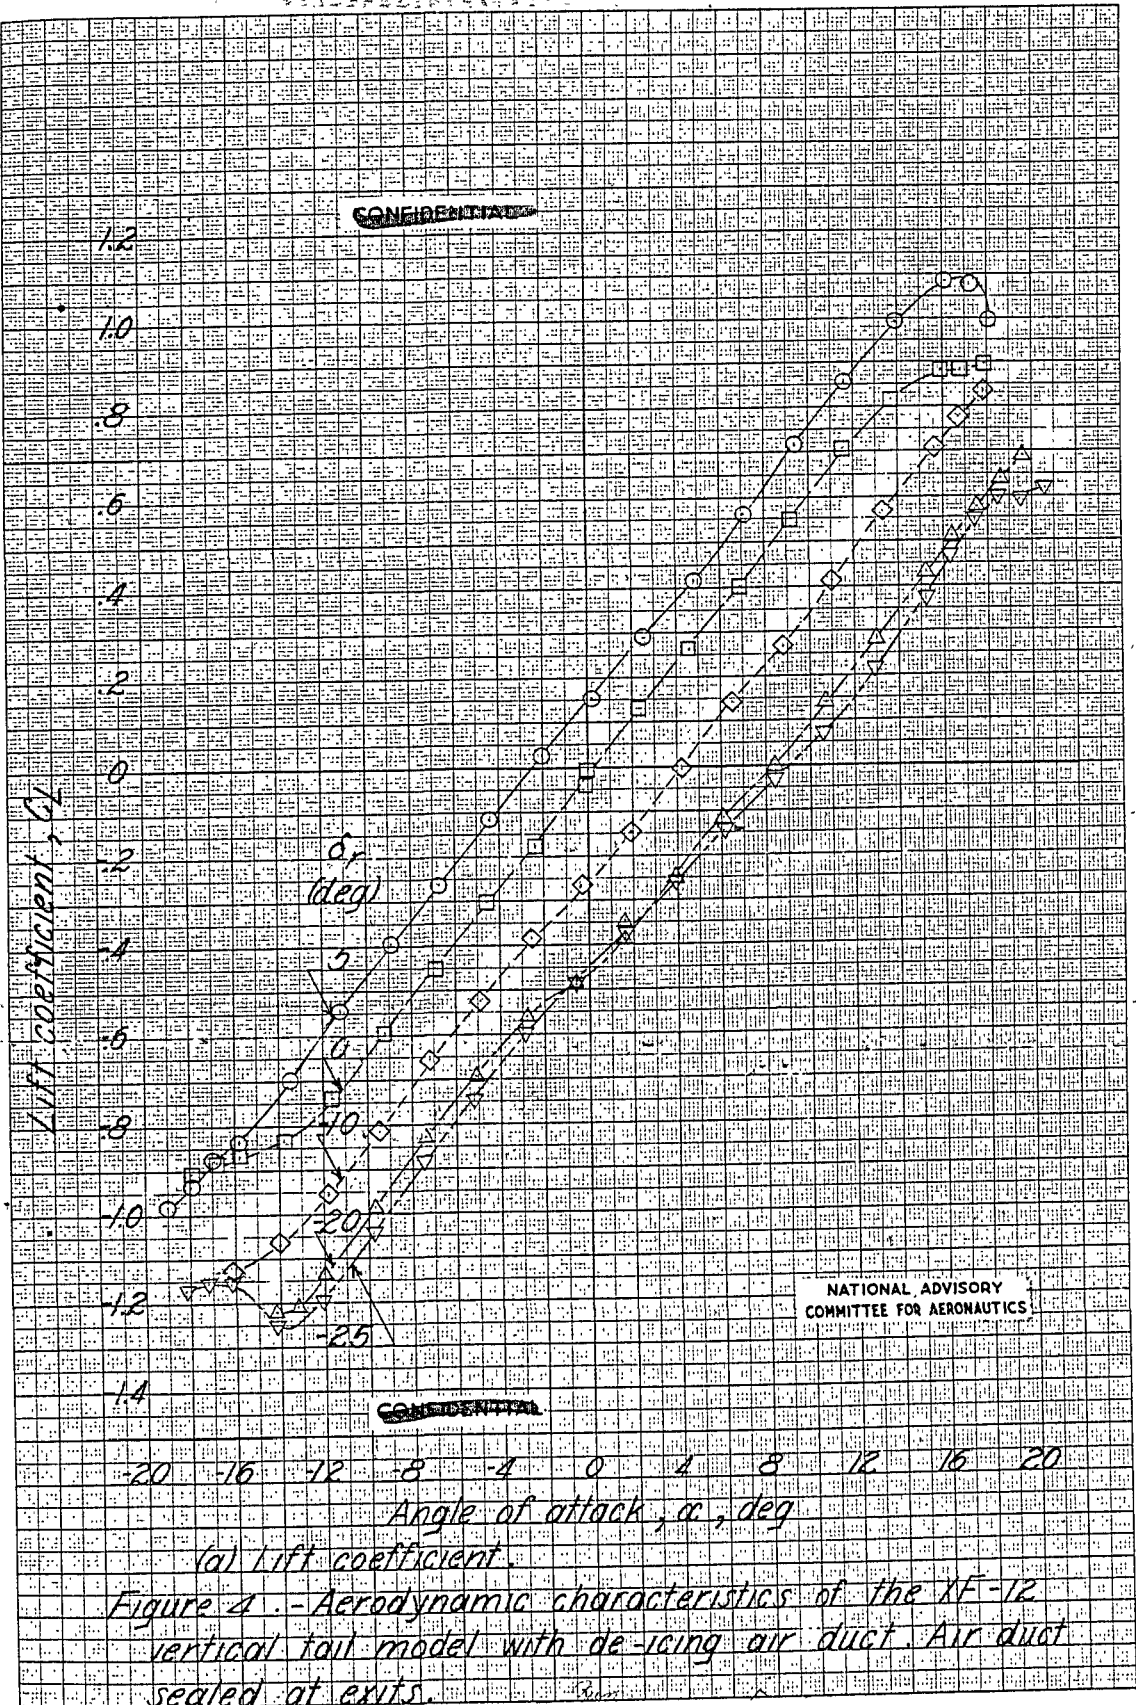


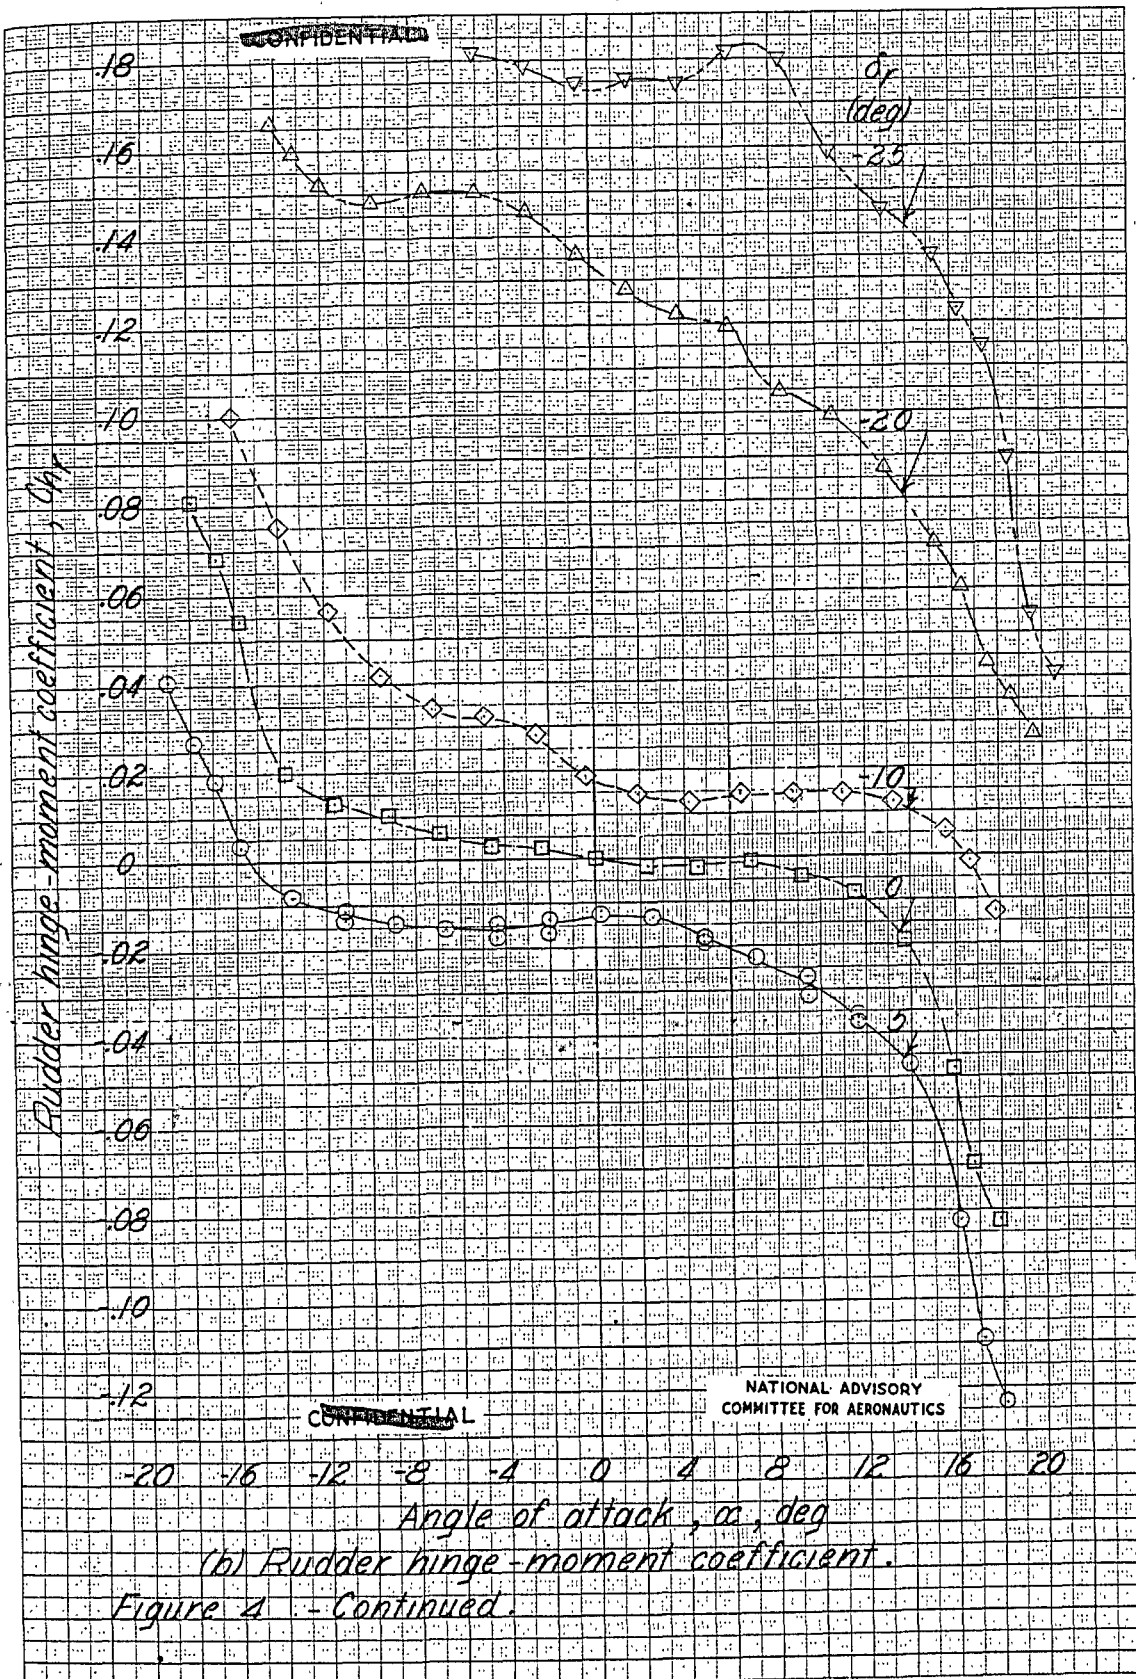


(b) Rudder hinge-moment coefficient.


Figure 4 - Continued.

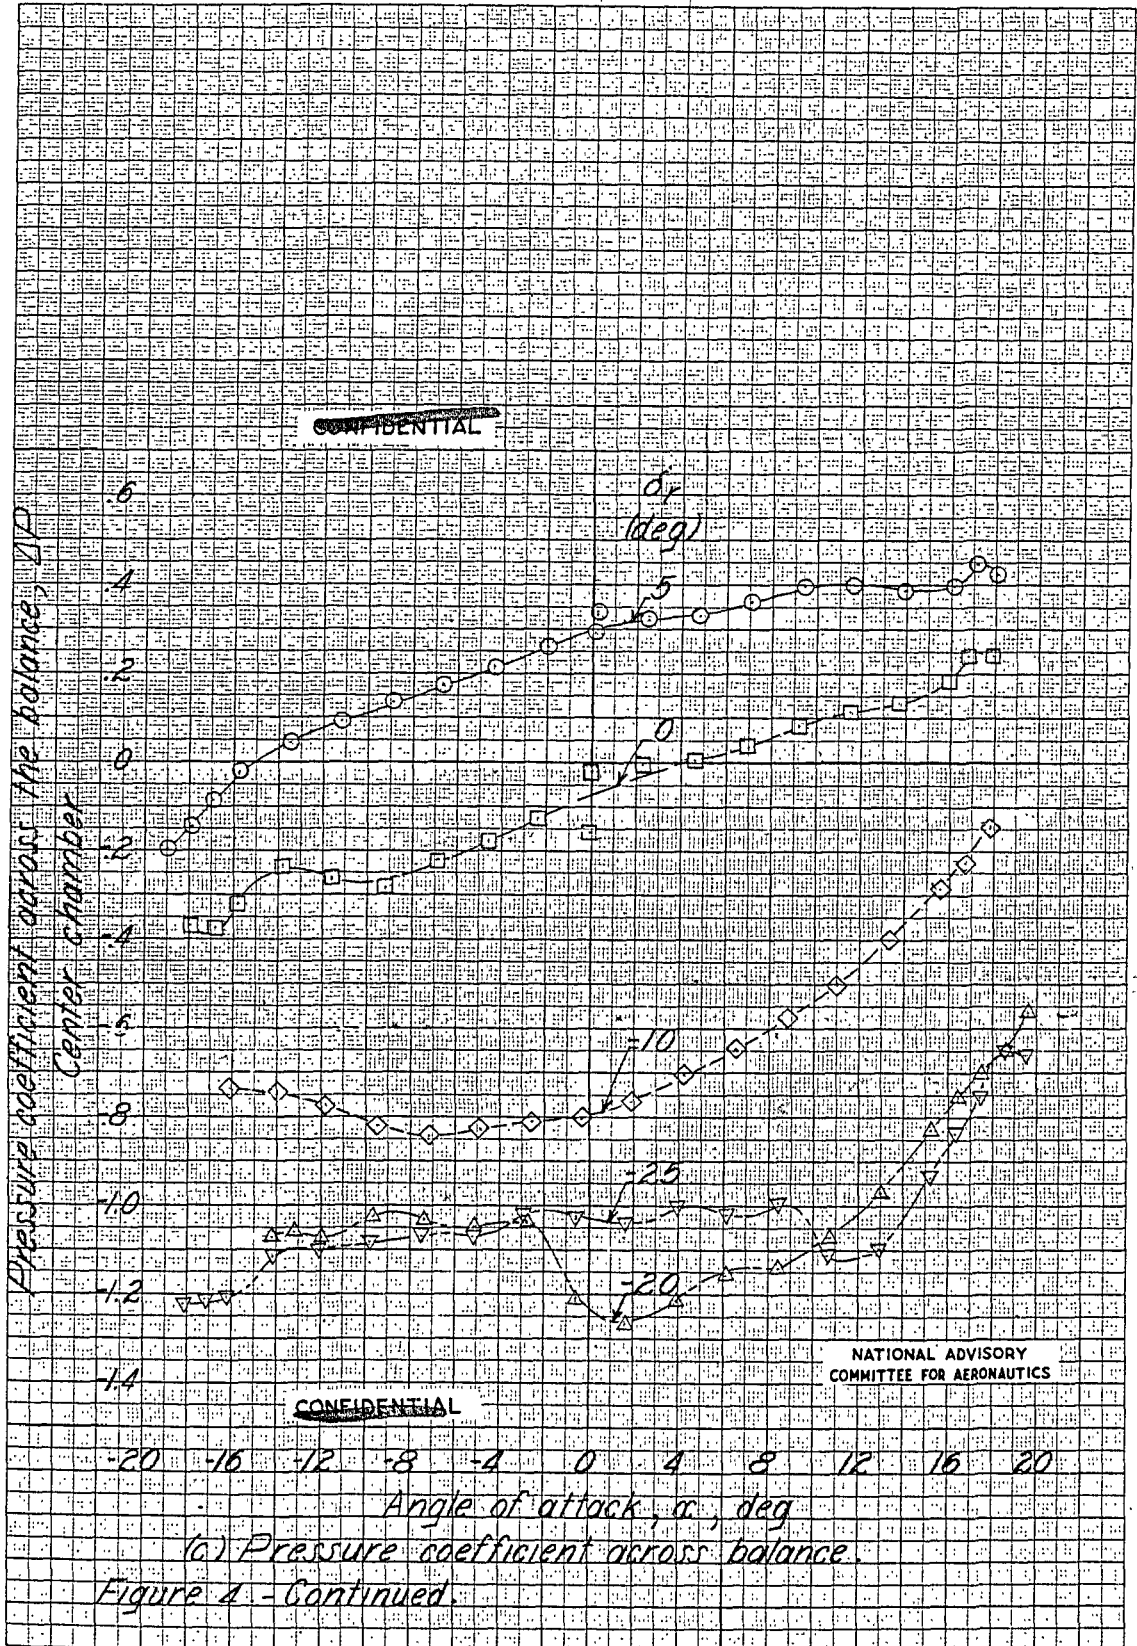

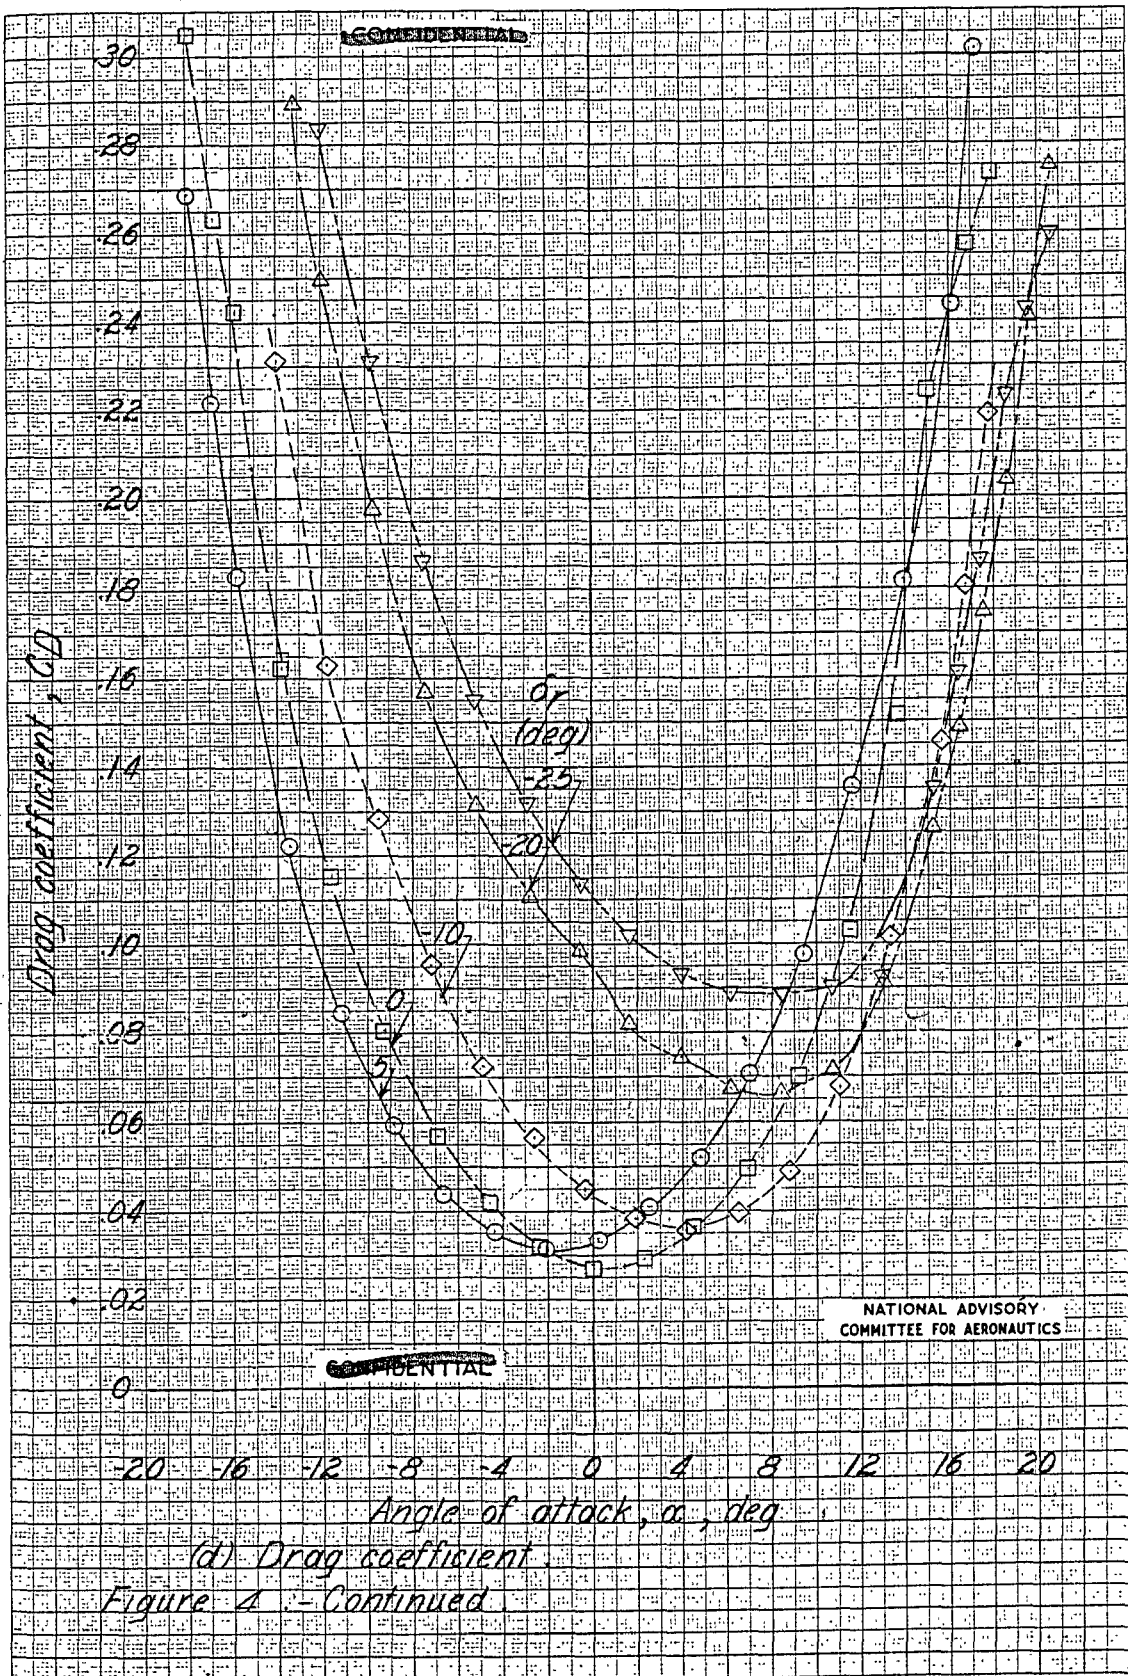


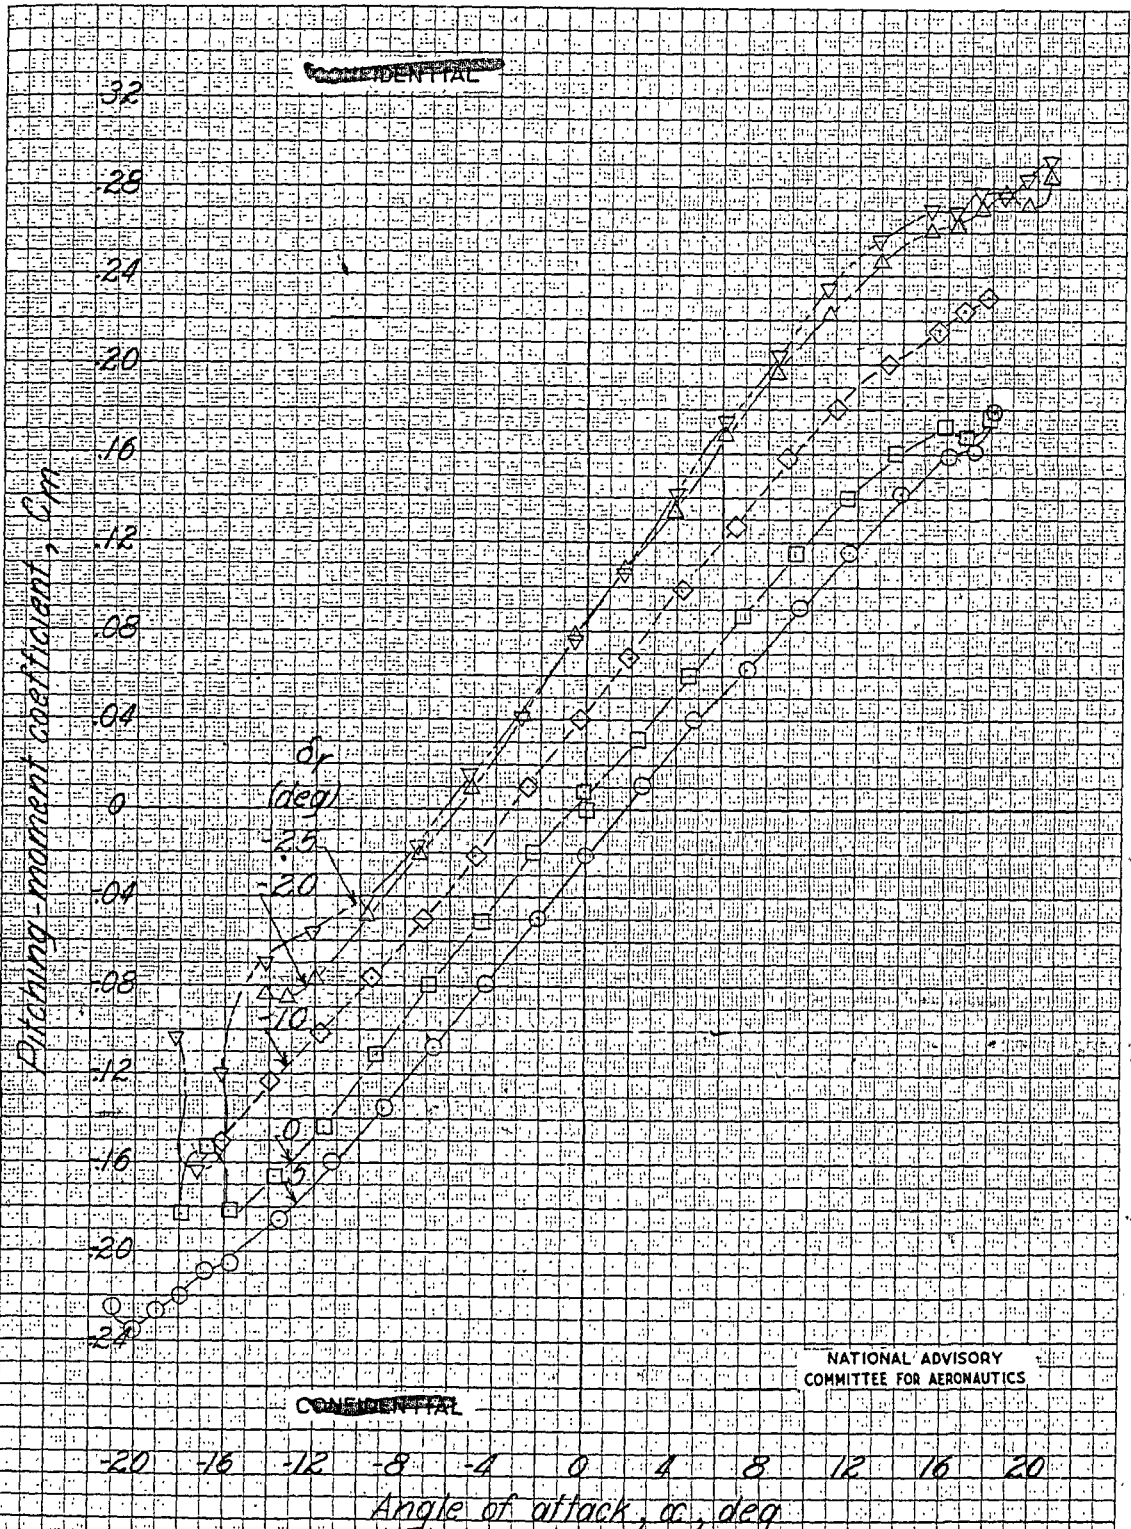

(e) Pitching-moment coefficient
Figure 4 - Concluded

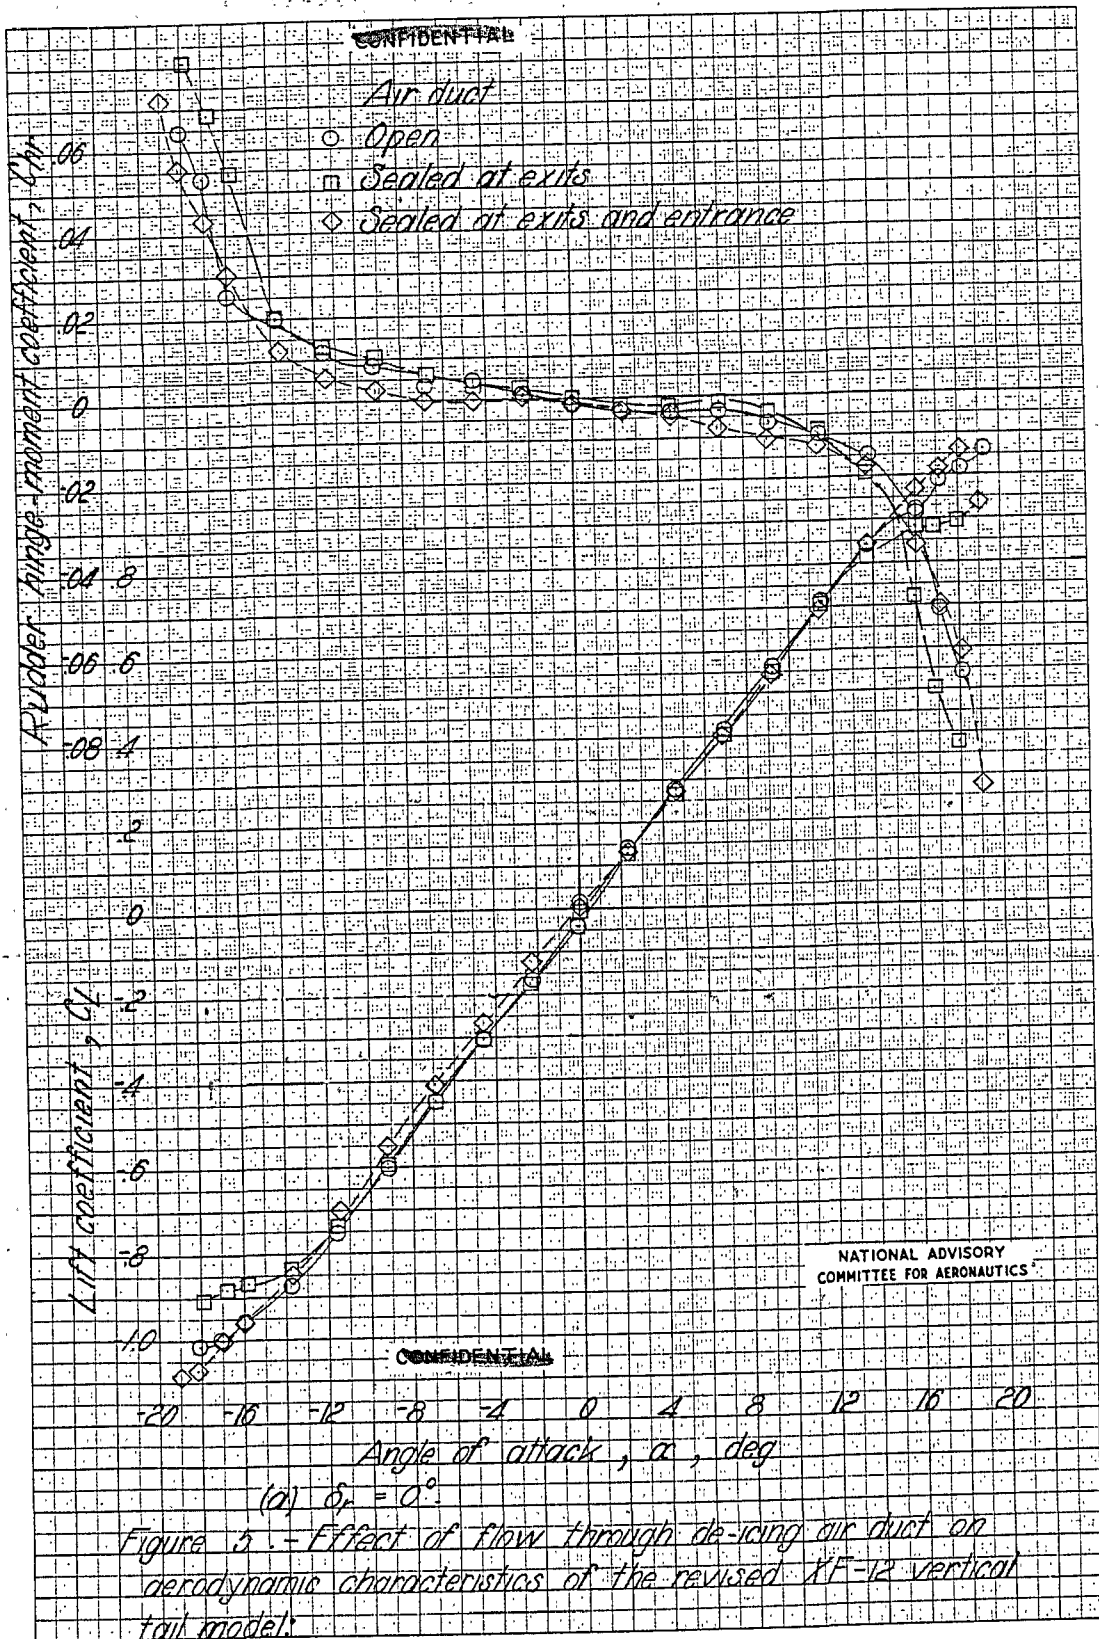



UNCLASSIFIED

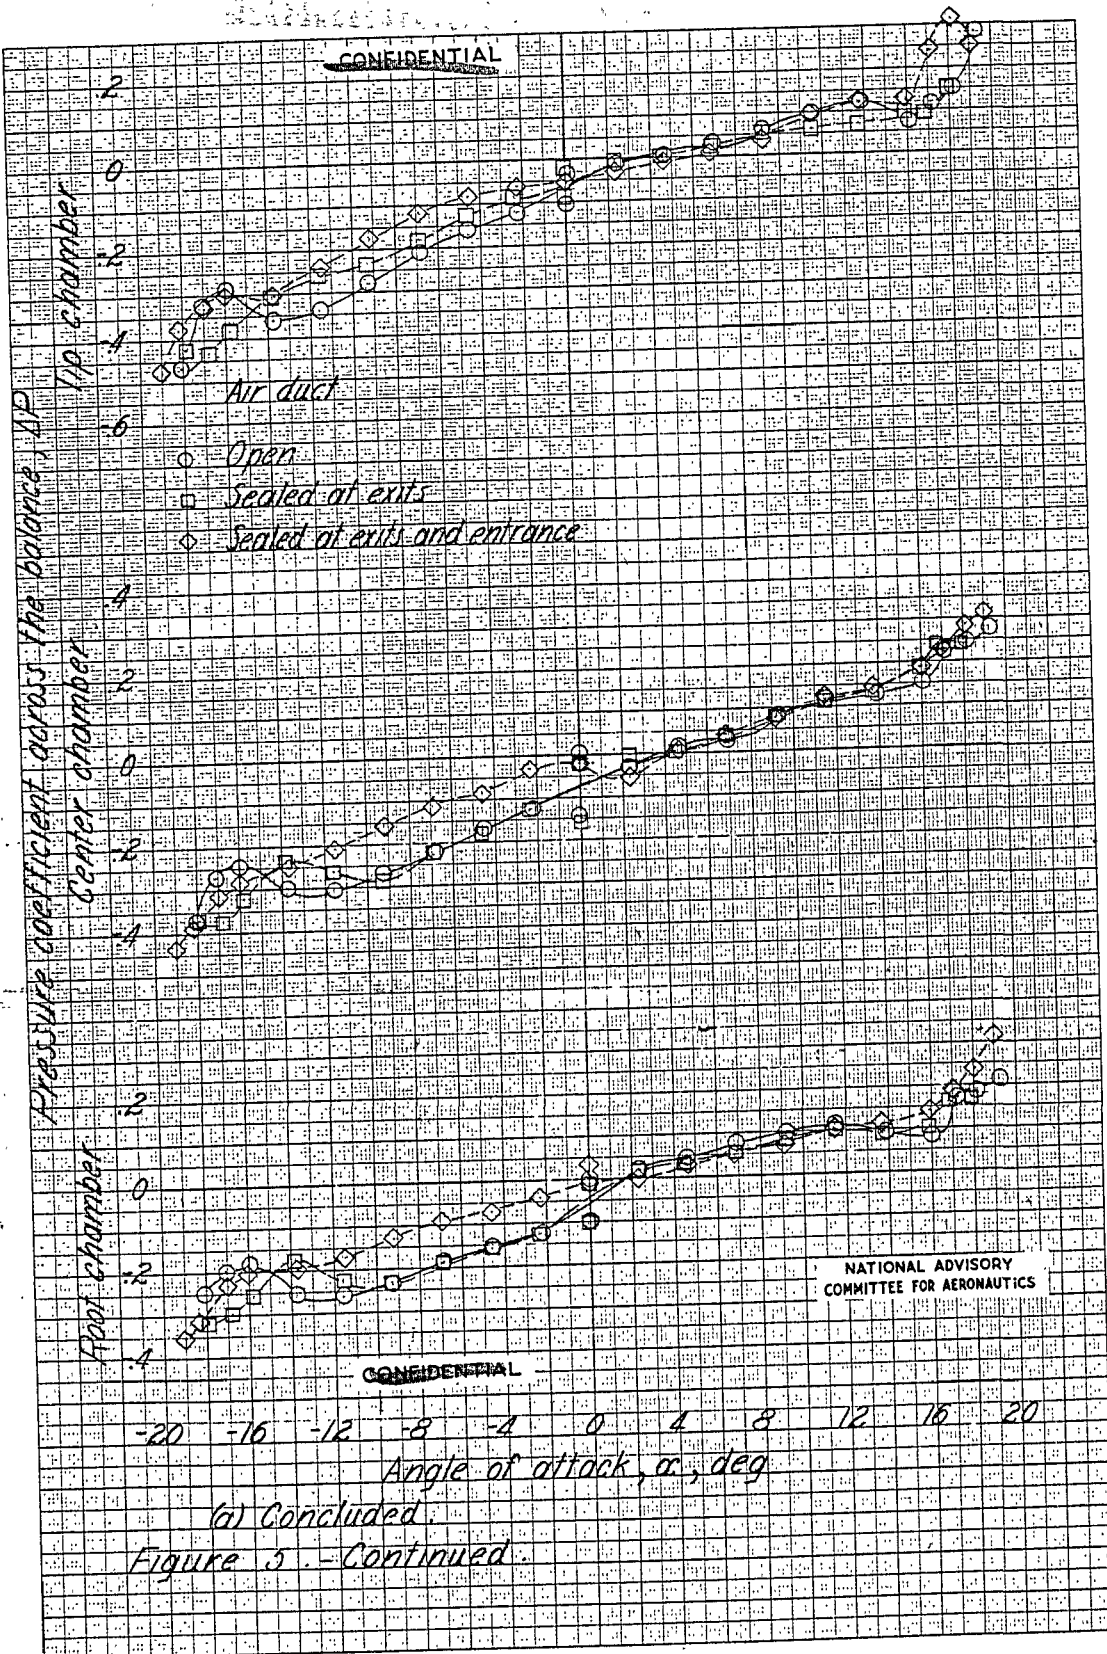

(a) Concluded.
Figure 5 - Continued.

UNCLASSIFIED

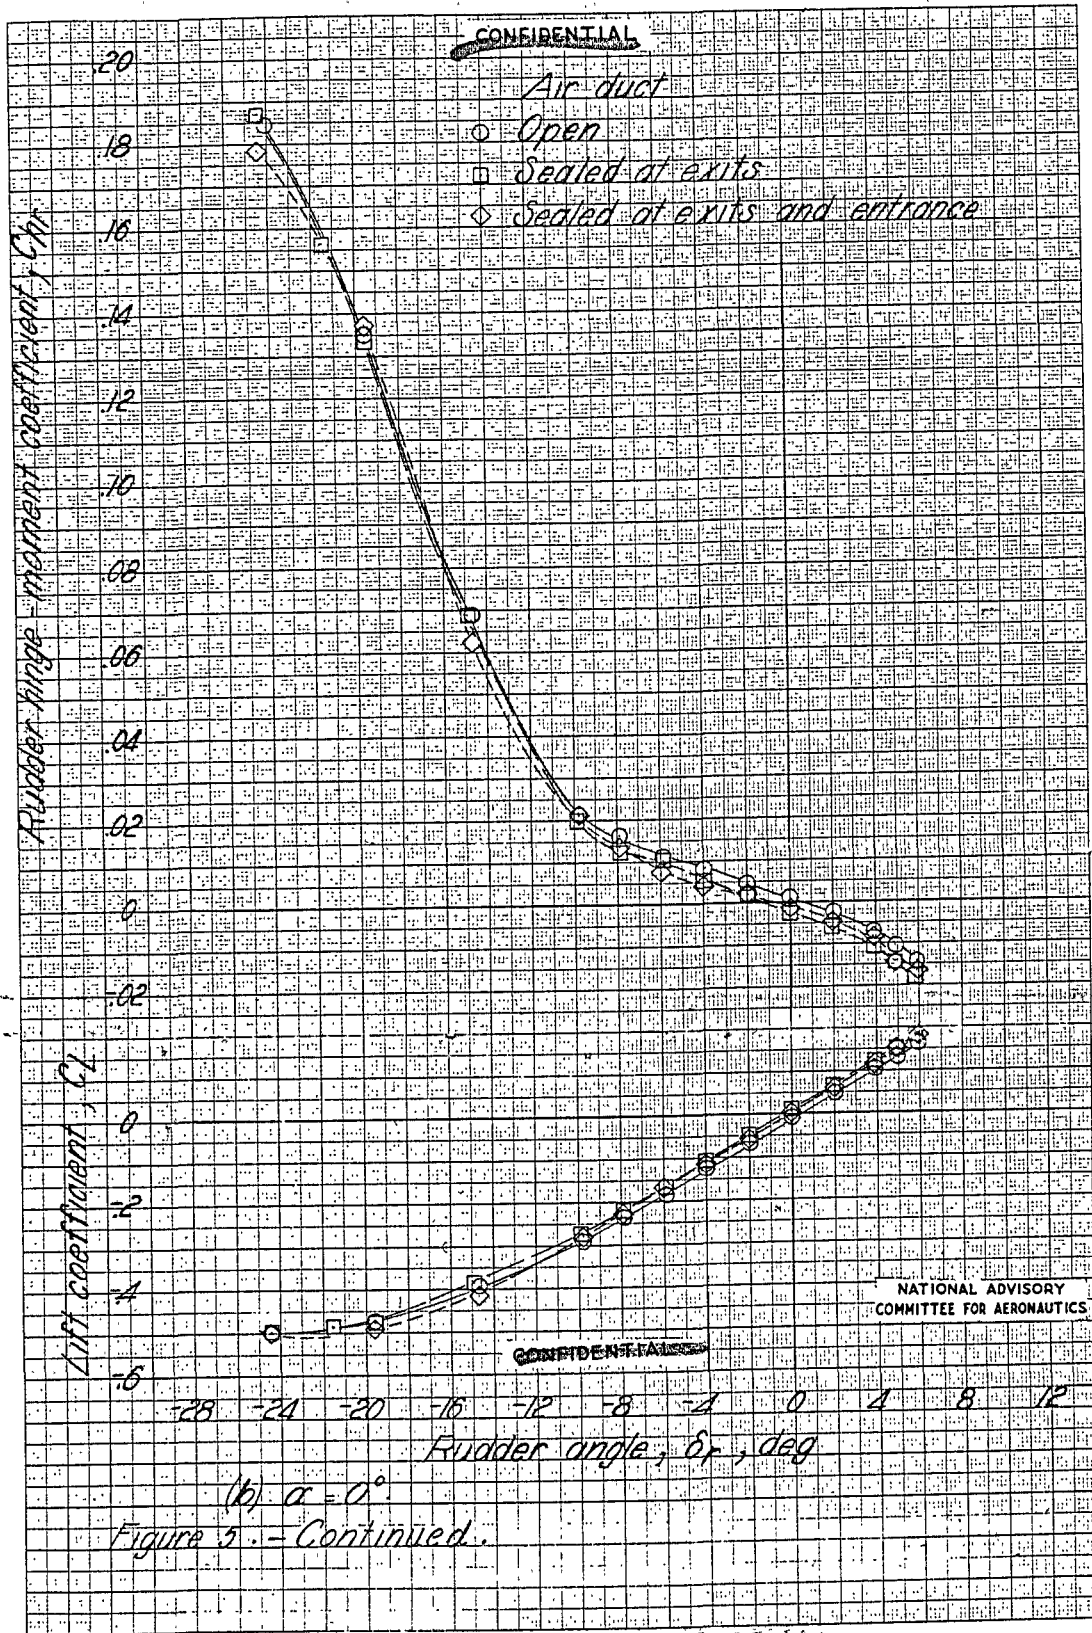

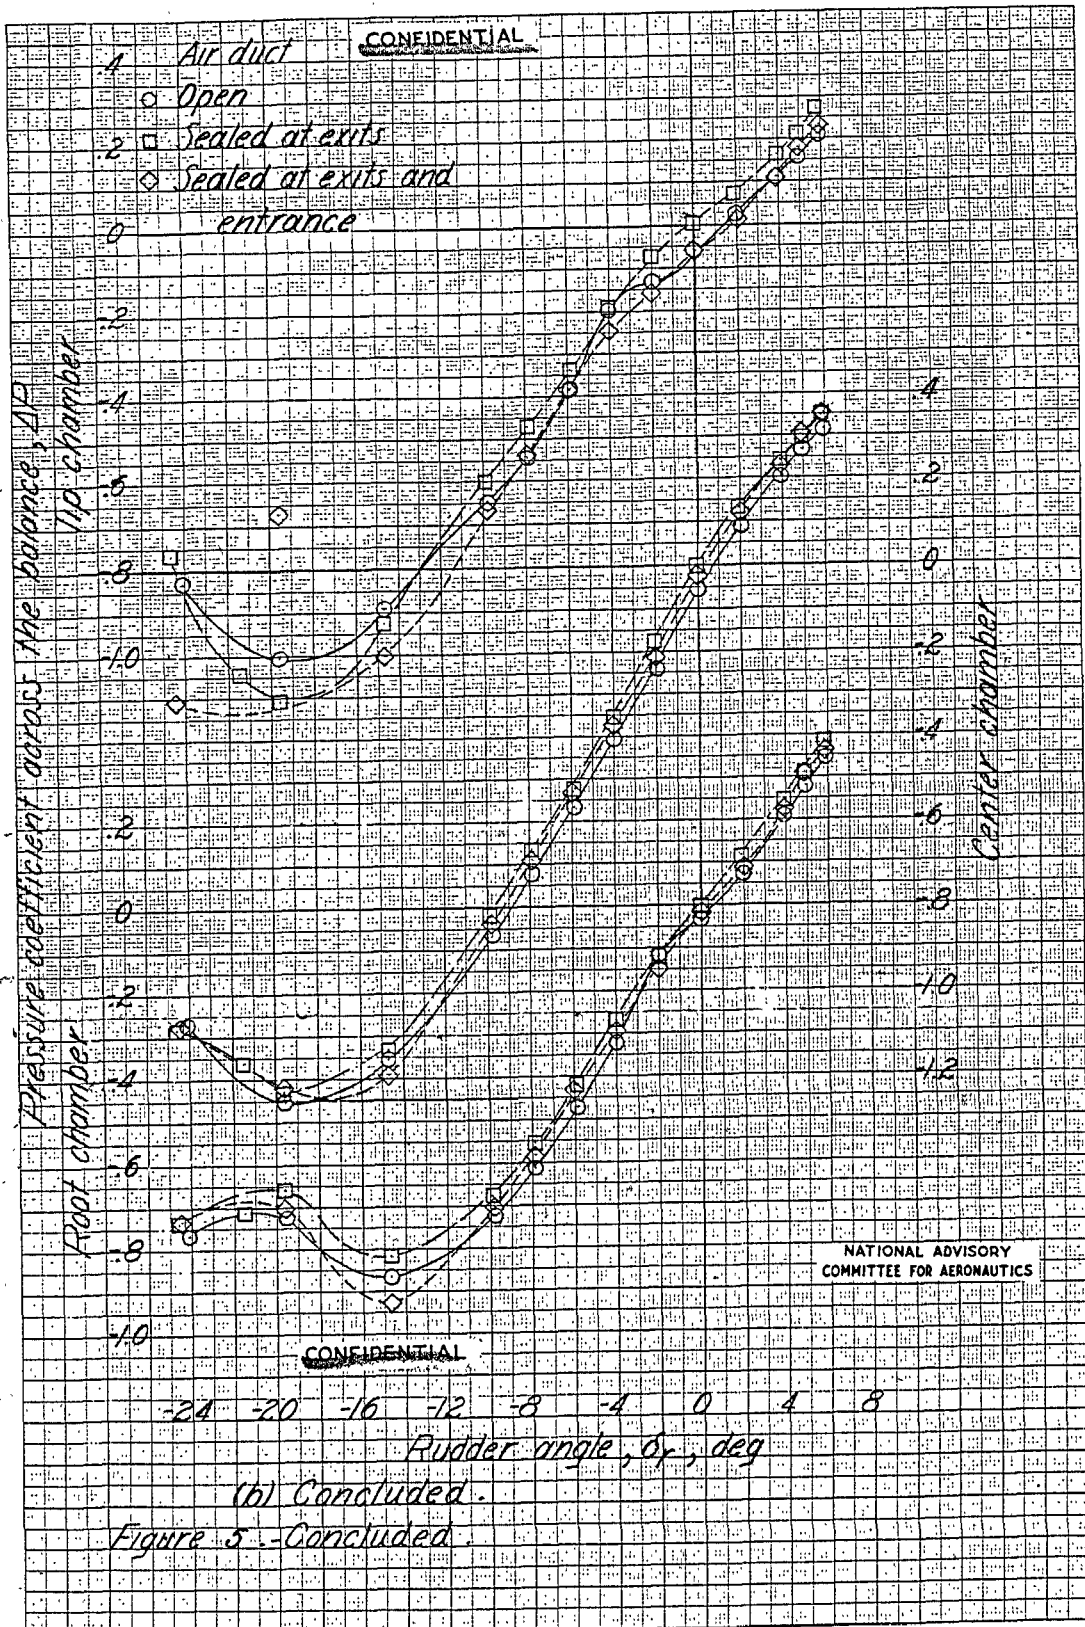

(b) Concluded.

Figure 5 - Concluded.

