

7

CALT-767P4-43

N10K-00  
CR  
per AEC release



FACILITY FORM 602

N70-15219  
(ACCESSION NUMBER)

9  
(PAGES)


CR-107581  
(NASA CR OR TMX OR AD NUMBER)

(THRU)

0  
(CODE)

(CATEGORY)

# A Facsimile Report



Reproduced by  
**UNITED STATES  
 ATOMIC ENERGY COMMISSION**  
 Division of Technical Information  
 P.O. Box 62 Oak Ridge, Tennessee 37830

59-259660

CALT-767P4-43  
CONF-690702--4  
RECEIVED BY DTIC JUL 14 1969

CONFIDENTIAL GROUP  
RECEIVED  
MAY 1969

Determination of Differential Elastic and Vibrational  
Excitation Cross Sections for e - H<sub>2</sub> Scattering

S. Trajmar,<sup>\*†</sup> J. K. Rice,<sup>†</sup> D. G. Truhlar,<sup>†</sup>  
R. T. Brinkmann,<sup>\*</sup> and A. Kuppermann<sup>†</sup>

ABSTRACT

The elastic scattering of electrons by H<sub>2</sub> has been studied together with the pure vibrational excitation (rotational levels are not resolved). Angular distributions of the elastically and inelastically scattered electrons causing the fundamental and first and second overtone excitations have been measured in the 8° to 80° range. Certain aspects of the experimental procedures and the angular behavior of some of the inelastic to elastic scattering intensity ratios (R) at 7 and 60 eV impact energies are presented here.

The experimental procedure consists of scattering an energy selected electron beam by a static low-pressure H<sub>2</sub> target gas and measuring the scattered signal intensities at fixed electron impact energies (E) and scattering angles (θ) as a function of energy-loss. Due to the weak inelastic signal intensities a long integration time is required to achieve adequate signal-to-noise ratios and the experimental conditions corresponding to measurements at different angles and energies are somewhat different. The quantity that one can extract from these measurements which is least subject to experimental uncertainties is R and its angular dependence at different energies. Figure 1 shows the ratio R<sub>1</sub> of the

\* Jet Propulsion Laboratory. Work supported in part by the National Aeronautics and Space Administration under Contract No. NAS 7-100.

† A. A. Hoyes Laboratory of Chemical Physics. Work supported in part by the U. S. Atomic Energy Commission, Report Code (CALT 532-43)

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

scattered signal intensity at an energy-loss corresponding to the excitation of the fundamental vibration to the signal intensity of the elastic peak at incident energies of 7 and 60 eV. The individual points are experimental values. The curves are calculated in the Born approximation with static and polarization potentials which take account of the non-spherical nature of the molecule and with exchange included in the Ochkur-Rudge approximation. The calculation is discussed in more detail elsewhere. The ratios R<sub>2</sub> for excitation of the second vibrational state have been determined with less accuracy. They are about ten times smaller but have approximately the same angular dependence as the ratios R<sub>1</sub>.

The elastic differential scattering cross sections (DCS) have been determined under identical experimental conditions in arbitrary units and at 7 eV normalized to the absolute scale by using the total scattering cross sections of Golden, Bandel and Salerno.<sup>1</sup> The shape of elastic DCS curve agrees very well with the experimental curve of Ehrhardt, et al.<sup>2</sup> From the intensity ratios and from the elastic DCS the inelastic DCS have also been obtained in absolute scale. Extrapolation of the DCS to 0° and to 180° yields an integrated cross section for the fundamental vibrational excitation of 0.61 a<sup>3</sup> (± 40%, including an estimate of the extrapolation error) as compared to that of 0.76 a<sup>3</sup> of Ehrhardt, et al. The vibrational excitation DCS at 60 eV has a minimum at 30° and rises to a plateau at 50°-80°.

Measurements carried out at different scattering angles correspond to different (dΩ)<sub>eff</sub> (explained below) and cannot be directly compared even when other experimental conditions (target density, beam

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:  
A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or  
B. Assumes any liabilities with respect to the use of, or for damage resulting from the use of any information, apparatus, method, or process disclosed in this report.  
As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

By *[Signature]*  
California Patent Group, USAEC  
There is no objection from the patent standpoint to the publication or dissemination of this document.  
4/10 - 1969

intensity, instrument efficiency, etc.) are the same. The usual expressions relating cross sections and scattered signal intensities contain the path length in an overly simplified way. In a realistic experiment, one has a large number of target particles distributed over the scattering volume and a beam containing many electrons with some kind of energy and spatial distribution. The measured scattered signal is the result of scattering events associated with different path lengths, cross sections and solid angles of detection. One can define only an effective (path length)  $\times$  (solid angle). This quantity  $(l d \Omega)_{\text{eff}}$  is a function of the scattering angle and has to be known for absolute DCS determination (or its relative value as a function of scattering angle has to be known to be able to compare DCS measured at different angles).

Previous calculations of  $(l d \Omega)_{\text{eff}}$  involved simplifications and approximations in scattering geometry, particle distribution and in angular dependence of  $l$  and/or  $\sigma$ . The effect of a more rigorous treatment is described here. Circular apertures define the beam cone and similarly apertures  $A_1$  and  $A_2$  define the view cone (see Fig. 2). Scattered signal can be detected from the volume defined by the surfaces of these two intersecting cones. The incoming electron beam density distribution is represented by a Gaussian function having its maximum density along the cone axis. To each volume element within the scattering volume a weighting factor is assigned which is composed of three factors: (a) the electron beam density at that volume element, (b) the solid angle subtended by the detector at that volume element, and (c) the appropriate correction for the change of DCS with angle within the view cone. The

weighted volume elements are then integrated over the scattering volume. (The limits of integration are determined by the equations of the cone surfaces.) This integral is by definition proportional to  $(l d \Omega)_{\text{eff}}$  and is normalized to unity at  $90^\circ$  for relative DCS determination and error estimation. In the limiting case of very narrow beams and a cross section constant over the whole scattering volume the integral is inversely proportional to  $\sin \theta$ . The energy dependence of the DCS and the energy spread of the electron beam were neglected. The integration was truncated at  $2 \theta_B$  in the beam cone. The scattering geometry for the case considered here:  $\theta_B = \theta_V = 5^\circ$ ,  $S_B = 3.89$  cm,  $S_V = 0.98$  cm,  $D_{12} = 0.89$  cm, and  $A_1 = A_2 = 0.038$  cm.  $\theta_B$  is the beam cone angle where the intensity falls to one half of its peak value;  $A_1$  and  $A_2$  are the radii of the exit apertures; for the definition of the other quantities, see Fig. 2. Figure 3 shows the error (%) introduced into the DCS by using  $\sin \theta$  instead of the inverse  $(l d \Omega)_{\text{eff}}$  correction for the various cases of  $\sigma(\theta)$ . The error is defined as

$$\text{Error} = \left| \frac{\sin \theta \cdot (l d \Omega)_{\text{eff}}^{-1}}{(l d \Omega)_{\text{eff}}^{-1}} \right| \times 100\%$$

When DCS are determined from experimental data, the procedure for finding  $(l d \Omega)_{\text{eff}}$  must be iterative because an approximate form for  $\text{DCS}(\theta)$  has to be assumed to start with. Once an approximate  $(l d \Omega)_{\text{eff}}$  is known, a better  $\text{DCS}(\theta)$  can be determined, and so on.

Here we do calculations designed to test the error introduced by using an improper scattering length correction. In these calculations

a guessed  $\sigma_{\text{guess}}(\theta)$  is used (in step C above) to compute the  $(\lambda d \Omega)_{\text{eff}}^{-1}$  correction without iterating, and we determine what error this will cause if the actual DCS is a given different one  $\sigma_{\text{actual}}(\theta)$ . The calculation shows that for this scattering geometry and for a case where  $\sigma_{\text{actual}}(\theta) \propto 10^{-0.0322 \theta}$  ( $H_2$  elastic DCS at 60 eV) one introduces a 40%, 14%, or 10% error in the DCS at  $10^\circ$  by using a  $\sin \theta$  correction, a  $(\lambda d \Omega)_{\text{eff}}^{-1}$  correction with  $\sigma_{\text{guess}}(\theta) = 1$ , or a  $(\lambda d \Omega)_{\text{eff}}^{-1}$  correction with  $\sigma_{\text{guess}}(\theta) \propto 10^{-0.0122 \theta}$  ( $H_2$  elastic DCS at 10 eV), respectively.

Relatively large (but not unreasonable) cone angles have been considered here to illustrate the importance of the proper path length correction. The errors introduced into the DCS at low scattering angles can be significant even for very slightly diverging beams.


#### REFERENCES

1. D. E. Golden, H. W. Bandel, and J. A. Salerno, Phys. Rev., 146, 40 (1966).
2. H. Murharat, L. Langhans, P. Linder, and H. S. Taylor, Phys. Rev., 173, 222 (1968).



#### FIGURE CAPTIONS


- Figure 1. Vibrational excitation to elastic scattering intensity ratios at 7 and 60 eV impact energies.
- Figure 2. Scattering geometry. Dashed lines drawn through the axes of the beam and view cones define the nominal scattering angle  $\theta$ .
- Figure 3. Error (%) introduced into the DCS by using  $(\sin \theta)$  instead of  $(\lambda d \Omega)_{\text{eff}}^{-1}$  correction for various cases of  $\sigma(\theta)$ .



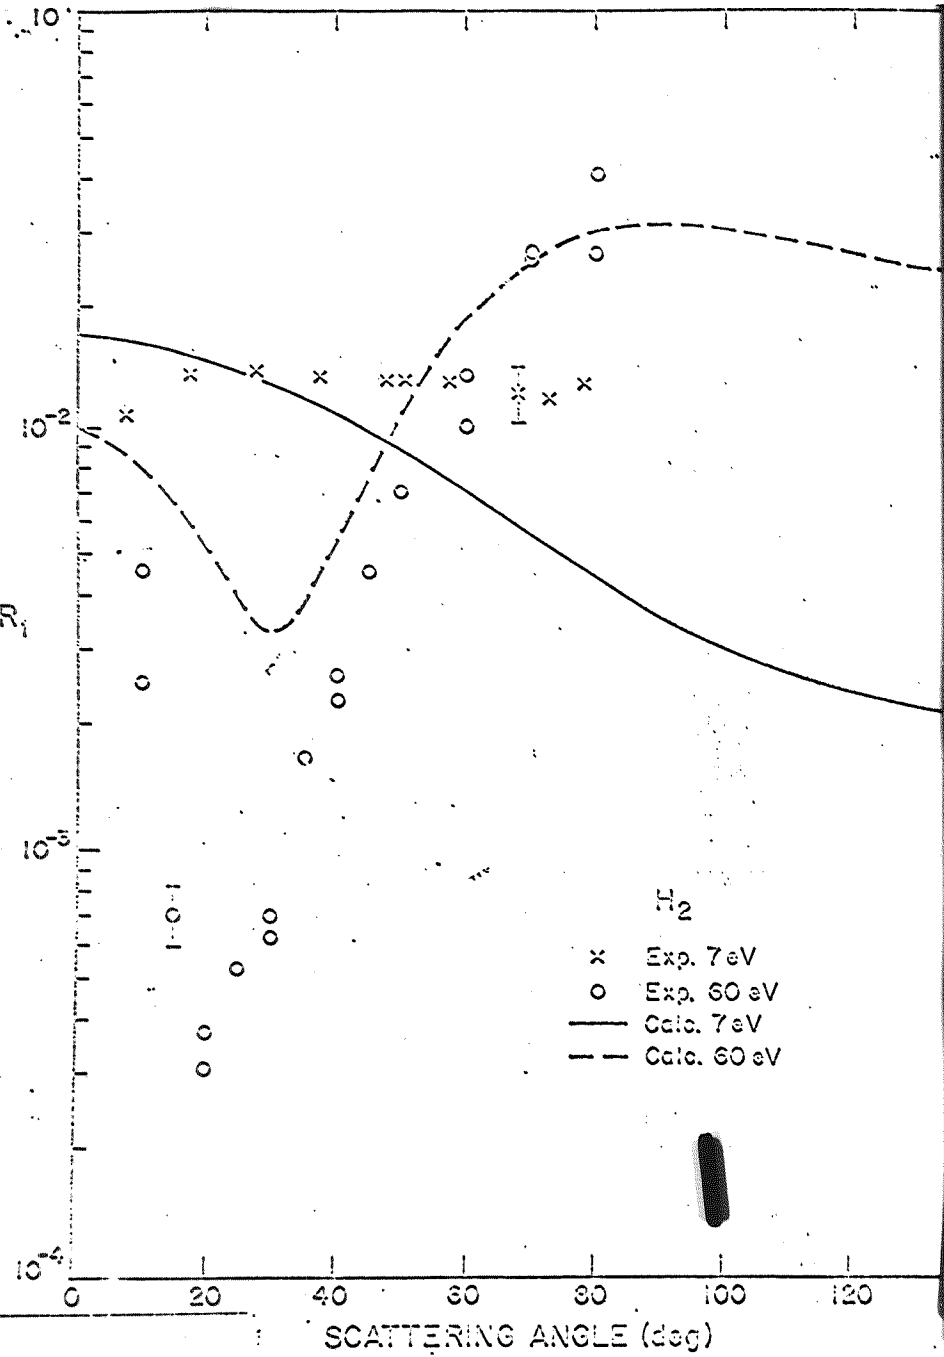

**BLANK PAGE**

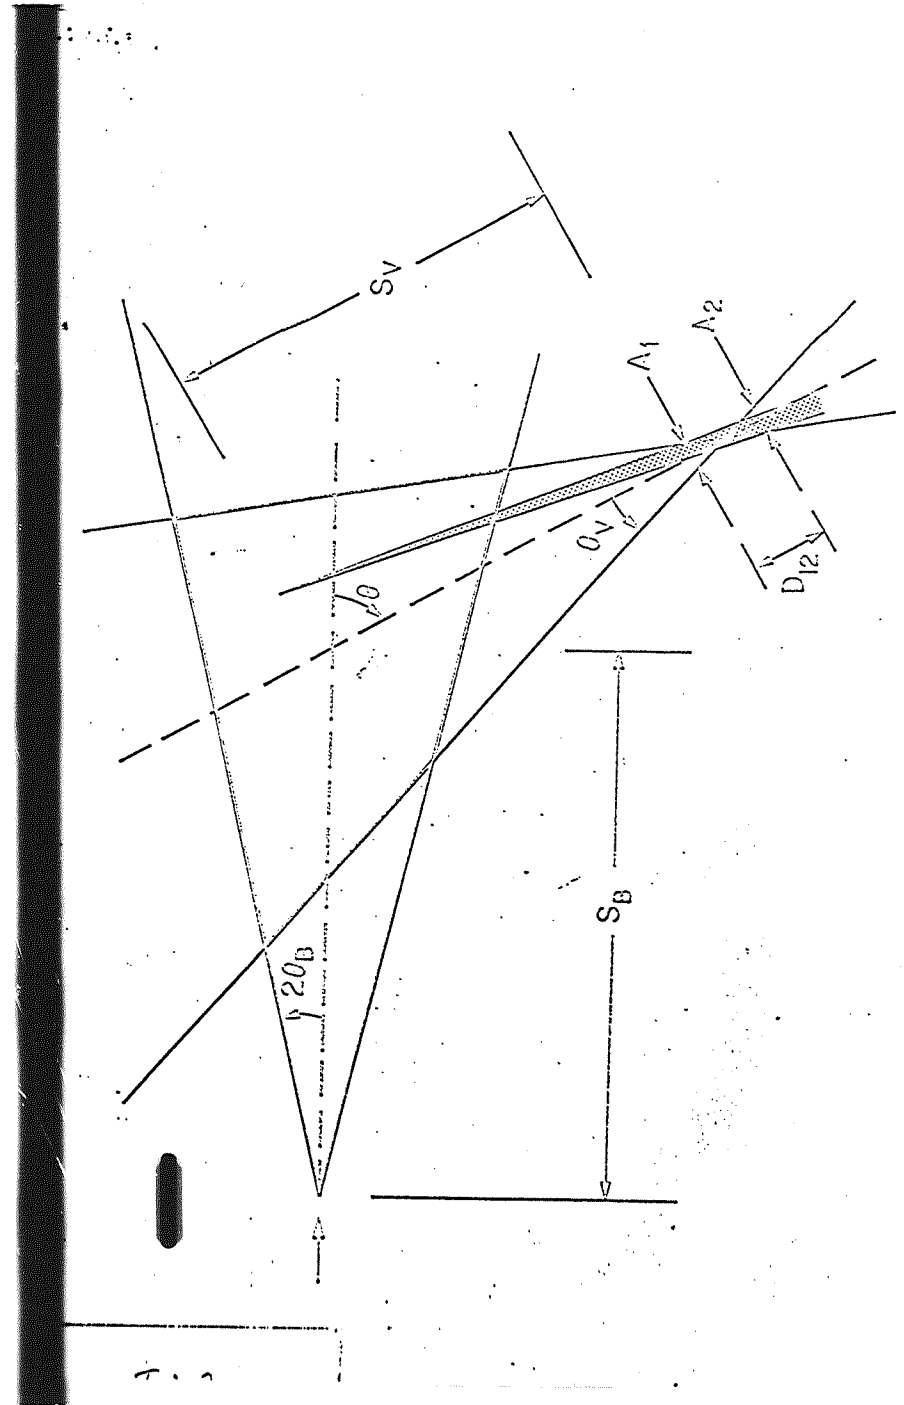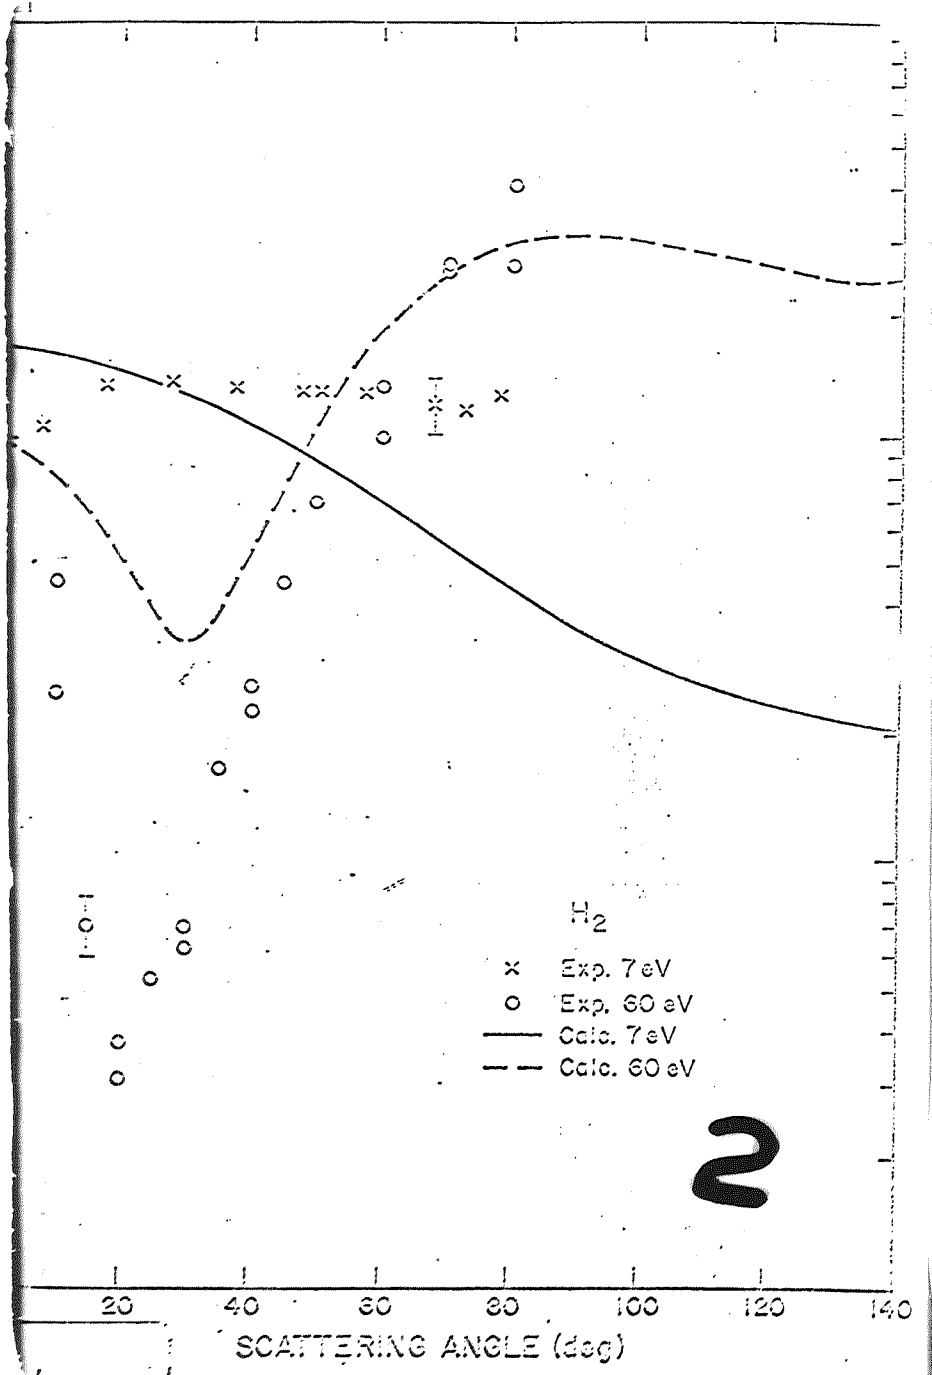

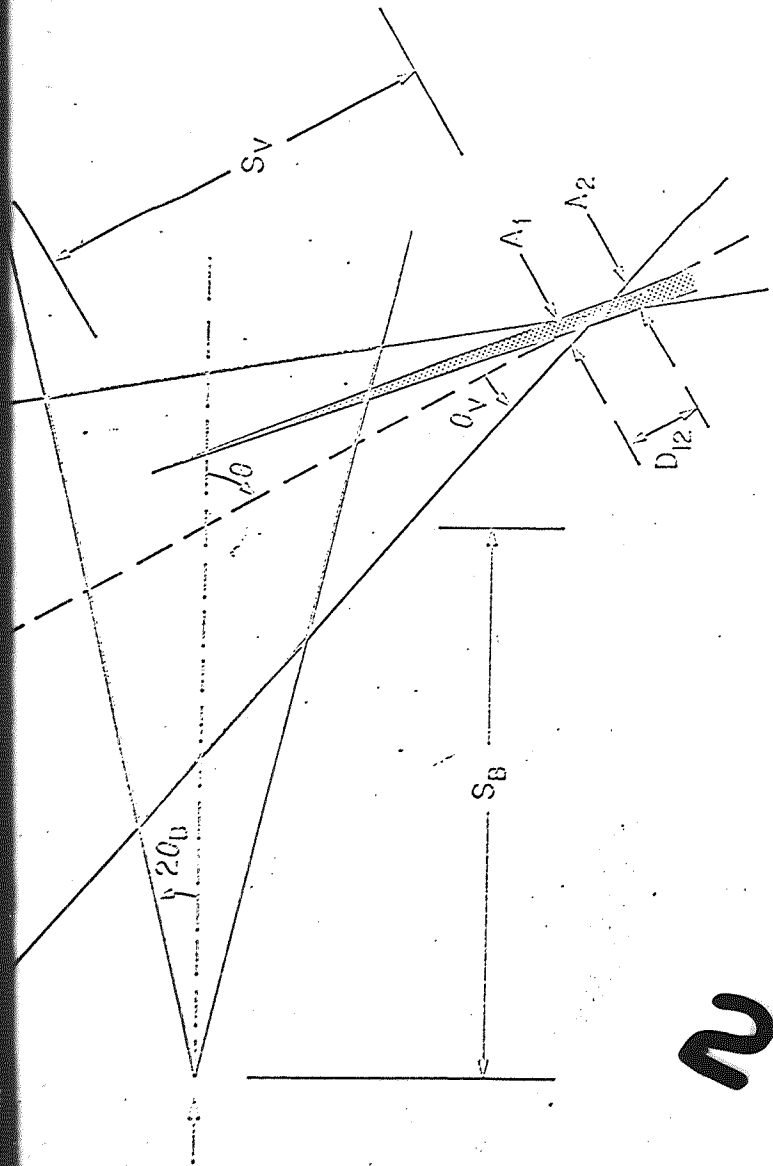

2

Geometric diagram for the calculation of the error in the determination of the scattering angle  $\theta$  and the distance  $S_B$ .


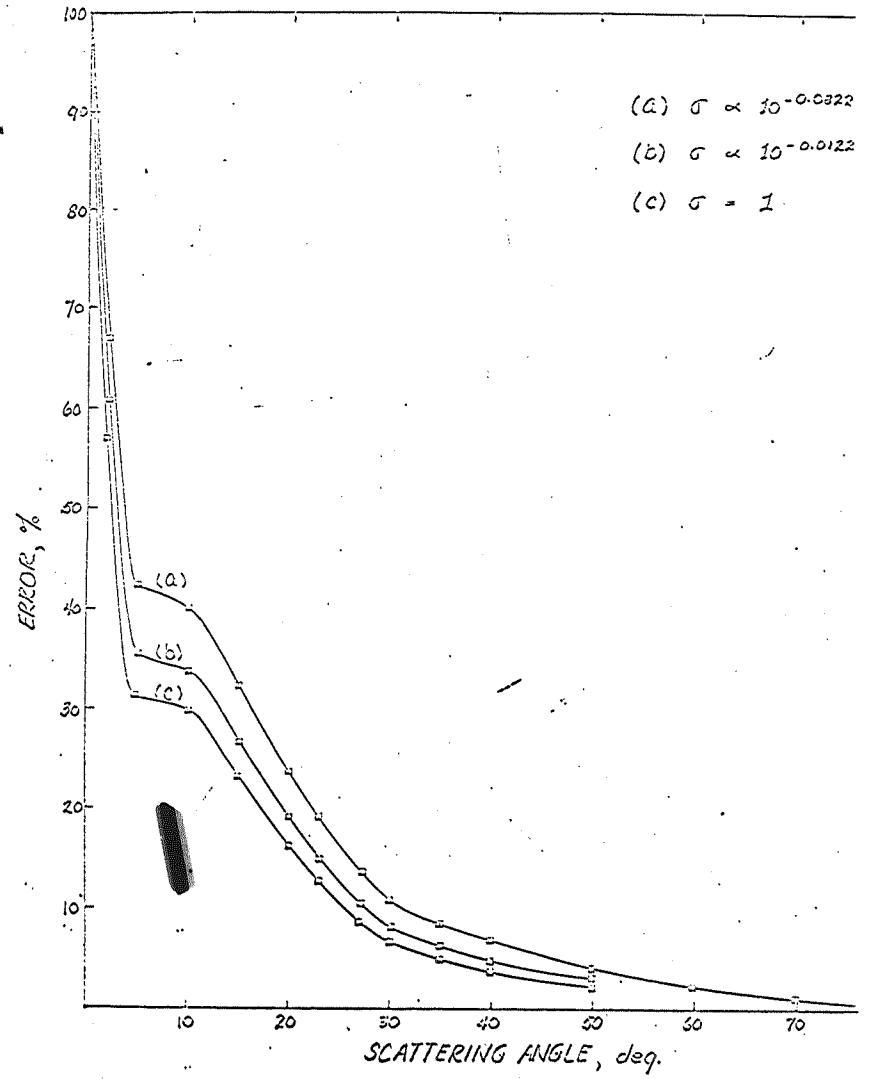


Fig. 3

(a)  $\sigma \propto 10^{-0.03220}$

(b)  $\sigma \propto 10^{-0.01225}$

(c)  $\sigma = 1$

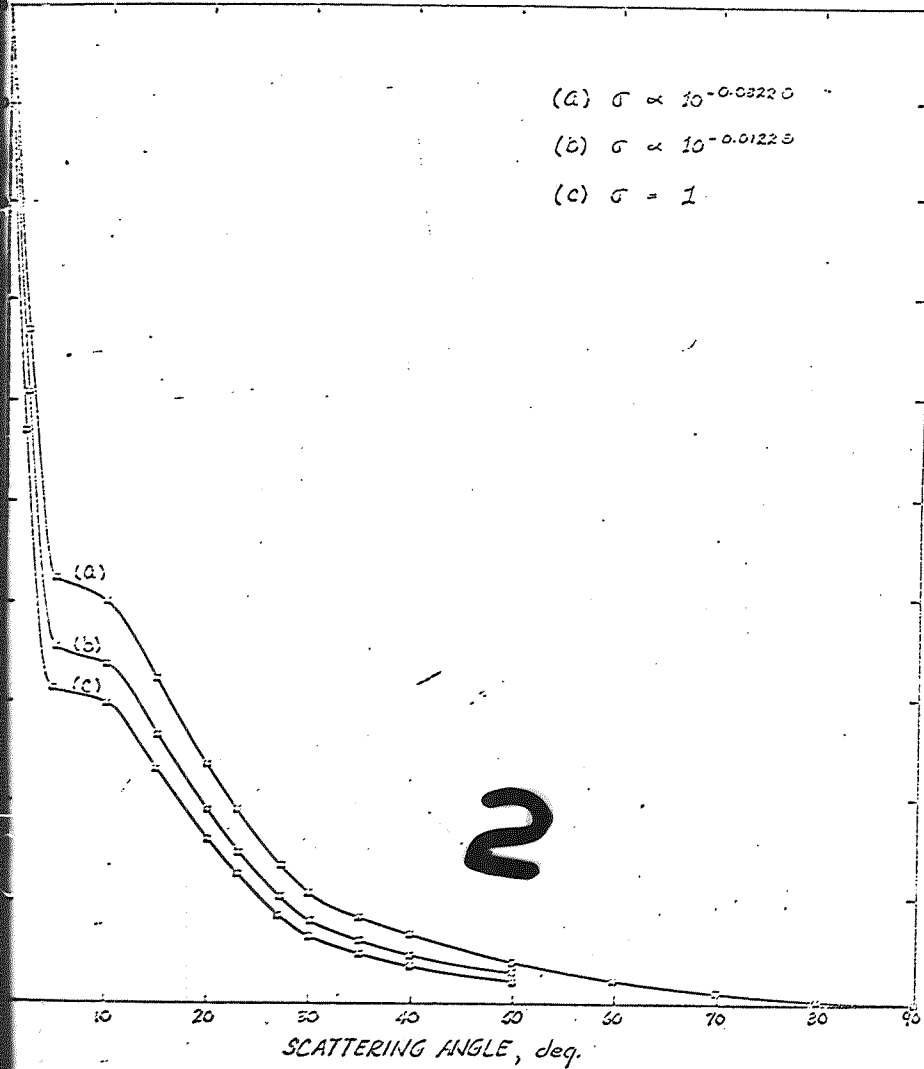

**END**

**DATE FILMED**

**8 / 7 / 69**